



---

# MISSPELLINGS IN NATURAL LANGUAGE PROCESSING: A SURVEY

---

Gianluca Sperduti , Alejandro Moreo ,  
Istituto di Scienza e Tecnologie dell'Informazione,  
Consiglio Nazionale delle Ricerche,  
56124 Pisa, Italy  
{firstname.lastname}@isti.cnr.it

## ABSTRACT

This survey provides an overview of the challenges of misspellings in natural language processing (NLP). While often unintentional, misspellings have become ubiquitous in digital communication, especially with the proliferation of Web 2.0, user-generated content, and informal text mediums such as social media, blogs, and forums. Even if humans can generally interpret misspelled text, NLP models frequently struggle to handle it: this causes a decline in performance in common tasks like text classification and machine translation. In this paper, we reconstruct a history of misspellings as a scientific problem. We then discuss the latest advancements to address the challenge of misspellings in NLP. Main strategies to mitigate the effect of misspellings include data augmentation, double step, character-order agnostic, and tuple-based methods, among others. This survey also examines dedicated data challenges and competitions to spur progress in the field. Critical safety and ethical concerns are also examined, for example, the voluntary use of misspellings to inject malicious messages and hate speech on social networks. Furthermore, the survey explores psycholinguistic perspectives on how humans process misspellings, potentially informing innovative computational techniques for text normalization and representation. Finally, the misspelling-related challenges and opportunities associated with modern large language models are also analyzed, including benchmarks, datasets, and performances of the most prominent language models against misspellings. This survey aims to be an exhaustive resource for researchers seeking to mitigate the impact of misspellings in the rapidly evolving landscape of NLP.

**Keywords** Misspellings · typos · natural language processing.

## 1 Introduction

Human language is constantly evolving. The world we live in is governed by information and communication technologies. Our time, sometimes dubbed *the digital era*, must thus be prepared to face changes in the way we communicate, and implement mechanisms to adapt to it. Changes in communication derive from multiple aspects. The use of non-standard written language might respond to cultural or societal factors, but not only. It may simply happen by *mistake*, in which case we speak of *misspellings*. Misspellings have become pervasive in the digital written production since the revolutionary Web 2.0 led people interact freely through social media, blogs, forums, etc. Even though misspellings are generally unintentional, in some contexts these may also be *intentional*.

Of course, the presence of misspellings complicates the reading of a text. Notwithstanding this, and somehow surprisingly, humans have the ability to read and comprehend misspelt text without much effort and, sometimes, even without realising their presence (Andrews, 1996; Healy, 1976; Shook et al., 2012; McCusker et al., 1981). Computers do not have similar capabilities though. Although the NLP community has long downplayed the problem of misspellings (if not for grammatical error correction (Shishibori et al., 2002) or text normalisation (Damerau, 1964)), it is by now abundant evidence that misspellings represent a serious risk to the performance of NLP systems (Baldwin et al., 2013; Heigold et al., 2018; Moradi and Samwald, 2021; Náplava et al., 2021; Nguyen and Grieve, 2020; Plank, 2016; Vinciarelli, 2005; Yang and Gao, 2019).

The last survey on the topic of misspellings in NLP dates back to 2009 (Subramaniam et al., 2009). Since then, the problem has come to receive an increased deal of attention, and a number of methods specifically devised to counter misspellings (Heigold et al., 2018; Belinkov and Bisk, 2018), as well as dedicated benchmarks of misspellings on which to test the methods (Michel and Neubig, 2018) and even dedicated events and data challenges (Lopresti et al., 2009; Basili et al., 2010; Dey et al., 2011) have made their appearance in the last decade. This paper aims at offering a comprehensive overview of recent advancements in the field.

The study of misspellings in NLP is paramount not only as a means for improving the performance of current systems, but also for reasons that are ultimately bound to *safety* and *ethics*. Misspellings are, as hinted above, not always an involuntary phenomenon. Misspellings may sometimes be carefully and maliciously designed (Li et al., 2019a) with the purpose of disguising certain words to elude the control of automatic content moderation tools or spam detection filters. The study of misspelling can help in mitigating the proliferation of hate speech or in preventing unwanted content to reach the final audience. Additionally, the fact that certain misspellings act as obfuscations for computers but not for humans suggests that studying this phenomenon from a psycholinguistic perspective might inspire alternative, more efficient methods for text representation and processing.

The rest of this survey is organised as follows. In Section 2 we offer an overview of the history of misspellings in the digital era, analysing the main trends before and after the proliferation of user-generated content and the upsurge of neural networks. In Section 3 we describe how the phenomenon is regarded under the lens of linguistics and NLP. In Section 4 we survey previous work on the potential harm of misspellings. Section 5 is devoted to describing methods specifically devised to counter misspellings. The main tasks, evaluation measures, venues, and datasets dedicated to misspellings are discussed in Section 6. Section 7 is devoted to analysing the phenomenon of misspellings from the point of view of modern large language models (LLMs). Section 8 discusses the main applications in which the presence of misspellings gains special relevance. Section 9 concludes, by also pointing to promising directions of research.

## 2 A Brief History of Misspellings

The treatment of misspellings in NLP has traversed two main phases that hinge upon the proliferation of the so-called Web 2.0 and, with these, the spread of huge quantities of (often carelessly generated) user-generated content. The term *Web 2.0* was first coined by Darcy DiNucci in 1999, but it was not until 2004 that the term became popular thanks to the *Web 2.0 Conference*.<sup>1</sup> It took some time for the user-generated content to take on the Internet, something that we identified to indicatively happen around 2010. This section is devoted to briefly surveying the history of misspellings before (Section 2.1) and after (Section 2.2) this event.

### 2.1 Before 2010: Fewer Data, Less Misspellings

Before the explosion of user-generated data on the Internet, the vast majority of content available on the web (static web pages, journal articles, etc.) was characterised by the fact that the content was moderately well curated. As a result, the amount of data was relatively limited, and the available data contained few misspellings. For this reason, automated text analysis technologies were rarely concerned with the presence of misspellings, if at all. The study of misspellings was confined to the development of automatic correction tools that aid users in producing misspelling-free texts by, e.g., correcting typos, or applying OCR-produced errors. Vinciarelli (2005) is one of the pioneer studies dealing with NLP systems resilient to misspellings (more precisely, with errors acquired via OCR).


Some studies seemed to indicate that the problem of misspellings was not paramount for text classification technologies, at least when these concern the classification by topic of (curated) text documents (Agarwal et al., 2007). The situation differed somewhat when shifting to other, less curated sources, such as emails, blogs, forums, and SMS data, or when analysing the output generated by automatic speech recognition engines from call centres. The problem attracted little attention from the research community at the time, and it was not until 2007 that a dedicated workshop, called *Analysis for Noisy Unstructured Text Data* (AND), emerged and renewed interest in the field (see also Section 6.4).

To the best of our knowledge, the only survey on NLP systems robust to noise was published in 2009 (Subramaniam et al., 2009). This survey primarily focused on handling noise in OCR scans, blogs, call centre transcriptions, and similar sources.

---

<sup>1</sup>Source [https://en.wikipedia.org/wiki/Web\\_2.0](https://en.wikipedia.org/wiki/Web_2.0)

Figure 1: Publication trends in NLP papers on misspellings (2004-2024)

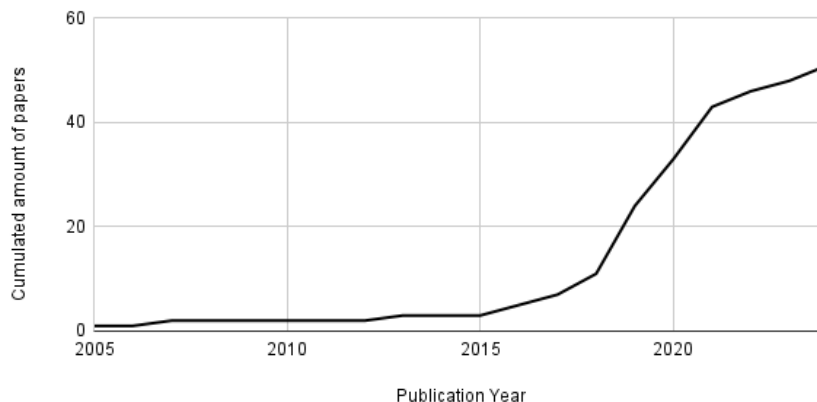

## 2.2 After 2010: The Rise of Social Networks and Deep Learning

Since 2010, user-generated content has become increasingly pervasive, mainly due to the revolution of social networks as stated in Perrin (2015). At the same time, deep learning technologies have taken the world by storm (Krizhevsky et al., 2012), not only due to the increase in performance they show off in most NLP tasks (Collobert et al., 2011), but also because of their potential to eliminate the need for manual feature engineering; instead, the neural network itself learns to represent the input. This raises questions about the necessity of a pre-processing step for correcting misspellings beforehand. The increasing prevalence of misspelt data and the proliferation of NLP technologies have inspired numerous studies analysing the impact of misspellings on state-of-the-art models (Section 4), as well as papers proposing systems that are resilient to misspellings (Section 5).

The study of misspellings in NLP presents significant benefits. The most apparent advantage is the enhancement of performance in any NLP tool, but not only. Systems that are resilient to misspellings are also *safer*. For reasons discussed later, some misspellings are *intentional*, designed to evade the scrutiny of content moderation tools or spam filters. Ultimately, the study of misspelling resilience aims to deepen our understanding of language (further discussions are offered in Section 9).

This increased interest in the subject was partially fostered by the work of Belinkov and Bisk (2018); Heigold et al. (2018); Edizel et al. (2019), who showed the performance of different models decrease noticeably in the presence of misspellings. This renewed momentum has led to the appearance of dedicated workshops devoted to studying the phenomenon from the point of view of user-generated content (such as the WNUT workshop series<sup>2</sup>) as well as from the point of view of machine translation (such as the WMT workshop/conference series<sup>3</sup>); more information about dedicated tasks and datasets can be found in Section 6.4.

Between 2017 and 2022, neural machine translation emerged as the most prolific field in the study of misspellings, closely followed by sentiment analysis. Over recent years, conversely, there has been a noticeable decline in the number of research papers in this field, coinciding with the advent of large language models (LLMs) (7). In particular, there has been a lack of new methods aimed at improving performance against misspellings, likely due to the high costs associated with experimenting with LLMs. However, several studies have conducted extensive analyses and proposed new benchmarks (Section 6.4.4) and other resources specific to LLMs (Section 7).

Figure 1 shows the publication trends with respect to all NLP papers related to misspellings.

## 3 What is a Misspelling?

The term *misspelling* is a too broad concept which has come to encompass many different types of unconventional typographical alterations. In this section, we turn to review the main considerations behind this term as viewed through the lens of *linguistics* and *NLP*, and we try to break down the many subtle nuances it encompasses. While in NLP, the

<sup>2</sup><https://aclanthology.org/venues/wnut/>

<sup>3</sup><https://aclanthology.org/venues/wmt/>

terms *misspelling* and *noise* are by and large interchangeable, in linguistics the term *error* is more commonly employed. Other terms like *typo*, *mistake*, or *slip* are often used in more general, non-specialized contexts. Throughout this survey, we prefer the term *misspelling* since it clearly evokes a link with text, and since *noise* and *error* are too wide hypernyms that the target audience of this survey might find rather ambiguous.

### 3.1 Under the Lens of Linguistics

In linguistics, there are primarily three fundamental viewpoints for models dealing with misspellings: the first is that of general linguistics, where some authors have attempted to define and categorise various types of misspellings. The second one is that of sociolinguistics, in which authors analyse misspellings from a social perspective. The last one is psycholinguistics, which focused more on cognitively relevant aspects of the same problem.

As already mentioned, in general linguistics there is no broadly agreed definition of what a *misspelling* is, and the term *error* is often preferred. Error analysis is one important field of linguistics that studies the phenomenon of errors in second language learners. James (2013) defines errors as *an unsuccessful bit of language*. Richards and Schmidt (2013) instead define errors as the use of a linguistic item (e.g., a word, a grammatical unit, a speech act, etc.) in a way such that a fluent or native speaker of the language regards as showing faulty or incomplete learning.

In general linguistics, it is customary to draw a distinction between *error* and *mistake*. Richards and Schmidt (2013) point out that errors are due to a lack of knowledge of the speaker, while mistakes instead are made because of other compounding reasons, such as fatigue or carelessness. In the same work, errors are classified as belonging to lexical error (i.e., surface forms which are not included in a vocabulary), phonological error (i.e., in the pronunciation), and grammatical error (i.e., not compliant to syntactic rules). Interestingly enough, none of these concepts seem to embrace the possibility that misspellings may be created as a voluntary act.

Sociolinguistics focuses on the concept of *spelling variation* (Nguyen and Grieve, 2020). The very own word *misspelling* expresses prejudice against the author: the author of the noise is responsible for *missing* the correct normative spell of the word. Contrarily, the sociolinguistic perspective states that there are no such errors, but just *variations* on the spellings. These variations can originate from social needs, such as avoiding censorship, expressing group identity, or representing regional or national dialects.

After outlining key conventions in the fields of general linguistics and sociolinguistics, it is essential to emphasize the significant relationship between psycholinguistics and the phenomenon of misspellings. As stated by Fernández and Cairns (2010), psycholinguistics is a discipline that investigates the cognitive processes involved in the use of language, rather than the structure of language itself. In the case of reading, psycholinguistics is concerned with understanding the cognitive processes that underlie this activity, from the acquisition of the sensory stimulus derived from the visual perception of letters, to the subsequent comprehension and cognitive reorganisation of the information within the brain.

The branch of psycholinguistics that is most relevant to the topic of this survey is the one devoted to studying the cognitive processes behind the acts of writing and reading. It has been noted on several occasions that humans are able to read long and complex sentences that include misspelt words with little reduction in performance. The most notable example of this is that of *garbled words*, in which the internal letters are randomly transposed. Despite this, humans are able to read them with high accuracy.

Some related work in the psycholinguistics literature include the work by Andrews (1996); Healy (1976); Shook et al. (2012); McCusker et al. (1981). This cognitive ability of human beings has inspired some of the methods we describe in Section 5.2.

Some researchers in the field of NLP have gained inspiration from lessons learnt in psycholinguistics, and have taken advantage of these to devise models robust to misspellings. For example, characters that are graphically similar can be interchanged without significantly affecting human reading comprehension (e.g., *cl0sed* for *closed*). This other intuition has inspired some of the methods that we discuss in Section 5.5.

From a computational point of view, the study of misspellings would certainly benefit from the synergies with linguistics and psycholinguistics. The cognitive abilities humans display represent a source of inspiration for methods dealing with misspellings or the creation of adversarial attacks. As an example, consider spam emails in which the content is made of garbled words or in which graphically similar characters have been replaced.

### 3.2 Under the Lens of NLP

Nor in the field of NLP is there a single, clear-cut definition of misspelling. Indeed, the same type of problem (morphological error) is often expressed with different words, such as *noise*, *typo*, and *spelling mistake*.

The most common of these, along with *misspelling*, is *noise*, which is defined as any non-standard spelling variation (Nguyen and Grieve, 2020). While this definition of noise may seem appropriate, any attempt to provide a universal definition of misspellings would appear contrived and, above all, imprecise.

To tackle this issue and establish clear boundaries around the concept of misspelling, NLP researchers have proposed various categorisations, which draw from different points of view: For example, from the perspective of the word surface, from the point of view of the user who generated them, or pointing up to the methods used to generate misspelt datasets in an experimental setting. Misspellings can be fine-grained, where multiple categories of misspellings are defined in detail, or less fine-grained, where fewer, more representative categories are selected. This lack of uniformity, among other things, complicates the search for relevant papers on the subject (which has indeed represented one of the significant challenges we faced when developing this survey).

In this section, we cover some of the main categorisations of misspellings proposed in the literature. In doing so, we note that the problem of misspelling can be approached from diverse viewpoints and thus there are multiple perspectives on this matter. For example, Heigold et al. (2018) have established three categories based on the **word surface**:

- character swaps: *nice* → *ncie*, the position of two subsequent characters is exchanged;
- word scrambling: *absolute* → *alusobte*, the order of the characters is permuted with the exception of the first and last one;
- character flipping: *nice* → *nite*, one character is replaced by another.

Belinkov and Bisk (2018) proposed an alternative classification of misspellings into two main categories based on the **dataset generation method**:

- Natural misspellings: real misspellings that occur in real-world data;
- Synthetic misspellings: misspellings artificially generated by various algorithms and techniques.

Note that the differentiation between *natural* and *synthetic* misspellings does not establish a clear-cut boundary, as any misspelling generated synthetically could plausibly occur naturally. Indeed, this distinction is functional to experimental setups and was originally conceived with dataset generation in mind. What Belinkov and Bisk (2018) referred to as *natural* misspellings actually involves lexical lists that provide context for the misspellings, which can be exploited to artificially introduce natural-sounding misspellings into otherwise correct sentences. In such cases, we will refer to a third category of *hybrid* misspelling, and reserve the term *natural* misspelling for real-world misspellings found in actual data. Further aspects related to dataset generation will be discussed in Section 6.4.

Several other researchers, including van der Goot et al. (2018) and Nguyen and Grieve (2020), have emphasized the **user’s intention** rather than focusing solely on the surface-level characteristics of misspelt words. They propose to distinguish between *intentional* and *unintentional* misspellings. For instance, Nguyen and Grieve (2020) observed that intentional misspellings, such as lengthening a word, are often used to add emphasis to an opinionated statement. An example of this could be the use of the interjection *wow* in a context where the user wants to emphasize their surprise, as in *wooooooooooooow*. Furthermore, the categorisation of misspellings can be more or less **fine-grained**; in this respect, van der Goot et al. (2018) have proposed as many as 14 different categories of misspellings, while Heigold et al. (2018) have proposed only 3.

It is thus important to bear in mind that the variability in the terminologies and approaches to this topic—along with the lack of a universal definition for this type of problem—represent one of the greatest challenges faced by NLP researchers. As for our survey, we found it particularly useful to list the types of misspellings for dataset generation (see Section 6.4).

## 4 How Serious is the Problem?

In principle, a straightforward way to eliminate misspellings is to simply run some *Spelling Correction* (SC) or *Text Normalization* (TN) tools. SC and TN pursue a common goal: translating from non-standard language to normative language. The distinction between them is subtle; SC is primarily intended to correct unintentional typos, while TN is rather devoted to converting any non-conventional surface form (e.g., slang) into the standard one.

SC/TN tools are commonly employed as a pre-processing step in many industrial applications as a way to cope with misspellings, while the core of the system is designed to work with clean text. (Such an approach represents the simplest scenario within the so-called *double-step methods* that will be surveyed in Section 5.3.) A legitimate question that arises is the following: *Can we simply rely on SC/TN tools and consider the problem solved?*

As the reader might have wondered, the answer is *no*. According to Plank (2016), non-standard (or non-canonical) language is rather a complex matter; there is no commonly agreed definition of what a misspelling is, nor what makes a text be considered *normalised*. As an example, Plank (2016) demonstrates that there is no unique standard form for spelling variations such as *labor* in American English and *labour* in British English. As a result, an NLP system should be able to process them both forms without any significant difference in performance. Furthermore, text normalisation can introduce undesirable effects, such as the removal of dialectal traits that can be of help in task-specific contexts. For instance, in literary contexts, preserving a character’s role might require translating a dialectal expression in the source language into a similar dialectal expression in the target language. Finally, psycholinguistics studies suggest humans are capable of processing misspellings without significant effort (Andrews, 1996; Rayner et al., 2006; McCusker et al., 1981). By removing misspellings as a pre-processing step we lose the opportunity to better comprehend how natural language is processed, and how to improve automated NLP tools accordingly.

A second, legitimate question is *Can we simply ignore the phenomenon?*. This section is devoted to answering this question. Throughout it, we offer a comprehensive review of past efforts devoted to quantifying the extent to which vanilla systems’ performance degrades when in the presence of misspellings. This performance decay is typically large, and is typically assessed with respect to artificial and natural misspellings (Baldwin et al., 2013; Belinkov and Bisk, 2018).

Note that the work presented in this section focuses on measuring the impact of misspellings in methods that do not make any attempt to counter them. Systems specifically designed to be robust against misspellings will be described in Section 5, while datasets and techniques for generating misspellings will be covered in more detail in Section 6.

#### 4.1 The Harm of Synthetic Misspellings

Synthetic misspellings are the most commonly employed type of misspelling in the related literature. The problem was partially dismissed by Agarwal et al. (2007), who tested traditional classifiers (SVM and Naive-Bayes) using bag-of-words representations, against misspellings generated using an automatic tool (dubbed *SpellMess*) which considers insertions, deletions, substitutions, and QWERTY errors,<sup>4</sup> in two well-known datasets for text classification (Reuters-21578 and 20 Newsgroups). Their results show that even moderately high levels of noise (affecting up to 40% of the words) did not affect classification accuracy as much as expected. The authors conjectured that this can be explained by the fact that many of the features affected by noise are rather uninformative, and that when classifying by topic, abundant patterns still remain in the rest of the training data, even at high levels of noise.

Quite some time later, Belinkov and Bisk (2018) confronted various char-based and BPE-based<sup>5</sup> encoded neural translators with synthetic misspellings in what has then come to be considered a milestone paper in the field.

Their results demonstrated that all machine translation models were significantly affected by the presence of synthetic misspellings.<sup>6</sup> This paper became influential and has served to raise awareness on the problem of misspellings.

Inspired by the latter, Naik et al. (2018) conducted robustness experiments on Natural Language Inference (NLI) models using different types of synthetic misspellings, such as swapping adjacent characters or inserting QWERTY errors. The authors designed a stress test to assess whether the qualitative result of NLI models are driven not only by strong pattern matching but also by genuine natural language understanding procedures. The paper goes on by demonstrating that the performance of NLI models, built on top of BiLSTMs and Word2Vec, declines when misspellings are inserted in the test set.

Heigold et al. (2018) carried out experiments considering different types of synthetic noise on the tasks of morphological tagging and machine translation and using different types of encodings, including word-based, character-based, and BPE-based ones. In their experiments, different models were trained independently on different variants of the training set, including *clean*, the original set without misspellings; *scramble*, obtained by permuting the order of the characters with the exception of the first and last one in each word; *swap@10*, that randomly swaps 10% of subsequent characters; and *flip@10*, that randomly replaces 10% of the characters with another one. Every pair of (system, training set variant) was tested against similar variants generated out of the test set. The results show the performance of all tested models degrades noticeably when exposed to synthetic misspellings different from those on which the system was trained on.

BERT, the popular transformer model proposed by Devlin et al. (2019), has garnered a great deal of attention due to its ability to deliver state-of-the-art performance across a wide range of NLP tasks. Given its success, several studies have

<sup>4</sup>Characters substitutions governed by the proximity of the keys in a QWERTY layout, see Section 6.4.2.

<sup>5</sup>*Byte Pair Encoding* (BPE) is an encoding method operating at the subword level. Pairs of tokens that appear together frequently are grouped together, and encoded using a new token.

<sup>6</sup>In their experiments, Belinkov and Bisk (2018) also considered *hybrid* misspellings (these are discussed later in Section 4.2), showing the harm of synthetic misspellings to be more serious than that caused by hybrid misspellings.

focused on analysing the sensitivity of BERT-based models to misspellings. Yang and Gao (2019) tested Vanilla BERT (i.e., a raw instance of BERT that does not implement any specific method to counter misspellings) in both extrinsic (customer review and question answering) and intrinsic (semantic similarity) tasks. To this aim, the authors employed both word-level noise (i.e., noise involving the addition or removal of entire words from a sentence) as well as various types of misspellings, showing that misspellings are significantly more detrimental to BERT than word-level noise.

Kumar et al. (2020) confronted BERT against QWERTY misspellings at various probabilities. The scope of this work was to quantify the extent to which the presence of misspellings harms the performance of a fine-tuned BERT in the tasks of sentiment analysis (on IMDb and SST-2 datasets) and textual similarity (STS-B dataset).

Their results demonstrated that BERT is highly sensitive to this type of misspelling, even at low rates.

Moradi and Samwald (2021) carried out a systematic evaluation of BERT and other language models (RoBERTa, XLNet, ELMo) in different tasks (text classification, sentiment analysis, named-entities recognition, semantic similarity, and question answering) considering different types of synthetic misspellings. Their results confirm that the performance of all tested models degrades noticeably for all tasks and types of misspelling. For instance, RoBERTa experiences a significant decrease in performance, with a loss of 33% accuracy in text classification and a 30% decrease in accuracy in sentiment analysis.

Ravichander et al. (2021) conducted an evaluation assessment of the effect of misspellings on question-answering performance, considering various state-of-the-art language models (BiDAF, BiDAF-ELMo, BERT, and RoBERTa). The authors of this study focused on errors induced by specific input interfaces (such as translation, audio transcription, or keyboard) and devised ways for generating synthetic misspellings that represent these errors. The experiments conducted revealed a significant decrease in performance across all models for all types of noise, with  $F_1$  drops ranging from 6.1 to 11.7 depending on the nature of the affected words. Additionally, their results indicated that the harm of synthetic misspellings is generally more pronounced than that caused by natural misspellings.

Both Liu et al. (2019) and Röttger et al. (2021) evaluate model performance on difficult data distributions including misspellings. Liu et al. (2019) introduce a method called *inoculation by fine-tuning* which involves creating normal and *challenging* versions of both training and test sets. The model is initially trained on the normal set and tested on both versions. If the performance is high on the normal set but low on the challenging set, the model is then fine-tuned using the challenging training set. This approach helps to determine whether the issue lies with the model itself or the original training data. If the model’s performance improves with this fine-tuning, it suggests that data augmentation could be sufficient for the model to generalize better. The method was applied to NLI datasets (some proposed in Naik et al. (2018)) and involved two models: the ESIM model of Chen et al. (2017) and the decomposable attention model of Parikh et al. (2016). The results revealed that all the tested models struggle with synthetic misspellings, even if fine-tuned.

Röttger et al. (2021) tested the effectiveness of previously trained hate speech detection models when in the presence of misspellings. Specifically, the models are evaluated on 29 functional classes including categories such as *hate expressed using denied positive statement* and *denouncements of hate that quote it*. This approach allows for very detailed results on the model’s ability to detect different types of hate speech. Among the 29 classes, 5 are related to the presence of misspellings (called *spelling variations* in the paper). The models tested include BERT, Google’s Perspective, and TwoHat’s SiftNinja. The results revealed all models struggle to handle misspellings, but the model Perspective fared significantly better than the others.

## 4.2 The Harm of Natural Misspellings

Naturally occurring misspellings are invaluable resources for testing NLP applications in real-world settings (Baldwin et al., 2013; Belinkov and Bisk, 2018). However, they are rarely employed in practice since collecting natural misspellings is anything but a simple task. As we have already pointed out, there is a lack of consensus on what precisely a *natural misspelling* is and, despite the fact that some *domains* of information (like user-generated content) are known to be prone to naturally generate misspellings, other authors have taken as natural misspellings different phenomena, like the errors generated by second language learners (Náplava et al., 2021) or by OCR scans (Vinciarelli, 2005). The root of this discrepancy can be traced back to the definition of *domain* itself; according to Plank (2016), real-world data emerge as complex interactions of many more dimensions (language, genre, group of age, etc.) than what we can realistically anticipate in an experimental setting.

Previous studies related to the analysis of natural misspellings are often devoted to understanding which types of misspellings are more likely to occur in which domains (Plank, 2016; Baldwin et al., 2013). For example, Baldwin et al. (2013) compared the rate of out-of-vocabulary terms (as a proxy of the number of misspellings) expected to be found in texts as a function of how curated these texts are. The results were arranged in an ordinal scale of increasing levels of

curation: tweets, comments, forums, blogs, Wikipedia articles, and documents from the British National Corpus. In their study, the authors took into account some lexical units like the word length, the sentence length, and the rates of out-of-vocabulary terms, finding out interesting direct correlations between the level of formality of the text and the average word and sentence length, with an anti-correlated rate of out-of-vocabulary terms. The same study analysed the perplexity of language models when processing different types of text. The results show that models trained and tested in similar domains (hence close to each other in terms of the degree of formality) tend to display lower perplexity. For example, a model trained on tweets (highly informal) shows a much lower perplexity when used to process blog forums (somehow informal), than when used to process Wikipedia articles (highly formal).

Nguyen and Grieve (2020) studied how robust different word embedding techniques (such as word2vec variants and FastText) are to deviations from conventional spelling forms (including misspellings among others) typical of social-media content. Using two datasets from Reddit and Twitter, the authors found that even techniques that are not specifically designed to take into account spelling variations (like the word2vec’s skip-gram model) manage to capture them to some extent. Interestingly enough, the authors draw a connection between *intentional* spelling variations (like an *elongated* word *gooooood*) and performance, suggesting that these variations typically arise in well-controlled situations acting as a form of sentiment markers and, for this reason, models are somehow able to make sense out of them. This is in contrast to unintentional misspellings, which are haphazardly distributed and tend thus to be harder to handle.

In addition to synthetic misspellings, Agarwal et al. (2007) carried out experiments on natural misspellings. To this aim, the authors used datasets from user-generated content, including logs from call centres, emails, and SMS. Their results suggest that real noise in user-generated content exhibits some patterns, attributable to the consistent usage of abbreviations and the repetition certain users do of specific errors. The results showed the models tested (SVM and Naive-Bayes) performed better than when confronted with synthetic misspellings (see Section 4.1).

In a similar vein, Ravichander et al. (2021) conducted experiments not only using synthetic misspellings (see Section 4.1) but also natural ones, in the context of question answering using the XQuAD dataset as a reference. The authors considered two types of natural misspellings: keyboard misspellings and automatic speech recognition (ASR) noise. For keyboard misspellings, natural misspellings were created by asking people to retype XQuAD questions without being able to correct their input when they made a mistake. For ASR, natural noise was created by reading and transcribing every question three times, by three different persons. The experiments showed a noticeable decrease in performance across all tested models (BiDAF, BiDAF-ELMo, BERT, and RoBERTa) for all types of noise. However, synthetic misspellings appeared, on average, to be slightly more problematic than natural ones. Among the types of natural noise, the one generated via ASR was found to be the most harmful. RoBERTa, the top-performing model of the lot, experienced a decay of 8% terms in  $F_1$  when confronted with such misspellings.

The study by Benamar et al. (2022) provides a detailed evaluation of how state-of-the-art subword tokenizers handle misspelt words. Specifically, they investigated two French versions of BERT (FlauBERT and CamemBERT) against natural misspellings originating in three different domains (medical, legal, and emails). To test the tokenization of misspellings, the authors randomly extracted 100 misspelt words from each corpus and paired them with their correct forms. The test was conducted by measuring the cosine similarity between tokens generated for the misspelt and clean terms. In all three domains, the average similarity was very low (19% in the legal domain, 39% in the medical domain, and 27% in the email domain). The authors also observed that incorporating POS tagging information drastically helped to improve performance. For example, CamemBERT scored 92% of averaged cosine similarity in the email domain with the aid of POS tags.

As recalled from Section 3.2, aside from the synthetic and natural misspellings, there is a third type of misspelling called *hybrid* that refers to real misspellings that have been artificially injected in different contexts for evaluation purposes (more on this in Section 6.4.3). To our knowledge, the only published record that employs hybrid misspellings to quantify the performance impact on systems that do not handle them is that of Belinkov and Bisk (2018). In their study, words from error correction databases (such as Wikipedia edits and second language learner corrections) were injected into the IWSLT 2016 machine translation dataset. While hybrid misspellings had less of an impact on machine translation tasks compared to synthetic misspellings, Belinkov and Bisk (2018) noted that hybrid and natural misspellings are more challenging to evaluate in a rigorous manner.

## 5 Methods

In this section we offer a comprehensive overview of previous efforts devoted to counter misspellings. We organise existing methods according to the following categorisation:



- Data augmentation (Section 5.1): methods that enhance the training set with perturbed signals to develop resiliency to them. This group can be further divided into two sub-categories:
  - Generalized data augmentation approaches (Section 5.1.1)
  - Adversarial training approaches (Section 5.1.2)
- Character-order-invariant representations (Section 5.2): methods devoted to counter one specific type of misspelling caused by variations in the natural order of the characters.
- Double step (Section 5.3): techniques that carry out a step of spelling correction (step 1) before solving the final task (step 2).
- Tuple methods (Section 5.4): methods that, in order to train a model, use a list of misspellings each annotated with the corrected surface form.
- Other methods (Section 5.5): relevant techniques that do not squarely belong to any of the above categories.

### 5.1 Data Augmentation

One of the earliest attempts for addressing the problem of misspellings in NLP comes down to expanding the training set with misspelt instances, so that the model learns to deal with them during training.

Although data augmentation techniques typically lead to direct improvements, there are important limitations worth mentioning. Augmenting the training set entails an additional cost, sometimes derived from complex techniques that seek to uncover the weaknesses of the model. Yet another important limitation regards its circumscription to a limited frame time. The misspelling phenomenon is not stationary, since language is in constant evolution. Additionally, data augmentation typically over-represents certain types of misspellings, thus injecting *sampling selection bias* into the model (i.e., the prevalence of the phenomena represented in the training set widely differ with respect to the prevalence expected for the test data as a result of a selection policy). Finally, misspellings consist of different character combinations, making it nearly impossible to achieve comprehensive coverage.

We first review a direct application of data augmentation strategies to the problem of misspellings (Section 5.1.1) and then move to describing methods that use a specific kind of generation procedure based on adversarial training (Section 5.1.2)

#### 5.1.1 Generalized Data Augmentation

To the best of our knowledge, the first attempt to cope with misspellings by means of data augmentation is by Heigold et al. (2018). The methodology consists in analysing the type of misspellings that most harmed the performance of a machine translator, and insert similar occurrences in the training set. In a similar vein, Belinkov and Bisk (2018) injected misspellings of various types in a parallel corpus, including the *full permutation*, *characters swapping*, *middle permutation*, and *insertion of QWERTY errors*. Information about how precisely these misspellings are individuated, and about other types of misspellings is available in Section 6.4 devoted to datasets.

Data augmentation has been extensively applied to the problem of machine translation (Vaibhav et al., 2019; Karpukhin et al., 2019; Zheng et al., 2019; Li and Specia, 2019; Passban et al., 2021) as a means to confer resiliency to misspellings to the models (for the most part, char-based neural approaches). For example, Vaibhav et al. (2019) augment the training instances of French and English languages in the EP dataset (see Section 6.4) by using the MTNT dataset of Michel and Neubig (2018) (see Section 6.4).

Noise is injected by randomly adding or deleting characters, and randomly adding emoticons and stop words in order to simulate noise and grammatical errors.

Karpukhin et al. (2019) experimented with four different types of misspellings, correspondingly generated by *deleting*, *inserting*, *substituting*, and *swapping* characters, that were applied to 40% of the training instances for Czech, German, and French source languages. Some authors have investigated the idea of *backtranslation* (i.e., reversing the natural direction of the translation, thus translating from the target language to the source language) as a mechanism to generate additional data. The idea is to generate the source translation-equivalent in domains in which resources for the target language are more abundant. The final goal is thus to enhance the source data and to inject misspellings so that a machine translation model resilient to misspellings can be later trained (Zheng et al., 2019; Li and Specia, 2019). In particular, Zheng et al. (2019) applied this technique to social media content for English-to-French, based on the observation that training data for this social media rarely contain misspellings in the target side, or do so in very limited quantities. They used additional techniques to expand the training set, including the use of out-of-domain documents (they considered the domain of news) along with their automatic translations.

Similarly, Li and Specia (2019) combined the idea of backtranslation with a method called *Fuzzy Matches* (Bulté and Tezcan, 2019). Fuzzy Matches takes as input a parallel corpus and a monolingual dataset and, for each sentence in the monolingual dataset, searches for the most similar ones in the parallel corpus, and returns the translation equivalent (i.e., its parallel view) as a potential translation for the original sentence. This method was applied to a monolingual corpus containing misspellings either *backwards* (this happens when the monolingual corpus is from the target language) and *forward* (this happens when the monolingual corpus is from the source language), thus generating (clean) translation approximations of noisy data. They combined this heuristic with a method to generate a monolingual corpus based on generating automatic transcriptions from audio files (using the so-called Automatic Speech Recognition software), in the hope that these transcriptions would eventually contain misspellings.

A different approach for developing resiliency to misspellings is the so-called *fine-tuning* approach that, in the context of machine translation, comes down to using a pre-trained translator model (typically trained on clean data) and performing additional epochs of training using source instances with injected misspellings (Namysl et al., 2020). Passban et al. (2021) experimented with a variant to this approach, called *Target Augmented Fine-Tuning* (TAFT), that consists of concatenating, at the end of the target sentence, the correct spelling of the misspelt term of the source sentence. The idea is to condition the model not only to produce the target sentence but also to discover the correct spelling of the affected source word.

Data augmentation has been applied to problems other than machine translation as well. For example, Namysl et al. (2020) propose a mechanism for generating misspelt entries for the tasks of named entity recognition (NER) and neural sequence labelling (NSL) characters of the words in a sentence as follows. Given a word  $w = (c_1, \dots, c_n)$  consisting of  $n$  characters, a pseudo-character  $\epsilon$  is inserted before every character and after the last one, thus obtaining a new token  $w = (\epsilon, c_1, \epsilon, c_2, \epsilon, \dots, c_n, \epsilon)$ . For example, given the word *spell*, a token  $\epsilon s \epsilon p \epsilon e \epsilon l \epsilon l \epsilon$  is created. Subsequently, a few of these characters are randomly chosen and replaced with another character randomly drawn from a certain probability distribution (called the *character confusion matrix*) that also includes  $\epsilon$  in its domain. For example, two possible derivations would be (note the underlined characters):

$$\begin{aligned} \text{(i)} \quad & \epsilon s \underline{\epsilon} p \epsilon e \epsilon l \epsilon l \epsilon \rightarrow \epsilon s \underline{m} p \epsilon e \epsilon l \epsilon l \epsilon \\ \text{(ii)} \quad & \epsilon s \epsilon p \epsilon e \epsilon l \epsilon \underline{l} \epsilon \rightarrow \epsilon s \epsilon p \epsilon e \epsilon l \epsilon \underline{\epsilon} \end{aligned}$$

Finally, all the remaining pseudo-characters are removed. In our example, this would give rise to the words (i) *spell*, and (ii) *spel*, respectively.

### 5.1.2 Adversarial Training

A different, related strategy for augmenting the data is by means of *adversarial training*. There are two main types of adversarial training that have been applied to the problem of misspellings:

1. **White-box setting:** Resiliency to misspellings is attained by adopting a perturbation-aware loss as the objective function of a specific model.
2. **Black-box setting:** A general-purpose model is trained to develop robustness to adversarial samples.

Li et al. (2019a) propose TEXTBUGGER, a method to generate misspellings by means of adversarial attacks. The method first searches for the most influential sentences (those for which the classifier returns the highest confidence scores) and then identifies the most important words in each such sentence (those that, if removed, would lead to a change in the classifier output). These words are altered by injecting misspellings either in training and in test documents. Zhou et al. (2020) generate adversarial examples via a loss-aware perturbation (hence, in a white-box setting) following Goodfellow et al. (2015), i.e., a perturbation to the input *optimised for damaging the loss* of the model. Their neural model was dubbed *Robust Sequence Labelling* (RoSeq), and was applied to the problem of named-entity recognition (NER). The idea is to optimise both for the original model’s loss and for the perturbation loss, simultaneously. Note that in this case, there is no explicit augmentation of training data, but rather an implicit regularisation in the loss function that carries out the adversarial training approach. Cheng et al. (2019) applied a similar idea but in the context of machine translation. The method is called *Doubly Adversarial Input* since, in this case, the perturbation is applied both to the source and to the target sentences. The most influential words in a sentence (hence, the candidates to perturb) are identified by searching for possible replacements that, if used in place of the original word, would yield the maximum (cosine) distance in the embedding space with respect to the original vector. The set of candidate words that are electable for this replacement is made of words that are likely to occur in place of the original one according to a language model trained for the source or target language, correspondingly. For the target sentences, this set is further expanded with words that the translator model itself considers likely. Later on, Park et al. (2020) extended this idea to the concept of *subwords* and their segmentation (see also Kudo and Richardson, 2018).

## 5.2 Character-Order-Agnostic Methods

There is abundant evidence from the psycho-linguistics literature indicating that humans are able to read garbled text (i.e., text in which the character-order within words is rearrangement, often called *scrambled*) without major difficulties, as long as the first and last letters remain in place, as in, *The chatreclas in tihs sencetme hvae been regarraned.* (see, e.g., Andrews, 1996; Rayner et al., 2006; McCusker et al., 1981). This is not true for computational language models relying on current representation mechanisms, though (Heigold et al., 2018; Yang and Gao, 2019). Character-order-agnostic methods (Sakaguchi et al., 2017; Belinkov and Bisk, 2018; Malykh et al., 2018; Sperduti et al., 2021) gain inspiration from these observations and propose different mechanisms that defy the need for representing the internal order of the characters; Figure 2 depicts this intuition.

The earliest published work we are aware of is by Sakaguchi et al. (2017). Their model, called the *Semi-Character Recurrent Neural Network* (ScRNN), represents the first and last characters of a word as separate one-hot vectors, while the internal characters are encoded as a bag-of-characters, i.e., a juxtaposition of one-hot vectors where character order is disregarded. The model was applied specifically to spelling correction, rather than to any particular downstream application. ScRNN was adopted as the first stage of a double-step method by Pruthi et al. (2019) (covered in Section 5.3).

Later on, Belinkov and Bisk (2018) proposed a representation mechanism, called *meanChar*, that was tested in machine translations contexts. In particular, the representation comes down to averaging the character embeddings of a word, and then using a word-level encoder, along the lines of the CharCNN proposed by Kim (2014).

Malykh et al. (2018) proposed

*Robust Word Vectors* (RoVe), a method that generates three vector representations out of each word: the *Begin* (B), *Middle* (M), and *End* (E) vectors. These vectors correspond to the juxtaposition of the one-hot vectors of certain characters in a word. For example, given the word *previous*, B is the sum of the one-hot vectors of the first three characters (*pre*), E is the sum of the one-hot vectors of the last three characters (*ous*), while M sums the one-hot vectors of all characters in the word (and not only of the remaining central characters, as the name may suggest). The method showed promising results in three different languages including Russian, English, and Turkish, and in three different tasks including paraphrase detection, sentiment analysis, and identification of textual entailment.

Sperduti et al. (2021) proposed a pre-processing trick, called *BE-sort*, to tackle the problem. The method comes down to alphabetically sorting all middle characters of a word, excluding the first and the last character, so that the original word itself (e.g., *embedding*) as well as any potentially garbled variant of it (e.g., *edbemindg*, *ebmeinddg*, etc.), would end up being represented by the exact same surface token (e.g., *ebddeimng*). This pre-processing is not only applied to the words in the training corpus, but also to every future test word. Word embeddings learned by using Skip-gram with negative sampling on a BE-sorted variant of the British National Corpus were found to perform almost on par, across 17 standard intrinsic tasks, with respect to word embeddings learned on the original corpus, and much better than word embeddings learned on variants of this corpus in which words were garbled at different probabilities.

## 5.3 Double-Step with Text Normalization

As the name suggests, double-step methods tackle any task by performing two subsequent steps: first, a task-agnostic *text normalization* step addresses and corrects any misspellings in the input text; second, the actual task of interest is performed, with the assumption that the input is now error-free. Since the first step removes misspellings from the

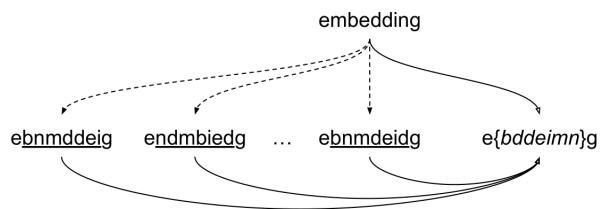


Figure 2: Conceptualization of an order-agnostic representation for garbled words. Dotted lines denote garbled variants of the original word, on the top. Solid lines denote an order-agnostic representation of a surface form word. If all characters (but the first and last) are represented as a set, then the representation of the original word and the garbled variants coincide.

source text, some authors have suggested that double-step methods represent the opposite of data-augmentation-based approaches (Plank, 2016).

There are two main strategies for implementing double-step methods. The first one, that we could call the *independent* approach, in which the error correction step is carried out independently from the second, task-specific step, that receives the cleaned input. The second one, that we call the *end-to-end* approach, instead considers the correction step and the task-specific step as dependent, and optimises both jointly.

While the double-step strategy is certainly the most straightforward and generic one, it loses any opportunity to learn from the type of misspellings that might characterise the specific task at hand. For example, in tasks like native language identification or authorship profiling, analysing the misspellings someone is prompted to produce could certainly bring to bear useful information to uncover their nationality, or the true identity, of the author of an unknown document. For example, cleaning all QWERTY errors from a document, as in *to allñow*  $\rightarrow$  *to allow*, would preclude to draw insights on the type of keyboard layout the author of a document was using; in this case, the mistake seems to suggest that the subject was using a Spanish layout (where character  $\tilde{n}$  is typically placed just to the right of character *l*), and this in turn brings evidence towards the fact that the unknown person comes from any Spanish-speaking region.

Aside from these considerations, double-step methods also lose the opportunity to learn from the linguistic phenomenon of misspellings itself. For example, the observation that garbling the middle letters of a word does not impede a human to comprehend a text seems to suggest that the way we humans process text does not take character order into much consideration, opening the gates for investigating new, hopefully more efficient, end-to-end representation mechanisms for encoding text or training language models. This, along with the fact that there is no precise definition of what *text normalisation* or related concepts like *spelling correction* are exactly, makes double-step methods arguably represent the least interesting approach to the scientific community (Plank, 2016). Nevertheless, double-step methods are straightforward solutions, and are customarily employed in industry Bhargava et al. (2017).

Pruthi et al. (2019) adopted a variant of ScRNN (covered in Section 5.2) as the first step of a double-step strategy applied to the problem of sentiment analysis and part-of-speech tagging. The variant implements heuristics for handling the *unknown tokens* (typically denoted by UNK) that ScRNN produces whenever it encounters an out-of-vocabulary (OOV) word (i.e., words that were not considered during the training phase). In particular, three mechanisms are explored: (i) *pass-through*, in which the UNK token is replaced by the original OOV term; (ii) *back-off to neutral*, in which the UNK token is replaced by a word that has a neutral value for the classification task; and (iii) *back-off to a background model*, in which another, more generic (hence less suitable for the task), spelling corrector is invoked in place of ScRNN.

Kurita et al. (2019) propose the *Contextual Denoising Autoencoder*. The Autoencoder receives in input the incorrect version of a textual token (e.g., *wrod*, incorrect spell of *word*) and predicts its denoised version in the output (e.g., *word*) by leveraging contextual information. The base architecture that Kurita et al. (2019) employed is a transformer model. To embed words, Kurita et al. (2019) exploited the CNN encoder of ELMO. Both Li et al. (2021) and Passban et al. (2021) propose methods for machine translation that take into account error correction in an *end-to-end* manner. Both approaches resort to an auxiliary task based on a double decoder for correcting the input. Given the noisy instance  $x'$ , the decoder is trained to produce its translated version  $y$ , while the correction decoder is trained to regenerate  $x$ , the clean version of  $x'$ . The two decoders are jointly optimised by means of a weighted loss, that takes into account the translation error and the reconstruction loss simultaneously.

## 5.4 The Tuple-Based Methods

Although the intuitions behind tuple-based methods are variegated, these methods find a common ground in the way training instances are represented. The two most common approaches are *tuples* of the form  $(x, x')$ , in which  $x$  and  $x'$  represent a clean and misspelt instance, respectively, and *triplets* of the form  $(x, x', y)$  in which  $y$  is a task-dependent specification of the desired output (e.g., a translation of  $x$ ). The instances can be words, sentences, or any other lexical unit.

Alam and Anastasopoulos (2020) used a tuple-based method to endow a transformer-based machine translator with resiliency to misspellings. To do so, they resorted to a dataset originally designed for grammatical error correction and consisting of tuples  $(x, x')$ , with  $x'$  a misspelt version of the sentence  $x$ . The idea is to generate translations of  $x$  to create new tuples  $(x', y)$  in which the misspelling-free translation  $y$  is presented as the desired output for the misspelt input  $x'$ ; tuples thus created are then used to fine-tune a transformer model.

Zhou et al. (2019) proposed a cascade model based on triples for machine translation. Given a triplet  $(x, x', y)$  (in which  $x$ ,  $x'$ , and  $y$  are defined as before), the model combines two auto-encoders sequentially: the first one is a denoising auto-encoder that receives  $x$  as the expected output for input  $x'$ , while the second one is a translation decoder that receives  $y$  as the expected output for the encoded representations of  $x$  and  $x'$ .

Edizel et al. (2019) propose *Misspelling Oblivious word Embeddings* (MOE), a variant of FastText (Joulin et al., 2017; Bojanowski et al., 2017) which, in turn, is a variant of the CBOW architecture of WORD2VEC (Mikolov et al., 2013) that endows the architecture with the ability to model subword information. The idea is to enhance the loss function of FastText with a component that favours the embeddings of subwords from misspelt terms to be close to the embedding of the correct term. To this aim, the authors created a dataset of word tuples  $(x, x')$  by relying on a probabilistic error model that captures the probability of mistakenly typing a character  $c'$  when the intended character was  $c$  by taking into account the entire word and its context. The probabilistic model was developed using an internal query log of Facebook.

Closely related, Doval et al. (2019) propose a modification of the Skip-Gram with Negative Sampling (SGNS) architecture of WORD2VEC (Mikolov et al., 2013) based on triplets of the form  $(w, w', b_j)$ , where  $b_j$  is the  $j$ -th word in a set of *bridge words*, and  $w'$  is a misspelt version of word  $w$ . The intuition behind bridge words is as follows. Consider the occurrence of a word *friend* in a document that also contains the misspelt form *frèinnd* in similar contexts; consider, for example, the sentence *my friend is tall* and *my frèinnd is tall*. The method first pre-processes the text by eliminating double letters and accents. In our example, *frèinnd* would thus become *freind* (note that two letters remain still swapped). Then, two sets of *bridge words* are generated, each containing all the words that would result from eliminating one single character from *friend* and *freind*, respectively. In our example, this would lead to one set of bridge words for the clean word *friend*, i.e.,  $\{riend, fiend, frend, frind, fried, frien\}$ , and another one for the misspelt word *freind*, i.e.,  $\{reind, feind, frind, freid, frein\}$ . All the words included in the union of both bridge words sets are then given as input to the SGNS model, which is requested to predict the target context (*my, is, tall*). The name *bridge words* refers to the fact that there are common elements at the intersection of both sets of variants thus created (e.g.,  $\{frind\}$ ) which act as *bridges* between the correct and the misspelt variant. Some limitations of this method include the possibility to generate bridge words that collide with other existing words (for example *fiend*), and the increased computational cost that derives from the generation of potentially many new training instances. To counter these problems, the authors propose some heuristics, like generating bridge words only for a limited number of terms, and to limit the impact of the bridge words during training.

## 5.5 Other Methods

This section is devoted to discuss relevant related methods that do not belong to any of the aforementioned groups. Papers in this section include ideas as variegated as experimental encodings (Jones et al., 2020; Sankar et al., 2021; Wang et al., 2020; Salesky et al., 2021), regularisation functions (Li et al., 2016), and contrastive learning (Sidiropoulos and Kanoulas, 2022; Chen et al., 2022).

Jones et al. (2020) propose Robust Encoding (*RobEn*), a (context-free) encoding technique that maps a word (e.g., *bird*) along with its possible misspellings (e.g., *brid, bidr*, etc.) to the same token, so that the variability among these surface forms becomes indistinguishable to the downstream model. Unique tokens therefore represent *clusters* of terms and typos. The authors study means for obtaining these clusters, and analyse the impact of different clustering strategies in terms of *stability* (measures the resiliency to perturbations) and *fidelity* (a proxy of the quality of the tokens in terms of the expected performance in downstream tasks). An initial solution is proposed in which clusters are decided by seeking for connected nodes in a graph in which nodes represent words from a controlled vocabulary, and in which edges connect words that share a common typo. Such a solution is found to lead to very stable solutions, but at the expense of fidelity. The final proposed method relies on agglomerative clustering, and searches for the clusters by optimising a function that trades-off stability for fidelity. Sankar et al. (2021) propose a method based on Locality-Sensitive Hashing (LSH). The final goal of LSH representations is to derive vectorial representations *on-the-fly*, thus reducing the memory footprint traditional embedding matrices require. In a nutshell, LSH assigns a hash code (i.e., binary representation much shorter than a standard one-hot encoding) to a word based on its n-grams, skip-grams, and POS tags, and derives a vector representation as a linear combination of learnable (low dimensional) basis vectors. The intuition is that LSH projections may lead to similar representations for clean and misspelt sentences, since this hashing is, by construction, low sensitive to noise. The experiments reported in text classification and perturbation studies seem indeed to confirm these intuitions.

Wang et al. (2020) experimented with visually-grounded embeddings of characters. The idea consists of generating an image for every character (i.e., rastering a character in a specific font-type and font-size), thus obtaining a matrix representation of it (the pixels of the image), that can directly be used as an embedded representation of the character. The intuition is that visually similar characters (e.g., ‘o’, ‘O’, ‘0’) shall end up being represented by similar such embeddings. The images (i.e., the character embeddings) are further reduced using PCA, and given as input to a char-based CNN that acts as the encoder for a machine translation neural model. In a related study, Salesky et al. (2021) explored visually-grounded representations of sliding windows (specifically, subword tokens) for machine translation. This work was later used, by the same team of researchers, at the basis of PIXEL (Rust et al., 2023), a language model that similarly processes text as a visual modality. PIXEL was trained using the ViT-MAE (He et al., 2022) architecture

on the same dataset used to train BERT, and demonstrated strong resilience to graphical misspellings, that is, cases where characters visually similar.

Li et al. (2016) investigate a special-purpose regularisation of the loss function that aims to confer resiliency to the presence of misspellings. The regularisation terms gains inspiration from adversarial training in computer vision, and is based on minimizing the Frobenius norm of the Jacobian matrix of partial derivatives of the outputs with respect to the (perturbed) inputs. Although the method was found to work better than other regularisation techniques (including dropout), the method was only tested against *masking* misspellings, i.e., against one specific type of noise consisting of replacing random characters with a mask symbol. It thus remains to be seen the extent to which this regularisation technique is of help when confronted with more general types of misspellings (e.g., swapping, garbling, deletion, etc.).

Sidiropoulos and Kanoulas (2022) studied ways for improving the performance of passage retrieval when the user questions contain misspellings. The approach is based on a combination of data augmentation and contrastive learning in dual-encoder architectures. The dual-encoder is based on BERT and is trained to rank, given a user question, the correct passages higher than incorrect passages. The data augmentation strategy consists of randomly deciding when to issue a clean question, or instead a misspelt variant of it, to the dual-encoder during training. The contrastive learning enforces the original question to be closer to the typoed variant than to any other question in the dataset. The experimental results prove that both data augmentation and contrastive learning help to improve the performance of passage retrieval, and that these techniques work even better when combined. In a related paper, Chen et al. (2022) propose LOVE, a contrastive method for learning out-of-vocabulary embeddings for misspellings, that enforces representations of typoed words to be close to the representations BERT derive for the corresponding correct word. A related body of papers has to do with the treatment of misspellings in the context of spam detection. Most of these papers belong to the first era of misspellings (see Section 2.1). For example, Ahmed and Mithun (2004) and Renuka and Hamsapriya (2010) rely on word stemming as a method to improve spam message detection, while Lee and Ng (2005) use a Hidden Markov Model-based method to correct misspelt words before performing detection. Recent survey papers like those by Crawford et al. (2015) and Wu et al. (2018) indicate that analysing the textual content of a spam message is only one small part of the operations typically used for spam detection. In addition to text, other elements such as key segments (e.g., URLs), patterns in usernames, account statistics, etc., are also worth considered.

# Misspellings in Natural Language Processing


Ref.	Section	Class	Task	Misspelling	Model	Datasets	Metrics	
Heigold et al. (2018)	5.1.1	Data Augmentation	Machine translation	Swap, Middle-Perm.	Char-based BPT CNN	CNN, WMT16, newstest 2016	BLEU	
Belinkov and Bisk (2018)	5.1.1	Data Augmentation	Machine Translation	Full-Perm., Swap, QW-ERTY	Char-based CNN	TED parallel corpus	BLEU	
Vaibhav et al. (2019)	5.1.1	Data Augmentation	Machine Translation	Add., Del.	Back-translation LSTM	MTNT, TED, EP	BLEU	
Karpukhin et al. (2019)	5.1.1	Data Augmentation	Machine Translation	Swap, Del.	Char-based CNN	IWSLT	BLEU	
Namysl et al. (2020)	5.1.1	Data Augmentation	Named Entity Recognition Sequence Labeling	Full-Perm., Middle-Perm., Swap, QWERTY	BiLSTM-CRF, BERT, FLAIR, ELMo, Glove	CoNLL 2003, 2004, German Eval 2004	F1	
Passban et al. (2021)	5.1.1	Data Augmentation	Machine Translation	Add., Del.	BPE + Transformer	WMT-14, newstest 2013, 2014	BLEU	
Li and Specia (2019)	5.1.1	Data Augmentation	Machine Translation	Various	Transformer	MTNT	BLEU	
Zheng et al. (2019)	5.1.1	Data Augmentation	Machine Translation	Various	Transformer	WMT15, KFTT, TED parallel corpus, JESC, MTNT	BLEU	
Cheng et al. (2019)	5.1.2	Adversarial Training	Machine Translation	Various	Transformer	LDC, NIST 2002-2008, WMT14, newstest 2013, 2014	BLEU	
Park et al. (2020)	5.1.2	Adversarial Training	Machine Translation	Del., Add., Swap	Transformer	MTNT 2018, 2019, IWSLT 2013, 2015, 2017	BLEU	
Li et al. (2019a)	5.1.2	Adversarial Training	Text Classification	Adversarial	LR CNN LSTM	Rot. Tom. Mov. Rev. IMDB	Success Accuracy	Rate
Zhou et al. (2020)	5.1.2	Adversarial Training	Named Entity Recognition	Natural Misspellings	CNN LSTM HN	CoNLL 2002, 2003, WNUT 2016, 2017	F1	
Belinkov and Bisk (2018)	5.2	Char-order agnostic	Machine Translation	Full-Perm., Middle-Perm., Swap, QWERTY	Char-based CNN	IWSLT 2016	BLEU	
Malykh et al. (2018)	5.2	Char-order agnostic	Sentiment Analysis, Text Entailment	Natural Misspellings	LSTM, SRU, CNN	Reuters RCV1, Russian National Corpus, Turkish "42 bin haber"	ROC AUC	
Sakaguchi et al. (2017)	5.2	Char-order agnostic	Grammatical Error Correction	Middle-Perm., Del., Add.	Char-based, CNN, ScRNN	PT	Accuracy	
Sperduti et al. (2021)	5.2	Char-order agnostic	Various	Full-Perm., Middle-Perm.	Word2vec	British National Corpus	Various	
Pruthi et al. (2019)	5.3	Double-step	Sentiment Analysis, Paraphrase Detection	Swap, Add., Del., QWERTY	BERT, Bi-LSTM	Stanf. Sent. Tree., MRPC	Accuracy	
Kurita et al. (2019)	5.3	Double-step	Text Classification	Full-Perm.	BERT, ELMO, FastText, CDAE	Jigsaw 2018, 2019, OffensEval 2019	Accuracy	
Li et al. (2021)	5.3	Double-step	Machine Translation	Various	Transformer, GRU	flickr2017, mscoco2017	BLEU, METEOR	
Passban et al. (2021)	5.3	Double-step	Machine Translation	Add., Del.	BPE + Transformer	WMT-14, newstest 2013, 2014	BLEU	
Alam and Anastasopoulos (2020)	5.4	Tuple methods	Machine Translation	Various	Bart For Conditional Generation	NUCLE, FCE, Lang8, JFFLEG-ES	Various	
Zhou et al. (2019)	5.4	Tuple methods	Machine Translation	Various	Transformer	TED, MTNT	BLEU	
Edizel et al. (2019)	5.4	Tuple methods	Word Similarity	Other	FastText, MOE	Wikipedia, WS353, Rare Words, Mikolov's word analogy	Various	
Doval et al. (2019)	5.4	Tuple methods	Various	Various	Word2vec, FastText	wordsim353, SCWS, SimLex999, SemEval17	Spear.	
Jones et al. (2020)	5.5	Other methods	Various	Swap, Add., Del.	BERT	GLUE	Various	
Sankar et al. (2021)	5.5	Other methods	Text Classification, Data Augmentation	Swap, Add., Del.	BERT, BiLSTM, SGNN, ProSeqo	MRDA, SWDA, AR, YA	Accuracy	
Wang et al. (2020)	5.5	Other methods	Machine Translation	Natural Misspellings (various types)	CNN-LSTM	IWSLT 2016	BLEU	
Salesky et al. (2021)	5.5	Other methods	Machine Translation	Swap, Full-Perm., Middle-Perm.	fairseq	MTTT TED, MTNT, WIPO, WMT	BLEU	
Li et al. (2016)	5.5	Other methods	Various	Other	CNN	Subj, CR, Stanf. Sent. Tree., Rot. Tom. Mov. Rev.	Accuracy	
Sidiropoulos and Kanoulas (2022)	5.5	Other methods	Question Answering	Full-Perm., Middle-Perm., QWERTY	BERT	MS MARCO, Natural Questions	MMR, Recall, Top k-ranks	
Chen et al. (2022)	5.5	Other methods	Sentiment Analysis, Text Classification, Named Entity Recognition, Word Similarity, Word Cluster	Swap, Del., Add., QW-ERTY	FastText, MIMIC, BoS, KVQ-FH, LOVE	Stanf. Sent. Tree. 2, Rot. Tom. Mov. Rev., CoNLL 2003, BC2GM, Various Intrinsic Datasets	Accuracy, F1, Spearman, Purity	

Table 1: Reference guide for the methods discussed in Section 5, along with tasks and misspellings addressed, type of models, datasets, and metrics used in the evaluation.

## 6 Tasks, Evaluation Metrics, and Datasets

Misspellings affect written text in a broad sense, and thus no text-related application is at safe from these. However, the phenomenon has been more actively investigated in particular contexts, with machine translation and text classification being the most prolific such areas. Figure 3 gives an insight into how methods have been applied to which tasks at the time of writing this survey. In this section, we turn to describe the most important tasks (Section 6.1) in which misspellings have been investigated, by also discussing the most employed evaluation metrics (Section 6.2), dedicated events (Section 6.3), and datasets (Section 6.4).

Figure 3: Distribution of methods (left) across tasks (right)

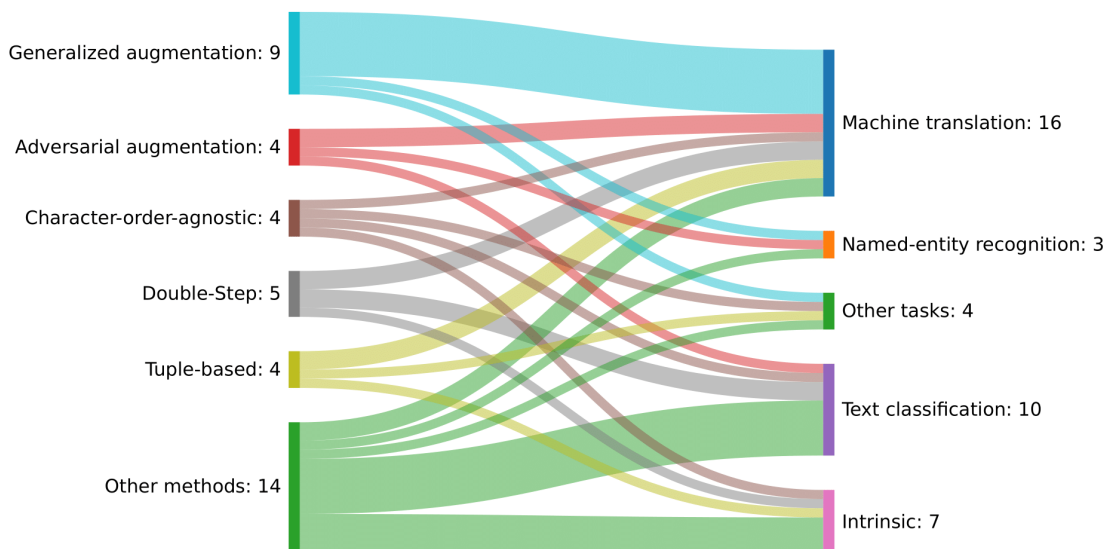

### 6.1 Main Tasks

The main tasks in which the phenomenon of misspellings has been more thoroughly investigated are listed below:

- Machine translation (MT)** is a supervised learning task that involves producing a text in a target language that is a translation equivalent of a text written in a different source language. With most modern MT systems relying on neural networks, the field is nowadays broadly referred to as Neural Machine Translation (NMT). Undoubtedly, NMT is the field in which more methods for misspellings have been applied. One possible reason why this area has attracted a lot of attention may have to do with the appearance of two influential papers by Belinkov and Bisk (2018) and Heigold et al. (2018) that brought the importance of misspellings in MT to the fore.
 

Most methods to counter misspellings in NMT rely on data augmentation (Section 5.1); see, e.g., (Heigold et al., 2018; Belinkov and Bisk, 2018; Vaibhav et al., 2019; Passban et al., 2021; Zheng et al., 2019; Cheng et al., 2019; Park et al., 2020; Li et al., 2021; Alam and Anastasopoulos, 2020; Wang et al., 2020; Salesky et al., 2021; Karpukhin et al., 2019).
- Text classification (TC)** is the supervised learning task of assigning class labels to unseen documents (Sebastiani, 2002). While the class labels may virtually represent *anything* (e.g., from types of news, to opinion stance, to characteristics of an author), the most important applications of TC for the concerns of this survey include *spam filtering* and *content moderation* (Kurita et al., 2019). The use of misspellings in such contexts might be deliberate and malicious, targeting specific relevant words so that they become unrecognisable for an automatic detector (thus eluding any ban), but easily recognisable for the final recipient of the message. Some relevant approaches focusing in TC include (Li et al., 2019a; Kurita et al., 2019; Sankar et al., 2021; Li et al., 2016; Chen et al., 2022).
- Named entity recognition (NER)** (Sang and De Meulder, 2003) is the task of identifying and categorising (potentially multi-word) expressions referring to entities such as names, locations, and organisations, in text (e.g., *White House*). Namysl et al. (2020) observed that humans can resolve NER even in the presence of



corrupted inputs, and studied automatic ways for developing NER systems resilient to misspellings. Some techniques explored for NER include data augmentation (Namysl et al., 2020; Zhou et al., 2020) and contrastive learning (Chen et al., 2022).

- *Other downstream tasks* tested in the field of misspellings include:
  - *Part-Of-Speech tagging* (PoST), the task of labelling words with their correct morphosyntactic part-of-speech (e.g., verb, noun, preposition, etc.).
  - *Paraphrase detection* is the task of determining whether two given sentences have the same meaning or not.
  - *Identification of textual entailment* is the task of determining whether there is entailment, contradiction, or no relation, between two given sentences.
  - *Question answering*: is the task of providing natural language answers to natural language questions.

Influential papers that tested some of these tasks are: Malykh et al. (2018); Sidiropoulos and Kanoulas (2022); Jones et al. (2020); Doval et al. (2019).

- *Intrinsic tasks*: misspellings have also been tested by means of problems carefully designed to probe the capability of the system to cope with one specific language-related ability. Some of these include:
  - *Semantic word similarity*, the task of identifying semantic relationships between words like *cat* and *dog*, or *tall* and *short* (Lenci et al., 2021).
  - *Analogy completion*, the task of inferring which, among a closed set of options, is the more likely missing word from an incomplete analogy like *Colosseo stands to Rome as the Buckingham Palace stands to . . . ?* (Lenci et al., 2021).
  - *Outlier detection*, the task of identifying the word from a set of candidates that bears less semantic similarity to the rest of the terms in that set (Camacho-Collados and Navigli, 2016).

Methods that have been assessed in intrinsic tasks include those by Sperduti et al. (2021); Pruthi et al. (2019); Edizel et al. (2019); Chen et al. (2022); Doval et al. (2019).

## 6.2 Evaluation Metrics

The most straightforward way to measure the robustness of a system to the presence of misspellings (and the way most papers have indeed adhered to) comes down to simply confronting the performance a model scores with and without noisy inputs, given a specific evaluation measure for a specific task.

That is, let  $m \in \mathcal{M}$  be a generic inference model  $m : \mathcal{X} \rightarrow \mathcal{Y}$  issuing predictions  $\hat{y} \in \mathcal{Y}$  on textual inputs  $x \in \mathcal{X}$ , that has been trained to perform any given downstream task (classification, translation, etc.), and let  $e : \mathcal{M} \times (\mathcal{X} \times \mathcal{Y})^n \rightarrow \mathbb{R}$  be our evaluation measure ( $F_1$  score, BLEU score, etc.) of choice, i.e., any scoring function that takes as input a model and a (labelled) test set, and computes a value reflecting the empirical *goodness* of  $m$ . The degradation in performance due to the presence of misspellings can generally be estimated as the difference in performance:

$$e(m, \{(x_i, y_i)\}_{i=1}^n) - e(m, \{(\tilde{x}_i, y_i)\}_{i=1}^n)$$

where  $\tilde{x}_i$  is a misspelt variant of the (clean) input  $x_i$ .

Such an evaluation strategy is generic enough as to apply to virtually any supervised task, and therefore has nothing specific to do with any particular evaluation metric. Typical evaluation measures used in the tasks discussed in Section 6.1 include, among others, BLEU (Papineni et al., 2002) and METEOR (Banerjee and Lavie, 2005) for machine translation; precision, recall, and  $F_\beta$  score for text classification and named entity recognition (van Rijsbergen, 1979); Pearson correlation and Spearman correlation for intrinsic tasks (Lenci et al., 2021; Doval et al., 2019). An in-depth survey of these and other specific evaluation metrics is out of the scope of this article.

A few metrics have been proposed by Anastopoulos (2019) which are particularly suitable to measuring the robustness of misspellings in the context of machine translation. These are based on the observation that any *perfectly robust-to-noise MT system would produce the exact same output for the clean and erroneous versions of the same input sentence*. The intuition is sketched as follows: let  $m^*$  be a perfect MT system; then  $m^*(x)$  should produce the same (correct) prediction  $y^*$  as  $m^*(\tilde{x})$ , with  $\tilde{x}$  a noisy variant of  $x$ . Such a perfect model is typically unavailable, but we might have a reasonably good model  $m$  instead. System robustness is therefore estimated by computing the extent to which  $m(x)$  produces outputs similar to  $m(\tilde{x})$ , even though such predictions might not be perfect. In light of this, Anastopoulos (2019) proposes the Robustness Percentage (RB) as:

$$\text{RB} = 100 \times \frac{|\{(x, \tilde{x}) : m(x) = m(\tilde{x})\}_{(x, \tilde{x}) \in D}|}{|D|} \quad (1)$$

where  $D$  is a dataset of pairs of correct and noisy inputs.

In the same paper, Anastasopoulos (2019) propose the Target-Source Noise Ratio (NR), a more fine-grained evaluation measure that also accounts for the distance between  $x$  and  $\tilde{x}$ , given that small differences would count just as much as large differences for RB. Instead, NR tries to factor out this distance  $d$ , which is computed using a surrogate evaluation metric like BLEU, or METEOR, for example. NR is defined as:

$$\text{NR}(m, x, \tilde{x}) = \frac{d(m(x), m(\tilde{x}))}{d(x, \tilde{x})} \quad (2)$$

Anastasopoulos (2019) suggest reporting the mean NR across a all pairs  $x$  and  $\tilde{x}$  contained in a dataset.

Michel et al. (2019) proposes a metric for evaluating adversarial attacks that requires access to the correct translation  $y^*$ . The metric requires a similarity function  $s$  and is computed for each pair of inputs  $x$  and  $\tilde{x}$  as follows:

$$A(m, x, \tilde{x}, y^*) = s(x, \tilde{x}) + \frac{s(m(x), y^*) - s(m(\tilde{x}), y^*)}{s(m(x), y^*)} \quad (3)$$

the adversarial attack is considered to be successful whenever  $A(m, x, \tilde{x}, y^*) > 1$ ; the metric therefore computes the fraction of successful cases against all cases in a dataset.

### 6.3 Conferences and Workshops

The most important venues, including workshops, conferences, and shared tasks, that have been devoted to discussing the problem of misspellings in NLP include:

- **Workshop on Analytics for Noisy Unstructured Text Data (AND):** This workshop had five editions run from 2007 to 2011. The main objective of AND was to gather papers discussing techniques for dealing with noisy inputs. The notion of *noisy inputs* encompasses misspellings, but also grammatical error correction, text normalisation, spelling correction, and any other form of noise affecting textual data as those generated through speech recognition systems or OCR. The first workshop was co-located in the 2007 edition of the *Joint Conference of Artificial Intelligence (IJCAI)*, although no proceedings seem to be available online. The second edition was co-located at the SIGIR conference in the next year (Lopresti et al., 2008), followed by a third edition co-located in the *International Conference On Document Analysis and Recognition (ICDAR)* (Lopresti et al., 2009), and a fourth edition co-located in the *International Conference on Information and Knowledge Management (CIKM)* (Basili et al., 2010). The workshop then evolved as a *Joint Workshop on Multilingual OCR and Analytics for Noisy Unstructured Text Data* (Dey et al., 2011) and was, to the best of our knowledge, discontinued after that.
- **Robustness task at the World Machine Translation (WMT) Conference:** This task was first proposed in 2019 (Li et al., 2019b) and was later followed by a new edition in 2020 (Specia et al., 2020). To the best of our knowledge, this is the only shared task specifically devoted to testing the MT systems’ resiliency to misspellings. In both editions, the shared tasks focused on the same language pairs: *English-French* and *English-Japanese*. In the first edition, the test set was constructed by applying the MTNT protocol (Michel and Neubig, 2018) to data gathered from Reddit, while the previously existing datasets (WMT15 for the English-French pair, and KFTT (Neubig, 2011), JESC (Pryzant et al., 2018), and TED Talks (Cettolo et al., 2012) for the English-Japanese pair) were employed as the training set. The systems were evaluated by professional translators as well as in terms of the BLEU score. In the second edition, the news dataset WMT20 was employed as the training set, while the test sets consisted of multiple sources, including Wikipedia and Reddit comments, among others.
- **Workshop on Noisy and User-Generated Text (W-NUT):**<sup>7</sup> this is an ongoing workshop series that started in 2015, has been held every year (except 2023), with the last edition co-located at the EACL 2024; the proceedings of all editions are published in the ACL Anthology. The workshop focuses on noisy-generated content in social networks and is not exclusively devoted to misspellings. The workshop gathers papers dealing with tasks as disparate as geolocalization prediction, global and regional trend detection and event extraction, fairness and biases in NLP models, etc.

### 6.4 Datasets

In this section we turn to describe the most important types of datasets that have been used for training and evaluation of systems dealing with misspellings in literature, with particular emphasis on the techniques that have been employed

<sup>7</sup><https://aclanthology.org/venues/wnut/>

for generating them. Since misspellings are relatively infrequent in real texts (with varying levels of prevalence that depend on the medium), the aim of these techniques is that of guaranteeing a relatively high number of misspellings in the corpus, somehow akin to oversampling strategies often used in extremely imbalanced supervised scenarios. Broadly speaking, these techniques can be grouped as belonging to the following categories:

- Natural misspellings (Section 6.4.1): techniques that collect real misspellings from textual data, i.e., errors that occur spontaneously in user-generated (e.g., in social media, emails) or technologically-generated contexts (e.g., optical character recognition, automatic transcription).
- Artificial misspellings (Section 6.4.2): techniques for generating synthetic misspellings out of the original (clean) words from the texts in a dataset.
- Hybrid approach (Section 6.4.3): consists of using error correction databases (that is, databases in which real misspellings have been labelled with the correct word) to inject misspellings in clean texts. The approach is called hybrid since the misspellings being injected are real, but the injection itself is artificial.

#### 6.4.1 Datasets of Natural Misspellings

This technique comes down to collecting real misspellings to form a dataset. Since real misspellings are relatively infrequent, datasets of natural misspellings are generated by scanning large quantities of text and retaining those entries in which some misspellings are identified.

The MTNT dataset (Michel and Neubig, 2018) represents, to the best of our knowledge, the only publicly available resource devoted to collecting natural misspellings for research purposes. MTNT arises in the context of machine translation and has come to represent a reference in the field (authors such as Park et al. (2020), Zhou et al. (2019), Salesky et al. (2021), Vaibhav et al. (2019), among many others, used it as a testbed for their methods). The dataset consists of four pairs of languages (French-English, English-French, Japanese-English, and English-Japanese), and contains no less than 75,005 instances gathered from Reddit. Misspellings have been identified with the aid of text normalisation tools, word vocabularies, and scores of perplexity generated by language models as *judgments* on the feasibility of the texts given as input.

#### 6.4.2 Datasets of Artificial Misspellings

Since misspellings affect written natural language in general, they potentially harm *any* textual application one could think of. For this reason, when it comes to measuring the impact that misspellings cause in any downstream task, or when training models that ought to be robust to them, it is customary to simply take standard datasets routinely used for these downstream tasks and produce variants of them that contain misspelt entries; this is the approach followed by, e.g., Belinkov and Bisk (2018); Heigold et al. (2018); Sperduti et al. (2021); Passban et al. (2021). Given that the phenomenon of misspellings is orthogonal to the downstream tasks in which they are studied, we refrain from listing typical datasets customarily used across different disciplines (a glance at Table reveals many of them).

The most common strategy comes down to generating synthetic misspelt variants of the original words in a text. Some techniques that have been proposed for this purpose (see, e.g., Moradi and Samwald, 2021; Belinkov and Bisk, 2018; Kumar et al., 2020) and that have been reproduced in other papers are listed below. The terminology we use for naming these types of misspellings is not standard in the literature but is, we believe, appropriate for describing them. A list of methods with the types of misspellings they used is summarized succinctly in Table.

- FULL PERMUTATION: involves generating a new token by completely permuting the characters of a term, e.g., *misspell* → *pseilmls*.
- MIDDLE PERMUTATION: generates a new token by permuting all characters of a term except the first and last, which remain in place, e.g., *misspell* → *mpseisll*. This is also known as *garbling* (Sperduti et al., 2021) or *scrambling* (Heigold et al., 2018).
- SWAP: consists of choosing two adjacent characters at random from a word and interchanging their positions, e.g. *misspell* → *mispsell*.
- QWERTY: consists in emulating typographical errors that are likely to arise when employing a QWERTY layout, e.g. *misspell* → *mi9sspell* (note the key ‘9’ is placed nearby the key ‘i’ in this layout). This kind of error is a special subtype of ADDITION (see below).
- ADDITION: comes down to adding one or more characters to the target word, e.g., *misspell* → *missprell*.
- DELETION: amounts to removing one or more characters from a word, e.g. *misspell* → *misspell*.

- **SUBSTITUTION:** consists of choosing one character at random from a word and replacing it with another character, e.g., *misspell*  $\rightarrow$  *mrsspell*.

Table 2: Types of misspellings applied in each paper. We included in this table only works that used synthetic misspellings and that explicitly described the kind of misspellings used.

Papers	FULL PERM.	SWAP	MIDDLE PERM.	QWERTY	ADDITION	DELETION	SUBSTITUTION
Agarwal et al. (2007)	X	X	X	✓	✓	✓	✓
Li et al. (2016)	X	X	X	X	X	X	✓
Belinkov and Bisk (2018)	✓	✓	✓	✓	X	X	X
Heigold et al. (2018)	X	✓	✓	X	X	X	✓
Yang and Gao (2019)	X	✓	X	X	✓	✓	X
Kurita et al. (2019)	✓	X	X	X	X	X	✓
Karpukhin et al. (2019)	X	✓	X	X	X	✓	✓
Li and Specia (2019)	X	X	X	✓	✓	✓	X
Doval et al. (2019)	X	X	X	X	✓	✓	✓
Kumar et al. (2020)	X	X	X	✓	✓	X	✓
Nguyen and Grieve (2020)	X	✓	X	✓	✓	✓	X
Jones et al. (2020)	X	✓	X	X	✓	✓	✓
Namysl et al. (2020)	✓	✓	✓	✓	X	X	X
Park et al. (2020)	X	X	X	X	✓	✓	✓
Moradi and Samwald (2021)	X	✓	X	X	✓	✓	✓
Sankar et al. (2021)	X	✓	X	X	✓	✓	X
Sperduti et al. (2021)	✓	X	✓	X	X	X	X
Passban et al. (2021)	X	X	X	X	✓	✓	✓
Wang et al. (2021)	X	✓	✓	✓	✓	✓	✓
Sidiropoulos and Kanoulas (2022)	✓	✓	✓	X	✓	✓	✓
Wang et al. (2023)	X	✓	✓	✓	✓	✓	✓
Zhang et al. (2024)	X	✓	✓	✓	✓	✓	✓
Zhu et al. (2024)	X	✓	✓	✓	✓	✓	✓

### 6.4.3 Datasets of Hybrid Misspellings

Hybrid misspellings are *natural* misspellings found somewhere else, that have been *artificially* injected in a different context. These misspellings are typically taken from text normalisation and grammar correction databases, in which they are listed along with the correct surface form. Some popular examples of such databases are listed below:

- Max and Wisniewski (2010) proposed *WiCoPaCo*,<sup>8</sup> a French database of misspellings created with the edit correction log of Wikipedia.
- Zesch (2012) generated, also using the edit correction logs of Wikipedia, a German database of misspellings.
- Šebesta et al. (2017) created a database of misspellings from text generated by second-language learners in Czech.<sup>9</sup>

Other spelling correction databases that could be potentially useful for creating hybrid misspellings datasets include, among many others, those by Faruqui et al. (2018); Grundkiewicz and Junczys-Dowmunt (2014); Napoles et al. (2017); Hagiwara and Mita (2020). However, to the best of our knowledge, no one before has come to use them for this purpose.

Taking a database of misspellings and a dataset specific for any downstream task as inputs, one can easily generate a variant of the dataset which contains misspellings. The process is straightforward and comes down to finding word occurrences that appear, as the correct surface form, in any entry of the database, and then replacing such word with any of the misspelt variants recorded for it. Some popular examples of datasets created following this procedure include those by Belinkov and Bisk (2018) and Karpukhin et al. (2019).

### 6.4.4 Benchmarks

There are four main benchmarks that introduce misspellings in adversarial settings, namely AdGlue, AdGlue++, PromptRobust, and eBench, which we discuss in what follows. In each case, misspellings are generated using TextBugger (Li et al., 2019a).

<sup>8</sup><https://wicopaco.limsi.fr/>

<sup>9</sup><https://lindat.mff.cuni.cz/repository/xmlui/handle/11234/1-2143>

Two of these benchmarks, AdvGlue and AdvGlue++, are from the same research team (Wang et al., 2021, 2023). The idea is to use various state-of-the-art adversarial methods to create perturbed instances. These methods target models from different perspectives, including character-based, word-based, and syntax-based approaches. The adversarial methods are applied across the entire GLUE testbed. In the case of AdvGlue (Wang et al., 2021), the authors focus on models like BERT, DeBERTa, and others, but exclude larger LLMs. In contrast, AdvGlue++ (Wang et al., 2023) tests the best-performing LLMs, including GPT-3.5, LLaMA, and GPT-4.

Another relevant benchmark that includes misspellings is PromptRobust (Zhu et al., 2024). The aim of this benchmark is to evaluate larger LLMs against various adversarial datasets. However, the approach does not introduce misspellings in instances or labels, but rather in the prompts given to the LLMs. Similarly, Zhang et al. (2024) created a benchmark, called eBench, to test the most prominent and recent LLMs with different types of adversarial attacks, including one based on misspellings. In this case, the challenging dataset used is called AlpacaEval.

## 7 Large Language Models against Misspellings

Large Language Models (LLMs) have brought about a major revolution in the field of NLP, achieving state-of-the-art performance across several tasks (Bubeck et al., 2023). LLMs have now become part of our everyday life with the availability of proprietary platforms like ChatGPT (OpenAI et al., 2024), Gemini (Anil and 1376 other authors, 2024), and open models like LLaMA (Touvron et al., 2023).

As LLMs are trained by big companies on vast amounts of data, there are no specific methods designed to *fix* or *reduce* the impact of misspellings. Instead, a plenty of papers focus on diagnosing and analysing how these LLMs perform in several generic tasks,<sup>10</sup> such as solving student tests (Puccetti et al., 2024), respecting morpho-syntactic constraints (Miaschi et al., 2024), among many others (see, e.g., Chang et al., 2024). Few papers, though, and only recently, have focused the evaluation study on the impact of misspellings in LLMs. Overall, these papers show all LLMs experience a drop in performance when tested against misspellings.

Most important techniques to evaluate the performance of LLMs against misspellings used in the literature include *instance-based tests* and *prompt-based tests*. We discuss both types in what follows.

### 7.1 Instance-based Tests

Instance-based tests come down to inserting misspellings into the test instances themselves. The primary approach to testing LLMs against misspellings has been through dedicated benchmarks as those described in Section 6.4.4.

Wang et al. (2023, 2024) employ the AdvGLUE benchmark to evaluate the robustness of models like GPT-3.5 and GPT-4. This benchmark includes misspellings in the test instances, as outlined in Section 6.4.4.

The benchmark AdvGLUE++ (Wang et al., 2023) has served to show that both GPT-3.5 and GPT-4 experience a notable drop in performance when exposed to misspellings. However, Wang et al. (2024) found that these models are still more robust when compared to smaller models like BART-L, DeBERTa-L, and even bigger models such as `text-davinci-002`. Despite these insights, neither AdvGLUE nor AdvGLUE++ allow for a detailed ablation study, since the exact quantity and typology of misspellings in the dataset are not specified.

### 7.2 Prompt-based Tests

Prompt-based tests introduce misspellings into the prompts provided to the model. Notable examples include the PromptRobust (Zhu et al., 2024) and eBench (Zhang et al., 2024) benchmarks.

In contrast to instance-based tests, these benchmarks include an ablation study, which enables further disentangling of how misspellings impact model performance. (Zhu et al., 2024) experimented with T5-large, Vicuna, LLaMA2, UL2, ChatGPT and GPT-4 on PromptRobust, while (Zhang et al., 2024) used LLaMA, Vicuna, GPT-3.5 and GPT-4 in eBench. Both studies concluded that LLMs experience significant performance drops when faced with misspelt prompts, though GPT-4 appears to be much more resilient than other models.

---

<sup>10</sup>See also [https://huggingface.co/docs/leaderboards/open\\_llm\\_leaderboard/about](https://huggingface.co/docs/leaderboards/open_llm_leaderboard/about)

## 8 Applications

Applications of systems robust to misspellings span the entire spectrum of text-based applications, with no exception. It is not our intention to list any possible such application here, but instead, highlight those in which the presence of misspellings might be of particular relevance. This is not to say that research in other applicative areas can simply disregard the problem; certainly, the presence of misspellings harms performance no matter the task, and it is worth investing efforts in trying to devise (maybe application-dependent) ways for countering them. However, in some applications, the presence of misspellings may carry over stronger implications. In particular, when the misspellings are *intentional*, i.e., are not due to an unadvertised typographical error. Examples of this include:

- Content moderation: language used in social networks is often informal and rich in misspellings and ungrammatical sentences; the phenomenon is well covered by Baldwin et al. (2013). This poses obvious difficulties for any automated analysis tool, and this is of particular concern when the misspellings are intentionally placed for escaping the control of a content moderation tool. Malicious users can cover up offensive comments by means of misspellings of graphical type (e.g., those based on replacing some characters with others that are graphically similar, like replacing an ‘i’ with ‘ı’) in order to sneak in toxic comments (e.g., ‘nıgger’, ‘ıdıot’) into a debate; see, e.g., the work by Hosseini et al. (2017); Kurita et al. (2019). As a matter of fact, in recent years, online communities have started to develop some *alternative slang* to avoid censorship that has later come to be known as *algospeak*.

The phenomenon has had a big impact on media, to the point that it has been echoed by renowned newspapers such as the Washington Post.<sup>11</sup> The phenomenon is far from new, however, and we might trace its influence back to the usage of the so-called *aesopian* languages (encrypted forms of language that became popular in totalitarian regimes, see also Loseff, 1984). Yet another related area in which (intentional) misspellings play a special role is that of pro-eating-disorders (pro-ED) communities, in which some users might resort to complex lexical variants to promote disordered eating habits that may eventually derive in anorexia or obesity (Chancellor et al., 2016).

- Spam filtering: spam filters are text classification tools aimed at preventing the delivery of unsolicited and even potentially virus-infected emails. The use of misspellings, among many other malicious practices (Fumera et al., 2006), is one way for eluding the filter to reach—much to her regret—the final user (Ahmed and Mithun, 2004; Lee and Ng, 2005; Renuka and Hamsapriya, 2010; Aldwairi and Flaifel, 2012).
- Authorship analysis: systems resilient to misspellings by design are relevant in authorship analysis. Specifically, some misspellings reveal the nativity of their author. For example, Berti et al. (2023) note that *de*, which is the misspelt form of *the*, is a typical phonological typo of Spanish native speakers. Double-step methods that clean the text as a pre-processing step are thus potentially harmful for authorship analysis endeavours. Indeed, Stamatatos (2009) cite misspellings as relevant features for authorship analysis.
- The applicative area that has, by far, received more attention with respect to the phenomenon of misspellings is machine translation (see Section 6.1). Belinkov and Bisk (2018) and Heigold et al. (2018) were the first to argue that neural machine translation models are heavily affected by the presence of misspellings, in contrast to human translators that have the cognitive ability to bypass misspelt entries without effectively penalizing comprehension (Rayner et al., 2006).

## 9 Frontiers and the Road Ahead

While humans can easily read and understand misspelt text, computers cannot. No textual application is out of reach for the potential harm of misspellings (Sections 4 and 8). Despite this, the field of misspelling resiliency has attracted uneven attention, with machine translation being the only field in which the phenomenon has been more thoroughly studied. This may be fostered by the lack of common definitions, frameworks and shared tasks for testing the robustness to misspellings. Filling these gaps would probably help in boosting research in the field. Text normalisation and grammatical error correction tools have often been regarded as all we need for dealing with misspellings in downstream tasks. However, these tools may often prove insufficient, especially when dealing with social-media content (Sections 4 and 5.3). It is our impression that resiliency to misspellings should become a *native* feature of modern NLP systems, that will contribute to paving the way toward achieving significant goals:

- Models dealing with misspellings represent a cornerstone not only for handling textual errors (OCR noise, social-media typo-ridden content, etc.) but also for handling the untamed evolution of natural language, which is closely tied to the evolution of human culture. Models that resolve misspellings by analysing the context

<sup>11</sup><https://www.washingtonpost.com/technology/2022/04/08/algospeak-tiktok-le-dollar-bean/>

in which these appear, might prove resistant to changes in morphology over time (diachronically), across different locations (diatopically), or in specific social contexts (diastratically).

- Models handling misspellings can inspire ways for attaining more efficient representations. The fact that most misspellings go unnoticed by human readers seems to suggest that the way we process them makes few distinctions between the misspelling and the clean word. From a computational point of view, this is equivalent to avoiding explicitly codifying information that carries over no really useful information, like the internal order of characters in certain words (Section 5.2) or the graphical differences between certain characters (Section 8). Put otherwise, systems resilient to misspellings should, in principle, be able to compress any spurious information.

We hope this survey has drawn attention to the challenge of misspelling resilience and provides valuable guidance for researchers interested in this area.

## References

- Agarwal, S., Godbole, S., Punjani, D., and Roy, S. (2007). How much noise is too much: A study in automatic text classification. In *Proceedings of the 7th International Conference on Data Mining (ICDM 2007)*, pages 3–12, Omaha, US.
- Ahmed, S. and Mithun, F. (2004). Word stemming to enhance spam filtering. In *Proceedings of the 2nd Conference on Email and Anti-Spam (CEAS 2004)*, Mountain View, US.
- Alam, M. M. and Anastasopoulos, A. (2020). Fine-tuning MT systems for robustness to second-language speaker variations. In *Proceedings of the 6th Workshop on Noisy User-Generated Text (NUT 2020)*, pages 149–158, Online Event.
- Aldwairi, M. and Flaifel, Y. (2012). Baeza-Yates and Navarro approximate string matching for spam filtering. In *Proceedings of the 2nd International Conference on Innovative Computing Technology (INTECH 2012)*, pages 16–20, Stanford, US.
- Anastasopoulos, A. (2019). An analysis of source-side grammatical errors in NMT. In *Proceedings of the 2019 Workshop on Analyzing and Interpreting Neural Networks for NLP (BlackboxNLP 2019)*, pages 213–223, Firenze, IT.
- Andrews, S. (1996). Lexical retrieval and selection processes: Effects of transposed-letter confusability. *Journal of Memory and Language*, 35(6):775–800.
- Anil, R. and 1376 other authors (2024). Gemini: A family of highly capable multimodal models. arXiv:2312.11805 [cs.CL].
- Baldwin, T., Cook, P., Lui, M., MacKinlay, A., and Wang, L. (2013). How noisy social media text, how different social media sources? In *Proceedings of the 6th International Joint Conference on Natural Language Processing (IJCNLP 2013)*, pages 356–364, Nagoya, JP.
- Banerjee, S. and Lavie, A. (2005). METEOR: An automatic metric for MT evaluation with improved correlation with human judgments. In *Proceedings of the ACL Workshop on Intrinsic and Extrinsic Evaluation Measures for Machine Translation and/or Summarization (MTSE 2005)*, pages 65–72, Prague, CZ.
- Basili, R., Lopresti, D. P., Ringstetter, C., Roy, S., Schulz, K. U., and Subramaniam, L. V., editors (2010). *Proceedings of the 4th Workshop on Analytics for Noisy Unstructured Text Data (AND 2010)*, Toronto, CA.
- Belinkov, Y. and Bisk, Y. (2018). Synthetic and natural noise both break neural machine translation. In *Proceedings of the 6th International Conference on Learning Representations (ICLR 2018)*, Vancouver, CA.
- Benamar, A., Grouin, C., Bothua, M., and Vilnat, A. (2022). Evaluating tokenizers impact on OOVs representation with transformers models. In *Proceedings of the 13th Language Resources and Evaluation Conference (LREC 2022)*, pages 4193–4204, Marseille, FR.
- Berti, B., Esuli, A., and Sebastiani, F. (2023). Unravelling interlanguage facts via explainable machine learning. *Digital Scholarship in the Humanities*, 38(3):953–977.
- Bhargava, P., Spasojevic, N., and Hu, G. (2017). Lithium NLP: A system for rich information extraction from noisy user-generated text on social media. In *Proceedings of the 3rd Workshop on Noisy User-Generated Text (NUT 2017)*, pages 131–139, Copenhagen, DK.
- Bojanowski, P., Grave, E., Joulin, A., and Mikolov, T. (2017). Enriching word vectors with subword information. *Transactions of the Association for Computational Linguistics*, 5:135–146.

- Bubeck, S., Chandrasekaran, V., Eldan, R., Gehrke, J., Horvitz, E., Kamar, E., Lee, P., Lee, Y. T., Li, Y., Lundberg, S. M., Nori, H., Palangi, H., Ribeiro, M. T., and Zhang, Y. (2023). Sparks of artificial general intelligence: Early experiments with GPT-4.
- Bulté, B. and Tezcan, A. (2019). Neural fuzzy repair: Integrating fuzzy matches into neural machine translation. In *Proceedings of the 57th Conference of the Association for Computational Linguistics (ACL 2019)*, pages 1800–1809, Firenze, IT.
- Camacho-Collados, J. and Navigli, R. (2016). Find the word that does not belong: A framework for an intrinsic evaluation of word vector representations. In *Proceedings of the 1st Workshop on Evaluating Vector-Space Representations for NLP (RepEval 2016)*, pages 43–50, Berlin, DE.
- Cettolo, M., Federico, M., Specia, L., and Way, A. (2012). WIT3: Web inventory of transcribed and translated talks. In *Proceedings of the 16th Annual Conference of the European Association for Machine Translation (EAMT 2012)*, pages 261–268, Trento, IT.
- Chancellor, S., Pater, J. A., Clear, T., Gilbert, E., and De Choudhury, M. (2016). #thyghapp: Instagram content moderation and lexical variation in pro-eating disorder communities. In *Proceedings of the 19th Conference on Computer-Supported Cooperative Work and Social Computing (CSCW 2016)*, pages 1201–1213, San Francisco, US.
- Chang, Y., Wang, X., Wang, J., Wu, Y., Yang, L., Zhu, K., Chen, H., Yi, X., Wang, C., Wang, Y., Ye, W., Zhang, Y., Chang, Y., Yu, P. S., Yang, Q., and Xie, X. (2024). A survey on evaluation of large language models. *ACM Trans. Intell. Syst. Technol.*, 15(3):39:1–39:45.
- Chen, L., Varoquaux, G., and Suchanek, F. (2022). Imputing out-of-vocabulary embeddings with LOVE makes language models robust with little cost. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (ACL 2022)*, volume 1, pages 3488–3504.
- Chen, Q., Zhu, X., Ling, Z., Wei, S., Jiang, H., and Inkpen, D. (2017). Enhanced LSTM for natural language inference. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics, ACL 2017, July 30 - August 4, Volume 1: Long Papers*, pages 1657–1668, Vancouver, CA. Association for Computational Linguistics.
- Cheng, Y., Jiang, L., and Macherey, W. (2019). Robust neural machine translation with doubly adversarial inputs. In *Proceedings of the 57th Conference of the Association for Computational Linguistics (ACL 2019)*, pages 4324–4333, Firenze, IT.
- Collobert, R., Weston, J., Bottou, L., Karlen, M., Kavukcuoglu, K., and Kuksa, P. (2011). Natural language processing (almost) from scratch. *Journal of Machine Learning Research*, 12:2493–2537.
- Crawford, M., Khoshgoftaar, T. M., Prusa, J. D., Richter, A. N., and Al Najada, H. (2015). Survey of review spam detection using machine learning techniques. *Journal of Big Data*, 2(Article 23):1–24.
- Damerau, F. (1964). A technique for computer detection and correction of spelling errors. *Communications of the ACM*, 7(3):171–176.
- Devlin, J., Chang, M., Lee, K., and Toutanova, K. (2019). BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT 2019)*, pages 4171–4186, Minneapolis, US.
- Dey, L., Govindaraju, V., Lopresti, D. P., Natarajan, P., Ringlstetter, C., and Roy, S., editors (2011). *Proceedings of the 2011 Joint Workshop on Multilingual OCR and Analytics for Noisy Unstructured Text Data (MOCR/AND 2011)*, Beijing, CN.
- Doval, Y., Vilares, J., and Gómez-Rodríguez, C. (2019). Towards robust word embeddings for noisy texts. arXiv:1911.10876 [cs.CL].
- Edizel, B., Piktus, A., Bojanowski, P., Ferreira, R., Grave, E., and Silvestri, F. (2019). Misspelling-oblivious word embeddings. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT 2019)*, pages 3226–3234, Minneapolis, US.
- Faruqui, M., Pavlick, E., Tenney, I., and Das, D. (2018). WikiAtomicEdits: A multilingual corpus of Wikipedia edits for modeling language and discourse. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing (EMNLP 2018)*, pages 305–315, Brussels, BE.
- Fernández, E. M. and Cairns, H. S. (2010). *Fundamentals of psycholinguistics*. John Wiley & Sons, Chichester, UK.
- Fumera, G., Pillai, I., and Roli, F. (2006). Spam filtering based on the analysis of text information embedded into images. *Journal of Machine Learning Research*, 7(12):2699–2720.



- Goodfellow, I. J., Shlens, J., and Szegedy, C. (2015). Explaining and harnessing adversarial examples. In *Proceedings of the 3rd International Conference on Learning Representations (ICLR 2015)*, San Diego, US.
- Grundkiewicz, R. and Junczys-Dowmunt, M. (2014). The WikEd error corpus: A corpus of corrective Wikipedia edits and its application to grammatical error correction. In *Proceedings of the 9th International Conference on NLP (PolTAL 2014)*, pages 478–490, Warsaw, PL.
- Hagiwara, M. and Mita, M. (2020). Github typo corpus: A large-scale multilingual dataset of misspellings and grammatical errors. In *Proceedings of the 12th Language Resources and Evaluation Conference (LREC 2020)*, pages 6761–6768, Marseille, FR.
- He, K., Chen, X., Xie, S., Li, Y., Dollár, P., and Girshick, R. B. (2022). Masked autoencoders are scalable vision learners. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR 2022, June 18-24, 2022*, pages 15979–15988, New Orleans, US.
- Healy, A. F. (1976). Detection errors on the word the: Evidence for reading units larger than letters. *Journal of Experimental Psychology: Human Perception and Performance*, 2(2):235–242.
- Heigold, G., Varanasi, S., Neumann, G., and van Genabith, J. (2018). How robust are character-based word embeddings in tagging and MT against word scrambling or random noise? In *Proceedings of the 13th Conference of the Association for Machine Translation in the Americas (AMTA 2018)*, volume 1, pages 68–80, Boston, US.
- Hosseini, H., Kannan, S., Zhang, B., and Poovendran, R. (2017). Deceiving Google’s perspective API built for detecting toxic comments. arXiv preprint arXiv:1702.08138.
- James, C. (2013). *Errors in language learning and use: Exploring error analysis*. Routledge, New York, NY.
- Jones, E., Jia, R., Raghunathan, A., and Liang, P. (2020). Robust encodings: A framework for combating adversarial typos. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics (ACL 2020)*, pages 2752–2765, Online Event.
- Joulin, A., Grave, E., Bojanowski, P., and Mikolov, T. (2017). Bag of tricks for efficient text classification. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics (EACL 2017)*, volume 2, pages 427–431, Valencia, ES.
- Karpukhin, V., Levy, O., Eisenstein, J., and Ghazvininejad, M. (2019). Training on synthetic noise improves robustness to natural noise in machine translation. In *Proceedings of the 5th Workshop on Noisy User-Generated Text (NUT 2019)*, pages 42–47, Hong Kong, CN.
- Kim, Y. (2014). Convolutional neural networks for sentence classification. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP 2014)*, pages 1746–1751, Doha, QA.
- Krizhevsky, A., Sutskever, I., and Hinton, G. E. (2012). ImageNet classification with deep convolutional neural networks. In *Proceedings of the 26th Annual Conference on Neural Information Processing Systems (NIPS 2012)*, pages 1106–1114, Lake Tahoe, US.
- Kudo, T. and Richardson, J. (2018). SentencePiece: A simple and language-independent subword tokenizer and detokenizer for neural text processing. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing (EMNLP 2018)*, pages 66–71, Brussels, BE.
- Kumar, A., Makhija, P., and Gupta, A. (2020). Noisy text data: Achilles’ heel of BERT. In *Proceedings of the 6th Workshop on Noisy User-Generated Text (NUT 2020)*, pages 16–21, Online Event.
- Kurita, K., Belova, A., and Anastasopoulos, A. (2019). Towards robust toxic content classification. arXiv:1912.06872 [cs.CL].
- Lee, H. and Ng, A. Y. (2005). Spam deobfuscation using a hidden Markov model. In *Proceeding of the 2nd Conference on Email and Anti-Spam (CEAS 2005)*, Stanford, US.
- Lenci, A., Sahlgren, M., Jeuniaux, P., Gyllensten, A. C., and Miliani, M. (2021). A comprehensive comparative evaluation and analysis of distributional semantic models. arXiv:2105.09825 [cs.CL].
- Li, J., Ji, S., Du, T., Li, B., and Wang, T. (2019a). Textbugger: Generating adversarial text against real-world applications. In *Proceedings of the 26th Annual Network and Distributed System Security Symposium (NDSS 2019)*, San Diego, US.
- Li, X., Michel, P., Anastasopoulos, A., Belinkov, Y., Durrani, N., Firat, O., Koehn, P., Neubig, G., Pino, J. M., and Sajjad, H. (2019b). Findings of the first shared task on machine translation robustness. In *Proceedings of the 4th Conference on Machine Translation (WMT 2019)*, pages 91–102, Firenze, IT.
- Li, Y., Cohn, T., and Baldwin, T. (2016). Learning robust representations of text. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing (EMNLP 2016)*, pages 1979–1985, Austin, US.

- Li, Z., Rei, M., and Specia, L. (2021). Visual cues and error correction for translation robustness. In *Findings of the Association for Computational Linguistics @ EMNLP 2021*, pages 3153–3168, Punta Cana, DO.
- Li, Z. and Specia, L. (2019). Improving neural machine translation robustness via data augmentation: Beyond back-translation. In *Proceedings of the 5th Workshop on Noisy User-Generated Text (NUT 2019)*, pages 328–336, Hong Kong, CN.
- Liu, N. F., Schwartz, R., and Smith, N. A. (2019). Inoculation by fine-tuning: A method for analyzing challenge datasets. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 2171–2179, Minneapolis, MN, US.
- Lopresti, D. P., Roy, S., Schulz, K. U., and Subramaniam, L. V., editors (2008). *Proceedings of the 2nd Workshop on Analytics for Noisy Unstructured Text Data (AND 2008)*, Singapore, SG.
- Lopresti, D. P., Roy, S., Schulz, K. U., and Subramaniam, L. V., editors (2009). *Proceedings of the 3rd Workshop on Analytics for Noisy Unstructured Text Data (AND 2009)*, Barcelona, ES.
- Loseff, L. (1984). *On the beneficence of censorship: Aesopian language in modern Russian literature*. Peter Lang International Academic Publishers, Bristol, UK.
- Malykh, V., Logacheva, V., and Khakhulin, T. (2018). Robust word vectors: Context-informed embeddings for noisy texts. In *Proceedings of the 4th Workshop on Noisy User-Generated Text (NUT 2018)*, pages 54–63, Brussels, BE.
- Max, A. and Wisniewski, G. (2010). Mining naturally-occurring corrections and paraphrases from Wikipedia’s revision history. In *Proceedings of the 7th International Conference on Language Resources and Evaluation (LREC 2010)*, Valletta, MT.
- McCusker, L. X., Gough, P. B., and Bias, R. G. (1981). Word recognition inside out and outside in. *Journal of Experimental Psychology: Human Perception and Performance*, 7(3):538–551.
- Miaschi, A., Dell’Orletta, F., and Venturi, G. (2024). Evaluating large language models via linguistic profiling. In Al-Onaizan, Y., Bansal, M., and Chen, Y., editors, *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing, EMNLP, address = Miami, US*, pages 2835–2848. Association for Computational Linguistics.
- Michel, P., Li, X., Neubig, G., and Pino, J. M. (2019). On evaluation of adversarial perturbations for sequence-to-sequence models. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT 2019)*, pages 3103–3114, Minneapolis, US.
- Michel, P. and Neubig, G. (2018). MTNT: A testbed for machine translation of noisy text. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing (EMNLP 2018)*, pages 543–553, Brussels, BE.
- Mikolov, T., Chen, K., Corrado, G., and Dean, J. (2013). Efficient estimation of word representations in vector space. In *Proceedings of the 1st International Conference on Learning Representations (ICLR 2013), Workshop Track Proceedings*, Scottsdale, US.
- Moradi, M. and Samwald, M. (2021). Evaluating the robustness of neural language models to input perturbations. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing (EMNLP 2021)*, pages 1558–1570, Punta Cana, DO.
- Naik, A., Ravichander, A., Sadeh, N. M., Rosé, C. P., and Neubig, G. (2018). Stress test evaluation for natural language inference. In *Proceedings of the 27th International Conference on Computational Linguistics, COLING 2018, August 20-26, 2018*, pages 2340–2353, Santa Fe, New Mexico, USA.
- Namysl, M., Behnke, S., and Köhler, J. (2020). NAT: Noise-aware training for robust neural sequence labeling. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics (ACL 2020)*, pages 1501–1517, Online Event.
- Náplava, J., Popel, M., Straka, M., and Straková, J. (2021). Understanding model robustness to user-generated noisy texts. In *Proceedings of the 7th Workshop on Noisy User-Generated Text (NUT 2021)*, pages 340–350, Online Event.
- Napoles, C., Sakaguchi, K., and Tetreault, J. R. (2017). JFLEG: A fluency corpus and benchmark for grammatical error correction. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics (EACL 2017)*, volume 2, pages 229–234, Valencia, ES.
- Neubig, G. (2011). The Kyoto free translation task. <http://www.phontron.com/kftt>.
- Nguyen, D. and Grieve, J. (2020). Do word embeddings capture spelling variation? In *Proceedings of the 28th International Conference on Computational Linguistics (COLING 2020)*, pages 870–881, Barcelona, ES.

- OpenAI, Achiam, J., and 283 other authors (2024). GPT-4 technical report. arXiv:2303.08774 [cs.CL].
- Papineni, K., Roukos, S., Ward, T., and Zhu, W. (2002). Bleu: A method for automatic evaluation of machine translation. In *Proceedings of the 40th Annual Meeting of the Association for Computational Linguistics (ACL 2002)*, pages 311–318, Philadelphia, US.
- Parikh, A. P., Täckström, O., Das, D., and Uszkoreit, J. (2016). A decomposable attention model for natural language inference. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing, EMNLP 2016, November 1-4, 2016*, pages 2249–2255, Austin, US. The Association for Computational Linguistics.
- Park, J., Sung, M., Lee, J., and Kang, J. (2020). Adversarial subword regularization for robust neural machine translation. In *Findings of the Association for Computational Linguistics @ EMNLP 2020*, pages 1945–1953, Online Event.
- Passban, P., Saladi, P. S. M., and Liu, Q. (2021). Revisiting robust neural machine translation: A transformer case study. In *Findings of the Association for Computational Linguistics @ EMNLP 2021*, pages 3831–3840, Punta Cana, DO.
- Perrin, A. (2015). Social media usage. *Pew research center*, pages 52–68.
- Plank, B. (2016). What to do about non-standard (or non-canonical) language in NLP. In *Proceedings of the 13th Conference on Natural Language Processing (KONVENS 2016)*, Bochum, DE.
- Pruthi, D., Dhingra, B., and Lipton, Z. C. (2019). Combating adversarial misspellings with robust word recognition. In *Proceedings of the 57th Conference of the Association for Computational Linguistics (ACL 2019)*, pages 54–63, Firenze, IT.
- Pryzant, R., Chung, Y., Jurafsky, D., and Britz, D. (2018). JESC: Japanese-English subtitle corpus. In *Proceedings of the 11th International Conference on Language Resources and Evaluation (LREC 2018)*, Miyazaki, JP.
- Puccetti, G., Cassese, M., and Esuli, A. (2024). The invals benchmark: measuring language models mathematical and language understanding in italian.
- Ravichander, A., Dalmia, S., Ryskina, M., Metze, F., Hovy, E. H., and Black, A. W. (2021). NoiseQA: Challenge set evaluation for user-centric question answering. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics (EACL 2021)*, pages 2976–2992, Online Event.
- Rayner, K., White, S., Johnson, R., and Liversedge, S. (2006). Reading words with jumbled letters: There is a cost. *Psychological Science*, 17(3):192–193.
- Renuka, D. K. and Hamsapriya, T. (2010). Email classification for spam detection using word stemming. *International Journal of Computer Applications*, 1(5):45–47.
- Richards, J. and Schmidt, R. (2013). *Longman dictionary of language teaching and applied linguistics*. Taylor and Francis, London, UK.
- Röttger, P., Vidgen, B., Nguyen, D., Waseem, Z., Margetts, H. Z., and Pierrehumbert, J. B. (2021). Hatecheck: Functional tests for hate speech detection models. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing, ACL/IJCNLP 2021, (Volume 1: Long Papers), Virtual Event, August 1-6, 2021*, pages 41–58, Nusa Dua, Bali, ID. Association for Computational Linguistics.
- Rust, P., Lotz, J. F., Bugliarello, E., Salesky, E., de Lhoneux, M., and Elliott, D. (2023). Language modelling with pixels. In *Proceedings of the 11th International Conference on Learning Representations (ICLR 2023)*, Kigali, RW.
- Sakaguchi, K., Duh, K., Post, M., and Durme, B. V. (2017). Robust word recognition via semi-character recurrent neural network. In *Proceedings of the 31st Conference on Artificial Intelligence (AAAI 2017)*, pages 3281–3287, San Francisco, US.
- Salesky, E., Etter, D., and Post, M. (2021). Robust open-vocabulary translation from visual text representations. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing (EMNLP 2021)*, pages 7235–7252, Punta Cana, DO.
- Sang, E. F. and De Meulder, F. (2003). Introduction to the CoNLL-2003 shared task: Language-independent named entity recognition. In *Proceedings of the 7th Conference on Natural Language Learning (CoNLL 2003)*, pages 142–147, Edmonton, CA.
- Sankar, C., Ravi, S., and Kozareva, Z. (2021). On-device text representations robust to misspellings via projections. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics (EACL 2021)*, pages 2871–2876, Online Event.
- Sebastiani, F. (2002). Machine learning in automated text categorization. *ACM Computing Surveys*, 34(1):1–47.

- Šebesta, K., Bedřichová, Z., Štindlová, B., Hrdlička, M., Hrdličková, T., Hana, J., Rosen, A., Petkevič, V., Jelínek, T., Škodová, S., Janeš, P., Lundáková, K., Skoumalová, H., Štastný, K., and Sládek, Š. (2017). CzeSL grammatical error correction dataset (CzeSL-GEC). LINDAT/CLARIAH-CZ digital library at the Institute of Formal and Applied Linguistics (ÚFAL), Faculty of Mathematics and Physics, Charles University, Prague, CZ.
- Shishibori, M., Lee, S. S., Oono, M., and Aoe, J. (2002). Improvement of the LR parsing table and its application to grammatical error correction. *Information Sciences*, 148(1-4):11–26.
- Shook, A., Chabal, S., Bartolotti, J., and Marian, V. (2012). CLEARPOND: Cross-linguistic easy-access resource for phonological and orthographic neighborhood densities. *PLOS ONE*, 7(8):e43230.
- Sidiropoulos, G. and Kanoulas, E. (2022). Analysing the robustness of dual encoders for dense retrieval against misspellings. In *Proceedings of the 45th International Conference on Research and Development in Information Retrieval (SIGIR 2022)*, pages 2132–2136, Madrid, ES.
- Specia, L., Li, Z., Pino, J. M., Chaudhary, V., Guzmán, F., Neubig, G., Durrani, N., Belinkov, Y., Koehn, P., Sajjad, H., Michel, P., and Li, X. (2020). Findings of the WMT 2020 shared task on machine translation robustness. In *Proceedings of the 5th Conference on Machine Translation (WMT 2020)*, pages 76–91, Online Event.
- Sperduti, G., Moreo, A., and Sebastiani, F. (2021). Garbled-word embeddings for jumbled text. In *Proceedings of the 11th Italian Information Retrieval Workshop 2021 (IIR 2021)*, Bari, IT.
- Stamatatos, E. (2009). A survey of modern authorship attribution methods. *Journal of the American Society for Information Science and Technology*, 60(3):538–556.
- Subramaniam, L. V., Roy, S., Faruque, T. A., and Negi, S. (2009). A survey of types of text noise and techniques to handle noisy text. In *Proceedings of the 3th Workshop on Analytics for Noisy Unstructured Text Data (AND 2009)*, pages 115–122, Barcelona, ES.
- Touvron, H., Lavril, T., Izacard, G., Martinet, X., Lachaux, M., Lacroix, T., Rozière, B., Goyal, N., Hambro, E., Azhar, F., Rodriguez, A., Joulin, A., Grave, E., and Lample, G. (2023). Llama: Open and efficient foundation language models. arXiv:2302.13971 [cs.CL].
- Vaibhav, Singh, S., Stewart, C., and Neubig, G. (2019). Improving robustness of machine translation with synthetic noise. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT 2019)*, pages 1916–1920, Minneapolis, US.
- van der Goot, R., van Noord, R., and van Noord, G. (2018). A taxonomy for in-depth evaluation of normalization for user-generated content. In *Proceedings of the 11th International Conference on Language Resources and Evaluation (LREC 2018)*, Miyazaki, JP.
- van Rijsbergen, C. J. (1979). *Information retrieval*. Butterworth-Heinemann, London, UK, 2nd edition.
- Vinciarelli, A. (2005). Noisy text categorization. *IEEE Transactions on Pattern and Machine Intelligence*, 27(12):1882–1895.
- Wang, B., Chen, W., Pei, H., Xie, C., Kang, M., Zhang, C., Xu, C., Xiong, Z., Dutta, R., Schaeffer, R., Truong, S. T., Arora, S., Mazeika, M., Hendrycks, D., Lin, Z., Cheng, Y., Koyejo, S., Song, D., and Li, B. (2023). DecodingTrust: A comprehensive assessment of trustworthiness in GPT models. In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems (NeurIPS 2023)*, New Orleans, December 10–16, 2023, New Orleans, LA, USA.
- Wang, B., Xu, C., Wang, S., Gan, Z., Cheng, Y., Gao, J., Awadallah, A. H., and Li, B. (2021). Adversarial GLUE: A multi-task benchmark for robustness evaluation of language models. In *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks 1, NeurIPS Datasets and Benchmarks 2021, December 2021, virtual*.
- Wang, H., Zhang, P., and Xing, E. P. (2020). Word shape matters: Robust machine translation with visual embedding. arXiv:2010.09997 [cs.CL].
- Wang, J., Hu, X., Hou, W., Chen, H., Zheng, R., Wang, Y., Yang, L., Ye, W., Huang, H., Geng, X., Jiao, B., Zhang, Y., and Xie, X. (2024). On the robustness of ChatGPT: An adversarial and out-of-distribution perspective. *IEEE Data Eng. Bull.*, 47(1):48–62.
- Wu, T., Wen, S., Xiang, Y., and Zhou, W. (2018). Twitter spam detection: Survey of new approaches and comparative study. *Computers & Security*, 76:265–284.
- Yang, R. and Gao, Z. (2019). Can machines read jmulbed senetcnes? <https://runzhe-yang.science/demo/jumbled.pdf>. Unpublished manuscript.

- Zesch, T. (2012). Measuring contextual fitness using error contexts extracted from the Wikipedia revision history. In *Proceedings of the 13th Conference of the European Chapter of the Association for Computational Linguistics (EACL 2012)*, pages 529–538, Avignon, FR.
- Zhang, Z., Hao, B., Li, J., Zhang, Z., and Zhao, D. (2024). E-bench: Towards evaluating the ease-of-use of large language models. arXiv:2105.09825 [cs.CL].
- Zheng, R., Liu, H., Ma, M., Zheng, B., and Huang, L. (2019). Robust machine translation with domain sensitive pseudo-sources: Baidu-OSU WMT19 MT robustness shared task system report. In *Proceedings of the 4th Conference on Machine Translation (WMT 2019)*, pages 559–564, Firenze, IT.
- Zhou, J. T., Zhang, H., Jin, D., Peng, X., Xiao, Y., and Cao, Z. (2020). RoSeq: Robust sequence labeling. *IEEE Transactions on Neural Networks and Learning Systems*, 31(7):2304–2314.
- Zhou, S., Zeng, X., Zhou, Y., Anastasopoulos, A., and Neubig, G. (2019). Improving robustness of neural machine translation with multi-task learning. In *Proceedings of the 4th Conference on Machine Translation (WMT 2019)*, pages 565–571, Firenze, IT.
- Zhu, K., Wang, J., Zhou, J., Wang, Z., Chen, H., Wang, Y., Yang, L., Ye, W., Zhang, Y., Gong, N. Z., and Xie, X. (2024). PromptRobust: Towards evaluating the robustness of large language models on adversarial prompts. arXiv:2105.09825 [cs.CL].

## Glossary

**BPE** Byte-Pair Encoding is a data compression technique that replaces recurring sequences of characters with new tokens. In NLP, BPE is used to encode words as sequences of subword units, allowing for flexible representation of rare and unseen words. BPE is commonly applied in tasks like machine translation and text generation to improve model efficiency and vocabulary handling. 6

**character-based** An encoding technique used to represent words based on their sequential character composition. Character-based models use characters as the building blocks of the representation, instead of entire words. Useful for handling morphologically rich languages and capturing fine-grained information at the character level. 6

**error** A generic linguistic term used to describe an unsuccessful piece of language, such as a misspelling or a grammatical mistake. In the context of NLP, errors refer to deviations from the intended or correct form of text. Errors can occur due to various factors, including misspellings, transcription noise, or other forms of linguistic variability. 2, 4

**fine-tuning** The process of performing additional training epochs on a pre-trained (language) model, such as BERT or RoBERTa, on domain-specific data. Fine-tuning allows the model to learn task-specific patterns and improve its performance on the target domain. 10

**garbling** Refers to the reproduction of a text in a confused or distorted manner, as in *wrod ebmneddigs ecndoe semnacits*. In the context of NLP, garbling can occur due to various factors, including misspellings, typographical errors, or text corruption during transmission or processing. It can affect the readability and interpretation of the text, making it challenging for NLP systems to handle. Somehow surprisingly, humans are less affected by this type of error if the first and last characters stay in place. 12, 14, 19

**LSH** Local Sensitive Hashing is an encoding technique used to reduce the dimensionality of sparse vectors. LSH groups similar items into the same *bucket* or index, allowing for efficient nearest neighbour search and similarity-based retrieval. LSH is commonly used in tasks like approximate nearest neighbour search and data deduplication. 13

**morphology** The study and description of the internal structure and forms of words in a language. Morphology is concerned with analysing how words are formed from smaller meaningful units called *morphemes* and how they inflect and change to convey grammatical information. Understanding morphology is important in NLP for tasks like word segmentation, lemmatisation, and morphological analysis, among others. 23

**natural misspelling** In the context of systems robust to misspellings, a natural misspelling is a misspelling that occurs in real-world data sources. Sources prone to this type of misspelling include social networks, OCR (Optical Character Recognition) data, or other forms of user-generated content. 5

**noise** Any unwanted alteration of the original textual source that distorts its intended meaning. In NLP, noise often encompasses various forms of errors or inconsistencies in text, such as misspellings, typographical errors, grammatical mistakes, or other unintended linguistic variations. These alterations can arise from issues in transcription, data transmission, or human error, ultimately affecting the accuracy of language processing tasks. 2, 4–9, 13, 14, 17, 18, 22

**OOV** Out-Of-Vocabulary. In NLP, OOV words refer to terms that are not included in a model’s training dataset or vocabulary. When processing text, vocabulary-based NLP systems may encounter OOV words and struggle to generate accurate representations or predictions for them due to a lack of prior information (e.g., embeddings). Effectively managing OOV words is crucial to enhance the coverage and overall performance of NLP models. 12

**perturbation** The process of deliberately introducing modifications or disturbances to an instance of data. In NLP, perturbation involves altering a text sample by adding noise, introducing misspellings, or making other modifications. Perturbed instances are commonly used to create adversarial examples, which help evaluate the robustness of NLP models against different types of input manipulation and unexpected variations. 10, 13

**QWERTY** Refers to the standard keyboard layout for the Latin alphabet, named after the arrangement of its first six letters. The QWERTY layout is widely used in English-speaking countries and serves as the default on many devices. In NLP, the term is sometimes associated with misspellings or linguistic variations that arise from typing errors commonly made on this layout. 6, 7, 9, 12, 19

**robustness** In NLP, robustness refers to a system’s ability to effectively process text containing misspellings, noise, or other linguistic variations, while maintaining reliable performance and accuracy. A robust NLP model can withstand challenging or imperfect inputs, making it essential for handling real-world text data, which frequently includes errors, misspellings, and other forms of noise. 10, 17, 22

**source sentence** In machine translation, a source sentence is a sentence that is written in the source language and serves as the input for translation into a target language. 10

**synthetic misspelling** A misspelling that is artificially generated by an algorithm and inserted in a text. Synthetic misspellings are commonly used in the context of systems robust to misspellings to simulate different types and levels of misspelt text. By introducing controlled misspellings, NLP models can be trained and evaluated to improve their robustness and generalisation to handle various forms of misspelt input. 5–8, 19, 20

**target sentence** In machine translation, a target sentence is a sentence in the dataset that represents the intended translation of a corresponding source sentence, written in the target language. 10