

nabqr: Python package for improving probabilistic forecasts

Bastian Schmidt Jørgensen^{a,*}, Jan Kloppenborg Møller^a, Peter Nystrup^{a,b},
Henrik Madsen^a

^a*DTU Compute, Bygning 303B, Kgs. Lyngby, 2800, Denmark*

^b*QUENT ApS, Svanemøllevej 41, Hellerup, 2900, Denmark*

Abstract

We introduce the open-source Python package NABQR: Neural Adaptive Basis for (time-adaptive) Quantile Regression that provides reliable probabilistic forecasts. NABQR corrects ensembles (scenarios) with LSTM networks and then applies time-adaptive quantile regression to the corrected ensembles to obtain improved and more reliable forecasts. With the suggested package, accuracy improvements of up to 40% in mean absolute terms can be achieved in day-ahead forecasting of onshore and offshore wind power production in Denmark.

Keywords: probabilistic forecasting, LSTM networks, time adaptivity, quantile regression, wind power production

Metadata

Table 1.

Abbreviations

Table 2.

1. Motivation and significance

Quantifying predictive uncertainty is a key challenge in many scientific fields that depend on model-based forecasts [1]. This is particularly important in

*Corresponding author. *Email address:* bassc@dtu.dk.

Nr.	Code metadata description	Metadata
C1	Current code version	0.1
C2	Permanent link to code/repository used for this code version	https://github.com/bast0320/nabqr
C3	Permanent link to Reproducible Capsule	https://github.com/bast0320/nabqr/blob/main/src/NABQR/nabqr.py
C4	Legal Code License	MIT License
C5	Code versioning system used	git, pypi
C6	Software code languages, tools, and services used	Python, R
C7	Compilation requirements, operating environments & dependencies	python \geq 3.10 and the following packages: icecream, matplotlib, numpy, pandas, properscoring, rich, SciencePlots, scikit_learn, scipy, tensorflow, tensorflow_probability, torch, typer, myst_parser, tf_keras R with the following packages installed: quantreg, readr
C8	If available Link to developer documentation/manual	For example: https://nabqr.readthedocs.io/en/latest/
C9	Support email for questions	bassc [*] AT [*] dtu.dk

Table 1: Code metadata

Abbreviation	Description
CRPS	Continuous Ranked Probability Score
MAE	Mean Absolute Error
QSS	Quantile Skill Score
TAQR	Time-Adaptive Quantile Regression
NABQR	Neural Adaptive Basis Quantile Regression
CSV	Comma-Separated Values

Table 2: List of Abbreviations

areas such as energy systems, climate modeling, and environmental planning, where decisions must often be made under uncertainty and carry significant economic or operational consequences. Our software addresses this need

by providing a streamlined and effective framework for converting ensemble forecasts—such as those generated by weather simulations from ECMWF [2]—into accurate probabilistic forecasts.

Minimizing uncertainty is a universal goal in all forecasting domains, and our software package Neural Adaptive Basis for (time-adaptive) Quantile Regression, NABQR, provides a novel way to achieve it. Assume some (pre-existing) ensembles exist. That is, scenarios describing possible future developments. We wish to convert them into accurate quantile-based predictions. This process is broadly relevant, as such predictions can be applied to many areas, including risk management in finance, electricity markets, and production. We have applied NABQR to wind forecasting with strong results, demonstrating how refined ensemble forecasts translate into more reliable quantile estimates and improve forecast accuracy [3].

Neural networks systematically correct ensemble forecasts, followed by time-adaptive quantile regression (TAQR) to estimate conditional quantile forecasts. This approach reduces quantile crossings and enhances forecast reliability. It supports scientific discovery by allowing users to incorporate data-driven corrections into their pipelines. Recent research on improving wind power prediction densities [3] shows how TAQR applied to refined ensembles leads to superior forecast distributions.

Using the software is straightforward: users supply ensemble forecasts and specify their target quantiles. The neural network component—drawing inspiration from architectures such as N-BEATS [4]—discovers basis functions that capture evolving data patterns, and an efficient TAQR solver [5] then produces calibrated quantiles. The open-source package, hosted on GitHub¹, ensures transparency, reproducibility, and opportunities for community-driven enhancements. Its ease of integration facilitates adoption into broader workflows, enabling model comparison, scenario testing, and iterative improvements.

Our approach builds on and extends a rich body of literature. Quantile regression has a long history in statistical modeling [6], while neural networks have enabled flexible functional approximations [4, 7, 8]. Ensemble-based methods from state-of-the-art weather forecasting centers [2] naturally inform our inputs for probabilistic modeling. By combining ensemble calibration, neural network corrections, and time-adaptive quantile regression,

¹<https://github.com/bast0320/nabqr>

our software creates a cohesive, methodologically sound, and practically useful framework. Its combination of neural network-based calibration, TAQR modeling, and user-friendly interfaces serves as a catalyst for advancing the state of the art in probabilistic forecasting and fostering scientific insights across diverse fields.

2. Software description

NABQR is an open-source Python package designed to enhance the accuracy and reliability of probabilistic forecasts. Built for flexibility and ease of integration, NABQR corrects ensemble forecasts using Long Short-Term Memory (LSTM) networks and applies Time-Adaptive Quantile Regression (TAQR) to produce optimal predictive distributions.

The software is implemented entirely in Python (compatible with version 3.10 and above). It adheres to modern software development practices, including modular design, comprehensive documentation, and integration with widely-used libraries such as TensorFlow, NumPy, and pandas. NABQR supports various input formats and produces results in accessible formats like CSV and NumPy arrays, facilitating seamless incorporation into existing workflows. NABQR provides users with a streamlined pipeline for processing ensemble data, training neural networks, and applying quantile regression methods. For comprehensive and well-documented examples, users are encouraged to visit the following ReadTheDocs². The documentation describes its usage in full detail.

NABQR has been tailored specifically to work well with wind power production forecasting in Denmark. Running the software with almost no tuning provides upwards of 40% improvements in the mean absolute sense for specific areas.

2.1. Software architecture

NABQR's Application Programming Interface (API) is designed to be compatible with the widely-used TensorFlow library [9], facilitating seamless integration into existing machine learning workflows. The package supports established data formats, such as NumPy arrays [10] and pandas data frames [11], ensuring ease of use and interoperability. Data generated by NABQR

²<https://nabqr.readthedocs.io/en/latest>

can be saved in pickle, NumPy, or CSV formats, allowing for flexible data handling and inspection.

To enhance extensibility and maintainability, NABQR employs object-oriented design principles, particularly when dealing with neural networks. This approach modularizes the framework, with each component encapsulated within a class or function. The repositories adhere to the Black³ coding style to ensure consistency and enhance readability.

Additionally, NABQR includes a comprehensive Python module that implements TAQR, featuring user-friendly function wrappers. The framework's components are integrated into a central `Pipeline` function wrapper, providing users with access to a variety of convenient methods, including logging and visualization capabilities, see Fig. 1. NABQR can be easily incorporated into Python scripts or Jupyter Notebooks, supporting tasks such as training LSTM networks, executing TAQR algorithms, or running the entire pipeline. NABQR primarily consists of 5 Python modules:

- **functions_for_TAQR.py**: This module contains the main functions of TAQR. It includes algorithms for updating and solving quantile regression problems using the simplex method.
- **functions.py**: This module provides core functionalities for the NABQR framework, including scoring metrics such as Variogram, CRPS, MAE and QSS. It also includes functions for dataset creation, preprocessing, and model definitions, as well as the implementation of the TAQR algorithm.
- **helper_functions.py**: This module offers utility functions that support the main operations of the NABQR framework. It includes functions for data manipulation, and simulating correlated AR(1) processes as well as more advanced and realistic wind power production (see `simulate_wind_power_sde`), which is used for generating synthetic datasets and testing robustness.
- **nabqr.py**: This is the main interface for running the NABQR pipeline. It integrates ensemble generation, model training, and visualization capabilities, providing a comprehensive pipeline for executing the NABQR

³<https://github.com/psf/black>

methodology from data simulation to result visualization. This is also where simulated data can be generated.

- **visualization.py**: This module is responsible for visualizing the results of the NABQR models. It includes functions to generate plots that illustrate the performance of the quantile regression models, helping users interpret and analyze the probabilistic forecasts effectively and ensure consistency in plotting, for example using functionalities from `matplotlib.mdates.AutoDateLocator` and a dynamic way to plot the number of ensembles.

The code is well-documented and easy to navigate, and people are welcome to make changes to their copy of the package under the MIT license.

2.2. Software functionalities

NABQR trains an LSTM network to correct the ensembles, to be more reliable, and to have a better quantile score. We optimize for a multidimensional quantile loss function; that is, we optimize for all quantiles in the same network, and not a separate network for each quantile. The output of the LSTM network is used as a basis matrix for a time-adaptive quantile regression algorithm, which produces probabilistic multivariate forecasts. Probabilistic forecast measures have been implemented to readily calculate a range of scores: MAE, CRPS, Variogram-Score, Quantile Score, and reliability plots. To install the package run:

```
>> pip install nabqr
```

2.2.1. Submodules

NABQR provides practical and useful wrapper functions. We will use the notation `function()→(output1, ...)` to explain the following functions. For more information, see the documentation.

`calculate_scores()` → (MAE, QS, CRPS, VarS)

When provided with the observations, TAQR predictions, and ensembles, this function will output MAE, QS, CRPS, and VarS scores to evaluate the probabilistic forecast's performance.

`simulate_wind_power_sde()` → (ensembles, y)

Simulates normalized wind power production using an Ornstein-Uhlenbeck process with GARCH volatility and jumps of normally distributed sizes driven by a Poisson process. The mean reversion is state-dependent with a repelling mechanism near 1.0 (upper boundary), and the diffusion term vanishes at the boundaries to avoid unphysical values outside $[0, 1]$. Returns ensembles and observations (y).

`run.taqr`($X, y, q_list, n_init, n_full$) \rightarrow ($q_hat, y, beta$)

Executes the full TAQR algorithm from timestep $t_{n_{init}}$ to $t_{n_{full}}$ [5]. It employs `one_step_quantile_prediction()`, which can run the TAQR algorithm for at least one timestep and up to all available timesteps for a single quantile. Returns the predicted quantiles \hat{q} , observations, y , for convenience, and the time-adaptive parameters, β .

`run.nabqr_pipeline`(X, y, \dots) \rightarrow ($scores, corr_ens, q_hat, \dots$)

Fig. 1 shows the step in the pipeline function. The workflow involves loading and preparing ensemble data and observations, followed by training an LSTM network on approximately 70% of the data to update the basis matrix. Once the data is corrected, the TAQR algorithm is initialized on a small subset and applied to the test set. The results are then prepared by cleaning missing values (NaNs) and evaluating MAE, CRPS, VarS, QS, and reliability. Finally, probabilistic forecasts are visualized for interpretation and analysis. Returns the calculated scores, corrected ensembles, \hat{q} . For the full output and the files it saves please see the documentation.

3. Illustrative examples

Running the `run_nabqr_pipeline` with the only inputs being wind power production data, ($X=ensembles, y=observations$), will create Fig. 2 as in [3].

Initially, the code imports essential components, including NABQR helper functions, the `SciencePlots` plotting library, and the `datetime` library. Subsequently, a synthetic dataset is generated for testing purposes. An example of using the `simulate_wind_power_sde`, can be seen in Appendix A. The final section of the code executes the entire pipeline, specifying the dataset, the training size for the LSTM network, the time steps (representing the lagged values for the LSTM network), and the quantiles for the TAQR algorithm. Fig. 2 shows predictions for actual wind power production, see [3].

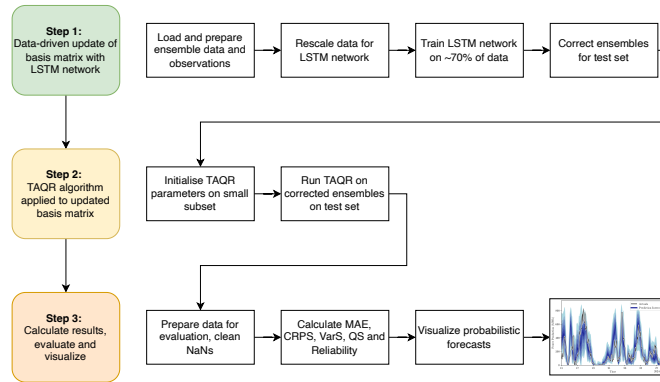


Figure 1: Overview of pipeline in NABQR. Note that for the first step if data is not specified to be loaded the pipeline will automatically simulate data.

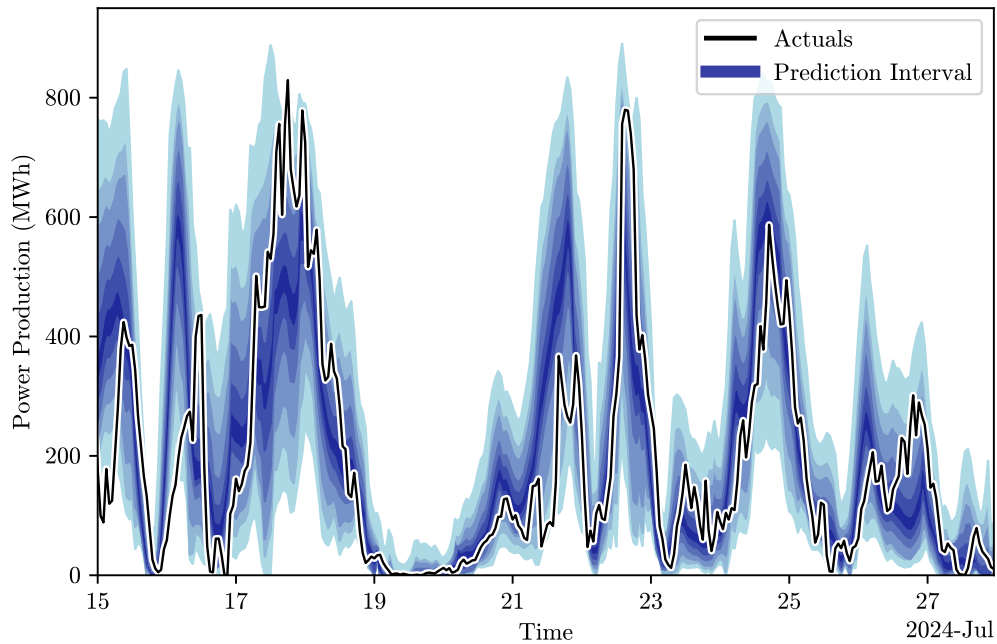


Figure 2: Excerpt of TAQR predictions with prediction interval 5%-95% shown in shades of blue for Denmark (area DK2) Offshore wind power production. Obtained by running `run_nabqr_pipeline` on wind power production.

4. Impact

The NABQR package improves renewable energy power production forecasts, achieving up to 40% better accuracy in terms of mean absolute error compared to previous state-of-the-art commercial forecasts. This directly impacts the efficiency and sustainability of power grid operations. By improving forecast accuracy, NABQR reduces reliance on backup power plants, thereby decreasing CO₂ emissions and supporting the green transition. This advancement encourages investment and innovation in renewable energy and accelerates the transition to sustainable energy sources.

NABQR democratizes advanced machine learning techniques, making them accessible to a wider audience beyond domain experts. This aligns with the principles of human-centered AI, promoting transparency, collaboration, and inclusivity. By simplifying machine learning pipelines, NABQR reduces the need for manual trial-and-error, streamlining the knowledge discovery process and empowering users to efficiently manage and analyze datasets.

Written in Python and thoroughly documented, NABQR is set to be used in both academic and industrial settings. This accessibility invites further exploration of neural networks as optimal basis function generators, fostering new research opportunities and advancements in the field.

5. Conclusions

NABQR is an open-source Python package designed to correct scenarios and produce more accurate reliable probabilistic forecasts. NABQR uses neural networks and time-adaptive quantile regression. The NABQR package includes the first time-adaptive quantile regression algorithm written in Python along with useful wrapper functions for e.g. visualizing probabilistic forecasts, training LSTM networks, and simulating realistic wind power.

CRediT authorship contribution statement

Bastian Schmidt Jørgensen: Writing– original draft, Project administration, Investigation, Data curation, Software, Methodology.

Jan Kloppenborg Møller: Writing– review & editing, Conceptualization, Software.

Peter Nystrup: Writing– review & editing, Data curation, Conceptualization.

Henrik Madsen: Writing– review & editing, Conceptualization, Funding, Project administration.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this article.

Data availability

The authors do not have permission to share data, but simulated data is available in NABQR.

Acknowledgements

This work is supported by *IIRES* (Energy Cluster Denmark), *SEM4Cities* (Innovation Fund Denmark, No. 0143-0004), *ELEXIA* (Horizon Europe No. 101075656), and the projects *DynFlex* and *PtXMarkets*, which both are part of the Danish Mission Green Fuel portfolio of projects.

Personal Acknowledgements

Thanks to Peder Bacher and Goran Goranovic for good discussion.

References

- [1] H. Tyrallis, G. Papacharalampous, A review of predictive uncertainty estimation with machine learning, *Artificial Intelligence Review* 57 (2024) 94. doi:10.1007/s10462-023-10698-8.
- [2] ECMWF, Ecmwf: European centre for medium-range weather forecasts, <https://www.ecmwf.int>, 2024. Accessed: 2024-07-01.
- [3] B. S. Jørgensen, J. K. Møller, P. Nystrup, H. Madsen, Sequential methods for error correction of probabilistic wind power forecasts (2025). arXiv:2501.14805.
- [4] B. N. Oreshkin, D. Carpov, N. Chapados, Y. Bengio, N-BEATS: neural basis expansion analysis for interpretable time series forecasting, *CoRR abs/1905.10437* (2019). arXiv:1905.10437.
- [5] J. K. Møller, H. A. Nielsen, H. Madsen, Time-adaptive quantile regression, *Computational Statistics & Data Analysis* 52 (2008) 1292–1303. doi:<https://doi.org/10.1016/j.csda.2007.06.027>.
- [6] C. Xu, Y. Sun, A. Du, D. ce Gao, Quantile regression based probabilistic forecasting of renewable energy generation and building electrical load: A state of the art review, *Journal of Building Engineering* 79 (2023) 107772. doi:<https://doi.org/10.1016/j.jobe.2023.107772>.
- [7] A. J. Cannon, Quantile regression neural networks: Implementation in r and application to precipitation downscaling, *Computers & Geosciences* 37 (2011) 1277–1284. doi:10.1016/j.cageo.2010.07.005.
- [8] J. B. Bremnes, Ensemble postprocessing using quantile function regression based on neural networks and bernstein polynomials, *Monthly Weather Review* 148 (2020) 403 – 414. doi:10.1175/MWR-D-19-0227.1.
- [9] M. Abadi, et al., Tensorflow: Large-scale machine learning on heterogeneous distributed systems, <https://www.tensorflow.org/>, 2015. Accessed: 2024-06-13.
- [10] C. R. Harris, K. J. Millman, S. J. van der Walt, R. Gommers, P. Virtanen, D. Cournapeau, E. Wieser, J. Taylor, S. Berg, N. J. Smith, et al., Array programming with numpy, *Nature* 585 (2020) 357–362.

- [11] W. McKinney, Data structures for statistical computing in python 445 (2010) 51–56.

Appendix A. Example of Simulated Data

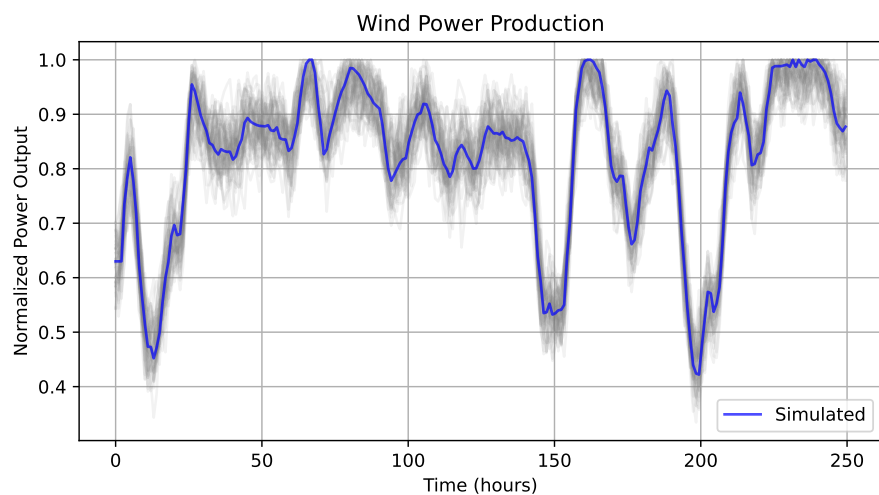


Figure A.3: Simulation for 250 hours of normalized wind power data including ensembles with the method `simulate_wind_power_sde` in `run_nabqr_pipeline`.