

NER4all or Context is All You Need

Using LLMs for low-effort, high-performance NER on historical texts. A humanities informed approach.

Torsten Hiltmann^{1,*} Martin Dröge^{1,3}

Nicole Dresselhaus^{1,2} Till Grallert^{1,2,*} Melanie Althage¹
Paul Bayer¹ Sophie Eckenstaler^{1,4} Koray Mendi¹
Jascha Marijn Schmitz^{1,2} Philipp Schneider¹
Wiebke Sczeponik¹ Anica Skibba^{1,2}

30 January 2025

Abstract

Named entity recognition (NER) is a core task for historical research in automatically establishing all references to people, places, events and the like. Yet, due to the high linguistic and genre diversity of sources, only limited canonisation of spellings, the level of required historical domain knowledge, and the scarcity of annotated training data, established approaches to natural language processing (NLP) have been both extremely expensive and yielded only unsatisfactory results in terms of recall and precision. Our paper introduces a new approach. We demonstrate how readily-available, state-of-the-art LLMs significantly outperform two leading NLP frameworks, spaCy and flair, for NER in historical documents by seven to twentytwo percent higher F1-Scores. Our ablation study shows how providing historical context to the task and a bit of persona modelling that turns focus away from a purely linguistic approach are core to a successful prompting strategy. We also demonstrate that, contrary to our expectations, providing increasing numbers of examples in few-shot approaches does not improve recall or precision below a threshold of 16-shot. In consequence, our approach democratises access to NER for all historians by removing the barrier of scripting languages and computational skills required for established NLP tools and instead leveraging natural language prompts and consumer-grade tools and frontends.

¹ Humboldt-Universität zu Berlin

² NFDI4Memory

³ AI-Skills

⁴ Kompetenzwerkstatt Digital Humanities

* Correspondence: Torsten Hiltmann <torsten.hiltmann@hu-berlin.de>, Till Grallert <till.grallert@hu-berlin.de>

Plain language summary

This paper introduces and positively evaluates a new method for *named entity recognition* (NER), or identifying and classifying references to real-world entities, such as people or places, in historical texts. NER is a foundational first task for many historical research questions as it allows us to screen large bodies of textual sources for relevant entities of interest. Yet, source corpora for historical research are commonly highly diverse in language, genre, and structure and very different from the modern texts with their highly regular language and standardised orthography. Thus, common NER tools, trained on modern texts, perform rather badly for our use case scenario without extensive and expensive pre-processing, customisation, and retraining of models.

In this paper we show how out-of-the-box, commercial large language models (LLMs) significantly outperform established frameworks for NER using natural language prompts in both German and English. We argue that in order to do so, one has to reconceptualize NER from a purely linguistic task into a humanist endeavour that requires some level of domain expertise and aims at activating the vast body of information LLMs have ingested during their training.

To test our approach, we created ground truth with manually annotated named entities from the 1921 Baedeker travel guide for Berlin and surroundings and evaluated the impact of various strategies for prompting readily available, commercial LLMs, namely ChatGPT-4o, on identifying (*recall*) and classifying (*precision*) named entities. Prompting strategies comprise the provision of contextual information and persona modelling directing the LLM away from a purely linguistic approach to NER, providing increasing numbers of random examples from our corpus (zero, few, and many-shot), and common prompt engineering techniques, such as reiterating instructions, offering rewards or punishments, and insisting on slow and thorough thought processes. Finally we compared all results to baselines generated with two leading NER frameworks, flair and spaCy.

Our results demonstrate that LLMs consequently perform at least on par with flair and spaCy and significantly outperform such traditional NER frameworks as soon as a bit of contextual information and persona modelling is included in the prompts. We also show that, surprisingly and against our expectations, zero-shot approaches, that is prompts without any examples, perform better than few-shot approaches until the number of examples reaches 16 and more. Examples require annotation from domain experts and are thus expensive. Including them in the prompt also increases the necessary context-window, which requires more computing power and has to be paid for when using commercial LLMs, as we did. Finally, we could show that although initially English performs better than German as a prompting language in terms of *recall*, this difference becomes insignificant when we incorporated our rather simple prompt engineering techniques.

Conflict of interest statement

Competing interests: The author(s) declare none

Introduction

The digital has brought in a new era of abundance for historical research and with it new challenges in order to make sense of vast amounts of highly diverse and unstructured data encapsulated in digitised—and increasingly born-digital—cultural artifacts (c.f. Rosenzweig 2003). Named entity recognition (NER), or the ability to automatically identify objects of interest for the historian, is one of the fundamental computational approaches for information extraction. Yet, our approaches to NER have hitherto been adopted from the domains of natural language processing (NLP) and computational linguistics. Existing tools work best with homogenous corpora of normalized texts in modern languages and come with steep learning curves for humanists without prior computing knowledge. Adapting and applying them to the specific challenges of historical corpora, requires prohibitive expenditures in effort, time, and money.

The recent hype around Large Language Models (LLM) has led to the expectation that they will solve historical NER with aplomb, but so far the performance of LLM is still significantly lower than established machine-learning approaches, such as transformer architectures (Keraghel, Morbieu, and Nadif 2024). In this paper we show demonstrate how rethinking prompting strategies and fundamentally reconceptualising NER from a linguistic task to a humanities-focused task with contextual information and appropriate persona modelling, allows us to significantly outperform state-of-the-art NLP tools such as spaCy and even flair in recall and precision using common foundation-models and 0-shot prompts without further training or fine-tuning and without creating additional data. We thus fundamentally remove barriers and democratize access to highly performant NER on heterogeneous corpora of very specific historical and frequently low-resourced texts.

The challenge of NER for historical texts

Named entities are references to distinct and uniquely nameable or designatable concepts that can be either concrete or abstract (Ehrmann 2008). Named Entity Recognition (NER) is a Natural Language Processing (NLP) task to detect these references in unstructured text data and classify them according to predefined categories, such as people, places or organizations. NER is thus a token classification task with a desired result like the following: t_1, t_2 : *PER (person)*, t_3 : *PER (person)*, $t_4 \dots t_9, t_{10}$: *LOC (location)*, t_{11} : *LOC (location)*, t_{12}, \dots . However, the disambiguation or identification of these named entities is not part of the NER task itself, but represents two subsequent processing steps (NE disambiguation and linking).

While some domains operate with relatively homogeneous text data, such as scientific publications, patient reports, or annual economic reports, which are written in modern standardized language and often follow a common internal structure, resulting in effective NER performance, this is not the case for the historical humanities. Historical research is characterized by texts defined by their diversity in form and content, presenting a significant challenge for NLP-tasks. This diversity may include:

- Language

- Multilinguality of the documents we work with,
- Different levels of historical language, with documents dating from different periods of time (e.g., Middle English, Early Modern English, Classical Latin, Medieval Latin) and varying dialects,
- Lack of standardized spelling in older texts and changing orthographic conventions that reflect linguistic and cultural shifts over centuries,
- Different editorial treatments of the texts, such as diplomatic and critical editions or normalised reading versions (e.g. providing the source text as it appears in the sources or reworking it according to certain rules).
- Text structure and vocabulary
 - Different text genres (chronicles, charters, diary entries, letters, press articles, ...),
 - Changing cultural customs, such as forms of personal address, use of titles, and other social conventions,
 - Different domains (law, economy, religion, military, food culture, etc.),
 - Changes over time in the vocabulary and meanings of words.
- Data
 - Scarcity of resources and limited annotated data.

Moreover, the process of detecting and classifying named entities in historical texts is often less straightforward than it appears as it involves a degree of interpretation by domain experts familiar with the specific subject, historical context, and time period. In their reliance on semi-automated workflows, historians, therefore, **value recall over precision**.

NER is a critical first step in accessing and analyzing unknown texts for historical scholarship. Identifying that and which persons, places, or institutions are mentioned in a given text is essential for historians seeking to understand and interpret new sources and to find new information about different entities that may be mentioned in the text. Consequently, published editions and other tools for accessing historical sources have always included indexes of persons, places, and subjects as a central and integral part.

Automated NER has become even more important in the face of major digitization campaigns that have made millions of textual documents from archives and libraries available as scans (e.g., Archivportal-D) and are increasingly being converted to full text via Optical Character Recognition (OCR) or Handwritten Text Recognition (HTR). However, the challenges our sources pose to NER, as outlined above, and from commonly trained on contemporary language and genres (particularly news texts, social media, and internet fora), have made automated NER with consistently high-quality results in both recall and precision nigh impossible

Historians, therefore, have to adopt one of the following strategies if they want to apply NER. All three involve a significant degree of compromise or a considerable investment of time and resources.

1. Use of ready-made models for general tag sets, resulting in a patchwork of results for historical texts. Performance correlates with similarity of historical input to training corpora.
2. Adapting the input texts to the models to address this under performance

through normalization, i.e. standardized, modern spelling. Problems caused by different genres and contexts remain (Ehrmann et al. 2023).

3. Generating a tailored rule set or acquiring sufficient training data to refine existing models or train an entirely new one. This yields the highest quality results, but is also the most resource-intensive and out of reach for many applications. Its efficacy is contingent upon the availability of sufficient data for annotation to justify the investment of resources Y. Chen et al. (2015) and case-specific domain expertise. In some cases, automated processing may even not be feasible at all due to the limited number of texts and data available.

With this paper, we demonstrate that these problems can be solved through the appropriate use of Large Language Models. Using our approach, LLMs can provide agnostic NER annotations for any type of historical text and potentially any tag set without the need to create specific training data and train or fine-tune a specific model. This represents a significant advancement in the automated analysis of historical documents, thereby transforming the field.

Current state of the field

NER techniques roughly fall into two camps (Keraghel, Morbieu, and Nadif 2024; Pakhale 2023): rule-based heuristics and machine-learning approaches. Deep-Learning approaches to NER, in particular in the form of fine-tuned variations of transformer-based language models and especially the BERT-model, have in recent years become the most widely discussed approach to NER on historical text, due to their high performance if purposefully and extensively trained on specific sources (Ehrmann et al. 2023, 23ff).

This has been radically changed with the publication of ChatGPT in November 2022, as we will argue in this paper. LLMs have rapidly gained popularity in historical research as prospective multipurpose tools that, due to their much improved complexity and domain indifference, might not just alter the tradeoffs but remove them altogether. Applications range from OCR/OCR correction (e.g. Thomas, Gaizauskas, and Lu 2024; van Eijnatten 2024), to (semi-)automatic building of knowledge graphs (e.g. Giovanelli and Traviglia 2024; Graham, Yates, and El-Roby 2023), and NLP tasks (e.g. Karjus 2023; Stammbach, Antoniak, and Ash 2022), including NER. Approaches range from zero-shot (De Toni et al. 2022; González-Gallardo et al. 2023; Sarker et al. 2024), to single-shot (Santos et al. 2024; Tang et al. 2024), and few-shot prompting (Sarker et al. 2024; Tang et al. 2024) using a wide array of proprietary and open LLMs: ChatGPT-4o (OpenAI 2024), GPT-3.5 / ChatGPT 3.5 (OpenAI 2022), Llama 2 (Touvron, Martin, and Stone 2023), Alpaca 7B (Taori et al. 2023), t0 (Sanh et al. 2022), and ChatGLM2-6B (THUDM 2023). Interestingly, these studies use LLMs for heterogeneous linguistic domains the models were not originally trained on, demonstrating the specific challenges for NER in the field and the transfer learning capabilities of LLMs, which makes them promising candidates for historical NER: 18th–19th century newspapers (English, French, German) (De Toni et al. 2022); 19th–20th century newspapers and commentaries on classical greek literature (German, French, Luxembourgish, English, Finnish, Swedish) (González-Gallardo et al. 2023); 18th century parish reports (Portuguese) (Santos et al. 2024); 17th century notary records (Spanish) (Sarker et al. 2024); 18th

century historical chronicles (Classical Chinese) (Tang et al. 2024).

Due to rapidly evolving technologies and the frequent publication of new and ever larger models, such applications are still in an early and experimental phase. Most studies evaluated results by comparing their results with established NER-tools (e.g., the embeddings and transformer-based NLP-framework flair (Akbik et al. 2019) or various transformer based Language Models, such as fine-tuned BERT models). In all cases where comparative tests were conducted, LLMs performed worse in many or even all tasks they were given, especially compared to BERT-models. Based on those largely negative results, (González-Gallardo et al. 2023; Sarker et al. 2024; Tang et al. 2024) came to unfavorable conclusions regarding LLMs capabilities for NER on historical texts, although the latter observed good performances for other NLP tasks (particularly Relationship Extraction). The other studies remained cautious until further and more extensive experimentation (De Toni et al. 2022) or concluded to see LLMs potentials in a more limited, assisting role (Santos et al. 2024).

Crucially, Tang et al. (2024) are the only ones explaining their usage of advanced techniques of prompt engineering targeting LLMs in-context learning capabilities, achieving good results for Relationship Extraction based on NER with some LLMs. Similarly Holla, Kumar, and Singh (2024) highlight the role of context to further improve benchmarks, although from the angle of adding additional tasks to the training procedure. Evaluating prompting strategies, including the structure of prompts and attempts at prompt engineering in a systematic way is therefore difficult, as the published documentation is usually insufficient or altogether lacking.

In most instances, LLMs have been used out-of-the-box, assuming they “understand” the prompt and can do the job. Opponents of such approaches argue that LLMs are purely predicting the most likely next token based on the input and the vast amount of training data and are therefore of limited use for sequence annotation. Wang et al. (2023) tried to solve this problem by introducing special sequences into the text to annotate named entities. In addition, they improved the performance of their LLM for NER by optimizing the structure and information content of the examples for few-shot learning.

Against this backdrop, we argue that LLMs have not yet been used to their full potential for common tasks in historical research, based, mainly, on insights from the wider LLM-research community regarding advanced prompt engineering, such as chain-of-thought prompting, and LLMs’ in-context learning capabilities, in particular of newer multimodal models that are not limited to texts, such as GPT-4o (e.g., Zixiao et al. 2024; Wang et al. 2023; Brown et al. 2020; J. Chen et al. 2023; Levy, Bogin, and Berant 2023).

Shifting the perspective from linguistics to history and contextual information

We propose a paradigmatic shift in the use of LLMs for NLP tasks: the redefinition of these tasks from a purely linguistic dimension to a content-oriented humanities dimension. Instead of treating the task as a technical exercise in NLP,

we argue for an approach that emphasizes the contextual and interpretative needs for solving corresponding tasks in the humanities. This means that we should use LLMs not only to process and recognize linguistic structures but also to analyze their content during NER tasks. As we show below, we can overcome the unique challenges presented by historical documents and other complex texts in the humanities and gain more accurate and meaningful insights following such an approach.

Previous approaches have focused primarily on the emergent abilities that result from the scaling process of LLMs. These skills include the execution of specific instructions without additional training, known as in-context learning, including instruction following, step-by-step reasoning, and so on. However, scaling language models to large language models by training them on larger amounts of texts entails not only these abilities, but also the inclusion of a large amount of information represented in the training texts.

We argue that through this process, the models not only learned new tasks, but also learned the contextual information necessary to perform these tasks and make more informed decisions. This means that LLMs possess both the ability to perform the task on a linguistic level as well as the necessary contextual information NER tasks.

While effective prompting is crucial to mobilize and exploit these new capabilities, we believe that the integration of contextual information embedded in the model during training is the key determinant of the success of LLMs for tasks such as NER. This embedded knowledge allows the model to perform tasks with appropriate contextual understanding, ultimately mimicking human behaviour in annotation processes.¹ As mentioned above, human annotators equally require extensive domain knowledge to perform these tasks correctly and to make informed decisions. They base their decisions not only on linguistic cues, but also on their extensive knowledge of the subject matter.

The presence of this contextual knowledge in LLMs is evidenced by studies such as OpenAI’s GPT-4 technical paper, according to which GPT-4 achieves over 80% accuracy on unspecified factual questions in history, demonstrating that the model has access to a broad base of historical information present in its training data (OpenAI et al. 2024). Our approach aims at making this embedded information accessible for decision making by including relevant context in the prompt, thereby activating the model’s contextual knowledge.

Aligning the annotated output with the input data in order to prevent “hallucinations” is a computational problem that we address below. However, the correctness of responses now depends not only on linguistic NLP tasks but also on the contextual information we incorporate into the prompt. By prominently incorporating this context into the prompt, we ensure that it is integrated into the decision process.

¹By using anthropomorphic language such as “understanding” and “knowledge”, we do not aim at insinuating sentience.

Corpus and data set

Since our goal was to test this LLM-based approach to NER under real-world conditions and in actual application scenarios and as the approach required some coherent historical corpus in order to provide clearly specified contextual information, we settled on a text from our own historical domain expertise instead of the usual benchmark texts. We chose the 19th edition of the Baedeker travel guide for Berlin and surroundings (Baedeker and Graupe 1921) because it has a well-defined historical context (information about traveling and sightseeing in Berlin around 1920), partly uses period-specific language, and also includes an interesting variety of structural features from narrative sections to comprehensive lists, such as stops on different bus routes. Travel guides are a good genre to benchmark NER performance because of the density and variety of named entities mentioned therein

The book was scanned and OCR'd with OCR4all (Reul et al. 2019), which acts as a service wrapping various tools for layout and text recognition into highly customizable workflows. We trained our own text recognition model based on the “idiotikon” Calamari model from the Schweizerisches Idiotikon (Reul and Wick 2021; Wick, Reul, and Puppe 2020) for 29 randomly selected pages (12.55% of the entire corpus), which resulted in a character error rate (CER) of 0.0064.

Preprocessing for NER was limited to removing line breaks and hyphenation and to normalizing of whitespace. Texts were then tokenized with spaCy (Honnibal et al. 2020).

The ground truth for NER was produced by manually annotating 55 randomly selected pages from our corpus with named entities using INCEpTION (Klie et al. 2018) following a set of guidelines specifically developed for this corpus and based on the NER guidelines from the Impresso project (Ehrmann et al. 2020). Each text was independently annotated by two team members. Differences between annotations were reconciled based on a third opinion.

We limited the types of entities to person (**PER**), organisation (**ORG**), and places (**LOC**). Nested annotations were not allowed. **PER** includes living people, historical and mythical figures, as well as collectives dependent on their individual members, such as the art collective “Die Brücke”. Role names, salutations, and addresses, such as “geh[eimer] Regierungsrat”, were not included in the **PER** tag. **ORG** differs from the kind of collectives encoded as **PER** in being limited to incorporated collectives, such as companies, public institutions, associations, etc. **LOC** designates geographic locations. Given that most incorporated collectives do have a physical location, consider, for instance, a restaurant or even a city, our annotation as either **ORG** or **LOC** depends on the context. If the text foregrounds the locality, such as in the case of directions, we opted for **LOC**. All other instances were annotated as **ORG**. Out of this dataset we used 25 random pages for the evaluation (in prodigy-format).

Method

In this section, we describe our methodology for leveraging LLMs to generate, evaluate, and refine named-entity annotations. We focus on the technique of

prompt engineering (Bsharat, Myrzakhan, and Shen 2024) to achieve better results instead of optimizing training-datasets and fine-tuning or retraining established approaches. This is due to the prohibitive cost of the latter approaches and the performance of the prompt-engineering approach as demonstrated below.

Because there are a lot of combinations for different prompting techniques, we chose the best combination that worked during experimentation without a comprehensive study. We then performed an ablation study on this prompt to measure how much each component impacts the overall performance—i.e. what is the relative importance of the prompt’s parts for the observable output.

This is a very recent, radical changing field. While additionally having slightly different effects on different LLMs, our experiments and approach can only be based on the current state in an evolving environment. More than any exact detail, we want to emphasise our main thesis that having domain and input specific contextual information plays an important role. We do not propose a definite set of instructions on what to include and what not as gold standard.

Finally, we tested the impact of different prompting languages, namely English and German.

In the following sections, we detail our chosen annotation format, which adopts a span-based, tag-like structure inspired by prior research (e.g. Wang et al. 2023). Next, we outline the instructions we provide to the model—highlighting key challenges such as maintaining fidelity to the original text, properly handling nested entities, and addressing frequent labeling errors. We then discuss our matching strategy, which employs fuzzy search techniques to robustly locate and compare generated spans with their corresponding ground truth. To evaluate performance, we measure precision, recall, and F_1 -Scores against two established NER pipelines (flair (Akbik et al. 2019) and spaCy (Honnibal et al. 2020)), emphasizing prompt engineering over dataset optimization or model retraining. We conclude by examining how one-shot, few-shot, and many-shot examples affect annotation quality, and by introducing the LLMs used in our experiments, notably “gpt4o-2024-08-16” (OpenAI 2024). Throughout, we stress the importance of including domain-specific context and adapting prompts to an evolving LLM landscape.

Choice of target annotations

Similar to the approach of (Wang et al. 2023), we annotate complete entity-spans, while also keeping in mind that it should be easily reproducible by a generating LLM. Depending on the token-embedding used we often saw generation of spaces at the end of a word, problems of properly opening and closing of the tags, etc., even if the prompt instructed the generation of a semantic tag for each word. As soon as we switched over to tag-like annotation of spans of characters all these problems nearly vanished even on smaller nets with smaller or non-complete embeddings. Also we do not need to “waste” much of the prompt on fixing the output-format. We suspect that this is due to a high amount of similar structured text like code, html or math in the training data.

We finally settled on `<<TAG word word word /TAG>>` as a way to annotate possibly nested spans and made all future experiments with this format. Yan,

Yu, and Chen (2024) reached similar conclusions (having <<, >> perform best with a slightly different layout).

Instructing the LLM

The final prompt (in both German and English) comprises multiple components:

1. A general **introduction** to the input text to be analyzed, with short, expert-level **contextual information**.
2. The main task and **instructions** on how to mark named entities in the text.
3. Some **examples** of input and expected output while making sure that all recognizable classes are included in decent amounts as Brown et al. (2020) demonstrated their significance for improving output quality.
4. A **reiteration of the instructions** in different wording and pointing out how in all examples these instructions were followed to the letter
5. Common tricks (Federiakina et al. 2024) to stress the importance of correctness and **offer monetary reward** for each successful classification
6. The seemingly important **empty phrase** “take a deep breath and think step by step”

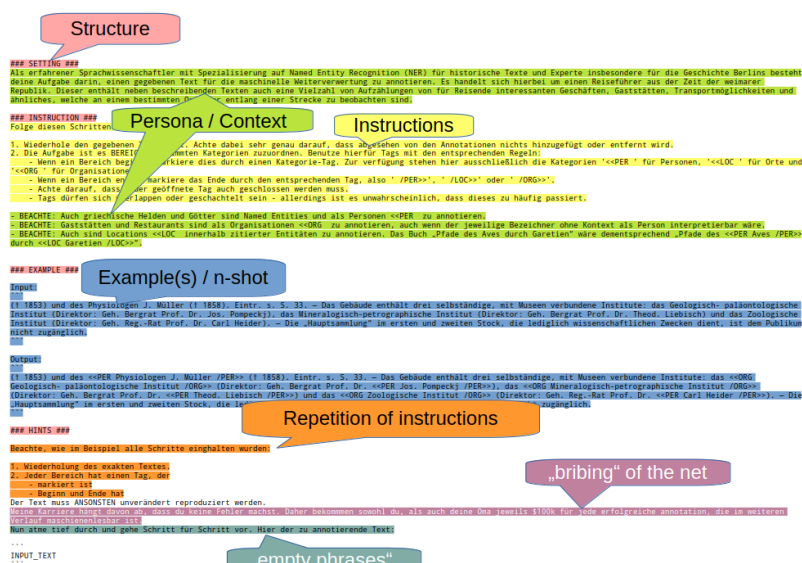


Figure 1: Main instructions in the German prompt

Overview of the prompt structure

The main instructions (2) are as follows (fig.1, note that the screenshot shows the German prompt):

- 1 Follow these steps:
- 2

- 3 1. Repeat the given text exactly. Be very careful to ensure that
- 4 nothing is added or removed apart from the annotations.
- 5 2. Your task is to categorize sections into predetermined categories.
- 6 Use tags with corresponding rules:
- 7 - When a section begins, mark it with a category tag. Available
- 8 categories include '<<PER' for people, '<<LOC' for locations,
- 9 and '<<ORG' for organizations.
- 10 - When a section ends, mark the end with the corresponding tag,
- 11 i.e., '/PER>>', '/LOC>>', or '/ORG>>'.
- 12 - Be sure to close each opened tag.
- 13 - Tags may overlap or be nested, but it is unlikely that this will
- 14 happen frequently.
- 15
- 16 - NOTE: Even Greek heroes and gods are named entities and should be
- 17 annotated as people (<<PER).
- 18 - NOTE: Restaurants are organizations (<<ORG) regardless of whether
- 19 the name can be interpreted as a person without context.
- 20 - NOTE: Locations (<<LOC) within quoted entities should also be
- 21 annotated. For example, "Pfade des Aves durch Garetien" would become
- 22 "Pfade des <<PER Aves /PER>> durch <<LOC Garetien /LOC>>".

The “NOTE” parts address systematic errors we noticed and are only relevant for detailed persona modeling and when including historical context. In the general case, we deployed notes such as “The text is in an old language and may be erroneous due to technical processes.” or “In the past people wrote like they heard, so an entity is also valid if it sounds like the real entity, even if written incorrectly”. All notes ought to be adapted to the specific, observed errors of the used LLM to improve performance.

Matching spans through post-processing the results

Due to the heuristic nature and only approximative generation of LLMs, the output is often not exactly reproducible. We especially noticed that the LLM tends to correct “mistakes” in the source format or change the hyphenation of entities. But this also enables the LLM to become closer to a real annotator, who has similar freedoms. Due to this we extracted the annotated spans and searched for them in the source material with a fuzzy search provided by the python-library `fuzzysearch`. We specifically used `find_near_matches(span, text, len(span) // 5)` to allow for up to 1 error every 5 generated characters, which corresponds to a Levenshtein-Distance of n for a string at least length $5n$ (Levenshtein 1966). With this we had no errors in locating the spans in the source-material.

For comparing if the same span is present in the generated annotation and the ground truth, we employed the library `nervaluate` (Batista and Upson [2019] 2020) to match the extracted spans. We used the most lenient criteria for NER matching `ent_type`, meaning it suffices to have an overlap with the annotation and having the correct entity-type annotated (Segura-Bedmar, Martínez, and Herrero-Zazo 2013). This also yielded an average precision/recall/F₁-Score for the whole corpus as well as every single page.

Selection of LLMs

For this paper, we focussed on the `gpt4o-2024-08-06` model (OpenAI 2024) with no retraining or more than a black-box access to the API.²

Evaluating the performance of prompt engineering

To measure the performance of our approach, we compare the results of iterative prompts and their various components to two off-the-shelf NLP libraries commonly used for NER: `flair` (Akbik et al. 2019) with its `ner-german-large` model (Schweter and Akbik 2021), which has a reported F_1 -Score of **92.31** on the CoNLL-03 German revised benchmark (“State-of-the-Art Models” [2018] 2025), and `spaCy` (Honnibal et al. 2020) using `de_core_news_lg`, for which `spaCy` claims a self-reported F_1 -Score of **85** for the NER-Task after training (“De_core_news_lg” 2023).³

Establishing baselines

`Flair` is straight-forward to implement. The German language model offers the entity classes we needed (plus an additional `MISC`-class). Results were also within our expectations across all classes. Due to the model being trained on modern texts, we expected not to achieve the reported F_1 -Score of 92 with historical sources (Our corpus resulted in 0.76 recall; 0.89 precision; F_1 -Score of 0.81, see tbl. 1).

The baseline of `spaCy` on the other hand was surprisingly disappointing. While having a recall of 0.82 in the `LOC`-Class and 0.76 in the `PER`-Class, `spaCy` completely failed to recognize most of the `ORG` (recall only 0.12). This is a known issue with `ORGs` that are not in the original training-set are rarely found. Additionally `spaCy` found 684 sequences as “named entities” that were not annotated as such (while the whole corpus only had 1490 annotations in total) yielding an unsatisfactory precision. Over all classes this only yielded mediocre results (Our corpus resulted in 0.59 recall; 0.44 precision; F_1 -Score of 0.50, see tbl. 1).

Results

Basic-Prompts

We expected basic prompts without any context or more advanced prompt-engineering to perform worse than a current large German model for `flair`. But even with this simple approach, modern sophisticated LLMs are able to at least perform on par with state-of-the-art specialist NLP tools (recall 0.77 (ours) vs. 0.76 (`flair`); precision 0.91 (ours) vs. 0.89 (`flair`); F_1 0.83 (ours) vs 0.81 (`flair`)).

This already yields good precision values. However, it is important to emphasize that historians are particularly interested in high recall in order to capture as

²We set up everything as reproducible as possible - according to documentation. Although we assume no bad intent on OpenAI’s part, all promises made could not be verified independently. On the notion of black box see Winner (1993).

³`SpaCy` reports a F_1 -Score of 91.6 for the CoNLL-03 benchmark but used a RoBERTa-based transformer model specifically trained for NER.

many potential results as possible, which they can then go through manually. Therefore, in the following test, we will examine whether recall can be increased, especially by using contextual information.

We achieve this comparison by analyzing three different dimensions of optimization. First we change the persona-modeling aspect of the prompt in two distinct ways: giving general guidance and giving source-specific knowledge. Then we look at the improvement potential that additional annotated examples would have

Context (0-Shot)

To analyze our main theory that context is core for unlocking the highest performance we compared the 0-shot prompt with different specifications of context.

- In the “No Context”-case the instructions were merely information on how to annotate the data. No specific prompt-engineering techniques (like in the ablation study) were used.
- The “Generic Context” takes a generic historic-persona (“As an experienced linguist specializing in Named Entity Recognition (NER) for historical texts and expert in various historical epochs and locations, your task is to annotate a given text for machine reusability.”).
- The “Specific Context” then also adds details on the specific material and what to expect (similar to the first paragraph of “Corpus and data set”).
- The “Full Prompt” integrates all the above, combined with several optimization techniques for prompting.
- Finally, we tested the prompts in both German and English (mentioned in brackets below).
- We report mean and standard deviation, as the annotation was done pagewise.

Table 1: Different levels of context-specificity (**without** prompt-engineering techniques) compared to baseline and full prompts (**with** prompt-engineering techniques).

Context-Impact	lang	Recall		Precision		F ₁ -Score	
		mean ± stdev	impact	mean ± stdev	impact	mean ± stdev	impact
All 0-Shot							
Full Prompt	de	0.84 ±0.10	0.00 %	0.91 ± 0.08	0.00 %	0.87 ±0.08	0.00 %
Full Prompt	en	0.85 ±0.09	0.78 %	0.91 ±0.06	-0.40 %	0.88 ± 0.07	+0.19 %
Specific Context	de	0.81 ±0.19	-3.58 %	0.87 ±0.19	-3.84 %	0.84 ±0.19	-3.66 %
Specific Context	en	0.86 ± 0.08	+2.26 %	0.89 ±0.08	-2.14 %	0.88 ±0.07	+0.07 %

Context-Impact	lang	Recall		Precision		F₁-Score	
Generic	de	0.81	-3.62 %	0.90	-1.36 %	0.85	-2.61 %
Context		±0.11		±0.10		±0.09	
No	de	0.75	-10.74 %	0.90	-1.61 %	0.81	-7.17 %
Context		±0.15	%	±0.09		±0.11	
<i>Baseline</i>		0.76	-9.98	0.89	-2.43	0.81	-7.38
<i>flair</i>		±0.13	%	±0.10	%	±0.11	%
<i>Baseline</i>		0.71	-15.91	0.62	-32.03	0.66	-24.53
<i>spaCy</i>		±0.13	%	±0.11	%	±0.10	%

Including examples: 1-shot, few-shot, many-shot

Another way to improve the results and provide more context is through one-shot or few-shot learning. Here, in addition to instructions in the sense of the “full prompt” mentioned earlier, we also include examples of the desired results. Brown et al. (2020) demonstrated that output quality improves significantly when prompts integrate examples. We consequently explore the impact of such examples. This approach allows us to measure the impact of few-shots on the outcomes. At the same time, it addresses the question of whether the added value of preparing such examples is worthwhile at all.

Every example consists of small random excerpts of around 200-500 characters from the corpus that were not in the annotation set. This is drastically lower than the whole page the model has to annotate in the experiments, which are 4000-9000 characters long. However, each sample needed to be manually annotated, making the process rather labor-intensive. Nguyen and Wong (2023) have shown that prompts are sensitive to choosing the *right* examples. To control for the impact of implicit domain knowledge, we chose random examples ensuring an equal distribution of classes.

We incrementally increased the number of shots by powers of two from 2^1 to a maximum of 2^5 . The maximum amount tested was 32-shot, with all classes being balanced. In all other cases they were randomly chosen once from those 32. This also has the side-effect of simulating impacts from non-optimized examples as opposed to specifically optimizing these for the given prompt with the risk of overfitting. Liu et al. (2021) describe the impact of such optimizations in detail.

Table 2: Impact of the number of examples given in addition to specific context and all used prompt-engineering techniques.

Shots	lang	Recall		Precision		F₁-Score	
All Full Prompt	lang	mean	impact	mean	impact	mean	impact
		±		±		±	
		stdev		stdev		stdev	
32	de	0.89	0.00	0.90	0.00 %	0.89	0.00
		±0.09	%	±0.06		±0.06	%

Shots	lang	Recall		Precision		F ₁ -Score	
16	de	0.86 ±0.10	-2.86 %	0.90 ±0.08	-0.62 %	0.88 ±0.07	-1.81 %
8	en	0.83 ±0.13	-6.12 %	0.88 ±0.09	-1.93 %	0.85 ±0.09	-4.40 %
8	de	0.81 ±0.12	-9.31 %	0.90 ±0.08	0.13 %	0.85 ±0.09	-5.15 %
4	de	0.80 ±0.13	-10.47 %	0.90 ±0.08	0.41 %	0.84 ±0.09	-5.82 %
2	de	0.83 ±0.13	-7.12 %	0.90 ±0.08	0.67 %	0.86 ±0.10	-3.65 %
1	en	0.82 ±0.13	-8.27 %	0.89 ±0.10	-0.71 %	0.85 ±0.10	-4.83 %
1	de	0.82 ±0.12	-7.62 %	0.92 ±0.07	1.72 %	0.86 ±0.08	-3.33 %
0	en	0.85 ±0.09	-4.50 %	0.91 ±0.06	1.11 %	0.88 ±0.07	-1.14 %
0	de	0.84 ±0.10	-5.02 %	0.91 ±0.08	1.27 %	0.87 ±0.08	-1.91 %
<i>Baseline</i>		0.76	-14.51	0.89	-1.20	0.81	-9.15
<i>flair</i>		±0.13	%	±0.10	%	±0.11	%
<i>Baseline</i>		0.71	-20.13	0.62	-31.17	0.66	-25.98
<i>spaCy</i>		±0.13	%	±0.11	%	±0.10	%

The surprising result is that overall **0-shot performs better than few-shot** in both recall and precision. Small improvements occur only with 16 examples and more. **We did not manage to hit a ceiling** at which recall stops improving - even with 32-shot. But we were limited by the amount of tokens fitting inside the LLMs’ context-window, so that a further increase is not possible.

Prompting language

Throughout our initial experiments we had prompted the LLMs in German and expected a significant improvement of performance when switching to English as the language for instructions and contextual information (though not for the examples). This expectation was confirmed and yielded a 5% improvement in recall. The difference in precision was much lower. This discrepancy can be nearly mitigated in German-language prompts through prompt optimization techniques (tbl. 2). To our surprise we noticed that prompt-engineering is only relevant in a meaningful way for German instructions, as the performance for English instructions did not change considerably with or without prompt-engineering. In consequence, and most importantly, the differences between the performance of the two prompting languages using our full prompts were insignificant. This will require further testing with other languages but it certainly opens opportunities for a broader application of our approach and to democratize access to such techniques for non-English speaking communities.

Ablation Study

In the ablation study, we enable and disable specific features of our prompt in order to measure their impact on the overall outcome. The ablation study was conducted on the German prompt only.

We first did the ablation study on the 32-shot prompt, but all results were pretty similar due to the example-block dominating the whole prompt. With so many examples using a multiple of tokens compared to all instructions, the ablation-effect we want to measure here is basically invisible. Therefore we switched to 0-shot for this analysis.

The parts added and reviewed individually were the following:

- **only structure:** addition of markdown-headings/separations of areas
- **only instruction-repetition:** addition of the short summary of instructions at the end
- **only bullying:** offering of reward/punishment for correct/wrong annotations
- **only system-prompt:** providing the input as two distinct messages marked “system” containing the prompt and “user” containing the data versus putting everything in one “user”-message

For comparison we added selected results from the previous tables regarding different context levels (in italics) as well as the baseline results. “PE” here refers to using all techniques, otherwise none other than the mentioned one was used. As zero for our benchmark we set a prompt with specific contextual information but no prompt-engineering techniques.

Table 3: Ablation study with impact of different prompt-engineering techniques on the overall recognition; gray/italic results are from previous tables for comparison.

Ablation	Recall		Precision		F ₁ -Score	
	mean ± stdev	impact	mean ± stdev	impact	mean ± stdev	impact
All 0-Shot						
<i>Specific Context + PE</i>	<i>0.84</i> <i>±0.10</i>	<i>3.71</i> %	0.91 ±0.08	3.99 %	<i>0.87</i> <i>±0.08</i>	<i>3.80</i> %
Specific Context + structure	0.85 ±0.09	5.10 %	0.91 ±0.08	3.84 %	0.88 ±0.08	4.40 %
Specific Context + system-prompt	0.85 ±0.10	4.04 %	0.91 ±0.08	3.88 %	0.88 ±0.08	3.95 %
Specific Context + instruction-repetition	0.82 ±0.19	0.26 %	0.88 ±0.19	0.28 %	0.85 ±0.19	0.31 %
Specific Context + bullying	0.83 ±0.20	1.44 %	0.87 ±0.20	-0.82 %	0.84 ±0.19	0.20 %
<i>Specific Context</i>	<i>0.81</i> <i>±0.19</i>	0.00 %	<i>0.87</i> <i>±0.19</i>	0.00 %	<i>0.84</i> <i>±0.19</i>	0.00 %

Ablation	Recall		Precision		F₁-Score	
<i>Generic Context + PE</i>	<i>0.80</i>	<i>-2.35</i>	<i>0.92</i>	<i>2.92</i>	<i>0.84</i>	<i>-0.07</i>
	± 0.11	%	± 0.10	%	± 0.10	%
<i>Generic Context</i>	<i>0.81</i>	<i>-0.05</i>	<i>0.90</i>	<i>2.58</i>	<i>0.85</i>	<i>1.09</i>
	± 0.11	%	± 0.10	%	± 0.09	%
<i>No Context + PE</i>	<i>0.74</i>	<i>-8.59</i>	<i>0.91</i>	<i>3.63</i>	<i>0.81</i>	<i>-3.66</i>
	± 0.15	%	± 0.10	%	± 0.11	%
<i>No Context</i>	<i>0.75</i>	<i>-7.43</i>	<i>0.90</i>	<i>2.31</i>	<i>0.81</i>	<i>-3.64</i>
	± 0.15	%	± 0.09	%	± 0.11	%
<i>Baseline flair</i>	<i>0.76</i>	<i>-6.65</i>	<i>0.89</i>	<i>1.46</i>	<i>0.81</i>	<i>-3.86</i>
	± 0.13	%	± 0.10	%	± 0.11	%
<i>Baseline spaCy</i>	<i>0.71</i>	<i>-</i>	<i>0.62</i>	<i>-</i>	<i>0.66</i>	<i>-</i>
	± 0.13	<i>12.79</i>	± 0.11	<i>29.32</i>	± 0.10	<i>21.66</i>
		%		%		%

We could already show that context is an important driver for achieving great performance. But without prompt-engineering techniques the difference between generic and specific context is within each other’s standard-deviations. Adding well-known **prompt-engineering techniques however, seems to behave orthogonal to contextual clues**, as only adding all techniques does not improve the results (“No Context” vs. “No Context + PE”).

Discussion

Our results show that while advanced prompting strategies improve scores, their impact is limited, typically increasing performance by only 1-2% or (as in our case) negating a difference in the instruction language. Similarly, the number of examples in few-shot learning has shown some more substantial impact only if there are 16 or more shots, while creating appropriate examples is labor-intensive and requires expert knowledge to avoid bias and ensure comprehensive coverage.

In contrast, providing explicit and detailed context has a much greater impact. Just providing general context, as has been the norm, improves recall by 6%. However, when specific, detailed context is provided, it leads to further, significant improvement of the results by another 5%. Which in the end, sets our approach in terms of retrieval 10% above flair and 15% above spaCy, in terms of F₁-Score 7% above flair and 22% above spaCy.

The results clearly demonstrate that instead of relying solely on the model’s capabilities as a language model in handling language (NLP), the outcomes improve significantly when the task is defined as a content-based one, thereby incorporating the domain knowledge represented within the model through appropriate prompting—while acknowledging that this represents only a limited perspective of the world. In doing so, the model can surpass human capabilities in certain areas.

To cite an example for this: when annotating the sequence “Borstells Lesezirkel,” human annotators labeled “Borstells” as a person (PER), whereas the model

correctly identified the entire phrase as an organization (**ORG**). Further investigation confirmed that “Borstells Lesezirkel” refers to a commercial lending library, a fact unknown to the human annotators but represented within the model’s knowledge base. When the model is separately asked about “Borstells Lesezirkel,” it provides additional information, which, while not entirely accurate, aids human editors in correctly determining the category. This opens avenues for future work on iterative generation of ground truth with the help of LLMs.

On the other hand, the result cannot be attributed to a more flexible language understanding of the model. In our experiment, when no contextual information was provided, the model achieved the exact same F_1 -Score of 81% as the more universally trained Flair model. Both outperformed the spaCy model, which was trained on newspaper texts from the 1990s.

This demonstrates that well-formulated prompts including much more specific information of the task at hand can effectively leverage the model’s representation of knowledge in this domain and thus enhance, in our case, detection and classification. Within the constraints of its limitations regarding bias and representation, as well as its dependence on training data, the model operates here akin to an omniscient historian, capable of outperforming human annotators within the scope of its represented knowledge.

Furthermore, we could show that prompt-engineering techniques evened out differences in the performances of German and English prompts, while the latter outperformed the former without such approaches.

Our ablation study indicates that while prompt engineering strategies individually contribute to enhanced LLM performance in NER, their effectiveness is markedly amplified when paired with contextually rich information. However, it’s noteworthy that there isn’t a straightforward additive relationship between the two; instead, they intertwine, each influencing the efficacy of the other. Rather than merely stacking benefits from additional prompt examples or refining structure alone, their synergy seems to unlock nuanced understanding within LLMs, leading to better recognition outcomes without guaranteeing perfection. The intricacies of historical texts demand a delicate balance between explicit instructions and embedded contextual knowledge—a combination that requires more exploration for its potential full realization in practical applications. This finding encourages a tempered enthusiasm as we continue to refine our approach, acknowledging the complexity of language models’ interaction with humanities-informed data.

Transferability and future work

In terms of transferability, preliminary tests on documents from the 16th to the 18th centuries from a variety of genres suggest that our methodology can be applied to texts from different historical periods and backgrounds with clear improvements over the respective baselines of Flair and spaCy, although further testing is needed to fully understand the scope of applicability of this approach to a wider range of historical documents and use cases.

In particular, since our approach may also provide a way to annotate unique classes without first having to manually generate sufficient training data and

perform fine-tuning, simply by describing the class in natural language. Having established in this paper the importance of detailed and task-specific contextual information, future work will explore its transferability to other, more specific tasks in the field of historical research. Future work will include:

- Investigating how well our approach can handle earlier linguistic forms to determine its broader applicability across different historical periods and languages,
- Experimenting with unique, case-specific classes that have not been used before, which would normally require specific training data and fine-tuning, but could be solved based on our approach by a well-thought-through natural description of the class,
- Investigate the extent to which a model can find the specifics of a given text itself and thus improve the quality of the contextual information, or even create it by itself, thereby making more extensive use of the content-based capabilities of the models,
- how the different models and their different capacities can influence their performance in these tasks, and how more specific context information is related to different prompt engineering techniques,
- and finally, to investigate the extent to which limitations in the results are due to ambiguities inherent in the historical texts, and how we can deal with these ambiguities and represent them in the evaluation.

Conclusion

In our study, we have explored the use of LLMs for NER in historical and low-resource texts through humanities-informed approaches, demonstrating a significant improvement in performance compared to traditional methods as they are implemented state-of-the-art NLP-frameworks like flair or spaCy. The results indicate that incorporating specific contextual information into prompts is fundamental for achieving high accuracy in NER tasks.

The integration of domain knowledge through humanities-informed prompting has shown to significantly enhance LLM performance in NER tasks for historical texts. This method not only facilitates more efficient analysis but also brings us closer to replicating the expertise traditionally required by human annotators, which could revolutionize how we approach textual analysis within digital humanities and beyond.

Acknowledgements

Use of artificial intelligence (AI) tools

As non-native speakers of English, some of our co-authors edited parts of their contributions for linguistic and idiomatic clarity. To this end, draft passages were submitted to ChatGPT-4o (OpenAI 2024) and DeepL Write. During this process, all suggested changes were individually verified and accepted or rejected accordingly. The text was then finalised and edited without further resort to AI tools.

Funding disclosure statement

Parts of the research have been funded through the German National Research Data Infrastructure (NFDI) consortium 4Memory (<www.4memory.de>) and the AI-Skills (<www.ai-skills.hu-berlin.de>) project at Humboldt-Universität zu Berlin. We gratefully acknowledge the financial support of the German Research Foundation (DFG) (4Memory, project no. 501609550), the Federal Ministry of Education and Research (BMBF) (AI-Skills, project funding code 16DHBKI014) and the Berlin Senate Department for Science, Health and Care (AI-Skills).

Authorship contribution statement (CRediT)

- Conceptualization: Torsten Hiltmann, Martin Dröge
- Data curation: Martin Dröge, Wiebke Sczeponik, Koray Mendi, Paul Bayer, Anica Skibba, Philipp Schneider, Sophie Eckenstaler
- Formal analysis: Nicole Dresselhaus
- Methodology: Torsten Hiltmann, Martin Dröge, Nicole Dresselhaus
- Software: Nicole Dresselhaus
- Writing - original draft: Torsten Hiltmann, Nicole Dresselhaus, Martin Dröge, Till Grallert, Jascha Schmitz, Melanie Althage, Philipp Schneider
- Writing - review & editing: Till Grallert

Data availability statement

All data and code is available under free and open licenses and <anonymized> at <https://osf.io/yr5ck/?view_only=a9b2b10af0f247048d64b2bf4415b5c8>.

Bibliography

- Akbik, Alan, Tanja Bergmann, Duncan Blythe, Kashif Rasul, Stefan Schweter, and Roland Vollgraf. 2019. “FLAIR: An Easy-to-Use Framework for State-of-the-Art NLP.” In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics (Demonstrations)*, 54–59. Minneapolis: Association for Computational Linguistics. <https://doi.org/10.18653/v1/N19-4010>.
- Baedeker, Karl, and Bruno Graupe. 1921. *Berlin Und Umgebung: Handbuch Für Reisende*. 19th ed. Leipzig: Karl Baedeker. <https://nbn-resolving.org/urn:nbn:de:kobv:11-717582>.
- Batista, David, and Matthew Antony Upson. (2019) 2020. “Nervaluate.” <https://github.com/mantisnlp/nervaluate>.
- Brown, Tom B., Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, et al. 2020. “Language Models Are Few-Shot Learners.” July 22, 2020. <https://doi.org/10.48550/arXiv.2005.14165>.
- Bsharat, Sondos Mahmoud, Aidar Myrzakhan, and Zhiqiang Shen. 2024. “Principled Instructions Are All You Need for Questioning LLaMA-1/2, GPT-3.5/4.” January 18, 2024. <http://arxiv.org/abs/2312.16171>.
- Chen, Jiawei, Yaojie Lu, Hongyu Lin, Jie Lou, Wei Jia, Dai Dai, Hua Wu, Boxi Cao, Xianpei Han, and Le Sun. 2023. “Learning In-context Learning for

- Named Entity Recognition.” May 26, 2023. <https://doi.org/10.48550/arXiv.2305.11038>.
- Chen, Yukun, Thomas A. Lasko, Qiaozhu Mei, Joshua C. Denny, and Hua Xu. 2015. “A Study of Active Learning Methods for Named Entity Recognition in Clinical Text.” *Journal of Biomedical Informatics* 58 (December): 11–18. <https://doi.org/10.1016/j.jbi.2015.09.010>.
- De Toni, Francesco, Christopher Akiki, Javier de la Rosa, Clémentine Fourier, Enrique Manjavacas, Stefan Schweter, and Daniel van Strien. 2022. “Entities, Dates, and Languages: Zero-Shot on Historical Texts with T0.” <http://arxiv.org/abs/2204.05211>.
- “De_core_news_lg.” 2023. Explosion. https://github.com/explosion/spacy-models/releases/tag/de_core_news_lg-3.7.0.
- Ehrmann, Maud. 2008. “Les Entités Nommées, de la linguistique au TAL : Statut théorique et méthodes de désambiguïsation.” PhD thesis, Paris Diderot University. <https://hal.science/tel-01639190>.
- Ehrmann, Maud, Ahmed Hamdi, Elvys Linhares Pontes, Matteo Romanello, and Antoine Doucet. 2023. “Named Entity Recognition and Classification in Historical Documents: A Survey.” *ACM Computing Surveys* 56 (2): 27:1–47. <https://doi.org/10.1145/3604931>.
- Ehrmann, Maud, Camille Watter, Matteo Romanello, Simon Clematide, and Flückiger. 2020. “Impresso Named Entity Annotation Guidelines,” January. <https://doi.org/10.5281/zenodo.3604227>.
- Eijnatten, Jorsi van. 2024. “Dutch Intellectual Culture Between 1962 and 1995, or, Using Classical Algorithms and LLMs to Efficiently Extract Data with Imperfect OCR.” In. https://2024.dhbenelux.org/wp-content/uploads/2024/05/DHB24_paper_van_Eijnatten_Dutch-intellectual-culture-between-1962-and-1995.pdf.
- Federiakina, Denis, Dimitri Molerov, Olga Zlatkin-Troitschanskaia, and Andreas Maur. 2024. “Prompt Engineering as a New 21st Century Skill.” *Frontiers in Education* 9 (November): 1366434. <https://doi.org/10.3389/educ.2024.1366434>.
- Giovanelli, Riccardo, and Arianna Traviglia. 2024. “AIKoGAM: An AI-driven Knowledge Graph of the Antiquities Market: Toward Automatised Methods to Identify Illicit Trafficking Networks.” *Journal of Computer Applications in Archaeology* 7 (January): 92–114. <https://doi.org/gtr3s6>.
- González-Gallardo, Carlos-Emiliano, Emanuela Boros, Nancy Girdhar, Ahmed Hamdi, Jose G. Moreno, and Antoine Doucet. 2023. “Yes but.. Can ChatGPT Identify Entities in Historical Documents?” *2023 ACM/IEEE Joint Conference on Digital Libraries (JCDL)*, June, 184–89. <https://doi.org/10.1109/JCDL57899.2023.00034>.
- Graham, Shawn, Donna Yates, and Ahmed El-Roby. 2023. “Investigating Antiquities Trafficking with Generative Pre-Trained Transformer (GPT)-3 Enabled Knowledge Graphs: A Case Study.” *Open Research Europe* 3 (100). <https://doi.org/gtbsdp>.
- Holla, Kiran Voderhobli, Chaithanya Kumar, and Aryan Singh. 2024. “Large Language Models Aren’t All That You Need.” <https://doi.org/10.48550/ARXIV.2401.00698>.
- Honnibal, Matthew, Ines Montani, Sofie Van Landeghem, and Adriane Boyd. 2020. “spaCy: Industrial-strength Natural Language Processing in Python.” <https://doi.org/10.5281/zenodo.1212303>.

- Karjus, Andres. 2023. “Machine-Assisted Mixed Methods: Augmenting Humanities and Social Sciences with Artificial Intelligence.” September 24, 2023. <https://doi.org/10.48550/arXiv.2309.14379>.
- Keraghel, Imed, Stanislas Morbieu, and Mohamed Nadif. 2024. “A Survey on Recent Advances in Named Entity Recognition.” January 19, 2024. <https://doi.org/10.48550/arXiv.2401.10825>.
- Klie, Jan-Christoph, Michael Bugert, Beto Boulosa, Richard Eckart de Castilho, and Iryna Gurevych. 2018. “The INCEpTION Platform: Machine-assisted and Knowledge-Oriented Interactive Annotation.” In *Proceedings of the 27th International Conference on Computational Linguistics: System Demonstrations*, 5–9. Santa Fe: Association for Computational Linguistics. <http://tubiblio.ulb.tu-darmstadt.de/106270/>.
- Levenshtein, V. I. 1966. “Binary Codes Capable of Correcting Deletions, Insertions and Reversals.” *Soviet Physics Doklady* 10 (February): 707. <https://ui.adsabs.harvard.edu/abs/1966SPHD...10..707L>.
- Levy, Itay, Ben Bogin, and Jonathan Berant. 2023. “Diverse Demonstrations Improve In-context Compositional Generalization.” In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 1401–22. Toronto, Canada: Association for Computational Linguistics. <https://doi.org/10.18653/v1/2023.acl-long.78>.
- Liu, Jiachang, Dinghan Shen, Yizhe Zhang, Bill Dolan, Lawrence Carin, and Weizhu Chen. 2021. “What Makes Good In-Context Examples for GPT-3?” January 17, 2021. <http://arxiv.org/abs/2101.06804>.
- Nguyen, Tai, and Eric Wong. 2023. “In-Context Example Selection with Influences.” June 5, 2023. <https://doi.org/10.48550/arXiv.2302.11042>.
- OpenAI. 2022. “ChatGPT [Large Language Model].” <https://openai.com/index/chatgpt/>.
- . 2024. “ChatGPT-4o.” <https://openai.com/index/hello-gpt-4o/>.
- OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, et al. 2024. “GPT-4 Technical Report.” March 4, 2024. <http://arxiv.org/abs/2303.08774>.
- Pakhale, Kalyani. 2023. “Comprehensive Overview of Named Entity Recognition: Models, Domain-Specific Applications and Challenges.” September 25, 2023. <https://doi.org/10.48550/arXiv.2309.14084>.
- Reul, Christian, Dennis Christ, Alexander Hartelt, Nico Balbach, Maximilian Wehner, Uwe Springmann, Christoph Wick, Christine Grundig, Andreas Büttner, and Frank Puppe. 2019. “OCR4all: An Open-Source Tool Providing a (Semi-)Automatic OCR Workflow for Historical Printings.” *Applied Sciences* 9 (22, 22). <https://doi.org/10.3390/app9224853>.
- Reul, Christian, and Christoph Wick. 2021. “Calamari-OCR/Calamari_models: Pretrained Mixed Models to Be Used with Calamari.” https://github.com/Calamari-OCR/calamari_models.
- Rosenzweig, Roy. 2003. “Scarcity or Abundance? Preserving the Past in a Digital Era.” *The American Historical Review* 108 (3): 735–62. <https://doi.org/10.1086/ahr/108.3.735>.
- Sanh, Victor, Albert Webson, Colin Raffel, Stephen H. Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, et al. 2022. “Multitask Prompted Training Enables Zero-Shot Task Generalization.” March 17, 2022. <https://doi.org/10.48550/arXiv.2110.08207>.
- Santos, Joaquim, Helena Freire Cameron, F. Olival, Fátima Farrica, and Renata

- Vieira. 2024. “Named Entity Recognition Specialised for Portuguese 18th-Century History Research.” In. <https://www.semanticscholar.org/paper/Named-entity-recognition-specialised-for-Portuguese-Santos-Cameron/b1efd28f5ae7faeaff6e01a640497ac15d9d8028>.
- Sarker, Shraboni, Ahmad Tamim Hamad, Hulayyil Alshammari, Viviana Grieco, and Praveen Rao. 2024. “Seventeenth-Century Spanish American Notary Records for Fine-Tuning Spanish Large Language Models.” June 9, 2024. <https://doi.org/10.48550/arXiv.2406.05812>.
- Schweter, Stefan, and Alan Akbik. 2021. “FLERT: Document-Level Features for Named Entity Recognition.” May 14, 2021. <https://doi.org/10.48550/arXiv.2011.06993>.
- Segura-Bedmar, Isabel, Paloma Martínez, and María Herrero-Zazo. 2013. “SemEval-2013 Task 9: Extraction of Drug-Drug Interactions from Biomedical Texts (DDIExtraction 2013).” In *Second Joint Conference on Lexical and Computational Semantics (*SEM), Volume 2: Proceedings of the Seventh International Workshop on Semantic Evaluation (SemEval 2013)*, edited by Suresh Manandhar and Deniz Yuret, 341–50. Atlanta, Georgia, USA: Association for Computational Linguistics. <https://aclanthology.org/S13-2056>.
- Stammbach, Dominik, Maria Antoniak, and Elliott Ash. 2022. “Heroes, Villains, and Victims, and GPT-3: Automated Extraction of Character Roles Without Training Data.” In *Proceedings of the 4th Workshop of Narrative Understanding (WNU2022)*, 47–56. Seattle, United States: Association for Computational Linguistics. <https://doi.org/10.18653/v1/2022.wnu-1.6>.
- “State-of-the-Art Models.” (2018) 2025. `flairNLP/flair`. January 28, 2025. <https://github.com/flairNLP/flair>.
- Tang, Xuemei, Zekun Deng, Qi Su, Hao Yang, and Jun Wang. 2024. “CHisIEC: An Information Extraction Corpus for Ancient Chinese History.” April 20, 2024. <https://doi.org/10.48550/arXiv.2403.15088>.
- Taori, Rohan, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Li Xuechen, Carlos Guestrin, Percy Liang, and Tatsunori B. Hasimoto. 2023. “Alpaca: A Strong, Replicable Instruction-Following Model.” <https://crfm.stanford.edu/2023/03/13/alpaca.html>.
- Thomas, Alan, Robert Gaizauskas, and Haiping Lu. 2024. “Leveraging LLMs for Post-OCR Correction of Historical Newspapers.” In *Proceedings of the Third Workshop on Language Technologies for Historical and Ancient Languages (LT4HALA) @ LREC-COLING-2024*, edited by Rachele Sprugnoli and Marco Passarotti, 116–21. Torino, Italia: ELRA and ICCL. <https://aclanthology.org/2024.lt4hala-1.14>.
- THUDM. 2023. “ChatGLM2-6B.” THUKEG. https://github.com/THUDM/ChatGLM2-6B/blob/main/README_EN.md.
- Touvron, Hugo, Louis Martin, and Kevin Stone. 2023. “Llama 2: Open Foundation and Fine-Tuned Chat Models.”
- Wang, Shuhe, Xiaofei Sun, Xiaoya Li, Rongbin Ouyang, Fei Wu, Tianwei Zhang, Jiwei Li, and Guoyin Wang. 2023. “GPT-NER: Named Entity Recognition via Large Language Models.” October 7, 2023. <https://doi.org/10.48550/arXiv.2304.10428>.
- Wick, Christoph, Christian Reul, and Frank Puppe. 2020. “Calamari – A High-Performance Tensorflow-based Deep Learning Package for Optical Character Recognition.” *Digital Humanities Quarterly* 14 (2). <https://arxiv.org/abs/1807.02004>.

- Winner, Langdon. 1993. "Upon Opening the Black Box and Finding It Empty: Social Constructivism and the Philosophy of Technology." *Science, Technology, & Human Values* 18 (3, 3): 362–78. <https://doi.org/10.1177/016224399301800306>.
- Yan, Faren, Peng Yu, and Xin Chen. 2024. "LTNER: Large Language Model Tagging for Named Entity Recognition with Contextualized Entity Marking." April 8, 2024. <https://doi.org/10.48550/arXiv.2404.05624>.
- Zixiao, Zhu, Feng Zijian, Zhou Hanzhang, Qian Junlang, and Mao Kezhi. 2024. "MICL: Improving In-Context Learning Through Multiple-Label Words in Demonstration." June 16, 2024. <http://arxiv.org/abs/2406.10908>.