Investigating the Robustness of Deductive Reasoning with Large Language Models

Fabian Hoppe¹, Filip Ilievski¹, Jan-Christoph Kalo²

¹Vrije Universiteit Amsterdam ²Universiteit van Amsterdam {f.hoppe, f.ilievski}@vu.nl, j.c.kalo@uva.nl

Abstract

Large Language Models (LLMs) have been shown to achieve impressive results for many reasoningbased Natural Language Processing (NLP) tasks, suggesting a degree of deductive reasoning capability. However, it remains unclear to which extent LLMs, in both informal and autoformalisation methods, are robust on logical deduction tasks. Moreover, while many LLM-based deduction methods have been proposed, there is a lack of a systematic study that analyses the impact of their design components. Addressing these two challenges, we propose the first study of the robustness of LLM-based deductive reasoning methods. We devise a framework with two families of perturbations: adversarial noise and counterfactual statements, which jointly generate seven perturbed datasets. We organize the landscape of LLM reasoners according to their reasoning format, formalisation syntax, and feedback for error recovery. The results show that adversarial noise affects autoformalisation, while counterfactual statements influence all approaches. Detailed feedback does not improve overall accuracy despite reducing syntax errors, pointing to the challenge of LLM-based methods to self-correct effectively.

1 Introduction

Deriving new knowledge from existing knowledge, as in deductive reasoning, is a key human cognitive skill necessary for various applications, including complex question-answering and decision-making. Deductive reasoning can be intensive for humans (e.g., taking a lot of time), require specific expertise (e.g., logicians), and lead to incorrect conclusions (e.g., due to biases). This promotes deductive reasoning over Natural Language (NL) as a key objective of human-centric AI. Automatic deduction engines aim to support humans by providing certifiable reasoning chains, avoiding invalid inferences, and accelerating the process. To provide effective support for deductive reasoning, AI must be able to formalise knowledge and rules provided in NL robustly.

Performing logical reasoning has received much interest in AI. In the early days, symbolic methods were aimed at

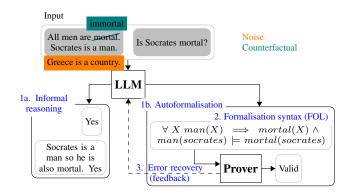


Figure 1: Overview of our methodology for investigating the robustness of reasoning with LLMs. Our perturbations (noise and counterfactuals) are shown in orange and teal, respectively. The three dimensions of our LLM-based methodological framework (reasoning format, syntax, and error recovery mechanism) are shown in blue.

transforming specific parts of language into logical statements [Pereira, 1982]. Recently, LLMs have been shown to achieve impressive results for many reasoning-based NLP tasks, suggesting a degree of deductive reasoning capability [Srivastava *et al.*, 2023]. In particular, generating informal reasoning chains via Chain-of-thought (CoT) prompting achieves good reasoning performance on many benchmarks [Wei *et al.*, 2022]. Contrary to symbolic methods, LLMs can answer a deductive reasoning task without providing a formal intermediate reasoning chain. Nevertheless, these informal reasoning chains do not need to follow truthpreserving proof rules, thus leading to reasoning chains that are hard to verify. Recent work shows that many informal reasoning chains suffer from lack of *faithfulness* [Ye and Durrett, 2022; Tanneru *et al.*, 2024].

Addressing these challenges, *autoformalisation* approaches [Pan *et al.*, 2023; Olausson *et al.*, 2023] use LLMs to translate NL input into a logical form, and a deterministic symbolic solver to perform the deductive reasoning. Autoformalisation is thus a hybrid approach, which aims to provide a faithful and verifiable reasoning chain while leveraging the linguistic manipulation skills of LLMs. Autoformalisation faces two key challenges: First, since they translate rich NL into a limited grammar of symbols and operations, it is critical to leverage a syntax with an optimal tradeoff between

translation accuracy and expressivity. Second, while autoformalisation chains provide an opportunity for syntactic and semantic validation and error analysis, designing an effective and efficient terror recovery mechanism is non-trivial. While prior autoformalisation systems leverage multiple syntaxes and error recovery mechanisms, *no systematic study has investigated their impact on autoformalisation accuracy*.

Meanwhile, a key requirement of LLM-based reasoning methods is their robustness to noise [Ebrahimi *et al.*, 2018] and out-of-distribution [Hendrycks *et al.*, 2021] inputs. Given the strong performance of LLMs across many domains and benchmarks [Sarlin *et al.*, 2020], dealing with noisy data in reasoning tasks has been considered more important [Sourati *et al.*, 2024]. Most evaluations have focused on adversarial noise (e.g., lexical perturbations) [Sarlin *et al.*, 2020], while a recent study has also experimented with counterfactual statements [Liu *et al.*, 2023]. While robustness evaluations for NLP tasks have yielded mixed results [Wang and Zhao, 2024; Liu *et al.*, 2023], it remains *unclear to which extent LLMs, in both informal and autoformalisation methods, are robust in logical deduction tasks*.

We address these two challenges by investigating the robustness of LLM-based deductive reasoning methods. Our overall approach is summarized in Figure 1. Our study makes three contributions. First, following standard practices in evaluating robustness, we devise a robustness framework for logical deduction with two families of perturbations: adversarial noise, where the model needs to preserve its label in the face of added irrelevant information, and counterfactual perturbations, where a single alteration in the context flips the label of the question. The combinations of the perturbations produce seven variants from a given dataset. Second, we synthesize the landscape of existing LLM-based logical deduction methods into a methodological framework with three dimensions: reasoning format, grammar syntax, and error recovery mechanism. For each of these dimensions, we incorporate representative approaches in the literature. Third, We perform extensive experiments with seven LLMs on eight perturbed variants of a recent modular benchmark. Our findings provide nuanced insights into the robustness of LLMbased methods on logical deduction.

2 Related Work

This section gives an overview of LLM-based reasoning methods and studies that evaluate their robustness.

2.1 Methods for LLM-based Reasoning

Informal reasoning. Scaling up the size of LLMs enables strong performance in many NLP tasks by few-shot prompting [Brown *et al.*, 2020], which suggests inherent reasoning capabilities. CoT combines few-shot prompting with generating intermediate informal reasoning chains [Wei *et al.*, 2022]. These informal reasoning skills motivated more elaborate prompting techniques, like Zero-Shot CoT [Kojima *et al.*, 2022] or self-consistency by generating multiple chains [Wang *et al.*, 2022b], as well as more complex structures than chains, such as Tree of Thoughts [Yao *et al.*, 2023] and Graph of Thoughts [Besta *et al.*, 2024].

These methods use an LLM to generate intermediate steps and evaluate the output through self-refinement. Similarly, ProofWriter [Tafjord *et al.*, 2021] improves multi-hop reasoning by adding the intermediate results to the reasoning context [Tafjord *et al.*, 2021]. A key benefit of informal reasoning chains is their flexibility, but this comes at the expense of guaranteeing faithfulness. Consequently, methods combining LLMs with formal reasoning have been suggested.

Autoformalisation. Instead of informal reasoning, another way combines an LLM with a deterministic symbolic solver, e.g., a theorem prover. Here, the prover guarantees faithful and deterministic reasoning. This combination is known as autoformalisation. One of the first autoformalisation approaches using formal reasoning chains in combination with prompting is PAL [Gao et al., 2023]. The authors generate Python snippets alongside informal steps and generate the final response by executing the generated code snippets. Logic-LM [Pan *et al.*, 2023] prompts LLMs to generate multiple task-specific formalisations (logic programming, first-order logic, satisfiability modulo theories and constraint satisfaction), which are solved by dedicated solvers. They report higher robustness for longer reasoning chains compared to CoT reasoning. The extension Logic-LM++ [Kirtania et al., 2024] tries to avoid new syntax errors by integrating a selfrefinement mechanism. The LINC [Olausson et al., 2023] approach uses the idea of self-consistency from CoT and generates multiple formalisations to avoid formalisation errors. Autoformalisation models achieve high accuracy for many deductive reasoning benchmarks, showing clear benefits for complex reasoning.

Comparison. Our work is the first to explore the robustness of LLM reasoning approaches from prior work: direct fewshot prompting, CoT, and autoformalisation. Another contribution of our work is consolidating these methods with their syntax and error recovery choices into a coherent methodological framework.

2.2 Robustness Evaluation of LLM Reasoning

Evaluating deductive reasoning. The improvements of LLM-based reasoning have inspired the development of benchmarks investigating capabilities for deductive reasoning. The synthetic PrOntoQA [Saparov and He, 2022] dataset is built on modus ponens multi-hop reasoning and confirms reasoning capabilities for the largest models. However, they noted issues with proof planning and selecting correct proof steps for longer reasoning chains. The FOLIO [Han et al., 2022] and AR-LSAT [Zhong et al., 2022] benchmarks confirmed these errors for more complex reasoning and more naturalistic language. LogicBench [Parmar et al., 2023] is a recent benchmark that systematically studies the performance of LLM-based reasoners across multiple inference rules (e.g., modus ponens), reporting a good model performance for predicate logic and first-order logic grammars. A vital challenge identified by these works is unfaithful reasoning, i.e., the intermediate steps are not used to infer the final result [Ye and Durrett, 2022; Lanham et al., 2023; Tanneru et al., 2024].

Robustness studies. A key requirement of LLM-based reasoning methods is their robustness to noise [Ebrahimi et al., 2018] and out-of-distribution [Hendrycks et al., 2021] inputs. Given the strong performance of LLMs across many domains and benchmarks [Sarlin et al., 2020], dealing with noisy data in reasoning tasks has been considered more important [Sourati et al., 2024], including adversarial and counterfactual perturbations. A variety of robustness tests have therefore been designed [Wang et al., 2022a]. These robustness benchmarks rely on the original problem's perturbations through paraphrasing and distractions on character, word, and sentence levels [Sourati et al., 2024; Sarlin et al., 2020]. Many works try to generate adversarial examples to better understand the generalization capabilities of LLMs, which are shown to significantly decrease LLM performance [Wang et al., 2022a]. RUPbench is a recent robustness study on logical reasoning of LLMs [Wang and Zhao, 2024], covering many reasoning datasets and all three types of perturbations. Another category involves semantic changes in the input texts. Semantic changes can also be performed purely on a linguistic or logical level. Recent approaches use these logic-based perturbations [Nakamura et al., 2023], which aligns with our robustness framework. Meanwhile, counterfactual studies of LLM robustness have been less common. One exception is RECALL [Liu et al., 2023], a benchmark based on external knowledge bases, whose study reveals that LLMs are generally susceptible to external knowledge with counterfactual information and that simple mitigation strategies cannot significantly alleviate this challenge.

Comparison. We conduct the first investigation of robustness differences between formal and informal LLM-based logical deduction methods. For this purpose, we base our experiments on LogicBench [Parmar *et al.*, 2023], which systematically includes nine inference rules mapped to natural language situations. We develop seven additional variants of LogicBench incorporating adversarial noise and counterfactual statements, in line with prior work like [Nakamura *et al.*, 2023] that studies LLM robustness on other reasoning tasks.

3 Framework for Evaluating Robustness in Logical Deduction Tasks

Task definition. Deductive reasoning is commonly formatted as binary Question Answering (QA) over a given context.

The task input consists of a NL question q and a set of logical premises transformed into an NL context c. The output of the task a is one of the two possible answers: true or false, indicating whether the context supports or refutes the question.

Formally, an NL deductive reasoning task defines a function $f: (c,q) \rightarrow \{true, false\}.$

Robustness types. Following prior work on investigating the robustness of LLMs [Sarlin *et al.*, 2020; Liu *et al.*, 2023], we conceptualize two families of context perturbations. First, inspired by adversarial robustness studies [Nakamura *et al.*, 2023], we posit that a reasoning system must be robust to adversarial **noise** (distractions), i.e., including irrelevant information in the context should not alter its prediction. Noise can shift the focus of a text, making it more difficult for an LLM to capture the relevant context. Second, a reasoning

system must be robust to **counterfactual** shifts in the context. Namely, the system must be faithful to the provided context without including biases from implicit world models [Liu *et al.*, 2023]. If the context states that *men are immortal*, the reasoning must overwrite its belief of men as mortal. By introducing counterfactual perturbations contradicting common sense, we investigate whether LLM-based logical deduction methods use reasoning shortcuts or perform genuine reasoning. We focus our perturbations on the NL context *c* rather than the question *q* because it corresponds to background knowledge sources, which tend to vary significantly in realworld applications (e.g., compare reasoning based on a research article to reasoning over a list of facts). The perturbed task can be formalised as $f' : (c', q) \rightarrow \{true, false\}$.

Next, we detail our framework for evaluating the robustness of LLM-based deduction methods to noise and counterfactual shifts.

3.1 Adversarial Noise

Formalisation. As monotonic reasoning, deductive reasoning must remain invariant to newly added irrelevant information, i.e., additional text that does not change the semantics of the premises used to derive the conclusion from the context. Let us consider a perturbed context that includes noisy information: $c' = d_1 \dots d_k c$, where each d_i denotes a noisy sentence concatenated to c for $k \in \{1, 2, 4\}$. The task function f' must resolve to the same output as the original function f for its proof to remain valid. To avoid any distractions that might change the original semantics (e.g., by breaking intersentence co-references), we append distractions only to the beginning of the context.

Design of adversarial noise. We define three types of noise relevant to logical deduction tasks, which vary in their degree of referential content, formalisation complexity, and depth of logical reasoning. All noise sentences are sampled in a way that guarantees they do not impact the semantics of the context and the original proof. Figure 2 (bottom-left) shows examples of the three noise types.

1. Encyclopedic (E) perturbations are NL sentences expressing factual information such as *It is 21 km from Karimnagar, on the highway from Karimnagar to Peddapa.* They express real-world information following pragmatic principles of language [Grice, 1975]. Encyclopedic sentences are often difficult or even impossible to formalize in first-order logic. At the same time, encyclopedic facts are not connected by complex logical relations and lack the linguistic structure typical for reasoning contexts. In summary, they represent world information, have a high formalisation complexity, and have low logical reasoning depth.

2. Logical (L) statements provide a typical structure of reasoning contexts and contain only knowledge that can be natively formalised, such as *All dresses are clothes*. Logical sentences include information about the world, albeit in a fictional form. The required formalisation usually requires more complex reasoning, like multi-hop inferences. Thus, logical perturbations introduce limited world information, have low formalisation complexity, and high reasoning depth.




Figure 2: Example of a premise and its perturbations.

3. Tautological (T) perturbations are easily recognisable general statements, e.g., *True is not false*. They may include negations and a small number of disjunctions or conjunctions. As such, they contain no referential information and require simple reasoning. However, their formalisation is often difficult because many first-order logic syntaxes do not consider predefined truth constants, like \perp , \top . In summary, tautologies in NL contain no referential information, have high formalisation complexity, and have low reasoning depth.

3.2 Counterfactual Shifts

Formalisation. We consider common sense contradictions by altering original statements in c into counterfactual ones. The inclusion of counterfactual statements is motivated by the requirement for faithful reasoning. Namely, the validity of a deduction depends only on the structure of the logical form, which in turn should follow the original task description in the context and the question. To introduce counterfactual premises, we do not add new sentences; instead, we negate sentences from the original context c. Since original premises often state common sense knowledge, their negation naturally contradicts world knowledge. For example, in the modus ponens inference in Figure 1, we negate mortal(X), stating that All men are immortal. The altered context c' is formalized as follows: c' = neg(c), where neg(c) negates one of the terms in the original context. The label of the resulting function f' is opposite from that of the original function f.

Design of counterfactual perturbations. We assume a deductive reasoning dataset where the natural language form corresponds to a logical formula. Then, we introduce counterfactual perturbations by altering each logical formula using predefined rules that negate the formula (see full list of rules in the Appendix). For example, we negate the consequent q(a) for the first implication of a constructive dilemma and adapt the inference to $\neg q(a) \lor s(a)$. Then, the negation to create the context c' is manually added before the relevant terms in c, thus guaranteeing high data quality. Since the inference results in the opposite label for f', we adapt the target label accordingly. Figure 2 (top-right) shows an example of such a contradiction. Importantly, all counterfactual perturbations can be combined with noise perturbations, leading to counterfactual versions of the original (O_C) , encyclopedic (E_C) , logical (L_C) , and tautological (L_T) sets.

4 Methodological Framework

We consider three key design dimensions: reasoning format, syntax, and error recovery mechanism to systematically analyse robust deductive reasoning capabilities for LLM-based methods. We describe each of these dimensions and their representative approaches studied in this work.

4.1 Reasoning Format

LLM-based methods can either: a) operate without any explicit formalisation as informal reasoning systems and generate the answer based on their internal representation, or b) generate a formal representation of the given input, which is fed into a theorem prover to find a valid proof.

The **informal** reasoning method instructs an LLM to answer q with Yes or No based on a context. We employ fewshot prompting using three manually engineered in-context examples. To make the model more robust, two of the three in-context examples include distractions with irrelevant information. We explicitly note in the instruction part of the prompt that the provided contexts may contain irrelevant details. The model is evaluated in two modes: *direct* prompting, where it answers directly, and *CoT* prompting, where it generates step-by-step reasoning in natural language before generating an answer. To support CoT prompting, we manually created in-context examples with fine-grained natural language reasoning steps designed to improve performance [Wei *et al.*, 2022]. The model's answers are extracted using a regular expression (details in Appendix E).

We include an **autoformalisation** method combining a symbolic theorem prover with an LLM. This approach follows Logic-LM [Pan et al., 2023] to formalise the context and query into symbolic representations, which are then deterministically evaluated. The process is divided into two subtasks: First, the model generates formal representations of the context and query, referred to as c_{LF} (context logical form) and q_{LF} (query logical form). Second, a symbolic theorem prover evaluates these logical forms to determine whether q_{LF} can be derived from c_{LF} , producing a *true* or *false* outcome. This approach allows for a transparent and verifiable reasoning process grounded in logical consistency. In practice, we prompt the LLM to create the logical forms using the same three in-context examples as in the informal reasoning approach. The prompt is extended with instructions describing the formalisation syntax, following the methodology of Logic-LM. The resulting logical forms are parsed and combined into an Abstract Syntax Tree (AST), which provides the input for a theorem prover.

4.2 Formalisation Syntax

While the reasoning performance should be independent of the particular formalisation syntax, models may perform better with specific syntaxes, e.g., because of their frequency in the training data [Razeghi *et al.*, 2022]. It is an open question whether the choice of syntax for formal reasoning impacts the model's translation performance and the robustness of its reasoning. Although all the syntaxes we consider represent First-Order Logic (FOL), their surface form variations may influence the formalisation ability of LLMs. The three evalu-

$ \begin{array}{c} \forall x \\ drinkWater(x) \\ hydrated(x) \end{array} \Longrightarrow $	$ \begin{array}{l} \forall \ ?x \ drinkWater(?x) \implies \\ hydrated(?x) \end{array} $
TPTP	
	Water(X) => hydrated(X)

Figure 3: Examples of the three syntaxes: FOL, R-FOL, and TPTP.

ated syntaxes, illustrated in Figure 3, contain identical information and are interchangeable, which ensures flexibility and allows the framework to include other syntaxes in the future:

FOL is widely used in logic classes and academic papers. It incorporates mathematical symbols such as \forall and \exists and implicitly distinguishes between variables and individuals. This syntax is employed by Logic-LM [Pan *et al.*, 2023].

R-FOL is a variation of FOL that explicitly differentiates variables and individuals by requiring variables to start with a question mark. This *resolves* the syntax ambiguity in FOL.

TPTP as the abbreviation of *Thousands of Problems for Theorem Provers* is a Prolog-like formalisation language developed for theorem provers. It avoids mathematical symbols and mandates that variables begin with an uppercase letter. While TPTP supports higher-order logic, we limit our scope to its first-order fragment (fof), using a syntax derived from its official specification [Sutcliffe, 2024].

4.3 Error Recovery Mechanism

To make autoformalisation more robust, we synthesise strategies for handling syntactic and semantic errors. Syntactic errors occur when the logical forms generated by LLMs do not follow the required syntax. Syntactic errors are easy to detect as logical forms cannot be parsed if they violate grammatical rules. In contrast, semantic errors, such as incomplete context representation, are more challenging to identify and resolve. We apply task-specific heuristics to identify suspicious constructs that lead to semantic errors and generate warnings. Unknown predicates as part of q_{LF} are one example of such a construct, because they indicate an incomplete context. We consider four strategies for handling these errors:

No recovery. The baseline approach does not attempt to correct errors. Instead, we predict a random value, *true* or *false*, as a fallback strategy. We avoid introducing an evaluation bias associated with more complex strategies, such as CoT-based refinement, which is commonly done in prior work [Pan *et al.*, 2023; Kirtania *et al.*, 2024], as this would blur the comparison with other methods.

Error type feedback. The LLM is prompted to refine the logical form using a generic parsing error message, such as *'parsing error'*. This type of message does not need a parser with an error handler, though it fails to point to specific errors in the logical form. Prior work has shown the effectiveness of this simple feedback method [Pan *et al.*, 2023].

Error message feedback. A more detailed approach where the LLM is given specific feedback, highlighting the exact parts of the logical form that violate the syntax. Creating this kind of feedback necessitates an error-handling strategy for the parser. For example, the missing argument in $man \wedge mortal(Socrates)$ results in the error message: *mis*matched input ' \wedge ' expecting '('. Using error messages from parsers as feedback to improve LLMs performance when synthesizing a formal language has shown promising results in code generation [Zhang *et al.*, 2023; Jiang *et al.*, 2024].

Warning feedback. This strategy extends the error message with warnings generated from heuristics to recognize semantic errors, inspired by the "soft" critics in the LLM-modulo method [Kambhampati *et al.*, 2024], where it has been shown to enhance robustness. Notably, soft critics have not been incorporated in prior LLM-based methods for logical deduction.

5 Experimental Setup

Dataset details. The robustness evaluation is based on the FOL part of the LogicBench (Eval) [Parmar *et al.*, 2023] dataset, containing 520 samples with 180 unique contexts. LogicBench systematically covers nine different inference rules. The samples are automatically generated by prompting GPT-3.5 and manually verified. 340 of the total of 520 samples are negative examples constructed by negating the conclusion. If the conclusion is a disjunction, each part of the disjunction is negated, resulting in a slight class imbalance. The authors report a mean accuracy of around 90% for three human annotators. By applying our robustness framework from §3, we obtain seven perturbed variants of LogicBench.

Perturbations. The noise sentences are randomly sampled from a source *s*. We sample encyclopedic perturbation sentences from 10,000 abstracts of Wikipedia articles gathered via its API. As a logical reasoning source, we use sentences from 1001 contexts of the deduction QA benchmark FO-LIO [Han *et al.*, 2022]. As tautologies, we manually write 22 sentences. All sentences use negations and, at most, one disjunction or conjunction. A complete list can be found in Appendix B. We randomly sample noise perturbations and add them to each sample. We do not alter the class distribution, i.e., we keep LogicBench's original class imbalance.

We consider unique contexts for eight out of the nine logical forms to create counterfactual statement perturbations, resulting in 160 samples. We create a balanced dataset by altering between valid and invalid queries from LogicBench.

Metrics. We use *accuracy* as a standard metric for classification tasks. We report *execution rate* as the fraction of parsable texts and *valid accuracy* as the accuracy on these parsable samples in the Appendix A due to space limitations.

LLMs. We test GPT 40-mini, as well as a smaller and a larger variant for the three open-source LLM families: Gemma-2 (9b and 27b), Mistral (7b and Small), and Llama 3.1 (8b and 70b).

6 Evaluation

We provide three sets of insights into this section, organised as *findings* (F^*). We quantitatively study the effect of the adversarial and counterfactual perturbations on the performance of informal reasoners and autoformalisation methods. Then, we dive deeper into method variants. Finally, we analyse the nature of formalisation errors made by the models.

6.1 Robustness Analysis

F1: Noise perturbations have a stronger effect on formalisation methods than informal LLM reasoners. Table 1 shows that, on average, the accuracy of both direct and CoT informal reasoning remains between 73% and 74% in the face of added noise. While the autoformalisation method performs similarly to informal reasoners on the original dataset, its performance decreases between 4% and 11%. The accuracy drops especially with logical (L) and tautological (T) distractions, whose logical language formats trick the LLM into formalizing the noisy clauses. On the other hand, the linguistically complex and more natural sentences of encyclopedic distractions show a minor effect, suggesting that LLMs successfully avoids formalizing the more complicated sentences.

F2: All LLM-based reasoning methods suffer a drop for counterfactual perturbations. Table 1 shows that counterfactual statements cause a significant decrease in performance for both the informal reasoners and autoformalisation methods of between 12% and 13% on average. Moreover, this observation also holds for all tested models, i.e., none are robust towards counterfactual perturbations across every evaluated dimension. Even the strongest model, GPT 40-mini, yields a performance of 63-68\%, which is relatively close to the random performance of 50%. The high impact of counterfactual statements (the single "not" inserted) could be due to the inability of LLMs to overwrite prior knowledge with explicitly stated information or memorization of the answers. We study the error sources further in §6.3.

F3: Introducing multiple noise sentences has an effect only for logical distractions. We show the impact of introducing between one and four sentences for the two top-performing autoformalisation models in Figure 4. The figure shows similar trends with and without counterfactual perturbations. As additional logical distractions are introduced, the model performance consistently decreases. Tautological (T) distractions lead to a decline in accuracy with a single disruptive sentence, yet adding more noise does not worsen the outcome. The tautological corpus introduces truth constants for all sentences as a persistent unseen logical construct. Given that this leads only to a decrease for a single occurrence, we can assume that a model can consistently handle the same unseen logical construct. In contrast, the logical corpus increases the chance of adding text, requiring new, previously unseen reasoning constructs for each added sentence. The impact of encyclopedic noise remains negligible, generalising F1 to k sentences. Similarly, counterfactual perturbations remain much more effective for all settings, generalising F2.

6.2 Impact of Method Design

F4: CoT prompting is most impactful when both noise and counterfactual perturbations are applied. The accuracies for the individual LLMs in Table 1 show that the impact of CoT is negligible for noise-only datasets (first four columns). Meanwhile, the benefit from CoT is most pronounced in the datasets that combine noise and counterfactual perturbations. The better-performing informal prompting strategy for a model remains stable for all types of distractions. Still, the

	Reasoning	0	D	istrac	tion	С	ounte	rfactu	ıal
	Format	0	E	L	Т	O_C	E_C	L_C	T_C
Gemma-2 9b	Informal (direct) Informal (CoT) Formal (FOL)	0.72	0.80 0.78 0.58	0.73	0.76	0.61	0.57	0.50 0.60 0.46	0.66
Ger 27b	Informal (direct) Informal (CoT) Formal (FOL)	0.66	0.69 0.65 0.74	0.64	0.63	0.62	0.58	0.54 0.62 0.58	0.64
Mistral	Informal (direct) Informal (CoT) Formal (FOL)	0.79	0.77 0.75 0.58	0.77	0.78	0.55	0.52	0.54 0.54 0.51	0.58
Small	Informal (direct) Informal (CoT) Formal (FOL)	0.72	0.76 0.72 0.59	0.72	0.71	0.62	0.59	0.56 0.62 0.49	0.68
Llama-3.1 3 8B	Informal (direct) Informal (CoT) Formal (FOL)	0.73	0.61 0.73 0.71	0.71	0.72	0.62	0.59	0.59 0.61 0.55	0.65
Llar 70B	Informal (direct) Informal (CoT) Formal (FOL)	0.78	0.74 0.75 0.73	0.76	0.76	0.64	0.61	0.56 0.66 0.59	<u>0.73</u>
GPT 40-mini	Informal (direct) Informal (CoT) Formal (FOL)	0.80	0.77 0.80 0.82	<u>0.81</u>	0.82	0.68	0.63	0.61 <u>0.68</u> 0.57	0.64
Avg	Informal (direct) Informal (CoT) Formal (FOL)	0.74	0.73 0.74 0.68	0.73	0.74	0.62	0.58	0.56 0.62 0.54	0.65

Table 1: Accuracies of informal and autoformalisation-based deductive reasoners. The best overall model per dataset is underlined; the best model version is marked in bold.




Figure 4: Influence of the number of noisy sentences for FOL.

decline in performance due to counterfactuals leads to a less consistent preference for a specific prompting style.

F5: The best-performing grammar differs per model and is unstable across data versions. The evaluation of different logical forms for formal LLM-based reasoning in Table 2 shows the preference of some models for specific syntactic formats. Llama 3.1 70B has a considerable improvement of

	Grammar Syntax	0	Di E	istrac L	tion T	-		rfactu L _C	
lama-3.1	FOL 8 R-FOL TPTP	0.78	0.71 0.69 0.67	0.62	0.53		0.55	0.52 0.54 0.46	0.52
Llar	FOL R-FOL TPTP	0.76	0.73 0.73 0.84	0.67	0.71	0.67 0.64 <u>0.81</u>	0.57	0.53	0.64
GPT	FOL R-FOL TPTP	0.84	0.82 0.77 0.82	0.70	0.78		0.56	0.61 0.54 0.57	0.63

Table 2: Accuracies of different formalisation grammars for autoformalisation.

12% with TPTP syntax on the original set, while Llama 3.1 8B benefits from the R-FOL syntax. However, all grammars show a declining accuracy trend and increased syntax errors for noise perturbations, where the best grammar loses its advantage over the rest. When comparing the grammars on the counterfactual partitions, we observe that TPTP is consistently more robust than the standard first-order logic grammar. Here, GPT 40-mini shows a reduction from O to O_C of 20% for FOL and only 12% for the TPTP grammar. Since this does not correlate with fewer syntax errors, the formalisation in TPTP prevents semantical errors for counterfactual premises. A positive reading of these results, especially the minor differences between FOL and R-FOL, is that autoformalisation LLMs can adapt to the grammar syntax prescribed in the prompt without further loss in performance.

F6: Feedback does not help LLMs self-correct to mitigate robustness issues. Table 3 shows the results with different error recovery mechanisms. The results indicate that no feedback strategy emerges as a winner in the different datasets. All feedback variants reduce syntax errors for noise perturbations, but given the lack of a consistent increase in accuracy, the corrected formalisations are most likely to contain semantic errors still. The type of feedback message only has a minor influence on correcting syntax errors, whereas Llama 3.1 70b and GPT 40-mini correct slightly more syntax errors with specific error messages. This finding aligns with [Huang *et al.*, 2023], who also found that LLMs cannot consistently self-correct their reasoning after receiving relevant feedback.

6.3 Error Analysis

F7: Autoformalisation increases syntax errors for noise perturbations. The low performance for noise perturbations correlates with more syntax errors for all models and distraction categories (cf. execution rates in Table 4). The three worst-performing models (both Mistral models, Gemma-2 9b) generate, at best, for 37% and, at worst, for only 4% of the samples, a valid logical form. Gemma-2 9b and Llama3.1 8b produce more syntax errors than the larger counterparts, suggesting that larger models are more robust towards noise perturbations. The accuracy of syntactically valid samples is higher than the informal reasoning methods for most distractions (Table 5), motivating informal reasoning as a backup

_							
_		Feedback	0	D E	istrac L	tion T	$\begin{array}{c} Counterfactual \\ O_C E_C L_C T_C \end{array}$
na-3.1	8B	No recovery Error type Error message Warning	0.79 0.78	0.71 0.71	0.62 0.63 0.67 0.58	0.56 0.55	0.59 0.58 0.56 0.56 0.66 0.54 0.52 0.51 0.59 0.53 0.64 0.49 0.55 0.60 0.49 0.49
Llama-3		No recovery Error type Error message Warning	0.72 0.71	0.70 0.70	0.73 0.72 0.73 0.72	0.73 0.71	0.64 0.59 0.61 0.56 0.62 0.56 0.60 0.58 0.64 0.59 0.54 <u>0.64</u> 0.62 <u>0.65</u> 0.61 0.63
GPT	40-mini	No recovery Error type Error message Warning	0.83 0.84	0.79 0.78	0.73 0.74 <u>0.77</u> 0.73	0.76 <u>0.80</u>	0.64 0.62 0.56 0.56 0.67 0.57 0.56 0.56 0.62 0.59 0.56 0.56 <u>0.70</u> 0.61 0.61 0.55

Table 3: Accuracies of error recovery strategies.

strategy for formal reasoning. The error message feedback reveals two common syntax errors: 1) errors by models with an initial low execution rate exhibit issues with the template structure, including using incorrect keywords or adding conversational phrases; 2) perturbation-related errors, the most common of which is using undefined truth constants as part of tautological distractions.

F8: Autoformalisation increases semantic errors for counterfactuals. Unlike the introduced noise, counterfactual perturbations do not lead to more syntax errors. The execution rate in Table 4 is stable or improves for counterfactuals. However, we see a drop in accuracy for the counterfactual column O_C in Table 1 and can conclude that the number of logical forms with semantic errors has to increase. This suggests that the introduced negation is not correctly formalised. Looking at the warnings generated by the feedback mechanism, for GPT 40-mini, 161 warning messages are generated on the unperturbed data. 54 of these were fixed with a single iteration. Not considering predicates and individuals as part of the context is the most frequent warning across all models.

7 Conclusion

We presented the first study of the robustness of LLM-based deductive reasoning methods by introducing two types of perturbations: adversarial noise and counterfactual statements. These perturbations were used to examine the methodological aspects of LLM reasoners based on their format, syntax, and feedback mechanism for error recovery. While adversarial noise only affects autoformalisation approaches, counterfactual statements remain a significant challenge for all variants of the tested method. While feedback strategies may lead to fewer syntax errors in autoformalisation methods, the refined formalisations tend to be semantically incorrect, failing to increase accuracy. We call on future work to devise more advanced mechanisms for detecting, reporting, and incorporating semantic errors. We also anticipate generalizing the study in this paper to other logical deduction datasets.

Acknowledgements

This work has received funding from the European Union's Horizon Europe research and innovation programme under the Marie Skłodowska-Curie grant agreement No 101073307.

References

- [Besta et al., 2024] Maciej Besta, Nils Blach, Ales Kubicek, Robert Gerstenberger, Michal Podstawski, Lukas Gianinazzi, Joanna Gajda, Tomasz Lehmann, Hubert Niewiadomski, Piotr Nyczyk, and Torsten Hoefler. Graph of thoughts: Solving elaborate problems with large language models. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(16):17682–17690, 2024.
- [Brown et al., 2020] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are fewshot learners. In Proceedings of the 34th International Conference on Neural Information Processing Systems, NIPS '20. Curran Associates Inc., 2020.
- [Ebrahimi *et al.*, 2018] Javid Ebrahimi, Anyi Rao, Daniel Lowd, and Dejing Dou. HotFlip: White-box adversarial examples for text classification. In Iryna Gurevych and Yusuke Miyao, editors, *Proceedings of the 56th Annual Meeting of the Assoc. for Computational Linguistics (Volume 2: Short Papers)*, pages 31–36, Melbourne, Australia, July 2018. Assoc. for Computational Linguistics.
- [Gao et al., 2023] Luyu Gao, Aman Madaan, Shuyan Zhou, Uri Alon, Pengfei Liu, Yiming Yang, Jamie Callan, and Graham Neubig. PAL: Program-aided language models. In Proceedings of the 40th International Conference on Machine Learning, pages 10764–10799. PMLR, 2023.
- [Grice, 1975] HP Grice. Logic and conversation. *Syntax and semantics*, 3, 1975.
- [Han *et al.*, 2022] Simeng Han, Hailey Schoelkopf, Yilun Zhao, Zhenting Qi, Martin Riddell, Luke Benson, Lucy Sun, Ekaterina Zubova, Yujie Qiao, Matthew Burtell, David Peng, Jonathan Fan, Yixin Liu, Brian Wong, Malcolm Sailor, Ansong Ni, Linyong Nan, Jungo Kasai, Tao Yu, Rui Zhang, Shafiq Joty, Alexander R. Fabbri, Wojciech Kryscinski, Xi Victoria Lin, Caiming Xiong, and Dragomir Radev. FOLIO: Natural language reasoning with first-order logic, 2022.
- [Hendrycks *et al.*, 2021] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding, 2021.
- [Huang et al., 2023] Jie Huang, Xinyun Chen, Swaroop Mishra, Huaixiu Steven Zheng, Adams Wei Yu, Xinying Song, and Denny Zhou. Large language mod-

els cannot self-correct reasoning yet. *arXiv preprint arXiv:2310.01798*, 2023.

- [Jiang et al., 2024] Dongwei Jiang, Marcio Fonseca, and Shay Cohen. LeanReasoner: Boosting complex logical reasoning with lean. In Kevin Duh, Helena Gomez, and Steven Bethard, editors, Proceedings of the 2024 Conference of the North American Chapter of the Assoc. for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers), pages 7497–7510, Mexico City, Mexico, June 2024. Assoc. for Computational Linguistics.
- [Kambhampati *et al.*, 2024] Subbarao Kambhampati, Karthik Valmeekam, Lin Guan, Mudit Verma, Kaya Stechly, Siddhant Bhambri, Lucas Saldyt, and Anil Murthy. Llms can't plan, but can help planning in llmmodulo frameworks. *arXiv preprint arXiv:2402.01817*, 2024.
- [Kirtania *et al.*, 2024] Shashank Kirtania, Priyanshu Gupta, and Arjun Radhakirshna. LOGIC-LM++: Multi-step refinement for symbolic formulations, 2024.
- [Kojima et al., 2022] Takeshi Kojima, Shixiang (Shane) Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. Large language models are zero-shot reasoners. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh, editors, Advances in Neural Information Processing Systems, volume 35, pages 22199–22213. Curran Associates, Inc., 2022.
- [Lanham et al., 2023] Tamera Lanham, Anna Chen, Ansh Radhakrishnan, Benoit Steiner, Carson E. Denison, Danny Hernandez, Dustin Li, Esin Durmus, Evan Hubinger, John Kernion, Kamil.e Lukovsiut.e, Karina Nguyen, Newton Cheng, Nicholas Joseph, Nicholas Schiefer, Oliver Rausch, Robin Larson, Sam McCandlish, Sandipan Kundu, Saurav Kadavath, Shannon Yang, Tom Henighan, Timothy D. Maxwell, Timothy Telleen-Lawton, Tristan Hume, Zac Hatfield-Dodds, Jared Kaplan, Janina Brauner, Sam Bowman, and Ethan Perez. Measuring faithfulness in chain-of-thought reasoning, 2023.
- [Liu *et al.*, 2023] Yi Liu, Lianzhe Huang, Shicheng Li, Sishuo Chen, Hao Zhou, Fandong Meng, Jie Zhou, and Xu Sun. Recall: A benchmark for llms robustness against external counterfactual knowledge. *arXiv preprint arXiv:2311.08147*, 2023.
- [Nakamura *et al.*, 2023] Mutsumi Nakamura, Santosh Mashetty, Mihir Parmar, Neeraj Varshney, and Chitta Baral. LogicAttack: Adversarial attacks for evaluating logical consistency of natural language inference. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Findings of the Assoc. for Computational Linguistics: EMNLP 2023*, pages 13322–13334, Singapore, December 2023. Assoc. for Computational Linguistics.
- [Olausson *et al.*, 2023] Theo X. Olausson, Alex Gu, Benjamin Lipkin, Cedegao E. Zhang, Armando Solar-Lezama, Joshua B. Tenenbaum, and Roger Levy. LINC: A neurosymbolic approach for logical reasoning by combining language models with first-order logic provers, 2023.

- [Pan et al., 2023] Liangming Pan, Alon Albalak, Xinyi Wang, and William Wang. Logic-LM: Empowering large language models with symbolic solvers for faithful logical reasoning. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Findings of the Assoc. for Computational Linguistics: EMNLP 2023*, pages 3806–3824. Assoc. for Computational Linguistics, 2023.
- [Parmar *et al.*, 2023] Mihir Parmar, Neeraj Varshney, Nisarg Patel, Man Luo, Santosh Mashetty, Arindam Mitra, and Chitta Baral. LogicBench: Towards systematic evaluation of logical reasoning ability of large language models, 2023.
- [Pereira, 1982] Fernando Carlos Neves Pereira. *Logic for natural language analysis*. PhD thesis, The University of Edinburgh, 1982.
- [Razeghi *et al.*, 2022] Yasaman Razeghi, Robert L Logan IV, Matt Gardner, and Sameer Singh. Impact of pretraining term frequencies on few-shot reasoning. *arXiv preprint arXiv*:2202.07206, 2022.
- [Saparov and He, 2022] Abulhair Saparov and He He. Language models are greedy reasoners: A systematic formal analysis of chain-of-thought. In *The Eleventh International Conference on Learning Representations*, 2022.
- [Sarlin et al., 2020] Paul-Edouard Sarlin, Daniel DeTone, Tomasz Malisiewicz, and Andrew Rabinovich. Superglue: Learning feature matching with graph neural networks, 2020.
- [Sourati et al., 2024] Zhivar Sourati, Darshan Girish Deshpande, Filip Ilievski, Kiril Gashteovski, and Sascha Saralajew. Robust text classification: Analyzing prototype-based networks. In Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen, editors, *Findings of the Assoc. for Computational Linguistics: EMNLP 2024*, pages 12736–12757, Miami, Florida, USA, November 2024. Assoc. for Computational Linguistics.
- [Srivastava *et al.*, 2023] Aarohi Srivastava, Abhinav Rastogi, Abhishek Rao, and et al. Beyond the imitation game: Quantifying and extrapolating the capabilities of language models. *Transactions on Machine Learning Research*, 2023. Featured Certification.
- [Sutcliffe, 2024] G. Sutcliffe. Stepping Stones in the TPTP World. In C. Benzmüller, M. Heule, and R. Schmidt, editors, *Proceedings of the 12th International Joint Conference on Automated Reasoning*, number 14739 in Lecture Notes in Artificial Intelligence, pages 30–50, 2024.
- [Tafjord *et al.*, 2021] Oyvind Tafjord, Bhavana Dalvi, and Peter Clark. ProofWriter: Generating implications, proofs, and abductive statements over natural language. In Chengqing Zong, Fei Xia, Wenjie Li, and Roberto Navigli, editors, *Findings of the Assoc. for Computational Linguistics: ACL-IJCNLP 2021*, pages 3621–3634. Assoc. for Computational Linguistics, 2021.
- [Tanneru et al., 2024] Sree Harsha Tanneru, Dan Ley, Chirag Agarwal, and Himabindu Lakkaraju. On the difficulty of

faithful chain-of-thought reasoning in large language models. In *Trustworthy Multi-modal Foundation Models and AI Agents (TiFA)*, 2024.

- [Wang and Zhao, 2024] Yuqing Wang and Yun Zhao. Rupbench: Benchmarking reasoning under perturbations for robustness evaluation in large language models, 2024.
- [Wang et al., 2022a] Xuezhi Wang, Haohan Wang, and Diyi Yang. Measure and improve robustness in NLP models: A survey. In Marine Carpuat, Marie-Catherine de Marneffe, and Ivan Vladimir Meza Ruiz, editors, *Proceedings of the* 2022 Conference of the North American Chapter of the Assoc. for Computational Linguistics: Human Language Technologies, pages 4569–4586. Assoc. for Computational Linguistics, 2022.
- [Wang et al., 2022b] Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc V. Le, Ed H. Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. Self-consistency improves chain of thought reasoning in language models. In *The Eleventh International Conference on Learning Representations*, 2022.
- [Wei *et al.*, 2022] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, brian ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. Chain of thought prompting elicits reasoning in large language models. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho, editors, *Advances in Neural Information Processing Systems*, 2022.
- [Yao et al., 2023] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Tom Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, Advances in Neural Information Processing Systems, volume 36, pages 11809–11822. Curran Associates, Inc., 2023.
- [Ye and Durrett, 2022] Xi Ye and Greg Durrett. The unreliability of explanations in few-shot prompting for textual reasoning. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho, editors, *Advances in Neural Information Processing Systems*, 2022.
- [Zhang et al., 2023] Kechi Zhang, Zhuo Li, Jia Li, Ge Li, and Zhi Jin. Self-edit: Fault-aware code editor for code generation. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki, editors, Proceedings of the 61st Annual Meeting of the Assoc. for Computational Linguistics (Volume 1: Long Papers), pages 769–787, Toronto, Canada, July 2023. Assoc. for Computational Linguistics.
- [Zhong et al., 2022] Wanjun Zhong, Siyuan Wang, Duyu Tang, Zenan Xu, Daya Guo, Yining Chen, Jiahai Wang, Jian Yin, Ming Zhou, and Nan Duan. Analytical reasoning of text. In Marine Carpuat, Marie-Catherine de Marneffe, and Ivan Vladimir Meza Ruiz, editors, *Findings of the As*soc. for Computational Linguistics: NAACL 2022, pages 2306–2319. Assoc. for Computational Linguistics, 2022.

		•	4
•	HVD	orim	onte
	Exp		CIILS
	r		

		Formalisation	0	D E	istrac L	tion T	\mathbf{O}_C		rfactu L _C	
Gemma-2	9b	Informal (direct) Informal (CoT) Formal (FOL)	0.99	0.99	1.00 0.98 0.04	0.98	0.99	0.99	1.00 0.99 0.07	0.99
Gen	27b	Informal (direct) Informal (CoT) Formal (FOL)		1.00	1.00 1.00 0.37	1.00	1.00	0.99	1.00 1.00 0.34	0.99
Mistral	7B	Informal (direct) Informal (CoT) Formal (FOL)	0.96	0.95	0.99 0.96 0.23	0.95	0.93	0.96	0.98 0.98 0.24	0.93
Mi	ma	Informal (direct) Informal (CoT) Formal (FOL)	1.00	1.00	1.00 1.00 0.12	1.00	1.00	0.99	1.00 1.00 0.14	1.00
Llama-3.1	BB	Informal (direct) Informal (CoT) Formal (FOL)	1.00	1.00	1.00 0.98 0.47	0.98	0.98	1.00	1.00 0.99 0.40	0.93
Llan	70B	Informal (direct) Informal (CoT) Formal (FOL)	0.99	1.00	1.00 1.00 0.70	0.99	1.00	0.99	1.00 0.99 0.73	1.00
GPT	Ē	Informal (direct) Informal (CoT) Formal (FOL)	1.00	1.00	1.00 1.00 0.74	1.00	1.00	1.00	1.00 1.00 0.69	1.00

Table 4: Comparison of execution rate of informal and autoformalisation-based LLM-based deductive reasoners.

	Formalisation	0	D E	istrac L	tion T	C O _C	ounte E _C	rfactu L _C	
Gemma-2 9b	Informal (direct) Informal (CoT) Formal (FOL)	0.72	0.78	0.79 0.73 0.70	0.75	0.61	0.52 0.58 0.58	0.60	0.66
Gen 27b	Informal (direct) Informal (CoT) Formal (FOL)	0.66	0.65	0.66 0.64 0.78	0.63		0.51 0.58 0.71	0.62	0.64
Mistral I 7B	Informal (direct) Informal (CoT) Formal (FOL)	0.80	0.77	0.75 0.78 0.69	0.80	0.57	0.54 0.54 0.38	0.55	0.58
Mi Small	Informal (direct) Informal (CoT) Formal (FOL)	0.72	0.72	0.76 0.72 <u>0.86</u>	0.71	0.62	0.51 0.60 0.63	0.62	0.68
Llama-3.1 B 8B	Informal (direct) Informal (CoT) Formal (FOL)	0.73	0.74	0.64 0.72 0.78	0.72	0.62	0.62 0.59 0.60	0.61	0.65
Llan 70B	Informal (direct) Informal (CoT) Formal (FOL)	0.78	0.75	0.74 0.76 0.80	0.76	0.64	0.53 0.60 0.63	0.66	0.73
GPT 40-mini	Informal (direct) Informal (CoT) Formal (FOL)	0.78 0.80 0.85	0.80	0.79 0.81 0.80	0.82	0.68	0.61 0.63 0.64	0.68	0.64

Table 5: Comparison of valid accuracy of informal and autoformalisation-based LLM-based deductive reasoners.

	Grammar Syntax	0	D E	istrac L	tion T	(_	ounte E _C		
nma-2 9h	FOL R-FOL TPTP FOL	0.71	0.55	0.53 0.52 0.52	0.55	0.	55	0.52 0.52 0.54	0.54	0.54
Gen 2.7h	FOL R-FOL TPTP	0.77	0.69	0.59 0.67 0.59	0.64	0.	66	0.62 0.63 0.69	0.55	0.56
Mistral	FOL R-FOL TPTP	0.60	0.60	0.58 0.52 0.51	0.58	0.	49	0.46 0.49 0.46	0.49	0.54
Mi Small	FOL R-FOL TPTP	0.71	0.64	0.52 0.53 0.54	0.60	0.	52	0.58 0.57 0.52	0.54	0.56

Table 6: Comparison of accuracies between different formalisation grammar syntaxes of autoformalisation.

		Grammar Syntax	0	D E	istrac L	tion T	-		rfactu L _C	
Gemma-2	9b	FOL R-FOL TPTP	0.63	0.17 0.27 0.13	0.13		0.64	0.33	0.07 0.14 0.04	0.14
Gen	27b	FOL R-FOL TPTP	0.83	0.72 0.78 0.82	0.50	0.44	0.78	0.77	0.34 0.53 0.39	0.32
Mistral	7B	FOL R-FOL TPTP	0.54	0.37 0.45 0.31	0.24	0.33	0.68	0.39	0.24 0.25 0.07	0.32
Mi	Small	FOL R-FOL TPTP	0.68	0.34 0.41 0.25	0.17	0.38	0.69	0.38	0.14 0.18 0.06	0.38
Llama-3.1	8B	FOL R-FOL TPTP	0.81	0.70 0.65 0.49	0.38		0.84	0.64	0.40 0.43 0.20	0.31
Llan	70B	FOL R-FOL TPTP	0.80	0.78 0.81 0.93	0.65	0.76	0.93	0.89	0.73 0.67 <u>0.78</u>	0.72
GPT	40-mini	FOL R-FOL TPTP	0.96	0.96 0.91 0.91	0.68	0.83	0.95	0.96	0.69 0.62 0.49	0.87

Table 7: Comparison of execution rate between different formalisation grammar syntaxes of autoformalisation.

	Grammar Syntax	0	D E	istrac L		C O_C		rfactu L _C	
Gemma-2	FOL R-FOL TPTP	0.82	0.83 0.68	0.70 0.65 0.74	<u>0.91</u> 0.74	0.72 0.60	0.58 0.58	0.73 0.55 0.57	0.57 0.57
Gem 775	FOL R-FOL TPTP	0.82	0.75	0.78 0.81 0.79	0.81	0.70	0.66	0.74 0.65 0.76	0.65
Mistral	FOL R-FOL TPTP	0.66	0.73	0.69 0.66 0.75	0.72	0.44	0.41	0.58 0.52 0.36	0.54
Mi	FOL R-FOL TPTP	0.81	0.73	0.86 0.64 0.81	0.79	0.55	0.62	0.52 0.55 0.22	0.70
ла-3.1 ав	FOL R-FOL TPTP	0.84	0.77	0.78 0.80 0.72	0.74	0.62	0.58	0.55 0.59 0.50	0.56
Llama-3	FOL R-FOL TPTP	0.81	0.77	0.80 0.77 0.90	0.77	0.67	0.61	0.64 0.58 0.67	0.64
GPT An mini	FOL R-FOL TPTP	0.86	0.80	0.80 0.80 0.85	0.83	0.72	0.56	0.63 0.59 0.70	0.63

Table 8: Comparison of valid accuracies between differentformalisation grammar syntaxes of autoformalisation.

	Feedback	0	D E	istrac L	tion T		ounte E _C		
па	No recovery Error type Error message	0.65	0.58 0.57 0.55	0.50	0.53	0.59	0.46 0.50 0.56	0.49	0.52
Gemn	No recovery Error type Error message	0.77	0.74 0.75 0.73	0.62	0.66	0.70	0.64 0.62 0.68	0.54	0.54
Mistral	No recovery Error type Error message	0.65	0.58 0.57 0.59	0.56	0.61	0.47	0.48 0.49 0.46	0.51	0.48
Mi	No recovery Error type Error message	0.70	0.57 0.59 0.65	0.58	0.66	0.54	0.54 0.61 0.43	0.62	0.58

Table 9: Comparison between accuracy of error recovery strategies.

		Feedback	0		istrac				rfactu	
				E	L	Т	O_C	\mathbf{E}_C	L_C	T_C
		No recovery	0.41	0.17	0.04	0.09	0.49	0.15	0.07	0.04
5	96	Error type		0.23			0.57	0.23	0.10	0.17
m		Error message	0.51	0.26	0.12	0.14	0.57	0.26	0.11	0.17
Gemma-2		No recovery	0.71	0.72	0.37	0.24	0.74	0.71	0.34	0.17
0	27b	Error type		0.80					0.41	
	(1	Error message	0.88	0.83	0.54	0.50	0.84	0.85	0.52	0.33
		No recovery	0.51	0.37	0.23	0.33	0.61	0.38	0.24	0.20
	р	Error type		0.57					0.24	
ral	-	Error message		0.49					0.20	
Mistral		Entor message								
2	all	No recovery		0.34					0.14	
	Small	Error type		0.41					0.22	
		Error message	0.69	0.49	0.26	0.53	0.70	0.46	0.28	0.49
		No recovery	0.83	0.70	0.47	0.28	0.86	0.70	0.40	0.37
	В	Error type	0.93	0.82	0.55	0.34	0.91	0.79	0.52	0.43
	∞	Error message	0.93	0.82	0.52	0.33	0.92	0.77	0.55	0.42
la-3		Warning		0.74	0.51	0.35	0.87	0.76	0.47	0.38
Llama-3		No recovery	0.78	0.78	0.70	0.66	0.88	0.84	0.73	0.66
Ц	В	Error type		0.94					0.84	
	70B	Error message		0.97					0.88	
	7	Warning		0.96					0.89	
		No recovery	0.08	0.96	0.74	0.87	0.00	0.03	0.69	0.85
F	ini	Error type		0.90 0.98					0.09	
Ъ	TPT -min	Error message		0.97					0.73	
J	4	Warning		0.97					0.72	
		,, anning	5.70	5.77	5.00	0.00	0.74	5.74	5.70	0.05

Table 10: Comparison between execution rate of error recovery strategies.

	Feedback	0	D E	istrac L	tion T			rfactu L _C	
Gemma-2	No recovery Error type Error message	0.77	0.83 0.78 0.75	0.69	0.76	0.64	0.58	0.73 0.69 0.65	0.59
Gen	No recovery Error type Error message	0.84	0.82 0.81 0.79	0.77	0.79	0.71	0.68	0.74 0.62 0.72	0.61
Mistral	No recovery Error type Error message	0.73	0.76 0.64 0.68	0.75	0.69	0.54	0.49	0.58 0.55 0.56	0.51
Mi	No recovery Error type Error message	0.80	0.77 0.76 0.77	0.73	0.81	0.62	0.63	0.52 <u>0.74</u> 0.69	0.67
•	No recovery Error type Error message Warning	0.81 0.80	0.80 0.75 0.75 0.75	0.76 0.79	0.71 0.65	0.67 0.61	0.54 0.57	0.55 0.55 0.64 0.51	0.58 0.52
Llama-3	No recovery Error type Error message Warning	0.73 0.72	0.80 0.72 0.71 0.72	0.76 0.75	0.77 0.75	0.62 0.64	0.56 0.60	0.64 0.60 0.54 0.61	0.63 0.66
GPT	No recovery Error type Error message Warning	0.83 0.85	0.83 0.80 0.79 0.76	0.80 0.81	0.79 0.83	0.68 0.62	0.58 0.59	0.63 0.56 0.57 0.62	0.56 0.57

Table 11: Comparison between valid accuracy of error recovery strategies.

B Tautology corpus

- False is not true.
- True is not false.
- Not false is true.
- Not true is false.
- False and true is not true.
- False and not true is false.
- False and not false is false.
- Not true and true is false.
- Not true and false is false.
- True and false is not true.
- True and true is not false.
- True and not false is true.
- Not false and true is true.
- Not false and false is false.
- True or not true is true.
- True or true is true.
- False or not false is true.
- False or not true is false.
- Not true or false is not true.
- Not true or true is true.
- Not false or false is true.
- Not false or true is not false.

C Inference rules for counterfactual statements

Bidirectional dilemma

 $\forall x (\mathbf{p}(x) \implies \mathbf{q}(x)) \land (\mathbf{r}(x) \implies \mathbf{s}(x)) \land (\mathbf{p}(a) \lor \neg \mathbf{s}(a)) \models$ $(\mathbf{q}(a) \lor \neg \mathbf{r}(a))$ Negated: $\forall x (p(x))$ $\implies \neg q(x)) \land (r(x))$ $\mathbf{s}(x) \land (\mathbf{p}(a) \lor \neg \mathbf{s}(a)) \models (\neg \mathbf{q}(a) \lor \neg \mathbf{r}(a))$ **Constructive dilemma** $\forall x ((\mathsf{p}(x) \implies \mathsf{q}(x)) \land (\mathsf{r}(x) \implies \mathsf{s}(x))) \land (\mathsf{p}(a) \lor \mathsf{r}(a)) \models$ $(q(a) \lor s(a))$ Negated: $\forall x ((\mathbf{p}(x) \implies \neg \mathbf{q}(x)) \land (\mathbf{r}(x))$ $\mathbf{s}(x)) \land (\mathbf{p}(a) \lor \mathbf{r}(a)) \models (\neg \mathbf{q}(a) \lor \mathbf{s}(a))$ **Disjunctive syllogism** $\forall x (\mathbf{p}(x) \lor \mathbf{q}(x)) \land \neg \mathbf{p}(a) \models \mathbf{q}(a)$ Negated: $\forall x (\mathbf{p}(x) \lor \neg \mathbf{q}(x)) \land \neg \mathbf{p}(a) \models \mathbf{q}(a)$ **Existential generalization** $\mathbf{p}(a) \models \exists x \mathbf{p}(x)$ Negated: $\neg p(a) \models \exists x \neg p(x)$ Hypothetical syllogism $\forall x (\mathbf{p}(x) \implies \mathbf{q}(x)) \land (\mathbf{q}(x) \implies \mathbf{r}(x)) \models (\mathbf{p}(a) \implies$ $\mathbf{r}(a)$ Negated: $\forall x (\neg p(x) \implies q(x)) \land (q(x) \implies r(x)) \models$ $(\neg \mathsf{p}(a) \implies \mathsf{r}(a))$ **Modus ponens** $\forall x (\mathbf{p}(x) \implies \mathbf{q}(x)) \land \mathbf{p}(a) \models \mathbf{q}(a)$ Negated: $\forall x (\mathbf{p}(x) \implies \neg \mathbf{q}(x)) \land \mathbf{p}(a) \models \neg \mathbf{q}(a)$

Modus tollens

 $\forall x (\mathsf{p}(x) \Longrightarrow \mathsf{q}(x)) \land \neg \mathsf{q}(a) \models \neg \mathsf{p}(a)$ Negated: $\forall x (\neg \mathsf{p}(x) \Longrightarrow \mathsf{q}(x)) \land \neg \mathsf{q}(a) \models \mathsf{p}(a)$ **Universal instantiation** $\forall x \mathsf{p}(x) \models \mathsf{p}(a)$ Negated: $\forall x \neg \mathsf{p}(x) \models \neg \mathsf{p}(a)$

D Implementation details

If available, the specific instruction-tuned variant has been used for the tested LLMs. Except for GPT 40-mini, all models are provided from hugging-face and used with 4-bit quantization.

The Vampire theorem prover¹ processes the formal method's input, generating proofs by refutation to check whether the query logically follows from the context.

Our FOL variant is adapted from the ANTLR grammars-v4 repository.² For each grammar in § 4.2, we generate a parser using ANTLR4³ to decouple the logical forms from the input requirements of the theorem prover.

For all error recovery strategies, the LLM prompt includes three in-context examples. When recovery is attempted, refinement is limited to three iterations. If the error persists, the random fallback strategy is applied. This setup allows us to systematically compare the robustness of these recovery methods in the autoformalisation process.

The generated warnings use three heuristics to identify semantic errors. First, checking for predicates and individuals only mentioned in the query to avoid an incomplete context. Second, ensuring that all predicates with the same identifier use the same amount of parameter (checking for narity). Finally, avoiding similar named predicates and individuals based on Levenshtein distance.

E Prompts

E.1 Direct prompt

Given the context and question, answer the question and consider that not necessarily the whole context is relevant. Answer the question ONLY in 'yes' or 'no'. Please use the below format: Context: [text with logical rules] Question: [question based on context] Answer: Yes/No ----Context: If someone walks in the rain, they will get wet. Conversely, if someone exercises a lot, they will get fit. Leaders of a country for life are either a king or a queen. It is known that at least one of the

following statements is true: (1)

¹https://vprover.github.io

²https://github.com/antlr/grammars-v4/blob/5bb56f34bff3e0a43197d6e61ca89e ³https://www.antlr.org/

either John walks in the rain and (2) he will not get fit. It is possible that solely (1) is true, or solely (2) is true, or even both are true simultaneously.

- Question: Can we say at least one of the following must always be true? (a) he will get wet and (b) he does not exercises a lot?
- Reasoning steps: 1. John walks in the rain or he will not get fit 2. If John walks in the rain he will get wet. 3. If John will not get fit he cannot exercise a lot.

```
Answer: Yes
```

- Context: If a person leaves late, they will miss their train. In this particular situation, James left late.
- Question: Does this entail that he will not miss his train?

```
Reasoning steps:
```

 James left late 2. James left late, he will miss his train. 3. John misses his train contradicts that he will not miss his train.
Answer: No

Answer

- Context: It is known that one of the following options is true: someone goes to the office or someone goes home. However, Jill does not go to the office. If some pet in the office barks, then it is not dead.
- Question: Does this imply that Jill goes home?
- Reasoning steps: 1. Jill goes to the office or she goes home. 2. If Jill does not go to the office she must go home instead.

```
Answer: Yes
```

Regular expression for answer extraction:

```
r "(.*) (?P<answer>(yes) | (no)) (.*) "
```

E.2 CoT prompt

- Task Description: Given the context and question, think step-by-step logically to answer the question and consider that not necessarily the whole context is relevant. Answer the question ONLY in 'yes' or 'no'. Please use the below format:
- Context: [text with logical rules]
- Question: [question based on context] Reasoning steps: [generate step-by-step

reasoning]

Answer: Yes/No

- Context: If someone walks in the rain, they will get wet. Conversely, if someone exercises a lot, they will get fit. Leaders of a country for life are either a king or a queen. It is known that at least one of the following statements is true: (1) either John walks in the rain and (2) he will not get fit. It is possible that solely (1) is true, or solely (2) is true, or even both are true simultaneously.
- Question: Can we say at least one of the following must always be true? (a) he will get wet and (b) he does not exercises a lot?
- Reasoning steps: 1. John walks in the rain or he will not get fit 2. If John walks in the rain he will get wet. 3. If John will not get fit he cannot exercise a lot.
- Answer: Yes
- Context: If a person leaves late, they will miss their train. In this particular situation, James left late.
- Question: Does this entail that he will not miss his train?
- Reasoning steps:
- 1. James left late 2. James left late, he will miss his train. 3. John misses his train contradicts that he will not miss his train.
- Answer: No
- Context: It is known that one of the following options is true: someone goes to the office or someone goes home. However, Jill does not go to the office. If some pet in the office barks, then it is not dead.
- Question: Does this imply that Jill goes home?
- Reasoning steps: 1. Jill goes to the office or she goes home. 2. If Jill does not go to the office she must go home instead.

Answer: Yes

Regular expression for answer extraction:

r "(.*) answer \:\s*(?P<answer>(yes) |(no)) (.*) "

E.3 Autoformalistion prompt

- Task Description: Given a problem description and a question. The task is to parse the problem and the question into first-order logic formulars. Follow exactly the given structure and consider that not necessarily the whole context is relevant.
- The grammar of the first-order logic formular is defined as follows:
- logical conjunction of expr1 and expr2: expr1 ∧ expr2
- 2) logical disjunction of expr1 and expr2: expr1 ∨ expr2
- 3) logical exclusive disjunction of expr1 and expr2: expr1 ⊕ expr2
- 4) logical negation of expr1: ¬expr1
- 5) expr1 implies expr2: expr1 \rightarrow expr2
- 6) expr1 if and only if expr2: expr1 \leftrightarrow expr2
- 7) logical universal quantification: $\forall x$
- 8) logical existential quantification: $\exists x$
- Problem: If someone walks in the rain, they will get wet. Conversely, if someone exercises a lot, they will get fit. Leaders of a country for life are either a king or a queen. It is known that at least one of the following statements is true: (1) either John walks in the rain and (2) he will not get fit. It is possible that solely (1) is true, or solely (2) is true, or even both are true simultaneously.
- Question: Can we say at least one of the following must always be true? (a) he will get wet and (b) he does not exercises a lot?
- Predicates :
- WalksInRain(x) ::: x walks in the rain.
- GetWet(x) ::: x gets wet.
- ExercisesALot(x) ::: x exercises a lot.
- GetFit(x) ::: x gets fit.
- Premises :
- $\forall x \ (WalksInRain(x) \rightarrow GetWet(x)) ::: If$ someone walks in the rain, they will get wet.
- $\begin{array}{ll} \forall x \ (ExercisesALot(x) \rightarrow GetFit(x)) \ ::: \ If \\ someone \ exercises \ a \ lot \ , \ they \ will \\ get \ fit \ . \end{array}$
- (WalksInRain(john) ∨ ¬GetFit(john)) ::: John walks in the rain or he will not get fit.
- Conclusion:
- GetWet(john) ∧ ¬ExercisesALot(john) ::: John will get wet or he does not exercises a lot.

- Problem: If a person leaves late, they will miss their train. In this particular situation, James left late
- Question: Does this entail that he will not miss his train?
- Predicates :
- LeaveLate(x) ::: x leaves late.
- MissTrain(x) ::: x misses their train. Premises:
- $\forall x \ (LeaveLate(x) \rightarrow MissTrain(x)) ::: If$ a person leaves late, they will miss their train.
- LeaveLate(james) ::: James leave late. Conclusion:
- ¬MissTrain(james) ::: James does not miss his train.
- ____
- Problem: It is known that one of the following options is true: someone goes to the office or someone goes home. However, Jill does not go to the office. If some pet in the office barks, then it is not dead.
- Question: Does this imply that Jill goes home?
- Predicates :
- GoesToOffice(x) ::: x goes to the office
- GoesHome(x) ::: x goes home.
- Premises :
- ∀x (GoesToOffice(x) ∨ GoesHome(x)) ::: Either someone goes to the office or someone goes home.
- ¬GoesToOffice(jill) ::: Jill does not go to the office.
- Conclusion:
- GoesHome(jill) ::: Jill goes home.