## **Epistemic Uncertainty in Conformal Scores: A Unified Approach**

Luben M. C. Cabezas\*1,2

Vagner S. Santos\*1

Thiago R. Ramos<sup>1</sup>

Rafael Izbicki1

<sup>1</sup>Department of Statistics, Federal University of São Carlos, São Carlos, São Paulo, Brazil <sup>2</sup>Institute of Mathematics and Computer Science, University of São Paulo, São Carlos, São Paulo, Brazil <sup>\*</sup>Equal contribution.

## **Abstract**

Conformal prediction methods create prediction bands with distribution-free guarantees but do not explicitly capture epistemic uncertainty, which can lead to overconfident predictions in data-sparse regions. Although recent conformal scores have been developed to address this limitation, they are typically designed for specific tasks, such as regression or quantile regression. Moreover, they rely on particular modeling choices for epistemic uncertainty, restricting their applicability. We introduce EPICSCORE, a model-agnostic approach that enhances any conformal score by explicitly integrating epistemic uncertainty. Leveraging Bayesian techniques such as Gaussian Processes, Monte Carlo Dropout, or Bayesian Additive Regression Trees, EPICSCORE adaptively expands predictive intervals in regions with limited data while maintaining compact intervals where data is abundant. As with any conformal method, it preserves finitesample marginal coverage. Additionally, it also achieves asymptotic conditional coverage. Experiments demonstrate its good performance compared to existing methods. Designed for compatibility with any Bayesian model, but equipped with distribution-free guarantees, EPICSCORE provides a general-purpose framework for uncertainty quantification in prediction problems.

## 1 INTRODUCTION

Machine learning models traditionally focus on point predictions, estimating target variables from input features. However, understanding prediction uncertainty is crucial in many applications [Horta et al., 2015, Freeman et al., 2017, Izbicki and Lee, 2017, Schmidt et al., 2020, Dalmasso et al., 2020, Csillag et al., 2023, Mian et al., 2024, Valle et al., 2024a,

Fröhlich et al., 2024]. This has led to increased interest in uncertainty quantification methods, particularly conformal prediction, which constructs predictive regions with finite-sample validity under mild i.i.d. assumptions [Vovk et al., 2005, Shafer and Vovk, 2008]. Unlike probabilistic models that rely on asymptotic assumptions or priors, conformal methods provide a distribution-free framework with guaranteed coverage.

Conformal prediction works by designing a non-conformity score,  $s(\mathbf{x},y)$ , which measures the degree to which a given label value y aligns with the feature values  $\mathbf{x}$  of an instance. Given a new input  $\mathbf{x}_{\text{new}}$ , the method constructs a predictive region by inverting the non-conformity score at a given confidence level (see Section 2.1). The choice of  $s(\mathbf{x},y)$  is critical, as it directly influences the shape and informativeness of the resulting predictive regions [Angelopoulos and Bates, 2021]. For instance, in regression problems, a standard choice is  $s(\mathbf{x},y) = |y-g(\mathbf{x})|$ , where  $g(\mathbf{x})$  is a point prediction for Y, typically an estimate of the regression function  $\mathbb{E}[Y|\mathbf{x}]$  [Lei et al., 2018]. Another common option is  $s(\mathbf{x},y) = \max\{\widehat{q}_{\alpha_1}(\mathbf{x}) - y, y - \widehat{q}_{\alpha_2}(\mathbf{x})\}$ , where  $\widehat{q}_{\alpha_1}, \widehat{q}_{\alpha_2}$  are quantile estimates of  $Y|\mathbf{x}$  [Romano et al., 2019].

Despite offering distribution-free guarantees, standard conformal scores primarily capture *aleatoric uncertainty*, which arises from inherent randomness in the data generation process - specifically, the fact that  ${\bf x}$  does not uniquely determine y. For example, in the cases discussed above, both  $E[Y|{\bf x}]$  and  $q_{\alpha}({\bf x})$  reflect this form of uncertainty. However, an equally important source of uncertainty is *epistemic uncertainty*, which stems from limitations in training data and the resulting lack of knowledge about the true datagenerating process [Hüllermeier and Waegeman, 2021].

Since standard conformal prediction does not explicitly account for epistemic uncertainty, it can produce misleadingly narrow predictive intervals in regions with little or no training data. Figure 1 illustrates this issue in a regression problem (see Appendix A.1 for technical details): in the range  $x \in (7,8)$ , there is essentially no training data, so we ex-

pect predictive regions to widen, reflecting the increased uncertainty. However, standard conformal methods (e.g., regression-split) instead produce overconfident, narrow intervals in this region. To address this limitation, we propose a novel approach that augments any conformal score with a measure of epistemic uncertainty. As shown in the figure, our method (EPICSCORE) successfully expands the predictive regions where data is scarce, providing a more reliable uncertainty quantification.




Figure 1: A comparison of predictive intervals from standard split-conformal regression and our proposed EPICSCORE approach. While all methods maintain valid marginal coverage, standard conformal prediction often produces overconfidently narrow intervals in the data-scarce region (e.g.  $x \in (7,8)$ ). Our method explicitly accounts for epistemic uncertainty, resulting in appropriately widened predictive intervals that better reflect total uncertainty when extrapolating beyond the training distribution.

This limitation also appears in classification tasks, where conventional conformal methods produce overconfident prediction sets for test instances outside the training distribution. Using a ResNet-34 pre-trained on ImageNet (see Appendix A.2 for details and additional results), Figure 2 compares Adaptive Prediction Sets (APS, Romano et al. 2020) and EPICSCORE on CIFAR-100 images. Both maintain valid coverage, but EPICSCORE explicitly quantifies epistemic uncertainty: prediction sets expand for outliers while remaining concise for in-distribution examples. EPICSCORE also shows improved Size-Stratified Coverage (SSC; Angelopoulos and Bates 2021) by 33% over APS, thus producing better prediction sets.

#### 1.1 NOVELTY

We introduce EPICSCORE (Epistemic Conformal Score), a novel nonconformity score that explicitly integrates epistemic uncertainty into the conformal prediction framework. Our key innovation is modeling the epistemic uncertainty of any given conformal score  $s(\mathbf{x},y)$  using a Bayesian process.

This allows us to refine uncertainty quantification, particularly in regions of the feature space where data are sparse.

EPICSCORE is flexible and can leverage various Bayesian approaches, including Gaussian Processes, Bayesian Additive Regression Trees, or even approximations such as Neural Networks with Monte Carlo Dropout. By incorporating these probabilistic models, our method dynamically adjusts predictive regions to account for both aleatoric and epistemic uncertainty.

Despite EPICSCORE using Bayesian models, it preserves the finite-sample validity guarantees of conformal prediction and also achieves asymptotic conditional coverage, a property that many existing conformal approaches lack. Furthermore, EPICSCORE is model-agnostic and can be applied on top of any existing conformal score, making it an enhancement rather than a replacement.

#### 1.2 RELATION TO OTHER WORK

Several recent frameworks have attempted to model epistemic uncertainty in machine learning predictions (see, e.g., He et al. 2023, Tyralis and Papacharalampous 2024, Wang et al. 2025, Izbicki 2025 and references therein). However, these methods generally lack guarantees on the coverage of their estimates.

In contrast, conformal prediction offers valid coverage guarantees under the relatively weak assumption of i.i.d. data. Since its introduction [Vovk et al., 2005, Shafer and Vovk, 2008], the method has advanced significantly in both theoretical foundations and practical applications [Lei et al., 2018, Angelopoulos and Bates, 2021, Fontana et al., 2023, Manokhin, 2024]. A key challenge in this area has been enhancing the quality of predictive regions, particularly by achieving conditional coverage, which ensures validity conditional on specific feature values.

Since exact conditional coverage is unattainable without strong assumptions [Lei and Wasserman, 2014], research has focused on two strategies: (1) locally tuning cutoffs to adapt to the data distribution [Boström and Johansson, 2020, Foygel Barber et al., 2021, Guan, 2023, Cabezas et al., 2024, 2025], and (2) designing conformal scores that achieve conditional coverage asymptotically [Romano et al., 2019, Izbicki et al., 2020, Chernozhukov et al., 2021, Izbicki et al., 2022, Dheur et al., 2024, Plassier et al., 2024]. Among these, the score introduced by Dheur et al. [2025, Eq. 14] is particularly relevant to our approach. This method transforms a nonconformity score s via its estimated cumulative distribution function,  $s'(\mathbf{x}; y) = \widehat{F}(s(\mathbf{x}, y)|\mathbf{x})$ , improving conditional coverage. While s' ensures asymptotic conditional coverage, it does not explicitly model epistemic uncertainty. Our approach builds on this idea by incorporating epistemic uncertainty in s'. In particular, we show that as the calibration sample grows, EPICSCORE achieves asymp-

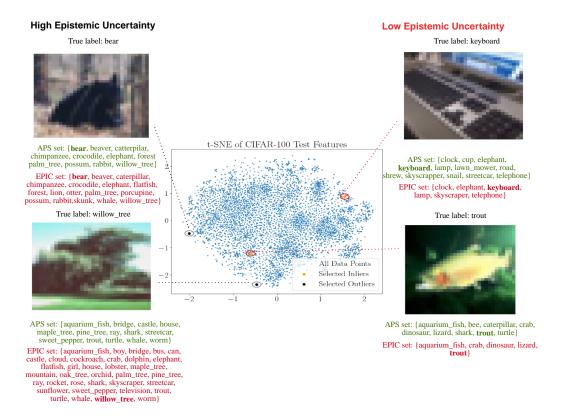


Figure 2: Prediction sets from Adaptive Prediction Sets (APS) versus the proposed EPICSCORE approach on CIFAR-100 images. Both methods maintain valid coverage, but EPICSCORE explicitly quantifies epistemic uncertainty, resulting in adaptively expanded prediction sets for outlier images (e.g., those in data-sparse regions) while remaining concise for in-distribution examples.

totic conditional coverage (Theorem 2).

Bayesian methods have been explored as a means to incorporate epistemic uncertainty into conformal prediction. One approach is to use Bayesian predictive sets and subsequently apply conformal methods to adjust their marginal coverage. However, existing techniques typically do not leverage existing conformal scores explicitly, and do not lead to asymptotic conditional coverage [Vovk et al., 2005, Fong and Holmes, 2021, Wasserman, 2011].

Other recent studies have attempted to incorporate epistemic uncertainty directly into existing conformal scores. Cocheteux et al. [2025] modifies the Weighted regressionsplit nonconformity score [Lei et al., 2018],  $s(\mathbf{x},y) = |y-g(\mathbf{x})|/\sigma(\mathbf{x})$ , by redefining  $\sigma(\mathbf{x})$  to capture epistemic uncertainty about Y, rather than aleatoric uncertainty only as in the original formulation. This uncertainty is estimated via Monte Carlo Dropout, which we also employ in some experiments. However, our approach is more flexible, as it accommodates any nonconformity score and, unlike this method, ensures asymptotic conditional coverage.

Another approach is proposed by Rossellini et al. [2024], who modify the conformal quantile regression (CQR; Romano et al. 2019) score function,  $s(\mathbf{x},y) = \max\{\widehat{q}_{\alpha_1}(\mathbf{x}) -$ 

 $y,y-\widehat{q}_{\alpha_2}(\mathbf{x})\}$ , to account for epistemic uncertainty in the quantile estimates. While this adaptation shows promising results, it is restricted to quantile regression models and does not generalize to other conformal scores. Moreover, it necessarily measures epistemic uncertainty using ensembles.

Other efforts to model epistemic uncertainty include Jaber et al. [2024] and Pion and Vazquez [2024], which integrate conformal methods with Gaussian processes. Although these approaches yield calibrated sets for Gaussian processes, they are tailored to this class of models and cannot be applied to other frameworks, such as Bayesian Additive Regression Trees [Chipman et al., 2012]. In contrast, EPICSCORE is model-agnostic and can be applied to any Bayesian model for epistemic uncertainty.

## 2 METHODOLOGY

#### 2.1 REVIEW OF CONFORMAL PREDICTION

Conformal prediction constructs valid prediction regions  $R(\mathbf{X}_{n+1})$  under minimal assumptions. A widely used approach is split conformal prediction [Papadopoulos et al., 2002, Lei et al., 2018], which partitions the data

into a training set  $\mathcal{D}_{\text{train}}$  and a calibration set  $\mathcal{D}_{\text{cal}} = \{(\mathbf{X}_1, Y_1), \dots, (\mathbf{X}_n, Y_n)\}$ . The training set is used to fit a nonconformity score  $s(\mathbf{x}, y)$  such as those described in the introduction. The conformal prediction region is given by

$$R(\mathbf{x}_{n+1}) = \{ y : s(\mathbf{x}_{n+1}, y) \le t_{1-\alpha} \}.$$

The value  $t_{1-\alpha}$  is set using the calibration set. Concretely,  $t_{1-\alpha}$  is set to be the  $(1-\alpha)$ -quantile of the calibration scores,

$$t_{1-\alpha} = \text{Quantile}_{1-\alpha} \{ s(\mathbf{X}_i, Y_i) : (\mathbf{X}_i, Y_i) \in \mathcal{D}_{\text{cal}} \}.$$

This construction ensures that the prediction set for a new observation  $(\mathbf{X}_{n+1}, Y_{n+1})$  satisfies marginal coverage:

$$\mathbb{P}(Y_{n+1} \in R(\mathbf{X}_{n+1})) \ge 1 - \alpha.$$

The choice of s is critical in determining the shape and other properties of R. In the next section, we introduce a new conformal score that measures the epistemic uncertainty around any given score s.

#### 2.2 OUR APPROACH - EPICSCORE

We assume that a nonconformity score  $s(\mathbf{x},y)$  is already defined based on the training set. Our starting point is to define a family of distributions that model the aleatoric uncertainty of  $s(\mathbf{X},Y)$  given  $\mathbf{X}$ , which is a set of distributions indexed by a parameter  $\theta \in \Theta$ . We denote this family by  $\mathcal{F} = \{f(s|\mathbf{x},\theta): \theta \in \Theta\}$ . This formulation is very general;  $\Theta$  may even represent a nonparametric space.

To construct EPICSCORE, we adopt a Bayesian model that places a prior distribution over  $\Theta$  (or equivalently, over  $\mathcal{F}$ ). For simplicity, we assume this prior has a density  $f(\theta)$ , though the method is generally applicable. This prior captures epistemic uncertainty in the data-generating process. In our experiments, we use Gaussian Processes, Bayesian Additive Regression Trees, and approximate Bayesian Mixture Density Neural Networks with Monte Carlo Dropout, but our approach supports any prior process.

We update the prior distribution  $f(\theta)$  using a subset of the calibration set  $\mathcal{D}_{cal}$ . Specifically,  $\mathcal{D}_{cal}$  is split into two disjoint subsets:  $\mathcal{D}_{cal,1}$  and  $\mathcal{D}_{cal,2}$ . The first subset,  $\mathcal{D}_{cal,1}$  is transformed into the dataset

$$D = \{ (\mathbf{X}, S) : (\mathbf{X}, Y) \in \mathcal{D}_{\text{cal}, 1}, S = s(\mathbf{X}, Y) \}.$$

Using this transformed dataset, we compute the posterior distribution  $f(\theta|D)$ , which reflects the updated epistemic uncertainty about the data-generating process after observing this data. Our Bayesian model assumes that, given  $\theta$ , the data points  $(\mathbf{X},S)$  are independent and share the same conditional distribution  $f(s|\mathbf{x},\theta)$ . Then, we derive the predictive cumulative distribution

$$F(s|\mathbf{x}, D) = \int F(s|\mathbf{x}, \theta) f(\theta|D) d\theta,$$

where  $F(s|\mathbf{x}, \theta)$  is the CDF given by model  $\theta$ .

Finally, our modified nonconformity score, EPICSCORE, is defined as

$$s'(\mathbf{x}, y) = F(s(\mathbf{x}, y)|\mathbf{x}, D). \tag{1}$$

By construction, s' incorporates epistemic uncertainty into s by averaging the original score distribution,  $F(s|\mathbf{x},\theta)$ , over the posterior  $f(\theta|D)$ , thus propagating the uncertainty about  $\theta$  throughout the model.

Once s' is computed, the prediction region for a new sample point is obtained using the standard split conformal method, with s' serving as the nonconformity score. Specifically, s' is evaluated for every sample in the second subset,  $\mathcal{D}_{\text{cal},2}$ . The  $(1-\alpha)$ -quantile of these values, denoted as  $t_{1-\alpha}$ , is then used to construct the prediction region

$$R_{\text{EPIC}}(\mathbf{x}_{n+1}) = \{ y : s'(\mathbf{x}_{n+1}, y) \le t_{1-\alpha} \},$$

which, by the definition of s', can be expressed in terms of the original nonconformity score s as

$$R_{\text{EPIC}}(\mathbf{x}_{n+1}) = \{ y : s(\mathbf{x}_{n+1}, y) \le F^{-1}(t_{1-\alpha} | \mathbf{x}_{n+1}, D) \}.$$

 ${\tt EPICSCORE} \ is \ summarized \ in \ Algorithm \ 1 \ and \ illustrated \\ in \ Figure \ 3.$ 

## Algorithm 1: EPICSCORE

**Input:** Data  $\mathcal{D} = \{(\mathbf{X}_i, Y_i)\}_{i=1}^n$ , conformal score  $s(\mathbf{X}, Y)$ , nominal level  $\alpha$ , test point  $\mathbf{X}_{n+1}$ 

## **Step I: Fit conformal scores**

- 1: Split data  $\mathcal{D}$  into a training set  $\mathcal{D}_{train}$  and a calibration set  $\mathcal{D}_{cal}$ .
- 2: Fit the conformal score  $s(\mathbf{X}, Y)$  in  $\mathcal{D}_{\text{train}}$ .

## **Step II: Fit the predictive function**

- 1: Split data  $\mathcal{D}_{cal}$  into a training set  $\mathcal{D}_{cal,1}$  and a calibration set  $\mathcal{D}_{cal,2}$ .
- 2. Fit predictive CDF  $F(s|\mathbf{x}, D)$  using  $\mathcal{D}_{\text{cal},1}$ .
- 3. Compute EPICSCORE conformal score  $s'(\mathbf{x},y)$  for all elements of  $\mathcal{D}_{\mathrm{cal},2}$  (Eq. (1))
- 4: Compute the  $(1 \alpha)$  empirical quantile  $t_{1-\alpha}$  of the conformal scores.

## Step III: Compute prediction set

3: Compute the set  $R_{EPIC}(\mathbf{X}_{n+1})$  as:

$$R_{\text{EPIC}}(\mathbf{X}_{n+1}) = \{ y \mid s'(\mathbf{X}_{n+1}, y) \le t_{1-\alpha} \}$$
  
=  $\{ y \mid s(\mathbf{X}_{n+1}, y) \le F^{-1}(t_{1-\alpha}|\mathbf{X}_{n+1}, D) \}$ 

#### 2.2.1 Special Cases

We examine specific instances of conformal scores to provide further insight into how EPICSCORE captures epistemic uncertainty.

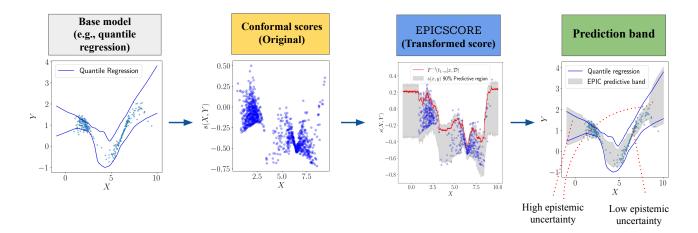


Figure 3: EPICSCORE schematic illustration: Given a fitted base model (first panel), we begin by creating a nonconformity score and evaluating it over the calibration set (second panel). We then model the predictive distribution of the conformal score  $s(\mathbf{X}, Y)$  using a specified family of models, integrating the epistemic uncertainty about the data-generating process. The predictive CDF of each original score defines a new conformal score, allowing threshold computation in the transformed space (third panel). Finally, leveraging these predictive-based cutoffs, we construct an adaptive prediction band that accounts for epistemic uncertainty (fourth panel).

**Regression**. If the original conformal score is  $s(\mathbf{x},y) = |y-g(\mathbf{x})|$ , the prediction regions given by EPICSCORE have the form

$$g(\mathbf{x}_{n+1}) \pm F^{-1}(t_{1-\alpha}|\mathbf{x}_{n+1}, D),$$

In particular, if  $S|\mathbf{x}, D$  is modeled by a normal distribution with mean  $\mu(\mathbf{x}, D)$  and standard deviation  $\sigma(\mathbf{x}, D)$  the prediction sets will have the shape

$$(g(\mathbf{x}_{n+1}) - \mu(\mathbf{x}_{n+1}, D)) \pm \sigma(\mathbf{x}, D)\sqrt{2}\mathrm{erf}^{-1}(2t_{1-\alpha} - 1),$$

where erf<sup>-1</sup> denotes the inverse error function. This is equivalent to changing the original conformal score to  $|y-g(\mathbf{x}_{n+1})-\mu(\mathbf{x}_{n+1},D)|/\sigma(\mathbf{x}_{n+1},D)$ , which is similar to the approach by Cocheteux et al. [2025], although any process can be used to model the epistemic uncertainty in our version.

**Quantile Regression**. If the original conformal score s is given by Conformalized Quantile Regression (CQR) [Romano et al., 2019], the prediction regions of EPICSCORE have the form

$$[q_{\alpha_1}(\mathbf{x}_{n+1}) - F^{-1}(t_{1-\alpha}|\mathbf{x}_{n+1}, D), q_{\alpha_2}(\mathbf{x}_{n+1}) + F^{-1}(t_{1-\alpha}|\mathbf{x}_{n+1}, D)].$$

Unlike the original CQR formulation, which expands or contracts the quantile regions  $[q_{\alpha_1}(\mathbf{x}_{n+1}), q_{\alpha_2}(\mathbf{x}_{n+1})]$  by a constant factor t, EPICSCORE adjusts the regions dynamically based on the epistemic uncertainty at  $\mathbf{x}_{n+1}$ . This approach is similar, but more flexible than previous methods, such as UACQR-S [Rossellini et al., 2024], which imposes a

correction factor of the form  $t \times g(\mathbf{x}_{n+1})$ . Also, any process can be used to model  $F^{-1}(t_{1-\alpha}|\mathbf{x}_{n+1},D)$ .

Classification. Let  $s(\mathbf{x},y)$  be any nonconformity score for classification. One example is the APS score

$$s(\mathbf{x}, y) = \sum_{y' \in \mathcal{Y}: \widehat{\mathbb{P}}(y'|\mathbf{x}) > \widehat{\mathbb{P}}(y|\mathbf{x})} \widehat{\mathbb{P}}(y'|\mathbf{x}), \tag{2}$$

where  $\widehat{\mathbb{P}}(y'|\mathbf{x})$  represents the predicted probabilities from any classifier. Another common choice is

$$s(\mathbf{x}, y) = -\widehat{\mathbb{P}}(y|\mathbf{x}),\tag{3}$$

[Vovk et al., 2005, Valle et al., 2023, 2024b]. Since Y is discrete, the score  $s(\mathbf{x},Y)$  is also discrete. Moreover, the cumulative distribution function of its predictive distribution can be computed using the predictive distribution of the labels,  $\mathbb{P}(y|\mathbf{x},D)$ . In particular, EPICSCORE is given by

$$\begin{split} s'(\mathbf{x}, y) &= \mathbb{P}\left(s(\mathbf{x}, Y) \leq s(\mathbf{x}, y) | \mathbf{x}, D\right) \\ &= \sum_{y'} \mathbb{I}(s(\mathbf{x}, y') \leq s(\mathbf{x}, y)) \mathbb{P}(y' | \mathbf{x}, D) \\ &= \sum_{y': s(\mathbf{x}, y') \leq s(\mathbf{x}, y)} \mathbb{P}(y' | \mathbf{x}, D). \end{split}$$

This formulation reveals several key insights about EPICSCORE for classification:

• If the initial classifier  $\widehat{\mathbb{P}}(y|\mathbf{x})$  is a neural network trained with Monte Carlo dropout or batch normalization, an approximation to  $\mathbb{P}(y|\mathbf{x},D)$  is readily available; one only needs to use the same technique at test

time. This is because these methods provide a variational approximation of Bayesian predictive distributions [Gal and Ghahramani, 2016, Teye et al., 2018], eliminating the need to compute the predictive distribution using a separate holdout set.

- Both scoring functions in Eqs. 2 and 3 lead to the same EPICSCORE score. Additionally, EPICSCORE follows a similar structure to APS, with the key difference being that the estimates  $\widehat{\mathbb{P}}(y|\mathbf{x})$  on the sum of Eq. 2 are replaced by the predictive distribution  $\mathbb{P}(y|\mathbf{x},D)$ .
- When  $\mathbf{x}_{n+1}$  is located in a region with little training data, the estimated probabilities  $\widehat{\mathbb{P}}(y|\mathbf{x})$  tend to be low for all labels, reflecting a high degree of uncertainty. Consequently, even the most conformal labels will have small probabilities, leading to lower values of  $s'(\mathbf{x}_{n+1},y)$ . This results in larger prediction sets  $\{y:s'(\mathbf{x}_{n+1},y)\leq t_{1-\alpha}\}$  in areas with sparse data, effectively capturing uncertainty in underrepresented regions.
- For large D, no epistemic uncertainty remains and, therefore, EPICSCOREconverges to the populational version of the APS score.

## 3 THEORY

Just like any split-conformal method, EPICSCORE guarantees marginal coverage as long as the data is i.i.d., regardless of the chosen Bayesian model (see Appendix D for all proofs):

**Theorem 1.** Assuming that the data are independent and identically distributed (i.i.d.), the confidence region constructed by EPICSCORE satisfies marginal coverage, that is

$$\mathbb{P}\left(Y \in R_{FPIC}(\mathbf{X})\right) > 1 - \alpha.$$

Moreover, if the fitted scores follow a continuous joint distribution, the upper bound also holds:

$$\mathbb{P}\left(Y \in R_{EPIC}(\mathbf{X})\right) \le 1 - \alpha + \frac{1}{1 + |\mathcal{D}_{cal,2}|}.$$

We now analyze its conditional coverage properties.

As the sample size of the calibration set used to compute the posterior D increases, the distribution function  $F(s(\mathbf{x},y)|\mathbf{x},D)$  typically converges to  $S(\mathbf{X},Y)|\mathbf{x},\theta^*$ , where  $\theta^*$  denotes the true parameter value [Schervish, 2012, Bernardo and Smith, 2009]. Consequently, EPICSCORE recovers the score proposed by Dheur et al. [2025, Eq. 14] in the limit of large calibration samples, which is exactly when epistemic uncertainty is negligible. This score is known to control asymptotic conditional coverage. We show that our proposed score exhibits the same property.

Formally, we assume that the predictive distribution converges to the true distribution of the conformal score [Bernardo and Smith, 2009, Schervish, 2012]:

**Assumption 1.** For any  $\varepsilon > 0$ , we assume uniform convergence in probability over the randomness in D:

$$\lim_{|D| \to \infty} \mathbb{P}\left(\sup_{s, \mathbf{x}} |F(s \mid \mathbf{x}, D) - F(s \mid \mathbf{x}, \theta^*)| > \varepsilon\right) = 0.$$

Next, we show that EPICSCORE has asymptotic conditional coverage:

**Theorem 2.** Under Assumption 1, and assuming that the data are independent and identically distributed (i.i.d.), the confidence region constructed by EPICSCORE satisfies the asymptotic conditional coverage condition, that is:

$$\lim_{|\mathcal{D}_{cal}| \to \infty} \mathbb{P}\left(Y \in R_{EPIC}(\mathbf{X}) \mid \mathbf{X} = \mathbf{x}\right) = 1 - \alpha.$$

## 4 EXPERIMENTS

In this section, we evaluate our framework against state-ofthe-art baselines, applying EPICSCORE to two initial conformal scores: (i) quantile-based and (ii) regression-based. Each version of EPICSCORE is compared to appropriate baselines, which are detailed in the following subsections.

We consider three versions of EPICSCORE, each using a different model for the predictive distribution (see implementation details in Appendix C):

• Bayesian Additive Regression Trees [Chipman et al., 2012]: The BART model represents the score as a sum of regression trees:

$$s(Y, \mathbf{X}) | \mathbf{X}, \boldsymbol{\theta} \sim \phi \left( \sum_{i=1}^{m} G_i(\mathbf{X}, T_i, M_i), \sigma \right) ,$$

where  $\phi$  denotes a probability distribution,  $\sigma$  its associated scale,  $G_i$  a binary tree with structure  $T_i$  and leaf values  $M_i$ . We set  $\phi$  as a Normal distribution and  $\sigma$  depending on  $\mathbf X$  to incorporate heteroskedasticity [Pratola et al., 2020].

- Gaussian Process (GP) [Williams and Rasmussen, 2006, Schulz et al., 2018]: For the GP regression model, we assume the score follows the form  $s(Y, \mathbf{x}) = f(\mathbf{x}) + \varepsilon$ , with  $\varepsilon \sim N(0, \sigma_{\varepsilon}^2)$  representing independent Gaussian noise, and  $f(\mathbf{x}) \sim GP(m(\mathbf{x}), k(\mathbf{x}, \mathbf{x}'))$  is a Gaussian Process with mean function  $m(\mathbf{x})$  and covariance function  $k(\mathbf{x}, \mathbf{x}')$ . We adopt variational approximations to the predictive distribution [Salimbeni et al., 2018], which offer scalability.
- Mixture Density Network with MC-Dropout [Bishop, 1994, Gal and Ghahramani, 2016]: The

Mixture Density Network (MDN) models the score distribution using a weighted sum of Gaussian components:

$$f(s(y, \mathbf{x})|\mathbf{x}) = \sum_{k=1}^{K} \pi_k(\mathbf{x}) N(s(y, \mathbf{x})|\mu_k(\mathbf{x}), \sigma_k^2(\mathbf{x})) ,$$

where  $N(\cdot)$  denotes the normal density and  $\pi_k(\cdot)$ ,  $\mu_k(\cdot)$ ,  $\sigma_k(\cdot)$  are all modeled by neural networks, with  $\sum_{k=1}^K \pi_k(\mathbf{x}) = 1$ . To derive a predictive distribution for the scores, we incorporate dropout at each MDN layer. By performing multiple stochastic forward passes using MC Dropout, we approximate the posterior distribution of the MDN parameters, thus propagating uncertainty into the predictive score distribution [Gal and Ghahramani, 2016].

Our comparisons are conducted using 13 datasets commonly employed for benchmarking in the conformal prediction literature: Airfoil [Dua et al., 2017], Bike [Mehra, 2023], Concrete [Yeh, 1998, Dua et al., 2017], Cycle [Tfekci and Kaya, 2014, Dua et al., 2017], HomesKaggle [2016], Electric [Dua et al., 2017], Meps19 [Romano et al., 2019], Protein [Rana, 2013, Dua et al., 2017], Star [Achilles et al., 2008], Super-Conductivity [Hamidieh, 2018], WEC [Neshat et al., 2020], WineRed [Cortez et al., 2009], and WineWhite [Cortez et al., 2009]. Additional details on these datasets are provided in Table 4 of the Appendix.

We report the average performance across 50 runs, highlighting methods that achieve statistically significant improvements based on 95% confidence interval of each evaluation metric. In each run, we randomly partition the data into 40% for training, 40% for calibration, and 20% for testing.

We use the Average Interval Score Loss (AISL) [Gneiting and Raftery, 2007] as our primary evaluation metric, as it balances coverage and interval length, favoring the narrowest valid prediction intervals. Additionally, we assess each method's efficiency by measuring (i) the average interval length, (ii) the marginal coverage, and (iii) the Pearson correlation between coverage and interval length on Appendix B.2, with the latter serving as a proxy for the quality of conditional coverage [Feldman et al., 2021]. A detailed description of all evaluation metrics is provided in Appendix B.1.

## 4.1 QUANTILE-REGRESSION BASELINES

For quantile regression-based scores, we adopt CatBoost [Dorogush et al., 2018] as the base quantile-regression model in all conformal methods. See Appendix B.3 for details on hyperparameters.

We compare EPICSCORE to the following baselines:

• **CQR** [Romano et al., 2019], the conformal quantile regression method described in the introduction.

- CQR-r [Sesia and Candès, 2020], which scales each derived cutoff by the interval width to produce adaptive intervals. As CQR, this approach accounts only for aleatoric uncertainty.
- UACQR-P and UACQR-S [Rossellini et al., 2024], which aims to integrate epistemic uncertainty into prediction intervals through ensemble-based statistics. We use their default strategies, deriving UACQR-S correction factors from the ensemble standard deviation and computing UACQR-P percentiles using ensemble order statistics.

All baselines are fitted and evaluated using the implementation from Rossellini et al. [2024].

#### 4.2 REGRESSION BASELINES

For regression-based conformal scores, we use a neural network optimized with a penalized Mean Squared Loss. Detailed descriptions of the architectures and hyperparameters used can be found in Appendix B.3.

We compare EPICSCORE to the following baselines:

- Regression Split [Lei and Wasserman, 2014], the conformal method based on residuals from a regression model described in the introduction.
- Weighted Regression Split [Lei et al., 2018], which multiplies the derived cutoff by a conditional Mean Absolute Deviance (MAD) estimate to yield adaptive intervals. The MAD is modeled by regressing the training set's absolute residuals on X, using the same model architecture as the base predictor.
- Mondrian Conformal Regression [Boström and Johansson, 2020], which enhances conditional coverage by adaptively partitioning the feature space using a binning scheme based on conditional variance. We estimate variance by fitting a Random Forest to (**X**, *Y*).

#### 4.3 RESULTS

The mean average coverage is close to the nominal 90% for all methods (Table 5 and 8 of Appendix B.2), which is expected since all methods are conformal.

In the quantile regression setting, Table 1 highlights EPICSCORE's strong performance across all datasets, with the MDN-MC Dropout variant excelling in 12 out of 13 cases. Notably, EPICSCORE outperforms all competitors on 7 datasets, effectively balancing coverage and interval precision. Additionally, Tables 6 and 7 (Appendix B.2) show that the MDN-MC Dropout variant produces narrower predictive intervals while maintaining good conditional coverage.

Table 1: Quantile regression AISL values for each method and dataset. The table reports the mean across 50 runs, with twice the standard deviation in brackets. Bold values indicate the best-performing method within a 95% confidence interval. EPICSCORE demonstrates strong performance across most datasets and consistently ranks among the top methods.

Dataset	EPIC-BART	EPIC-GP	EPIC-MDN	CQR	CQR-r	UACQR-P	UACQR-S
airfoil	19.361 (0.234)	19.704 (0.27)	18.799 (0.29)	20.521 (0.234)	20.535 (0.236)	23.021 (0.337)	20.188 (0.3)
bike $\times (10^1)$	44.722 (0.297)	47.818 (0.320)	43.858 (0.326)	45.628 (0.256)	45.638 (0.258)	53.413 (0.376)	43.815 (0.385)
concrete	42.765 (0.723)	45.276 (0.764)	44.442 (0.8)	46.882 (0.681)	46.896 (0.683)	52.789 (1.097)	47.324 (1.349)
cycle	34.435 (0.142)	35.054 (0.131)	34.077 (0.129)	39.218 (0.134)	39.408 (0.136)	43.775 (0.181)	35.346 (0.197)
electric	0.099 (< 0.001)	0.096 (< 0.001)	0.082 (< 0.001)	0.102 (0.001)	0.102 (0.001)	0.111 (0.001)	0.097 (< 0.001)
homes $\times (10^5)$	7.739 (0.066)	8.098 (0.072)	7.225 (0.049)	8.360 (0.075)	8.433 (0.078)	11.427 (0.131)	8.544 (0.107)
meps19	65.085 (1.469)	64.907 (1.56)	64.3 (1.528)	64.239 (1.56)	64.239 (1.56)	71.015 (1.763)	63.737 (1.461)
protein	17.687 (0.019)	18.096 (0.037)	17.417 (0.019)	17.7 (0.015)	17.7 (0.016)	18.149 (0.015)	17.691 (0.015)
$star \times (10^1)$	98.466 (0.768)	98.033 (0.750)	98.725 (0.754)	97.770 (0.725)	97.791 (0.724)	99.782 (0.647)	99.809 (0.968)
superconductivity	74.37 (0.222)	80.278 (0.266)	70.212 (0.196)	75.496 (0.219)	75.508 (0.218)	87.929 (0.513)	73.971 (0.404)
WEC $\times (10^5)$	2.925 (0.009)	2.665 (0.012)	2.374 (0.010)	3.138 (0.009)	3.142 (0.009)	3.517 (0.010)	3.046 (0.010)
winered	3.007 (0.058)	3.009 (0.059)	2.977 (0.05)	2.979 (0.069)	2.978 (0.069)	3.059 (0.069)	2.999 (0.063)
winewhite	3.334 (0.03)	3.327 (0.034)	3.219 (0.03)	3.316 (0.036)	3.315 (0.036)	3.378 (0.038)	3.2 (0.036)

Table 2: Regression AISL values for each method and dataset. The reported values represent the average across 50 runs, with two times the standard deviation in parentheses. Bolded values highlight the method with superior performance within a 95% confidence interval. EPICSCORE demonstrates competitive or superior performance compared to other methods.

Dataset	EPIC-BART	EPIC-GP	EPIC-MDN	Mondrian	Reg-split	Weighted
airfoil	19.747 (0.767)	20.287 (0.686)	19.823 (0.675)	21.532 (0.919)	21.201 (0.98)	20.276 (0.819)
bike $\times (10^1)$	36.381 (0.463)	41.448 (0.575)	37.041 (0.452)	38.190 (0.403)	43.918 (0.567)	37.773 (0.468)
concrete	52.098 (2.237)	52.998 (2.359)	51.648 (2.185)	61.915 (2.815)	54.902 (2.634)	58.399 (3.165)
cycle	19.418 (0.211)	19.522 (0.221)	19.436 (0.213)	19.403 (0.226)	19.73 (0.208)	19.49 (0.207)
electric	0.048 (<0.001)	0.049 (<0.001)	0.048 (<0.001)	0.05 (<0.001)	0.05 (0.001)	0.048 (<0.001)
homes $\times (10^5)$	5.921 (0.0716)	6.192 (0.0689)	5.546 (0.0545)	5.710 (0.053)	7.569 (0.098)	5.860 (0.056)
meps19	86.039 (2.421)	87.086 (2.405)	75.061 (1.807)	79.192 (1.821)	109.83 (2.695)	92.433 (3.259)
protein	18.885 (0.054)	18.772 (0.065)	17.735 (0.055)	17.586 (0.051)	19.423 (0.055)	18.314 (0.065)
$star \times (10^1)$	105.616 (1.255)	106.112 (0.998)	106.368 (1.173)	109.346 (1.119)	105.250 (1.038)	129.492 (1.657)
superconductivity	54.895 (0.364)	59.16 (0.449)	53.406 (0.365)	58.065 (0.313)	68.183 (0.418)	54.981 (0.345)
WEC $\times (10^5)$	1.437 (0.010)	1.435 (0.011)	1.283 (0.009)	1.294 (0.009)	1.620 (0.009)	1.410 (0.009)
winered	3.152 (0.07)	3.171 (0.064)	3.101 (0.062)	3.262 (0.069)	3.214 (0.063)	3.415 (0.067)
winewhite	3.104 (0.027)	3.187 (0.029)	3.129 (0.029)	3.087 (0.023)	3.181 (0.028)	3.189 (0.033)

For regression, Table 2 shows EPICSCORE's strong performance across most datasets. The MDN-MC Dropout variant excels in 12 out of 13 cases, while the BART version ranks among the top in 8 datasets. Additionally, Tables 9 and 10 (Appendix B.2) confirm its effectiveness in interval length, as well as approximate conditional coverage. These results highlight EPICSCORE's flexibility and robustness in capturing epistemic and aleatoric uncertainty across different conformal scores.

## 5 FINAL REMARKS

We introduce EPICSCORE, a novel conformal score that incorporates epistemic uncertainty into predictive regions. Using Bayesian modeling, EPICSCORE dynamically adjusts any nonconformity score to account for epistemic uncertainty, ensuring coverage even in sparse regions. We prove it preserves marginal coverage and achieves asymptotic conditional coverage. Empirical results show EPICSCORE often outperforms alternatives, producing prediction regions that

better reflect uncertainty while maintaining valid coverage.

Unlike previous approaches that rely on specific modeling choices or task-dependent formulations, EPICSCORE is fully model-agnostic. Any Bayesian model can estimate the epistemic uncertainty of a given conformal score, allowing practitioners to tailor the method to their application. This flexibility extends EPICSCORE's applicability across regression, classification, and structured prediction problems.

Looking ahead, we will extend EPICSCORE to settings with distribution shift, where capturing epistemic uncertainty is crucial due to data sparsity in some regions. By refining our approach for domain adaptation, we aim to maintain reliable predictive regions even when test distributions differ from training data.

Code to implement EPICSCORE and reproduce the experiments is available at https://github.com/Monoxido45/EPICSCORE.

## Acknowledgements

L.M.C.C is grateful for the fellowship provided by São Paulo Research Foundation (FAPESP), grant 2022/08579-7. V. S. S. is grateful for the financial support from FAPESP (grant 2023/05587-1). R. I. is grateful for the financial support of FAPESP (grants 2019/11321-9 and 2023/07068-1) and CNPq (grants 422705/2021-7 and 305065/2023-8).

#### References

- Charles M Achilles, Helen Pate Bain, Fred Bellott, Jayne Boyd-Zaharias, Jeremy Finn, John Folger, John Johnston, and Elizabeth Word. Tennessee's student teacher achievement ratio (star) project. *Harvard Dataverse*, 1:2008, 2008.
- Anastasios N Angelopoulos and Stephen Bates. A gentle introduction to conformal prediction and distribution-free uncertainty quantification. *arXiv preprint arXiv:2107.07511*, 2021.
- J.M. Bernardo and A.F.M. Smith. *Bayesian Theory*. Wiley Series in Probability and Statistics. Wiley, 2009. ISBN 9780470317716. URL https://books.google.com.br/books?id=11nSgIcd7xQC.
- Christopher M Bishop. Mixture density networks. 1994.
- Henrik Boström and Ulf Johansson. Mondrian conformal regressors. In *Conformal and Probabilistic Prediction and Applications*, pages 114–133. PMLR, 2020.
- Markus M Breunig, Hans-Peter Kriegel, Raymond T Ng, and Jörg Sander. Lof: identifying density-based local outliers. In *Proceedings of the 2000 ACM SIGMOD international conference on Management of data*, pages 93–104, 2000.
- Luben Cabezas, Guilherme P Soares, Thiago R Ramos, Rafael B Stern, and Rafael Izbicki. Distribution-free calibration of statistical confidence sets. *arXiv preprint arXiv:2411.19368*, 2024.
- Luben MC Cabezas, Mateus P Otto, Rafael Izbicki, and Rafael B Stern. Regression trees for fast and adaptive prediction intervals. *Information Sciences*, 686:121369, 2025.
- Victor Chernozhukov, Kaspar Wüthrich, and Yinchu Zhu. Distributional conformal prediction. *Proceedings of the National Academy of Sciences*, 118(48):e2107794118, 2021.
- Hugh A Chipman, Edward I George, and Robert E McCulloch. BART: Bayesian additive regression trees. *Annals of Applied Statistics*, 6(1):266–298, 2012.

- Mathieu Cocheteux, Julien Moreau, and Franck Davoine. Uncertainty-aware online extrinsic calibration: A conformal prediction approach. *arXiv preprint arXiv:2501.06878*, 2025.
- Paulo Cortez, A. Cerdeira, F. Almeida, T. Matos, and J. Reis. Wine Quality. UCI Machine Learning Repository, 2009. DOI: https://doi.org/10.24432/C56S3T.
- Daniel Csillag, Lucas Monteiro Paes, Thiago Ramos, João Vitor Romano, Rodrigo Schuller, Roberto B Seixas, Roberto I Oliveira, and Paulo Orenstein. Amnioml: amniotic fluid segmentation and volume prediction with uncertainty quantification. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, pages 15494–15502, 2023.
- Niccolò Dalmasso, Taylor Pospisil, Ann B Lee, Rafael Izbicki, Peter E Freeman, and Alex I Malz. Conditional density estimation tools in python and r with applications to photometric redshifts and likelihood-free cosmological inference. *Astronomy and Computing*, 30:100362, 2020.
- Victor Dheur, Tanguy Bosser, Rafael Izbicki, and Souhaib Ben Taieb. Distribution-free conformal joint prediction regions for neural marked temporal point processes. *Machine Learning*, 113(9):7055–7102, 2024.
- Victor Dheur, Matteo Fontana, Yorick Estievenart, Naomi Desobry, and Souhaib Ben Taieb. Multi-output conformal regression: A unified comparative study with new conformity scores. *arXiv preprint arXiv:2501.10533*, 2025.
- Anna Veronika Dorogush, Vasily Ershov, and Andrey Gulin. Catboost: gradient boosting with categorical features support. *arXiv preprint arXiv:1810.11363*, 2018.
- Dheeru Dua, Casey Graff, et al. Uci machine learning repository, 2017. *URL http://archive. ics. uci. edu/ml*, 7 (1):62, 2017.
- Shai Feldman, Stephen Bates, and Yaniv Romano. Improving conditional coverage via orthogonal quantile regression. *Advances in neural information processing systems*, 34:2060–2071, 2021.
- Edwin Fong and Chris C Holmes. Conformal bayesian computation. *Advances in Neural Information Processing Systems*, 34:18268–18279, 2021.
- Matteo Fontana, Gianluca Zeni, and Simone Vantini. Conformal prediction: a unified review of theory and new challenges. *Bernoulli*, 29(1):1–23, 2023.
- Rina Foygel Barber, Emmanuel J Candes, Aaditya Ramdas, and Ryan J Tibshirani. The limits of distribution-free conditional predictive inference. *Information and Inference: A Journal of the IMA*, 10(2):455–482, 2021.

- Peter E Freeman, Rafael Izbicki, and Ann B Lee. A unified framework for constructing, tuning and assessing photometric redshift density estimates in a selection bias setting. *Monthly Notices of the Royal Astronomical Society*, 468 (4):4556–4565, 2017.
- Alek Fröhlich, Thiago Ramos, Gustavo Cabello, Isabela Buzatto, Rafael Izbicki, and Daniel Tiezzi. Personalizedus: Interpretable breast cancer risk assessment with local coverage uncertainty quantification. *arXiv:2408.15458*, 2024.
- Yarin Gal and Zoubin Ghahramani. Dropout as a bayesian approximation: Representing model uncertainty in deep learning. In *International Conference on Machine Learning*, Proceedings of Machine Learning Research, pages 1050–1059. PMLR, 2016.
- Jacob Gardner, Geoff Pleiss, Kilian Q Weinberger, David Bindel, and Andrew G Wilson. Gpytorch: Blackbox matrix-matrix gaussian process inference with gpu acceleration. *Advances in neural information processing systems*, 31, 2018.
- Tilmann Gneiting and Adrian E Raftery. Strictly proper scoring rules, prediction, and estimation. *Journal of the American statistical Association*, 102(477):359–378, 2007.
- Leying Guan. Localized conformal prediction: A generalized inference framework for conformal prediction. *Biometrika*, 110(1):33–50, 2023.
- Kam Hamidieh. Superconductivty Data. UCI Machine Learning Repository, 2018. DOI: https://doi.org/10.24432/C53P47.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- Wenchong He, Zhe Jiang, Tingsong Xiao, Zelin Xu, and Yukun Li. A survey on uncertainty quantification methods for deep learning. *arXiv preprint arXiv:2302.13425*, 2023.
- Ana Horta, B Malone, U Stockmann, B Minasny, TFA Bishop, AB McBratney, R Pallasser, and L Pozza. Potential of integrated field spectroscopy and spatial analysis for enhanced assessment of soil contamination: A prospective review. *Geoderma*, 241:180–209, 2015.
- Eyke Hüllermeier and Willem Waegeman. Aleatoric and epistemic uncertainty in machine learning: An introduction to concepts and methods. *Machine Learning*, 110: 457–506, 2021.

- Sergey Ioffe and Christian Szegedy. Batch normalization: accelerating deep network training by reducing internal covariate shift. In *Proceedings of the 32nd International Conference on International Conference on Machine Learning Volume 37*, ICML'15, page 448–456. JMLR.org, 2015.
- Rafael Izbicki. *Machine Learning Beyond Point Predictions: Uncertainty Quantification*. 1st edition, 2025. ISBN 978-65-01-20272-3.
- Rafael Izbicki and Ann B Lee. Converting high-dimensional regression to high-dimensional conditional density estimation. *Electronic Journal of Statistics*, 11:2800–2831, 2017.
- Rafael Izbicki, Gilson Shimizu, and Rafael Stern. Flexible distribution-free conditional predictive bands using density estimators. In *International Conference on Artificial Intelligence and Statistics*, pages 3068–3077. PMLR, 2020.
- Rafael Izbicki, Gilson Shimizu, and Rafael B Stern. Cd-split and hpd-split: Efficient conformal regions in high dimensions. *Journal of Machine Learning Research*, 23 (87):1–32, 2022.
- Edgar Jaber, Vincent Blot, Nicolas Brunel, Vincent Chabridon, Emmanuel Remy, Bertrand Iooss, Didier Lucor, Mathilde Mougeot, and Alessandro Leite. Conformal approach to gaussian process surrogate evaluation with coverage guarantees. *arXiv preprint arXiv:2401.07733*, 2024.
- Kaggle. House sales in king county, usa. Online, 2016. URL https://www.kaggle.com/harlfoxem/ housesalesprediction/metadata. Accessed: August, 2019.
- Diederik P Kingma. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- Alex Krizhevsky, Geoffrey Hinton, et al. Learning multiple layers of features from tiny images. 2009.
- Siddharth Krishna Kumar. On weight initialization in deep neural networks. arXiv preprint arXiv:1704.08863, 2017.
- Jing Lei and Larry Wasserman. Distribution-free prediction bands for non-parametric regression. *Journal of the Royal Statistical Society Series B: Statistical Methodology*, 76 (1):71–96, 2014.
- Jing Lei, Max G'Sell, Alessandro Rinaldo, Ryan J Tibshirani, and Larry Wasserman. Distribution-free predictive inference for regression. *Journal of the American Statistical Association*, 113(523):1094–1111, 2018.
- Valery Manokhin. Awesome conformal prediction, 2024. URL https://github.com/valeman/awesome-conformal-prediction.

- Raj Mehra. Bike sharing demand rmsle: 0.3194. https://www.kaggle.com/code/rajmehra03/bike-sharing-demand-rmsle-0-3194/input?select=train.csv, 2023. Accessed: [Insert Date Here].
- Zhibao Mian, Xiaofei Deng, Xiaohui Dong, Yuzhu Tian, Tianya Cao, Kairan Chen, and Tareq Al Jaber. A literature review of fault diagnosis based on ensemble learning. *Engineering Applications of Artificial Intelligence*, 127: 107357, 2024.
- Mehdi Neshat, Bradley Alexander, Nataliia Y Sergiienko, and Markus Wagner. Optimisation of large wave farms using a multi-strategy evolutionary framework. In *Proceedings of the 2020 genetic and evolutionary computation conference*, pages 1150–1158, 2020.
- Harris Papadopoulos, Kostas Proedrou, Volodya Vovk, and Alex Gammerman. Inductive confidence machines for regression. In *Machine learning: ECML 2002: 13th European conference on machine learning Helsinki, Finland, August 19–23, 2002 proceedings 13*, pages 345–356. Springer, 2002.
- Aurélien Pion and Emmanuel Vazquez. Gaussian process interpolation with conformal prediction: methods and comparative analysis. In *LOD 2024*, *10th International Conference on Machine Learning, Optimization, and Data Science*, 2024.
- Vincent Plassier, Alexander Fishkov, Maxim Panov, and Eric Moulines. Conditionally valid probabilistic conformal prediction. *stat*, 1050:1, 2024.
- Matthew T Pratola, Hugh A Chipman, Edward I George, and Robert E McCulloch. Heteroscedastic bart via multiplicative regression trees. *Journal of Computational and Graphical Statistics*, 29(2):405–417, 2020.
- Miriana Quiroga, Pablo G Garay, Juan M Alonso, Juan Martin Loyola, and Osvaldo A Martin. Bayesian additive regression trees for probabilistic programming. *arXiv* preprint arXiv:2206.03619, 2022.
- Prashant Rana. Physicochemical Properties of Protein Tertiary Structure. UCI Machine Learning Repository, 2013. DOI: https://doi.org/10.24432/C5QW3H.
- Yaniv Romano, Evan Patterson, and Emmanuel Candès. Conformalized quantile regression. In *Advances in Neural Information Processing Systems*, volume 32, pages 3543–3553. Curran Associates, Inc., 2019.
- Yaniv Romano, Matteo Sesia, and Emmanuel Candes. Classification with valid and adaptive coverage. *Advances in Neural Information Processing Systems*, 33:3581–3591, 2020.

- Raphael Rossellini, Rina Foygel Barber, and Rebecca Willett. Integrating uncertainty awareness into conformalized quantile regression. In *International Conference on Artificial Intelligence and Statistics*, pages 1540–1548. PMLR, 2024.
- Hugh Salimbeni, Stefanos Eleftheriadis, and James Hensman. Natural gradients in practice: Non-conjugate variational inference in gaussian process models. In *International Conference on Artificial Intelligence and Statistics*, pages 689–697. PMLR, 2018.
- Mark J Schervish. *Theory of statistics*. Springer Science & Business Media, 2012.
- S. J. Schmidt, A. I. Malz, J. Y. H. Soo, I. A. Almosallam, M. Brescia, S. Cavuoti, J. Cohen-Tanugi, A. J. Connolly, J. DeRose, P. E. Freeman, M. L. Graham, K. G. Iyer, M. J. Jarvis, J. B. Kalmbach, E. Kovacs, A. B. Lee, G. Longo, C. B. Morrison, J. A. Newman, E. Nourbakhsh, E. Nuss, T. Pospisil, H. Tranin, R. H. Wechsler, R. Zhou, R. Izbicki, and LSST Dark Energy Science Collaboration. Evaluation of probabilistic photometric redshift estimation approaches for The Rubin Observatory Legacy Survey of Space and Time (LSST). *Monthly Notices of the Royal Astronomical Society*, 499(2):1587–1606, December 2020.
- Eric Schulz, Maarten Speekenbrink, and Andreas Krause. A tutorial on gaussian process regression: Modelling, exploring, and exploiting functions. *Journal of mathematical psychology*, 85:1–16, 2018.
- Matteo Sesia and Emmanuel J Candès. A comparison of some conformal quantile regression methods. *Stat*, 9(1): e261, 2020.
- Glenn Shafer and Vladimir Vovk. A tutorial on conformal prediction. *Journal of Machine Learning Research*, 9(3), 2008.
- Nitish Srivastava, Geoffrey Hinton, Alex Krizhevsky, Ilya Sutskever, and Ruslan Salakhutdinov. Dropout: a simple way to prevent neural networks from overfitting. *The journal of machine learning research*, 15(1):1929–1958, 2014.
- Mattias Teye, Hossein Azizpour, and Kevin Smith. Bayesian uncertainty estimation for batch normalized deep networks. In *International Conference on Machine Learning*, pages 4907–4916. PMLR, 2018.
- Pnar Tfekci and Heysem Kaya. Combined Cycle Power Plant. UCI Machine Learning Repository, 2014. DOI: https://doi.org/10.24432/C5002N.
- Hristos Tyralis and Georgia Papacharalampous. A review of predictive uncertainty estimation with machine learning. *Artificial Intelligence Review*, 57(4):94, 2024.

- D. Valle, R. Leite, Rafael Izbicki, C. Silva, and L. Haneda. Local uncertainty maps for land-use/land-cover classification without remote sensing and modeling work using a class-conditional conformal approach. *International Jour*nal of Applied Earth Observation and Geoinformation, 2024a.
- Denis Valle, Rafael Izbicki, and Rodrigo Vieira Leite. Quantifying uncertainty in land-use land-cover classification using conformal statistics. *Remote Sensing of Environment*, 295:113682, 2023.
- Denis Valle, Rodrigo Leite, Rafael Izbicki, Carlos Silva, and Leo Haneda. Local uncertainty maps for land-use/land-cover classification without remote sensing and modeling work using a class-conditional conformal approach. *International Journal of Applied Earth Observation and Geoinformation*, 135:104288, 2024b.
- Laurens Van der Maaten and Geoffrey Hinton. Visualizing data using t-sne. *Journal of machine learning research*, 9 (11), 2008.
- Vladimir Vovk, Alexander Gammerman, and Glenn Shafer. *Algorithmic learning in a random world*, volume 29. Springer, 2005.
- Tianyang Wang, Yunze Wang, Jun Zhou, Benji Peng, Xinyuan Song, Charles Zhang, Xintian Sun, Qian Niu, Junyu Liu, Silin Chen, et al. From aleatoric to epistemic: Exploring uncertainty quantification techniques in artificial intelligence. *arXiv preprint arXiv:2501.03282*, 2025.
- Larry Wasserman. Frasian inference. 2011.
- Christopher KI Williams and Carl Edward Rasmussen. *Gaussian processes for machine learning*, volume 2. MIT press Cambridge, MA, 2006.
- I-Cheng Yeh. Concrete Compressive Strength. UCI Machine Learning Repository, 1998. DOI: https://doi.org/10.24432/C5PK67.

# **Epistemic Uncertainty in Conformal Scores: A Unified Approach**(Appendix)

Luben M. C. Cabezas\*1,2

Vagner S. Santos\*1

Thiago R. Ramos<sup>1</sup>

Rafael Izbicki<sup>1</sup>

<sup>1</sup>Department of Statistics, Federal University of São Carlos, São Carlos, São Paulo, Brazil <sup>2</sup>Institute of Mathematics and Computer Science, University of São Paulo, São Carlos, São Paulo, Brazil <sup>\*</sup>Equal contribution.

## A TECHNICAL DETAILS AND SUPPLEMENTARY RESULTS FOR THE INTRODUCTION'S EXAMPLES

#### A.1 REGRESSION

In this section, we detail the example presented by Figure 1. We simulate a scenario with two distinct dense regions exhibiting low aleatoric and epistemic uncertainty, separated by an intermediate, sparser region with high aleatoric and epistemic uncertainty. Given a sample size n, we first generate  $\lfloor 0.425 \cdot n \rfloor$  samples for each  $X \sim U(0,1.5)$  and  $X \sim U(8,10)$ , ensuring that 85% of the data comes from the two outer regions, reflecting low epistemic uncertainty. The corresponding response variable follows  $Y \sim N(2\sin X, 0.1)$ , which also reflects low aleatoric uncertainty. For the remaining  $\lfloor 0.425 \cdot n \rfloor$  samples, we draw X from a transformed Beta distribution,  $X \sim (\text{Beta}(8,8) \cdot (8-1.5)) + 1.5$ , concentrating points in the intermediate region. Here, the response variable follows  $Y \sim N(2\sin X, 2.1)$ , introducing high aleatoric uncertainty. Epistemic uncertainty is particularly elevated at the boundaries of this region.

In this setting, we use a K-nearest neighbors (KNN) algorithm with k=10 as the regression base model  $g(\mathbf{x})$ . We illustrate the difference between EPICSCORE and established conformal prediction baselines for regression intervals, including Regression Split [Lei and Wasserman, 2014], Weighted Regression Split [Lei et al., 2018], and the Mondrian Conformal Regression [Boström and Johansson, 2020]. For EPICSCORE, we use the BART-based version, with m=100 trees, default prior options for all parameters, and a heteroscedastic gamma distribution as the probability model for the conformal score (detailed in C.4), which is appropriate given that the regression conformal score is non-negative and often asymmetric.

In terms of baselines, both the Weighted and Mondrian methods estimate the conditional spread to construct prediction intervals. The locally weighted approach models the Mean Absolute Deviance (MAD),  $\mathbb{E}[|g(\mathbf{X}) - Y||\mathbf{X}]$ , by regressing absolute residuals  $|g(\mathbf{x}) - y|$  on  $\mathbf{X}$  using the same model type as  $g(\mathbf{x})$ . Meanwhile, the Mondrian method partitions the feature space using a binning scheme (or taxonomy) based on an estimation of conditional variance  $\mathbb{V}[Y|\mathbf{X}]$ , generally obtained using ensemble-based variance, commonly derived from an additionally fitted Random Forest.

Visually, both baseline methods outperform regression split, providing adaptive prediction intervals that widen in regions with high aleatoric uncertainty and narrow in regions with low aleatoric uncertainty. However, both methods struggle to generate wider intervals in data-sparse regions, such as  $x \in (1.5, 2)$  and  $x \in (7, 8)$ . This limitation arises because these regions have low spread estimates due to insufficient data, leading to underestimated cutoffs. In contrast, EPICSCORE offers widened predictive intervals in these regions, better capturing epistemic uncertainty, while still accurately representing uncertainty in data-rich areas.

#### A.2 CLASSIFICATION

For the image classification example (introduced in Figure 2), we used the publicly available CIFAR-100 dataset [Krizhevsky et al., 2009], which consists of 60,000 color images of size  $32 \times 32$  spanning 100 classes, with each class containing 600 images. The dataset was split into training, calibration, and test sets, allocating 10% for testing and 45% each for training

and calibration. We utilized a ResNet-34 model [He et al., 2016] to extract 512-dimensional feature representations and trained a Random Forest classifier on the training set with default parameters except for the number of trees, which we fixed at 300. The classifier reports an accuracy of 47% in the test set. The Adaptive Prediction Set and EPICSCORE were then applied to the calibration set, using the MDN MC-dropout variant of EPICSCORE, which model's architecture is better detailed in C.2.

In the classification setting, EPICSCORE includes an alternative adaptation to handle the discrete nature of the conformal score (see Section 2.2.1 for details). However, it can also be applied similarly to the regression and quantile regression settings by treating the conformal score as continuous, fitting a predictive distribution, and deriving adaptive cutoffs. This approach involves normalizing the score to better leverage the chosen models. Given the large number of classes in CIFAR-100, this approximation remains valid, as it produces more fine-grained probability vectors. In this example, we adopt this formulation of EPICSCORE, using the APS score as the conformal score and deriving adaptive thresholds from its fitted predictive distribution.

To provide both a broad and detailed performance comparison, we first assess each method's coverage and set size using the size-stratified coverage (SSC) metric [Angelopoulos and Bates, 2021]. Next, we examine and visualize the prediction set sizes for the top 150 outliers and inliers, evaluating how well each method captures epistemic uncertainty in outliers while remaining adaptive for inliers. For illustration purposes, we set  $\alpha = 0.2$  across all analyses.

#### SSC metric

The SSC metric aims to evaluate the calibration of prediction sets by stratifying them into G bins  $\{B_j\}_{j=1}^G$  based on their cardinality. For j < G, the bin  $B_j$  contains the prediction sets with cardinality j, while  $B_G$  includes all sets with at least G elements. Formally, let  $I_j = \{i : R(\mathbf{X}_i) \in B_j\}$  denote the indices of prediction sets that fall into bin  $B_j$ . The SSC metric for a given prediction set method  $R(\cdot)$  is then defined as:

$$SSC(R) = \min_{j \in \{1, \dots, G\}} \frac{1}{|I_j|} \sum_{i \in I_j} \mathbb{I} \{Y_i \in R(\mathbf{X}_i)\} . \tag{4}$$

Intuitively, this metric measures the minimum coverage of  $R(\cdot)$  across different set sizes, assessing whether coverage remains stable despite changes in set cardinality. SSC values close to  $1-\alpha$  indicate strong coverage performance, while values farther from  $1-\alpha$  suggest greater violations of conditional coverage [Angelopoulos and Bates, 2021]. For this analysis, we set G=15. Table 3 reports the SSC average values and 2 times the standard error across 10 runs for both methods.

Table 3: Average SSC metric over 10 runs, with twice the standard deviation in brackets. EPICSCORE achieves SSC values closer to the nominal level compared to APS.

Method	SSC	2 * SE
EPICSCORE-MDN	0.734	0.014
APS	0.553	0.036

These results show that EPICSCORE-MDN achieves an SSC much closer to the nominal level of 0.8 than APS, indicating more consistent coverage across different set sizes. In contrast, APS has a lower average SSC, reflecting greater deviations from the target coverage and potentially less reliable uncertainty quantification.

## Outlier and inlier analysis

To differentiate inliers from outliers for further analysis and comparison of each method's prediction sets, we first apply t-SNE [Van der Maaten and Hinton, 2008] to reduce the dimensionality of the feature space in the test set. We then use the Local Outlier Factor (LOF) method [Breunig et al., 2000] for outlier detection, leveraging a KNN-based density estimation to identify anomalies. The LOF score not only highlights outliers but also helps characterize typical (inlier) observations, offering a structured approach to assessing epistemic uncertainty across different regions of the data distribution. We fit LOF on the first two t-SNE dimensions, assuming a contamination rate of 10% of the sample is contaminated (i.e., treating 10% of the sample as outliers), and rank the top 150 outliers and inliers for analysis.

In general, we expect outliers to have wider prediction sets, as they are located in sparser regions of the feature space. In contrast, inliers are likely to have narrower sets, reflecting their position in denser, more typical regions of the data distribution. Beyond Figure 2, Figures 4 and 5 provide additional examples that further illustrate this behavior, emphasizing how EPICSCORE differentiates itself from APS. Additionally, Figure 6 displays the distribution of set sizes for outliers and inliers across both methods. While both methods generate larger prediction sets for outliers than for inliers, EPICSCORE shows higher set sizes and a more dispersed distribution for outliers compared to APS, while presenting a more concentrated distribution for inliers.

Furthermore, we observe that the APS set sizes do not exceed a cardinality of 20, highlighting its lack of adaptability. Overall, these results reinforce the flexibility of our method across regions with varying levels of epistemic uncertainty, showcasing its advantage over the standard APS by explicitly incorporating epistemic uncertainty into the cutoff derivation.



Figure 4: Additional outlier image prediction sets examples. EPICSCORE consistently produces broader prediction sets for all selected outlier images, effectively capturing the high epistemic uncertainty associated with these observations.

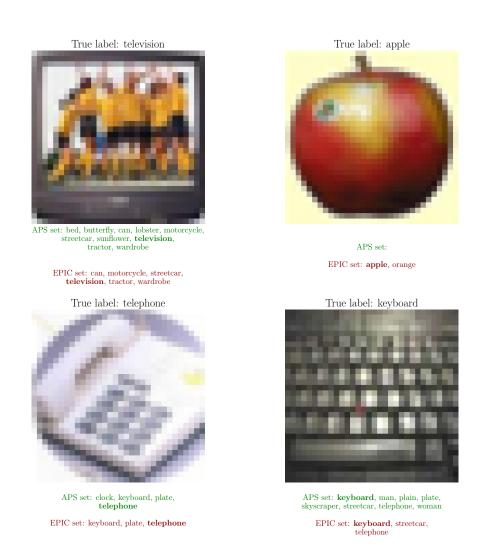


Figure 5: Additional inlier prediction sets examples. EPICSCORE generates more compact prediction sets for all selected inliers while also preventing empty sets in one instance. This highlights its robustness and reliability in regions with low epistemic uncertainty.

## B ADDITIONAL RESULTS AND DETAILS FOR REAL DATA EXPERIMENTS

In this section, we provide an overview of the evaluation metrics, dataset summaries, and additional results for both quantile and standard regression experiments. Additionally, we outline the architecture and hyperparameter configurations for each base model.

## B.1 EVALUATION METRICS

Let  $R(\cdot)$  denote a generic prediction interval. Given a test set  $(\mathbf{X}_1, Y_1), (\mathbf{X}_2, Y_2), \dots, (\mathbf{X}_m, Y_m)$ , we evaluate performance using the following metrics:

• Average Marginal Coverage (AMC):

$$AMC = \frac{1}{m} \sum_{i=1}^{m} \mathbb{I}(Y_i \in R(\mathbf{X}_i)),$$

which is an estimate of the marginal coverage of R.

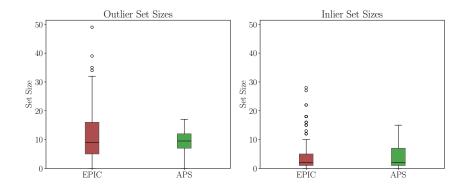


Figure 6: Left: Prediction set sizes for the top 150 most outlying observations. Right: Prediction set sizes for the top 150 most typical (inlier) observations. Both methods consistently produce larger prediction sets for outliers compared to inliers, but EPICSCORE shows a more dispersed boxplot with higher set sizes for outliers, and a more concentrated boxplot for inliers compared to APS.

• Average Interval Score Loss (AISL) [Gneiting and Raftery, 2007]:

$$\begin{aligned} \text{AISL} &= \frac{1}{m} \sum_{i=1}^{m} \left[ \left( \max \hat{R}(\mathbf{X}_{i}) - \min \hat{R}(\mathbf{X}_{i}) \right) \right. \\ &+ \frac{2}{\alpha} \cdot \left( \min \hat{R}(\mathbf{X}_{i}) - Y_{i} \right) \cdot \mathbb{I} \left\{ Y_{i} < \min \hat{R}(\mathbf{X}_{i}) \right\} \\ &+ \frac{2}{\alpha} \cdot \left( Y_{i} - \max \hat{R}(\mathbf{X}_{i}) \right) \cdot \mathbb{I} \left\{ Y_{i} > \max \hat{R}(\mathbf{X}_{i}) \right\} \right], \end{aligned}$$

where  $\min \hat{R}(\mathbf{X})$  and  $\max \hat{R}(\mathbf{X})$  represent the lower and upper bounds of the prediction interval, respectively, and  $\alpha$  is the miscalibration level. The Interval Score Loss balances two key objectives: maintaining narrow prediction intervals while penalizing those that fail to cover  $Y_i$ , with larger penalties for greater deviations. By averaging these scores across all instances, AISL provides a measure that prioritizes the shortest interval while ensuring sufficient coverage.

• Interval Length (IL):

$$IL = \frac{1}{m} \sum_{i=1}^{m} \max \hat{R}(\mathbf{X}_i) - \min \hat{R}(\mathbf{X}_i) ,$$

which measures the average interval length, reflecting the precision of the predictive intervals. Larger values correspond to wider, less informative intervals, while smaller values indicate more compact and precise intervals.

Pearson Correlation between Coverage and Interval Length (ρ) [Feldman et al., 2021]: This metric measures the
correlation between the width of the prediction interval and its coverage, providing insight into potential conditional
coverage violations. Specifically,

$$\rho = \left| \frac{\text{Cov}(\mathbf{C}, \mathbf{W})}{\sigma_{\mathbf{C}} \sigma_{\mathbf{W}}} \right|,$$

where  $\mathbf{C} = (C_1, \dots, C_m)$  represents a binary vector, with  $C_i = \mathbb{I}(Y_i \in R(\mathbf{X}_i))$  indicating whether the prediction interval  $R(\mathbf{X}_i)$  covers  $Y_i$ , and  $\mathbf{W} = (W_1, \dots, W_m)$ , where  $W_i = \max \hat{R}(\mathbf{X}_i) - \min \hat{R}(\mathbf{X}_i)$ . A strong correlation between coverage and interval width suggests a potential violation of conditional coverage, which requires their independence [Feldman et al., 2021]. However,  $\rho = 0$  does not guarantee conditional coverage, as non-adaptive methods like regression split can achieve zero correlation by maintaining constant-width intervals [Rossellini et al., 2024]. Thus, while this metric provides a useful proxy for assessing conditional coverage, it is not a definitive measure.

## **B.2 ADDITIONAL RESULTS**

The dataset details are provided in Table 4. The evaluation results for quantile regression are summarized in Tables 5, 6, and 7, while the corresponding results for standard regression are presented in Tables 8, 9, and 10.

Table 4: Summary of the datasets used in this paper, including the number of samples (n), features (p), and access links.

Dataset	n	p	Source	Dataset	n	р	Source
Airfoil	1503	5	Airfoil (UCI)	Protein	45730	8	Protein (UCI)
Bike	10885	12	Bike (Kaggle)	Star	2161	48	Star (Harvard Dataverse)
Concrete	1030	8	Concrete (UCI)	SuperConductivity	21263	81	Superconductivity (UCI)
Cycle	9568	4	Cycle (UCI)	Wave Energy Converter	54000	49	WEC (UCI)
Homes	21613	17	Home (Kaggle)	Winered	4898	11	Wine red (UCI)
Eletric	10000	12	Electric (UCI)	WineWhite	1599	11	Wine white (UCI)
Meps19	15781	141	Meps19 (AHRQ site))				

Table 5: Quantile regression Mean Average Coverage values across different methods and datasets. The reported values represent the average over 50 runs, with two times the standard deviation in parentheses. As expected for conformal methods, all approaches achieve marginal coverage close to the nominal level of 0.9

Dataset	EPIC-BART	EPIC-GP	EPIC-MDN	CQR	CQR-r	UACQR-P	UACQR-S
airfoil	0.9 (0.008)	0.9 (0.01)	0.896 (0.01)	0.901 (0.007)	0.901 (0.007)	0.907 (0.009)	0.9 (0.007)
bike	0.9 (0.003)	0.898 (0.003)	0.899 (0.003)	0.899 (0.002)	0.899 (0.002)	0.9 (0.002)	0.9 (0.002)
concrete	0.905 (0.008)	0.9 (0.009)	0.898 (0.01)	0.897 (0.007)	0.897 (0.007)	0.914 (0.012)	0.895 (0.007)
cycle	0.899 (0.003)	0.9 (0.003)	0.898 (0.004)	0.901 (0.003)	0.902 (0.003)	0.901 (0.002)	0.9 (0.002)
electric	0.9 (0.003)	0.901 (0.003)	0.902 (0.004)	0.901 (0.002)	0.901 (0.002)	0.901 (0.002)	0.901 (0.002)
homes	0.902 (0.003)	0.902 (0.003)	0.9 (0.003)	0.901 (0.002)	0.901 (0.002)	0.901 (0.002)	0.901 (0.002)
meps19	0.9 (0.003)	0.9 (0.003)	0.9 (0.003)	0.899 (0.002)	0.899 (0.002)	0.901 (0.002)	0.899 (0.002)
protein	0.897 (0.003)	0.897 (0.003)	0.897 (0.003)	0.9 (0.001)	0.9 (0.001)	0.901 (0.001)	0.9 (0.001)
star	0.902 (0.006)	0.902 (0.006)	0.903 (0.006)	0.902 (0.004)	0.901 (0.004)	0.93 (0.013)	0.902 (0.004)
superconductivity	0.898 (0.004)	0.898 (0.003)	0.898 (0.003)	0.9 (0.002)	0.9 (0.002)	0.9 (0.001)	0.9 (0.002)
WEC	0.897 (0.003)	0.899 (0.003)	0.897 (0.004)	0.9 (0.001)	0.9 (0.001)	0.899 (0.001)	0.9 (0.001)
winered	0.906 (0.008)	0.905 (0.008)	0.904 (0.007)	0.897 (0.006)	0.897 (0.006)	0.903 (0.009)	0.897 (0.006)
winewhite	0.901 (0.004)	0.9 (0.005)	0.9 (0.004)	0.898 (0.003)	0.898 (0.003)	0.908 (0.009)	0.898 (0.003)

#### **B.3 BASE MODEL HYPERPARAMETERS**

For the CatBoost quantile regression model [Dorogush et al., 2018], we set the number of iterations (trees) to 1,000 and the learning rate to 0.001, enabling early stopping after 50 rounds of no improvement. To mitigate overfitting even further, we limit each tree to a maximum depth of 6. All other parameters follow the default CatBoost settings. In the regression setting, we implemented a Neural Network with three hidden layers, consisting of 64, 32, and 16 neurons, respectively. Each layer utilizes ReLU activation, batch normalization [Ioffe and Szegedy, 2015], and dropout rates [Srivastava et al., 2014] of 0.2, 0.1, and 0.05, correspondingly. We train the model using a smooth L1 loss, as it provides a balance between mean absolute error (MAE) and mean squared error (MSE), making it more robust to outliers while maintaining stable gradient updates.

For optimization, we utilize the Adam optimizer [Kingma, 2014] with an initial learning rate of 0.01. A learning rate scheduler is incorporated to decrease the learning rate by a factor of 0.5 if there is no improvement after 10 epochs, accelerating convergence. All weights are initialized using Xavier normal initialization [Kumar, 2017]. We set aside 30% of the training data for validation and set a batch size of 35. Training proceeds for a maximum of 750 epochs, with early stopping triggered if there is no improvement on the validation set for 30 consecutive epochs. Additionally, feature scaling and target min-max normalization are applied to ensure stable training.

### C EPICSCORE COMPUTATIONAL DETAILS

This section outlines the specifications of each predictive model used within our framework.

## C.1 SPLITTING STRATEGY

When splitting the calibration set  $\mathcal{D}_{\text{cal}}$  for fitting the predictive model and deriving EPICSCORE's adaptive cutoffs in disjunct data subsets, we prioritize allocating the majority of data to model training, as cutoff derivation primarily involves a simpler quantile computation. Specifically, for small with  $n \leq 3000$ , we reserve 30% of the calibration samples for cutoff computation. For larger datasets, this allocation is capped at 1000 samples to maintain computational efficiency. This approach ensures that EPICSCORE achieves both accurate predictive distribution estimates and well-calibrated cutoffs.

Table 6: Quantile regression Interval Length values across different methods and datasets. The reported values represent the average over 50 runs, with two times the standard deviation in parentheses. Bolded values indicate the best-performing method within a 95% confidence interval. Overall, EPICSCORE consistently produces narrower intervals in most cases.

Dataset	EPIC-BART	EPIC-GP	EPIC-MDN	CQR	CQR-r	UACQR-P	UACQR-S
airfoil	16.521 (0.18)	16.395 (0.237)	16.02 (0.222)	17.087 (0.127)	17.09 (0.124)	18.838 (0.367)	16.656 (0.386)
bike $\times (10^1)$	37.042 (0.190)	38.413 (0.229)	36.250 (0.218)	41.164 (0.150)	41.125 (0.153)	43.627 (0.591)	37.415 (0.386)
concrete	36.537 (0.375)	38.328 (0.618)	37.614 (0.651)	39.477 (0.353)	39.486 (0.36)	44.425 (1.307)	39.853 (1.536)
cycle	30.975 (0.128)	31.587 (0.132)	30.714 (0.146)	35.235 (0.095)	35.346 (0.093)	38.292 (0.195)	31.045 (0.207)
electric	0.088 (0.001)	0.084 (0.001)	0.072 (0.001)	0.09 (0.001)	0.09 (0.001)	0.097 (0.001)	0.084 (0.001)
homes $\times (10^5)$	5.888 (0.028)	5.739 (0.028)	5.816 (0.040)	6.313 (0.024)	6.259 (0.024)	6.750 (0.0302)	5.312 (0.0309)
meps19	32.996 (0.314)	29.268 (0.262)	29.16 (0.266)	28.948 (0.249)	28.949 (0.249)	27.857 (0.314)	32.763 (0.815)
protein	16.195 (0.039)	16.485 (0.052)	16.048 (0.034)	16.378 (0.011)	16.378 (0.011)	16.797 (0.019)	16.356 (0.017)
$star \times (10^1)$	81.851 (1.029)	81.760 (1.042)	82.050 (1.083)	81.359 (0.508)	81.396 (0.5117)	82.521 (0.618)	83.253 (0.952)
superconductivity	66.906 (0.205)	70.631 (0.366)	64.805 (0.197)	69.51 (0.144)	69.482 (0.145)	78.478 (0.7)	67.046 (0.492)
WEC $\times (10^5)$	2.401 (0.0111)	2.076 (0.011)	1.890 (0.009)	2.708 (0.004)	2.709 (0.004)	2.843 (0.008)	2.547 (0.007)
winered	2.098 (0.034)	2.096 (0.035)	2.11 (0.031)	1.906 (0.011)	1.902 (0.01)	2.031 (0.025)	2.077 (0.042)
winewhite	2.31 (0.017)	2.212 (0.029)	2.253 (0.016)	2.12 (0.006)	2.121 (0.006)	2.124 (0.012)	2.222 (0.017)

Table 7: Quantile regression Pearson correlation values across different methods and datasets. The reported values represent the average over 50 runs, with two times the standard deviation in parentheses. Bolded values indicate the best-performing method within a 95% confidence interval. Overall, EPICSCORE exhibits low correlation in most cases, reflecting strong conditional coverage performance.

Dataset	EPIC-BART	EPIC-GP	EPIC-MDN	CQR	CQR-r	UACQR-P	UACQR-S
airfoil	0.06 (0.013)	0.18 (0.016)	0.071 (0.016)	0.125 (0.017)	0.129 (0.017)	0.132 (0.033)	0.108 (0.02)
bike	0.171 (0.013)	0.138 (0.013)	0.213 (0.012)	0.062 (0.013)	0.069 (0.013)	0.108 (0.016)	0.091 (0.012)
concrete	0.101 (0.021)	0.147 (0.02)	0.068 (0.013)	0.081 (0.017)	0.082 (0.017)	0.121 (0.034)	0.088 (0.02)
cycle	0.046 (0.008)	0.045 (0.009)	0.085 (0.01)	0.27 (0.011)	0.292 (0.011)	0.255 (0.011)	0.192 (0.012)
electric	0.023 (0.006)	0.044 (0.009)	0.159 (0.008)	0.075 (0.006)	0.071 (0.006)	0.123 (0.01)	0.134 (0.008)
homes	0.122 (0.007)	0.143 (0.01)	0.048 (0.008)	0.126 (0.008)	0.15 (0.007)	0.271 (0.008)	0.221 (0.007)
meps19	0.017 (0.004)	0.084 (0.01)	0.069 (0.009)	0.08 (0.006)	0.08 (0.006)	0.128 (0.006)	0.051 (0.006)
protein	0.031 (0.004)	0.15 (0.01)	0.073 (0.004)	0.094 (0.003)	0.094 (0.003)	0.116 (0.004)	0.094 (0.004)
star	0.07 (0.012)	0.042 (0.009)	0.085 (0.012)	0.046 (0.009)	0.047 (0.01)	0.048 (0.011)	0.041 (0.009)
superconductivity	0.167 (0.006)	0.217 (0.008)	0.034 (0.007)	0.069 (0.007)	0.073 (0.006)	0.137 (0.008)	0.088 (0.005)
WEC	0.122 (0.004)	0.119 (0.006)	0.149 (0.005)	0.136 (0.005)	0.147 (0.005)	0.13 (0.007)	0.132 (0.005)
winered	0.062 (0.013)	0.085 (0.016)	0.058 (0.011)	0.113 (0.015)	0.114 (0.016)	0.097 (0.019)	0.076 (0.016)
winewhite	0.068 (0.016)	0.13 (0.016)	0.072 (0.012)	0.147 (0.011)	0.147 (0.011)	0.156 (0.014)	0.099 (0.011)

#### C.2 MDN MC-DROPOUT DETAILS

The employed Mixture Density Network (MDN) consists of 2 hidden layers, each with 64 neurons, ReLU activations, and batch normalization [Ioffe and Szegedy, 2015] to enhance training stability. The output layer predicts three parameters for each mixture component  $k = \{1, \ldots, K\}$ : membership probability  $\pi_k(\cdot)$ , the mixture mean  $\mu_k(\cdot)$  and the mixture variance  $\sigma_k^2(\cdot)$ . We set the number of components to K = 3, outputting 9 parameters. The network is trained using the negative log-likelihood loss, applying a softmax activation to the mixture probabilities and a softplus activation to the variance estimates.

Optimization relies on the Adam optimizer [Kingma, 2014] with a learning rate of 0.001 and a step learning rate scheduler that decays by 0.99 every 5 epochs. To model epistemic uncertainty, we incorporate MC dropout [Gal and Ghahramani, 2016], applying a dropout rate of 0.5 to each hidden layer. All weights are initialized using PyTorch's default settings. To monitor generalization performance, we reserve 30% of the training data exclusively for validation. The model is trained for up to 2,000 epochs, with early stopping triggered after 50 epochs of no improvement on the validation set to prevent overfitting. Additionally, we apply feature scaling and target normalization to enhance numerical stability and improve parameter estimation.

Batch size selection is dataset-dependent: 40 for small datasets (n < 10000), 125 for medium datasets (n < 50000), and 250 for large-scaled datasets, such as WEC. For the image experiment, we introduce an additional hidden layer with 32 neurons and maintain a dropout rate of 0.5, while adjusting the batch size to 135. To compute the predictive CDF  $F(s(\mathbf{X},Y)|\mathbf{X},D)$  at  $\mathbf{X}=\mathbf{x}$ , we generate 500 samples of the mixture parameters using MC dropout forward passes. For each sampled mixture parameter set, score samples are drawn from the Gaussian Mixture Model. The final predictive CDF is obtained by computing the empirical distribution of  $s(\mathbf{X},Y)$  over these score samples.

Table 8: Regression Mean Average Coverage values across different methods and datasets. The reported values represent the average over 50 runs, with two times the standard deviation in parentheses. As expected for conformal methods, all approaches maintain marginal coverage close to the nominal level of 0.9.

Dataset	EPIC-BART	EPIC-GP	EPIC-MDN	Mondrian	Reg-split	Weighted
airfoil	0.897 (0.01)	0.9 (0.008)	0.897 (0.009)	0.906 (0.006)	0.897 (0.007)	0.9 (0.007)
bike	0.901 (0.003)	0.903 (0.003)	0.898 (0.003)	0.904 (0.002)	0.899 (0.002)	0.9 (0.002)
concrete	0.897 (0.009)	0.902 (0.011)	0.907 (0.009)	0.929 (0.006)	0.901 (0.008)	0.896 (0.008)
cycle	0.898 (0.004)	0.9 (0.004)	0.896 (0.004)	0.905 (0.003)	0.898 (0.003)	0.9 (0.002)
electric	0.899 (0.003)	0.9 (0.003)	0.896 (0.003)	0.905 (0.002)	0.899 (0.003)	0.901 (0.003)
homes	0.9 (0.003)	0.899 (0.003)	0.9 (0.004)	0.902 (0.002)	0.901 (0.002)	0.9 (0.002)
meps19	0.899 (0.003)	0.9 (0.003)	0.897 (0.003)	0.902 (0.006)	0.9 (0.002)	0.9 (0.002)
protein	0.9 (0.003)	0.901 (0.003)	0.899 (0.002)	0.9 (0.001)	0.9 (0.001)	0.899 (0.001)
star	0.903 (0.005)	0.9 (0.006)	0.906 (0.006)	0.913 (0.005)	0.903 (0.004)	0.9 (0.004)
superconductivity	0.901 (0.003)	0.901 (0.003)	0.9 (0.004)	0.901 (0.002)	0.899 (0.002)	0.899 (0.002)
WEC	0.901 (0.002)	0.898 (0.003)	0.899 (0.003)	0.9 (0.001)	0.899 (0.001)	0.9 (0.001)
winered	0.898 (0.009)	0.9 (0.008)	0.895 (0.008)	0.91 (0.005)	0.903 (0.006)	0.895 (0.005)
winewhite	0.902 (0.004)	0.904 (0.004)	0.901 (0.004)	0.911 (0.003)	0.9 (0.004)	0.899 (0.003)

Table 9: Regression Interval length values across different methods and datasets. The reported values represent the average over 50 runs, with two times the standard deviation in parentheses. Bold values indicate the best-performing method within a 95% confidence interval. In general, our framework produces narrower intervals in most datasets.

Dataset	EPIC-BART	EPIC-GP	EPIC-MDN	Mondrian	Reg-split	Weighted
airfoil	15.099 (0.592)	15.223 (0.591)	15.089 (0.56)	16.671 (0.632)	15.325 (0.469)	15.693 (0.521)
bike $\times (10^1)$	24.910 (0.302)	26.616 (0.333)	25.665 (0.338)	27.263 (0.264)	27.634 (0.271)	25.865 (0.249)
concrete	39.025 (1.49)	39.44 (1.575)	40.475 (1.551)	51.284 (1.904)	39.943 (1.204)	43.053 (1.629)
cycle	14.911 (0.183)	14.851 (0.199)	14.712 (0.174)	15.015 (0.164)	14.855 (0.159)	14.833 (0.15)
electric	0.036 (<0.001)	0.037 (<0.001)	0.036 (<0.001)	0.038 (<0.001)	0.037 (<0.001)	0.037 (<0.001)
homes $\times (10^5)$	3.848 (0.043)	3.758 (0.049)	4.040 (0.059)	4.235 (0.037)	4.014 (0.033)	3.984 (0.032)
meps19	25.013 (0.87)	26.605 (0.774)	32.093 (1.446)	38.904 (1.039)	28.899 (0.544)	29.555 (0.843)
protein	14.572 (0.106)	14.311 (0.12)	13.573 (0.103)	14.102 (0.038)	15.261 (0.037)	13.692 (0.037)
$star \times (10^1)$	85.3 (1.015)	85.148 (1.326)	86.499 (1.288)	90.539 (0.762)	85.230 (0.792)	104.202 (1.306)
superconductivity	39.13 (0.419)	39.283 (0.479)	39.547 (0.5)	42.204 (0.216)	46.14 (0.242)	40.115 (0.228)
WEC $\times (10^5)$	0.893 (0.011)	0.858(0.011)	0.900 (0.012)	0.903 (0.004)	0.925 (0.006)	0.879 (0.006)
winered	2.361 (0.065)	2.37 (0.067)	2.316 (0.054)	2.576 (0.04)	2.39 (0.037)	2.541 (0.051)
winewhite	2.337 (0.032)	2.4 (0.032)	2.356 (0.031)	2.445 (0.013)	2.361 (0.014)	2.387 (0.015)

#### C.3 VARIATIONAL GP DETAILS

For the Variational Gaussian Process (GP), we implement the model using the *gpytorch* package [Gardner et al., 2018] and PyTorch. We first define the GP prior with a constant mean function and an RBF kernel for the covariance. To approximate the posterior, we employ a Natural Variational Distribution [Salimbeni et al., 2018], using 15 inducing points for small datasets (n < 10000) and 50 for medium and large-scale data. Training is performed by minimizing the negative variational ELBO, where the Natural Gradient Descent [Salimbeni et al., 2018] updates the variational parameters, while the Adam optimizer [Kingma, 2014] refines the GP kernel and noise variance hyperparameters.

The model is trained for up to 2000 epochs, with early stopping triggered after 50 epochs of no improvement. Following the MDN predictive model, we reserve 30% of the training data exclusively for validation and adopt an adaptive batch size of 40 for small datasets (n < 10000), 125 for medium-sized datasets (n < 50000), and 250 for large datasets. To ensure numerical stability, we apply feature scaling and target normalization. Using the learned variational gaussian posterior, we easily derive the predictive CDF  $F(s(\mathbf{X}, Y)|\mathbf{X}, D)$  at  $\mathbf{X} = \mathbf{x}$  by using gaussian conjugacy.

#### C.4 BART DETAILS

For the Bayesian Additive Regression Tree (BART) model, we use the base implementation from *pymc3* [Quiroga et al., 2022] and adopt the heteroscedastic variant [Pratola et al., 2020]. The conformal scores are modeled as a normal distribution, where the mean is determined by the sum of regression trees, and the variance depends on **X**. We set the number of trees to

Table 10: Regression Pearson correlation values across different methods and datasets. The reported values represent the average over 50 runs, with two times the standard deviation in parentheses. Bold values indicate the best-performing method within a 95% confidence interval. The Pearson correlation for Regression Split is omitted, as its constant interval length results in an undefined correlation value. Overall, EPICSCORE achieves low correlations in most cases, indicating strong conditional coverage performance.

Dataset	EPIC-BART	EPIC-GP	EPIC-MDN	Mondrian	Weighted
airfoil	0.056 (0.013)	0.125 (0.018)	0.054 (0.012)	0.148 (0.017)	0.124 (0.016)
bike	0.164 (0.009)	0.172 (0.006)	0.054 (0.007)	0.028 (0.005)	0.043 (0.007)
concrete	0.064 (0.015)	0.116 (0.019)	0.054 (0.011)	0.191 (0.02)	0.211 (0.022)
cycle	0.022 (0.005)	0.075 (0.008)	0.023 (0.005)	0.043 (0.006)	0.025 (0.005)
electric	0.052 (0.007)	0.128 (0.009)	0.024 (0.005)	0.047 (0.007)	0.029 (0.006)
homes	0.135 (0.007)	0.19 (0.011)	0.019 (0.005)	0.016 (0.003)	0.038 (0.005)
meps19	0.17 (0.012)	0.183 (0.015)	0.034 (0.008)	0.022 (0.006)	0.053 (0.016)
protein	0.063 (0.003)	0.071 (0.005)	0.062 (0.003)	0.013 (0.003)	0.043 (0.005)
star	0.076 (0.012)	0.037 (0.01)	0.073 (0.01)	0.156 (0.012)	0.335 (0.016)
superconductivity	0.072 (0.006)	0.254 (0.005)	0.016 (0.004)	0.019 (0.004)	0.025 (0.006)
WEC	0.012 (0.002)	0.115 (0.004)	0.21 (0.007)	0.009 (0.002)	0.059 (0.007)
winered	0.05 (0.01)	0.119 (0.016)	0.042 (0.009)	0.153 (0.018)	0.221 (0.019)
winewhite	0.035 (0.007)	0.079 (0.011)	0.025 (0.005)	0.055 (0.009)	0.092 (0.011)

100, while keeping the prior hyperparameters at their default values in *pymc3*. Target normalization is applied to enhance numerical stability and improve posterior estimation.

After obtaining BART posterior samples via MCMC [Chipman et al., 2012], we derive the predictive CDF  $F(S(\mathbf{X},Y)|\mathbf{X},D)$  for a given  $\mathbf{X}=\mathbf{x}$  by simulating scores from the postulated distribution using the posterior samples. The corresponding empirical CDF for the score  $S(\mathbf{X},Y)$  is then computed. In the regression example presented in Figure 1 and detailed in Appendix A.1, we used a modified version of BART. In this version, a heteroscedastic gamma distribution was assigned to the score instead of a normal distribution, which was necessary to account for the asymmetry in the regression conformal scores for that example.

## **D** PROOFS

*Proof of Theorem 1.* Follows immediately from the fact that EPICSCORE is a conformal score and Lei et al. [2018, Theorem 2].  $\Box$ 

Proof of Theorem 2. Let  $t'_{1-\alpha}$  be the empirical quantile obtained using  $s'(\mathbf{x},y) = F(s(\mathbf{x},y)|\mathbf{x},D)$ , and let  $t''_{1-\alpha}$  be the empirical quantile obtained using  $s''(\mathbf{x},y) = F(s(\mathbf{x},y)|\mathbf{x},\theta^*)$ .

By Assumption 1, for any  $\varepsilon, \delta > 0$ , if the calibration set is sufficiently large, then with probability at least  $1 - \delta$  (for some event  $\Omega$ ), we have

$$\sup_{s,\mathbf{x}} |F(s \mid \mathbf{x}, D) - F(s \mid \mathbf{x}, \theta^*)| \le \varepsilon,$$

where the randomness is over D.

Let  $\hat{\mathbb{P}}$  denote the empirical probability measure based on  $\mathcal{D}_{\operatorname{cal},2}$ , i.e., for a given event A and any function g:

$$\hat{\mathbb{P}}(g(s) \in A) = \frac{1}{|\mathcal{D}_{\operatorname{cal},2}|} \sum_{(\mathbf{X}_i,Y_i) \in \mathcal{D}_{\operatorname{cal},2}} \mathbf{1}(g(s(\mathbf{X}_i,Y_i)) \in A).$$

Conditionally on the event  $\Omega$ , we obtain:

$$1 - \alpha \le \hat{\mathbb{P}}(F(s|\mathbf{x}, D) \le t'_{1-\alpha})$$
  
 
$$\le \hat{\mathbb{P}}(F(s|\mathbf{x}, \theta^*) - \varepsilon \le t'_{1-\alpha}),$$

which, by the definition of the empirical quantile, implies that

$$t_{1-\alpha}^{"} \leq t_{1-\alpha}^{'} + \varepsilon$$
.

By a similar argument, we also have:

$$1 - \alpha \le \hat{\mathbb{P}}(F(s|\mathbf{x}, \theta^*) \le t_{1-\alpha}'')$$
  
$$\le \hat{\mathbb{P}}(F(s|\mathbf{x}, D) - \varepsilon \le t_{1-\alpha}'').$$

Therefore, under the event  $\Omega$  of probability at least  $1 - \delta$ , we conclude that

$$|t_{1-\alpha}' - t_{1-\alpha}''| \le \varepsilon.$$

Using this result and the fact that  $|F(s \mid \mathbf{x}, D) - F(s \mid \mathbf{x}, \theta^*)| \le \varepsilon$ , we establish the following bound:

$$\begin{split} \mathbb{P}(s'(\mathbf{X},Y) \leq t'_{1-\alpha}|\mathbf{X}) &\leq \mathbb{P}(s'(\mathbf{X},Y) \leq t'_{1-\alpha} \mid \mathbf{X},\Omega) \cdot 1 + \delta \\ &\leq \mathbb{P}(s'(\mathbf{X},Y) \leq t''_{1-\alpha} + \varepsilon \mid \mathbf{X},\Omega) + \delta \\ &\leq \mathbb{P}(s''(\mathbf{X},Y) - \varepsilon \leq t''_{1-\alpha} + \varepsilon \mid \mathbf{X},\Omega) + \delta \\ &= \mathbb{P}(s''(\mathbf{X},Y) \leq t''_{1-\alpha} + 2\varepsilon \mid \mathbf{X}) + \delta \\ &= t''_{1-\alpha} + 2\varepsilon + \delta. \end{split}$$

In the fourth equality, we used the fact that s''(x,y) is non-random and that  $t''_{1-\alpha}$  depends only on  $\mathcal{D}_{\operatorname{cal},2}$ , making it independent of  $\Omega$ . In the last equality, we used the fact that the random variable  $s''(\mathbf{X},Y)|\mathbf{X}$  is uniform.

By a similar argument, we can show that:

$$|\mathbb{P}(s'(\mathbf{X}, Y) \le t'_{1-\alpha}|\mathbf{X}) - t''_{1-\alpha}| \le 2\varepsilon + \delta.$$

Thus, as  $|\mathcal{D}_{\text{cal},1}| \to \infty$ , we can take  $\varepsilon, \delta \to 0$ , which implies that

$$\lim_{|\mathcal{D}_{\mathrm{cal},1}| \to \infty} \mathbb{P}(s'(\mathbf{X},Y) \le t'_{1-\alpha}|\mathbf{X}) = t''_{1-\alpha}.$$

Finally, by [Dheur et al., 2025, Lemma 2, Section D.2.2], we know that as  $|\mathcal{D}_{\text{cal},2}| \to \infty$ , we have  $t''_{1-\alpha} \to 1-\alpha$ , which concludes the proof.