

Principled Data Selection for Alignment: The Hidden Risks of Difficult Examples

Chengqian Gao¹ Haonan Li¹ Liu Liu² Zeke Xie³ Peilin Zhao² Zhiqiang Xu²

Abstract

The alignment of large language models (LLMs) often assumes that using more clean data yields better outcomes, overlooking the match between model capacity and example difficulty. Challenging this, we propose a new principle: “*Preference data vary in difficulty, and overly difficult examples hinder alignment, by exceeding the model’s capacity.*” Through systematic experimentation, we validate this principle with three key findings: (1) preference examples vary in difficulty, as evidenced by consistent learning orders across alignment runs; (2) overly difficult examples significantly degrade performance across four LLMs and two datasets; and (3) the capacity of a model dictates its threshold for handling difficult examples, underscoring a critical relationship between data selection and model capacity. Building on this principle, we introduce *Selective DPO*, which filters out overly difficult examples. This simple adjustment improves alignment performance by 9-16% in win rates on the AlpacaEval 2 benchmark compared to the DPO baseline, suppressing a series of DPO variants with different algorithmic adjustments. Together, these results illuminate the importance of aligning data difficulty with model capacity, offering a transformative perspective for improving alignment strategies in LLMs.¹

1. Introduction

Data selection focuses on identifying the most valuable subset of data from a dataset while excluding ineffective samples (Albalak et al., 2024). It significantly improves the first two stages of training large language models (LLMs): pre-training (Lee et al., 2021; Penedo et al., 2023; Tang et al., 2024) and supervised fine-tuning (SFT) (Cao et al., 2023; Qin et al., 2024; Zhou et al., 2023), by adhering to well-established principles. However, in the third stage, *i.e.*, preference alignment, data selection principles are often *implicit and superficial*, potentially limiting the alignment between LLM outputs and human preferences (Askell et al.,

¹Code is available at <https://github.com/glogrgao/SelectiveDPO>.

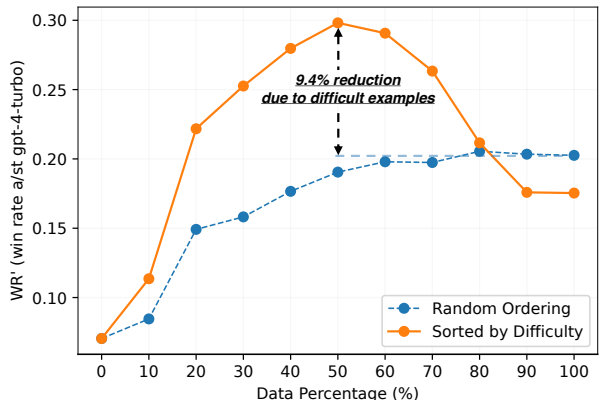


Figure 1: **Overly difficult examples hinder the alignment.** Training on difficult examples, identified by high *validation loss*, adversely affects alignment and decreases overall performance by 9.4% in win rate. The results are from experiments with four SFT models on the *UltraFeedback-binarized* dataset, *i.e.*, Figure 3.

2021; Weidinger et al., 2021).

Prior studies in alignment underscore the importance of selecting error-free data by demonstrating the presence and negative impacts of mislabeled data (Wang et al., 2024a; Gao et al., 2024), noisy feedback (Mitchell, 2023; Chowdhury et al., 2024), and data with low annotator agreement (Argilla, 2024). Those practices implicitly assume that all error-free data are beneficial for alignment regardless of the model’s capacity. However, we argue this assumption overlooks the relationship between data difficulty and model capacity. Our experiments show that overly difficult examples not only fail to improve alignment but can actually hinder the performance (see Figure 1). This observation motivates our systematic investigation into how example difficulty affects alignment performance.

Our main contribution is a new principle for preference data selection, which emphasizes the match between model capacity and example difficulty:

Preference data vary in difficulty, and overly difficult examples hinder alignment, by exceeding the model’s capacity.

This principle has three key claims: (1) preference data can be categorized by difficulty levels, (2) overly difficult ex-

amples can harm alignment performance, and (3) difficulty is relative to the model’s capacity—larger models, with greater capacity, can benefit from more difficult examples. We validate this principle through systematic experiments. Specifically:

Preference examples vary in difficulty level (Section 3).

We show that, in DPO (Rafailov et al., 2024), the order in which testing examples are correctly classified by the implicit reward model is consistent across different runs and training data. This robust ordering reflects the existence of inherent example difficulties. Based on this observation, we use *validation loss* as a computational proxy to systematically identify and rank example difficulty.

Difficult examples hinder alignment (Section 4). We reveal that difficult examples—identified by high validation loss—significantly hinder alignment. Our experiments across two datasets and four pre-trained models show consistent performance drops when including these difficult examples. These challenging examples emerge naturally during data collection, rather than through artificial construction. This highlights the imperfections of the previous principle and calls for a new data selection principle for alignment tasks.

Difficult examples exceed the model’s capacity (Section 4). We demonstrate that example difficulty interacts directly with model capacity. Experiments with models of 3B, 8B, and 14B parameters show that larger models benefit from higher proportions of difficult examples, confirming that difficulty must be calibrated to the model’s capacity.

Filtering out overly difficult examples yields remarkably gains (Section 5 and 6). Finally, we validate our principle with a new method, *Selective DPO*, which filters out overly difficult examples. This approach achieves a 9–16% higher win rate on AlpacaEval 2 (Dubois et al., 2024) compared to standard DPO (Rafailov et al., 2024), outperforming state-of-the-art methods such as SimPO (Meng et al., 2024) and R-DPO (Park et al., 2024) while maintaining better perplexity and implicit reward margins.

2. Preliminaries

2.1. Preference Alignment with DPO

Preference alignment (Ouyang et al., 2022) aims to align the outputs of LLMs with human ethics and styles, ensuring that these models are safe, reliable, and effective for real-world applications (Christiano et al., 2017). In this study, we focus on direct preference optimization (DPO) (Rafailov et al., 2024), a method known for its simplicity and robust performance in alignment tasks (Dubey et al., 2024). DPO trains a policy model, π_θ , on a dataset \mathcal{D} containing prompt x , preferred response y_w , and rejected response y_l . The training objective incorporates a *reference SFT model*, π_{ref} ,

and a hyper-parameter, β , to control the divergence between π_θ and π_{ref} :

$$\mathcal{L}_{\text{DPO}}(\pi_\theta, \mathcal{D}) = -\mathbb{E}_{(x, y_w, y_l \sim \mathcal{D})} \left[\log \sigma \left(\beta \log \frac{\pi_\theta(y_w|x)}{\pi_{\text{ref}}(y_w|x)} - \beta \log \frac{\pi_\theta(y_l|x)}{\pi_{\text{ref}}(y_l|x)} \right) \right]. \quad (1)$$

2.2. Quantifying the Example Difficulty

Learned Step as a Measure of Difficulty. An example’s *learned step* is defined as the earliest training step after which the model reliably distinguishes preferred responses from rejected answers. This is formalized as:

$$\text{LS}(x, y_w, y_l) = \min_{t_{\text{lm}}} \left\{ t_{\text{lm}} \left| \beta \log \frac{\pi_{\theta_t}(y_w|x)}{\pi_{\text{ref}}(y_w|x)} - \beta \log \frac{\pi_{\theta_t}(y_l|x)}{\pi_{\text{ref}}(y_l|x)} > \delta, \forall t > t_{\text{lm}} \right. \right\}. \quad (2)$$

A similar metric has been explored by Wu et al. (2021). The difference is that we calculate Eq. (2) exclusively on *held-out examples*, ensuring it reflects intrinsic difficulty rather than the order of data presentation (Zhu et al., 2024a). Higher learned steps indicate more difficult examples. For all experiments, we set $\delta = 0.4$.

Validation Loss as an Alternative Difficulty Proxy. We borrow *validation loss* (Wu et al., 2021; Rampp et al., 2024) as a computationally cheaper alternative to the *learned step*. Specifically, for a specific example (x, y_w, y_l) from $\mathcal{D} \setminus \hat{\mathcal{D}}$, validation loss is defined as:

$$\text{VL}(x, y_w, y_l) = -\log \sigma \left(\beta \log \frac{\pi_{\hat{\theta}}(y_w|x)}{\pi_{\text{ref}}(y_w|x)} - \beta \log \frac{\pi_{\hat{\theta}}(y_l|x)}{\pi_{\text{ref}}(y_l|x)} \right), \quad (3)$$

where $\pi_{\hat{\theta}} = \arg \min_{\pi_\theta} \mathcal{L}_{\text{DPO}}(\pi_\theta, \hat{\mathcal{D}})$ is a *reference model* trained on the subset $\hat{\mathcal{D}} \subset \mathcal{D}$.² Low validation loss indicates easier examples. To compute validation loss, we partition \mathcal{D} equally into $\hat{\mathcal{D}}$ and $\mathcal{D} \setminus \hat{\mathcal{D}}$, train on one, evaluate on the other, averaging results over three runs.

3. Preference Examples Vary in Difficulty

One surprising finding here is that the order in which examples are learned is remarkably consistent across runs. Such robustness reveals the underlying presence of example difficulty. We then validate the effectiveness of validation loss as a measure of example difficulty for alignment tasks.

²Throughout this work, the term reference model ($\pi_{\hat{\theta}}$) refers to the aligned model trained on subsets of the training examples, while reference SFT model (π_{SFT}) specifically denotes the model defined in Eq. (1).

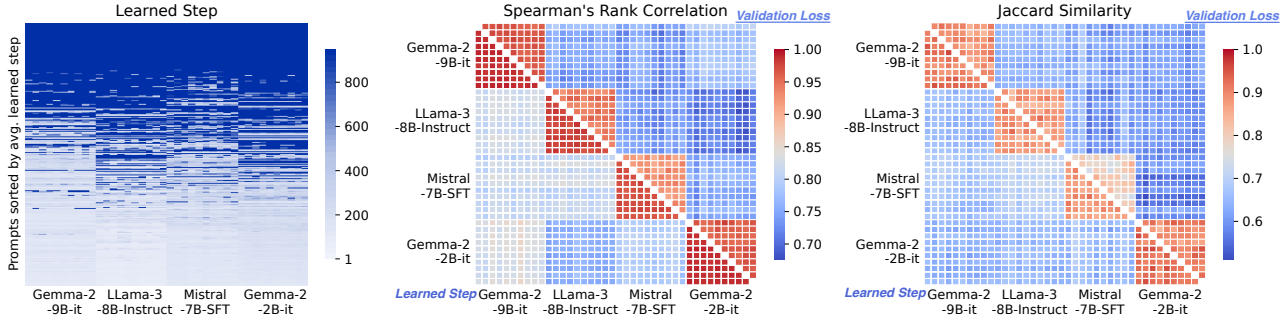


Figure 2: **Examples are learned in consistent orders across different runs of the same LLM**, despite variations in the training data and random seeds. *Left*: The learned step (ranging from 1 to 948) represents the step at which the implicit reward model distinguishes between preferred and rejected responses (see Eq. (2), threshold $\delta = 0.4$). X-axis: 40 unique combinations of model size (4 total) and training data subset (10 per model). Y-axis: 300 test examples, sorted by average learned step across 40 runs. Color gradients encodes difficulty. *Middle*: Two *Spearman's* rank correlation matrices. Lower triangle: correlations of learned step across runs; upper triangle: validation loss correlations. *Right*: Two *Jaccard* similarity matrices for difficult examples (top 50%) defined by learned step and validation loss across runs.

3.1. The Underlying Example Difficulty

While various metrics such as length (Spitkovsky et al., 2010; Tay et al., 2019; Nagatsuka et al., 2023) and perplexity (Wu et al., 2024) have been proposed to measure difficulty of text samples, their ability to reliably capture example difficulty remains controversial (Campos, 2021). We address this concern by demonstrating: (1) examples have distinct learned steps (see Eq.2), indicating different difficulty levels, and (2) these learned steps are consistent across runs with different training data and random seeds.

In Figure 2 (left), we visualize the learned steps of 300 test examples from *Ultrafeedback-binarized*³, where darker colors indicate more training steps needed for model comprehension. Results from 10 runs show consistent learning order across different models (Jiang et al., 2023; AI@Meta, 2024; Team et al., 2024) varying in size (2B–9B), training stage, and data sampling. This consistency confirms that examples vary in difficulty, allowing us to discuss difficult examples without debating various definitions of difficulty.

3.2. Validation Loss as a Proxy for Learned Step

The robust learning order suggests the existence of difficult examples—some examples are consistently harder for LLMs to understand. However, identifying these examples at scale is computationally expensive, as the computing of learned step requires evaluating the model after each gradient update. To address this, we adopt validation loss from the curriculum learning literature (Wu et al., 2021; Rampp et al., 2024) (see Eq(3)). Specifically, we train six reference models using the DPO objective on the randomly sampled

³https://huggingface.co/datasets/HuggingFaceH4/ultrachat_200k

half training set and evaluate the validation loss for examples on the other half. We refer the difficult examples to examples with large validation loss.

Definition 3.1 (Difficult example). A preference example (x, y_w, y_l) is considered a *difficult example* if its *validation loss* exceeds or equals a specified value:

$$VL(x, y_w, y_l) \geq Q(\tau).$$

Remark 3.2. We introduce a flexible threshold $Q(\tau)$, i.e., the τ -quantile of the validation loss distribution. This variability arises mainly from: (1) There is no formal definition of the easy and difficult samples (Zhu et al., 2024b), and (2) Different pre-train models have different training dynamics and thus different scales and distributions of validation loss.

To assess whether validation loss effectively approximates the learned step, we examine the correlation between difficulty rankings produced by these two measures. Using *Spearman's* rank correlation, we compared rankings across different runs and models. As shown in the middle panel of Figure 2, validation loss exhibits patterns remarkably similar to the learned step. Furthermore, the high correlation coefficients between average learned step and average validation loss across the four models (0.9258, 0.9227, 0.9336, and 0.9283) validate the effectiveness of validation loss as a computationally efficient proxy for learned step. Additionally, the *Jaccard similarity* between difficult example sets (defined as top 50% by either metric) remains consistently high for each model (Figure 2, right), confirming that both measures identify similar sets of difficult examples.

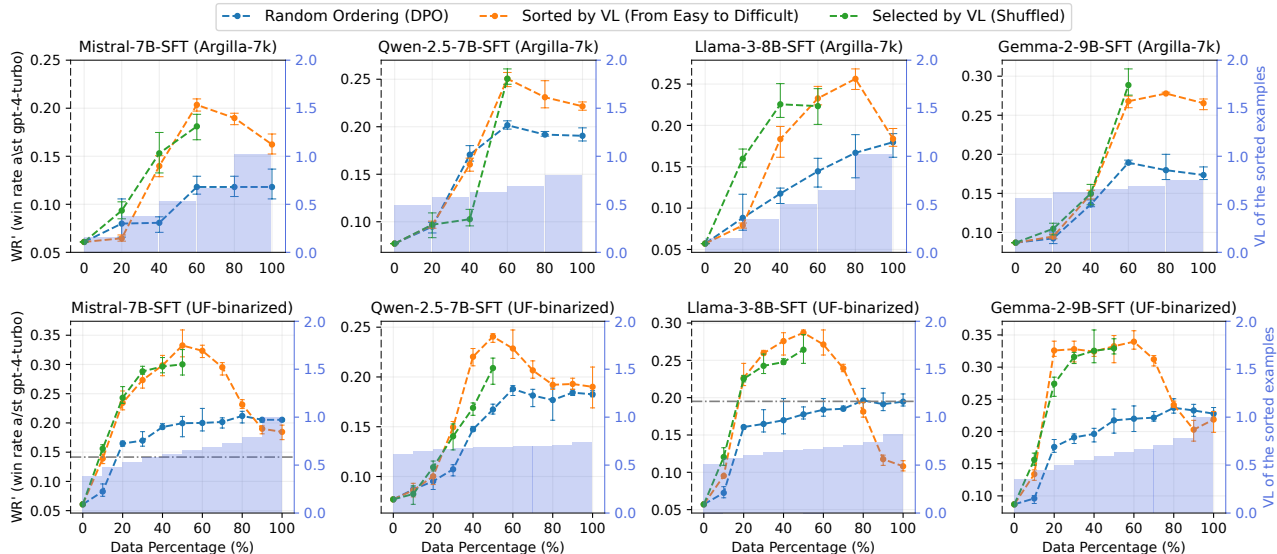


Figure 3: **Direct Preference Optimization (DPO) struggles with difficult examples, broadly and significantly.** We present the defined WR' evolution for four models trained on the *argilla-mix-dpo-7k* and *ultrafeedback-binarized* datasets. The results are based on checkpoints from three 1-epoch runs with different seeds. *Random Ordering (DPO)*: Training data are presented in a randomized sequence. *Sorted by VL (From Easy to Difficult)*: Training examples are ranked by their validation loss (VL) and presented from easy to difficult, following a curriculum learning approach. *Selected by VL (Shuffled)*: The easiest 60% (for Argilla-7K) or 50% (for UF-binarized) of the data is selected based on VL, and examples are sampled in a random order for training. The VL measurements are displayed as bar plots. We include evaluation results (dashed lines) from the two corresponding DPO models released by Meng et al. (2024) for reference.

4. Difficult Examples Hinder the Alignment

In this section, we first demonstrate that difficult examples significantly degrade alignment performance across various datasets and model scales. We then investigate the factors that contribute to their difficulty through a series of systematically designed empirical studies.

4.1. Investigation Setup

Models: We evaluate SFT models trained on the *UltraChat-200k* dataset: **Mistral-7B-SFT** (Jiang et al., 2023), **Qwen-2.5-7B-SFT** (Team, 2024), **Llama3-8B-SFT** (AI@Meta, 2024) and **Gemma-2-9B-SFT** (Team et al., 2024). We focus on SFT models as they better demonstrate the effects of alignment procedures (Meng et al., 2024).

Datasets: We use *UltraFeedback-binarized*, a widely adopted alignment dataset (Tunstall et al., 2023; Meng et al., 2024; Zhou et al., 2024; Pattnaik et al., 2024), and *Argilla-dpo-mix-7k*⁴, a small but high-quality dataset.

Hyper-parameters: Following prior work, we set $\beta = 0.01$ (Zhou et al., 2024). The learning rate is swept for DPO with random ordering and directly applied to DPO

⁴<https://huggingface.co/datasets/argilla/dpo-mix-7k>

with other settings. We conduct the alignment with one epoch following Meng et al. (2024).

Evaluation: We employ WR' , the win rate against *gpt-4-turbo* on 805 testing examples from *AlpacaEval 2* (Dubois et al., 2024) with *ArmoRM* (Wang et al., 2024b), a reward model with impressive performance on the Reward-Bench (Lambert et al., 2024), as the evaluator.

4.2. Difficult Examples Hinder Preference Alignment

As shown in Figure 3, training on difficult examples leads to significant performance declines. We compare three example-ordering strategies: (1) random ordering (standard DPO), (2) easy-to-difficult sorting by validation loss, and (3) random ordering with only easy examples. Despite using the same training recipes, models consistently perform better when trained on easier examples across all four architectures and both datasets. Notably, the benefits are mainly unlocked by excluding difficult examples rather than the ordering itself, as shown by the similar performance of sorted and shuffled easy examples (setting 2 and 3).

The performance drop from difficult examples is more pronounced in *Ultrafeedback-binarized*. This aligns the observation that *Ultrafeedback-binarized* contains mislabeled examples (Argilla, 2024; Bartolome et al., 2023) and *Argilla-*

dpo-mix-7k is characterized by high-quality data.

4.3. Difficult Examples Are Not Necessarily Data Errors

Before proposing our solution to filter out difficult and harmful examples, we here investigate their characters, ensuring their removal is justified. For statistics and case study on difficult examples, please refer to Appendix E and F.

Mislabeled data (Figure 4 (a)). Prior work suggests that difficult examples might be mislabeled (Argilla, 2024; Bartolome et al., 2023). To test this hypothesis, we sort the examples by their validation loss and flip the labels of last 40% (the most difficult) examples. However, this modification does not alleviate the performance drop, suggesting that label noise is not the primary cause.

Distribution shift (Figure 4 (b)). Another possibility is that difficult examples represent a distinct distribution, causing catastrophic forgetting when models transition from easy to difficult examples. We test this using ϵ -greedy sorting: each mini-batch contains ϵ portion of randomly sampled examples and $(1 - \epsilon)$ portion of examples sorted by validation loss. This ensures continuous exposure to both distributions, yet shows no improvement over the greedy sorting.

Learning rate sensitivity (Figure 4 (c)). We argue that the performance drop is not caused by simply the improper learning rate. We investigate this by varying the learning rate. However, adjusting the learning rate neither alleviates performance drops nor delays the decline, demonstrating that the issue is unrelated to improper optimization settings.

4.4. Difficult Example Exceeds Model’s Capacity

We hypothesize that difficult examples represent tasks beyond the model’s current capabilities, requiring larger models to properly understand the nuanced preference differences. To validate this hypothesis, we conduct experiments using Qwen-2.5 models (Team, 2024) of three sizes: 3B, 7B, and 14B. The dataset is *Argilla-dpo-mix-7k*. Figure 5 shows a clear relationship between model size and manageable example difficulty: the optimal percentage of training data (the *sweet spot*) increases from 64% for the 3B model to 81% for the 14B model. This scaling pattern demonstrates that larger models can effectively learn from more difficult examples, confirming the direct relationship between model capacity and example difficulty threshold.

5. Selective DPO

Having verified the three key claims underpinning our data selection principle, we are now well-positioned to propose an instantiated algorithm, *Selective DPO*. It extends the standard DPO (Rafailov et al., 2024) by selectively training on examples within the model’s capacity. The algorithm

consists of three main steps, as illustrated in Figure 6:

- **Train reference models.** The training dataset is randomly split into two partitions. Using the standard DPO loss (Eq. 1), SFT models are trained separately on each partition, resulting in two reference models per split. This process is repeated three times, yielding six reference models. Unlike the reference SFT model used in the DPO objective to control KL divergence, these reference models are specifically employed for computing validation loss.
- **Rank examples by their validation loss.** The trained reference models evaluate held-out examples from their respective complementary partitions ($\mathcal{D} \setminus \hat{\mathcal{D}}$). Each example is assessed three times using different reference models, and the mean validation loss is computed to rank the examples in ascending order.
- **Align with the selected data.** The easiest examples, comprising the lowest τ percent of validation loss rankings, are selected for alignment training. The alignment algorithm, such as DPO, is applied exclusively to these examples. To fully utilize the difficulty ranking, examples are processed sequentially from easy to difficult.

Remark 5.1 (Flexible hyper-parameter τ). The hyper-parameter τ determines the percentage of data selected for training. Optimal τ values depend on the data difficulty distribution and the model’s capacity. In practice, τ can be tuned using a third-party evaluator such as *AlpacaEval 2* (Dubois et al., 2024).

For the evaluation in the next section, we set $\tau = 50$ for the *UltraFeedback-binarized* dataset, based on insights from Figure 3. For clarity and reproducibility, pseudo-code for Selective DPO is provided in Appendix A.

6. Experiments

We evaluate the benefits of the proposed preference data selection principle by benchmarking the Selective DPO algorithm, against state-of-the-art alignment algorithms using the formal benchmarks: *AlpacaEval 2* (Dubois et al., 2024), *Arena-Hard v0.1* (Li et al., 2024b), and *MT-Bench* (Zheng et al., 2023). We report scores following each benchmark’s evaluation protocol.

6.1. Performance Comparison

Baselines. We compare Selective DPO with DPO (Rafailov et al., 2024) and its variants, including IPO (Azar et al., 2023), KTO (Ethayarajh et al., 2024), and ORPO (Hong et al., 2024), borrowing their results from the SimPO paper (Meng et al., 2024) to ensure consistency. For SimPO

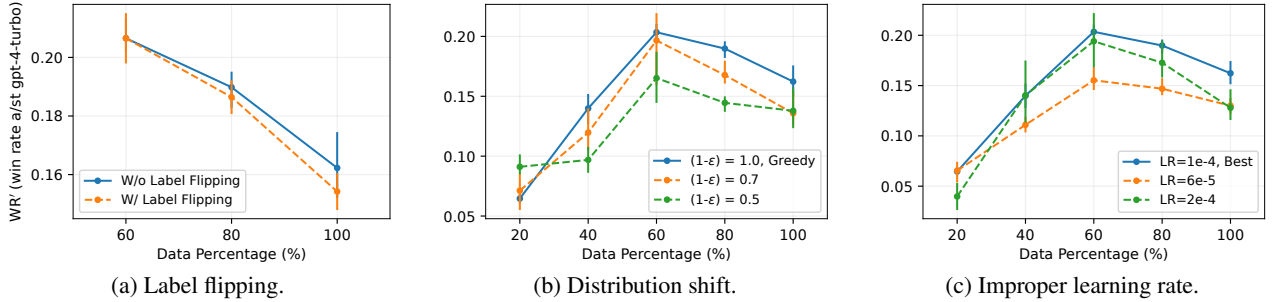


Figure 4: **Difficult examples are not necessarily data errors.** (a): flipping the last 40% examples with higher *validation loss*. (b): sorting the examples with the ϵ -greedy sorting algorithm. In this case, each mini-batch data contains $(1-\epsilon)$ part of easy-to-difficult examples and (ϵ) part of randomly sampled examples. (c): increasing and decreasing the learning rate. All experiments are conducted on the Mistral-7B-SFT model with *Argilla-dpo-mix-7k* dataset.

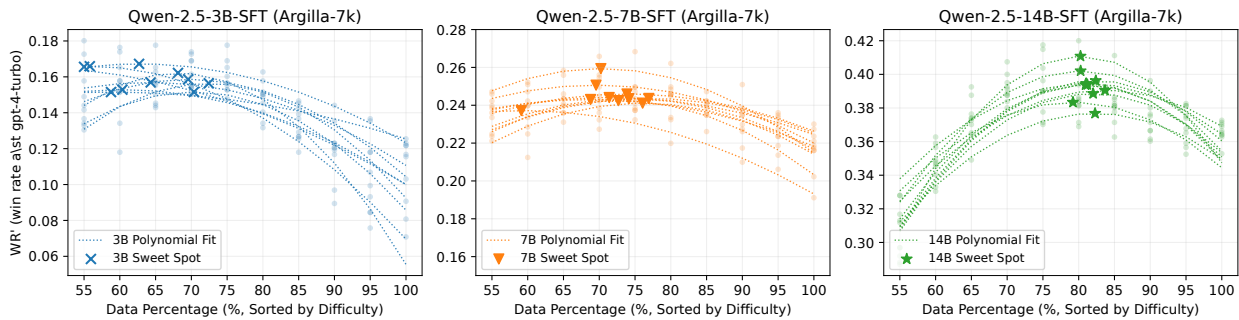


Figure 5: **Difficult examples benefit larger models with greater capacities.** Examples are sorted by their *validation loss*, ranging from easy to difficult. We fit the measured WR' (scatter points) using a second-degree polynomial (dashed line), identifying the peak of each parabola as the *sweet spot* (marker). Notably, larger models reach sweet spots at higher data percentages, indicating that model with greater capacity can manage more challenging examples. The results are from ten runs per model type, evaluated using *ArmoRM* (Wang et al., 2024b).

and WPO (Zhou et al., 2024), we rerun the released code on Llama, Gemma, and Qwen models. Hyper-parameter tuning is performed on the learning rate for all runs, see Appendix C. Additional baselines include techniques designed to address noisy labels, such as *label flipping* and *label smoothing*. Label flipping corrects mislabeled data identified by the *ArmoRM* reward model, while label smoothing assumes the dataset label is correct with probability 0.6.

Results (Table 1 and Figure 7). Table 1 compares results on the Mistral-7B (Jiang et al., 2023) and Llama-3-8B (AI@Meta, 2024) models. Label flipping yields only marginal gains, supporting our insight that difficult examples are not necessarily data errors. In contrast, Selective DPO, which carefully selects 50% of the training data, significantly outperforms all baselines across all three benchmarks, demonstrating the strength of our data selection principle for alignment tasks. Figure 7 extends the comparison to Gemma-2-9B (Team et al., 2024) and Qwen-2.5-7B (Team, 2024), showing exceptional performance in win rate (WR) on AlpacaEval 2 and comparable performance on length-controlled win rate (LC). The slightly lower performance on LC is consistent with results in Table 1, where

Selective DPO demonstrates better performance under WR.

We emphasize that our goal is not to propose the best ever alignment algorithm, but to verify the proposed data selection principle for alignment: selecting examples that align with the model’s capacity. The length exploitation issue, while beyond the scope of this paper, could potentially be addressed using techniques from SimPO (Meng et al., 2024) or WPO (Zhou et al., 2024), which we leave as future work.

6.2. Hyper-Parameter Study

Selective DPO introduces two implicit hyper-parameters. **Number of reference models (Figure 8 (a)):** Increasing the number of reference models used to compute the validation loss improves performance on *AlpacaEval 2* (LC). However, considering computational costs, training six reference models strikes a balance between performance and efficiency. **Percentage of selected easy examples (Figure 8 (b)):** Increasing τ incorporates examples exceeding the model’s capacity, leading to performance degradation, while excessively low values limit training to the simplest examples, also resulting in suboptimal performance.

Principled Data Selection for Alignment

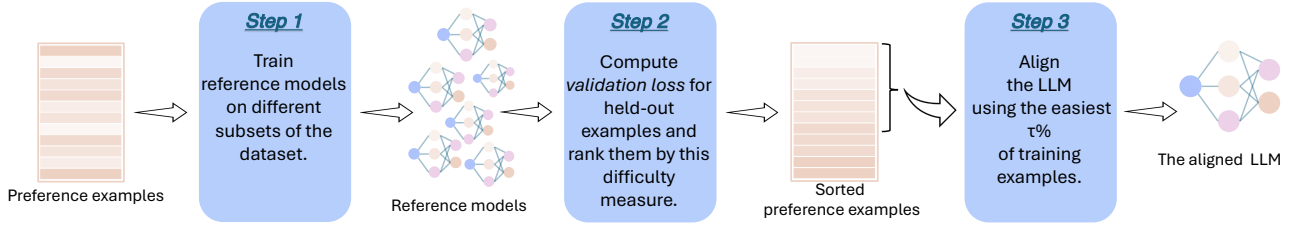


Figure 6: **The pipeline of Selective DPO.** It extends DPO (Rafailov et al., 2024) with an principled data selection process: selecting preference examples within the model’s capacity. Specifically, Selective DPO comprises three steps: (1) Train a set of reference models using the DPO loss on different subsets of the training data. (2) Evaluate the reference models to compute the validation loss, which serves as a proxy for example difficulty. (3) Selectively align LLMs on examples with low validation loss from easy to difficult examples.

Table 1: Benchmarking results from AlpacaEval 2 (Dubois et al., 2024), Arena-Hard (Li et al., 2024b), and MT-Bench (Zheng et al., 2023). In AlpacaEval 2, **WR** and **LC** indicate the win rate and length-controlled win rate against GPT-4-Turbo. In Arena-Hard, **WR** represents the win rate against GPT-4-0314, with GPT-4-Turbo serving as the evaluator. MT-Bench scores the quality of generated responses on a scale from 1 to 10, using either GPT-4 or GPT-4-Turbo as the evaluator. All results are based on full parameter fine-tuning (FPFT), except for the row labeled with LoRA (Hu et al., 2022). We run this comparison on the *UltraFeedback-binarized* dataset.

Method	Mistral-7B-SFT					Llama-3-8B-SFT				
	AlpacaEval 2		Arena-Hard	MT-Bench		AlpacaEval 2		Arena-Hard	MT-Bench	
	LC (%)	WR (%)	WR (%)	GPT-4 Turbo	GPT-4	LC (%)	WR (%)	WR (%)	GPT-4 Turbo	GPT-4
SFT	8.4	6.2	1.3	4.8	6.3	6.2	4.6	3.3	5.2	6.6
DPO (Rafailov et al., 2024)	15.1	12.5	10.4	5.9	7.3	18.2	15.5	15.9	6.5	7.7
+ Label Flipping (Wang et al., 2024a)	15.4	13.1	10.9	-	7.3	19.1	15.9	16.2	-	7.7
+ Label Smoothing (Mitchell, 2023)	15.2	12.7	10.2	-	7.3	17.7	14.8	15.7	-	7.6
RRHF (Yuan et al., 2023)	11.6	10.2	5.8	5.4	6.7	12.1	10.1	6.3	5.8	7.0
SLiC-HF (Zhao et al., 2023b)	10.9	8.9	7.3	5.8	7.4	12.3	13.7	6.0	6.3	7.6
IPO (Azar et al., 2023)	11.8	9.4	7.5	5.5	7.2	14.4	14.2	17.8	6.5	7.4
CPO (Xu et al., 2024)	9.8	8.9	6.9	5.4	6.8	10.8	8.1	5.8	6.0	7.4
KTO (Ethayarajh et al., 2024)	13.1	9.1	5.6	5.4	7.0	14.2	12.4	12.5	6.3	7.8
ORPO (Hong et al., 2024)	14.7	12.2	7.0	5.8	7.3	12.2	10.6	10.8	6.1	7.6
R-DPO (Park et al., 2024)	17.4	12.8	8.0	5.9	7.4	17.6	14.4	17.2	6.6	7.5
SimPO (Meng et al., 2024)	21.5	20.8	16.6	6.0	7.3	22.0	20.3	23.4	6.6	7.7
WPO (Zhou et al., 2024)	24.4	23.7	16.7	-	7.4	23.1	22.2	23.1	-	7.7
Selective DPO (Ours w/ LoRA)	25.4	27.4	16.2	-	7.3	21.1	18.3	22.7	-	7.8
Selective DPO (Ours)	27.1	28.9	17.0	-	7.4	24.9	25.3	24.1	-	8.0

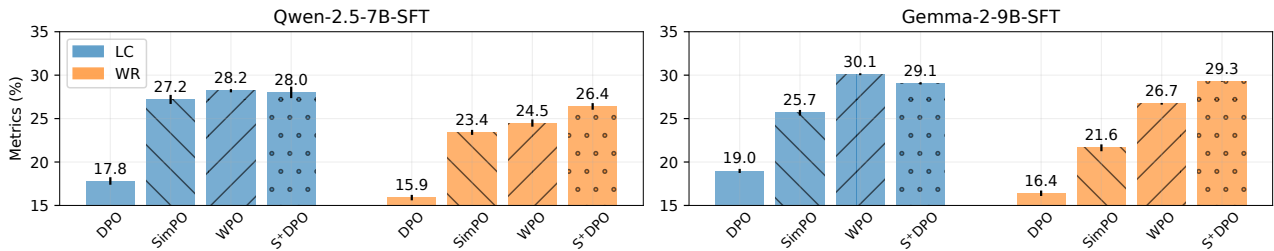


Figure 7: Comparison results against SimPO and WPO, with all methods tuned for their learning rates. Selective DPO (S⁺DPO) demonstrates superior performance in win rate (WR) and comparable results in length-controlled win rate (LC).

6.3. In-Depth Analysis of DPO vs. Selective DPO

Selective DPO outperforms DPO in terms of likelihood distribution and reward margin distribution. As shown in Figure 8(c), Selective DPO achieves a distribution of nega-

tive log-likelihoods (NLLs) closer to zero on test prompts, indicating higher confidence in generated responses. Additionally, the implicit reward model learned by Selective DPO exhibits better accuracy and larger reward margins

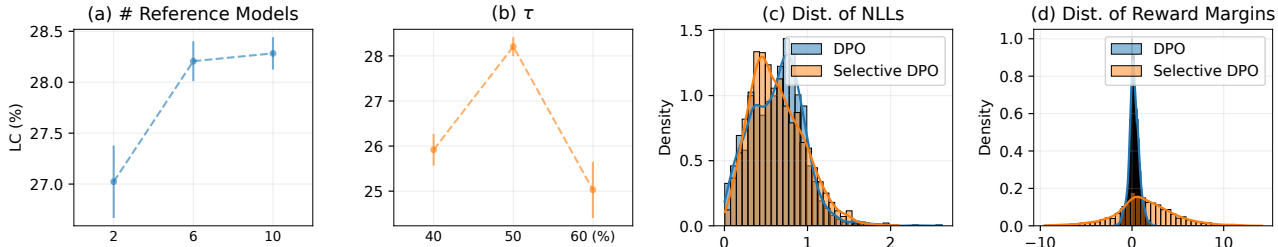


Figure 8: **Hyper-parameter study and in-depth analysis of Selective DPO.** (a): Relationship between the number of reference models and performance. (b): Performance with different percentages of selected easy examples. (c): Negative log-likelihoods distributions on the generated responses. (d): Reward margin distributions of the implicit reward models.

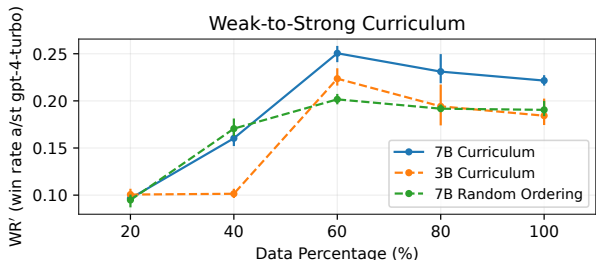


Figure 9: **Weak-to-strong curriculum under-performs.** Aligning a 7B model with examples ordered by 3B reference models yields compromised results.

on testing examples (Figure 8(d)). Together, these results suggest that by filtering out overly difficult examples, Selective DPO produces more robust reward models and reduces undesired hallucinations.

6.4. Weak-to-Strong Curriculum

To investigate whether difficult examples can be identified using smaller reference models, we compare alignment experiments where a 7B SFT model is trained with its own curriculum versus a curriculum derived from a smaller 3B model. Results in Figure 9 show moderate benefits from the smaller model’s curriculum, though slightly inferior to the model’s own curriculum. This suggests that while smaller models can provide insights, data selection remains more effective when tailored to the target model’s capacity.

7. Related Work

Response selection. The importance of selecting high-quality responses as preferred choices has been highlighted in several studies (Bai et al., 2022; Ethayarajh et al., 2022; Tunstall et al., 2023). These works focus on ensuring that preferred responses align with human values and ethics. Our work builds upon these efforts in two key ways: (1) the datasets we consider already incorporate these response selection techniques, and (2) we prioritize whether preference examples fall within the capabilities of the target LLM, rather than solely emphasizing their alignment with human

values. **Data correction.** Efforts to address noisy labels in datasets include techniques such as label flipping (Wang et al., 2024a) and confidence-based data filtering (Gao et al., 2024). Approaches like cDPO (Mitchell, 2023) and rDPO (Chowdhury et al., 2024) aim to mitigate the impact of mislabeling without explicitly removing mislabeled examples. In our study, we incorporate label flipping and label smoothing experiments to support our claim that difficult examples are not necessarily mislabeled, but instead exceed the model’s capacity. **Seemingly relevant work.** Our study differs from general data selection research, such as Liu et al. (2024); Xia et al. (2024), which uses the term alignment but actually focuses on the SFT stage. For a comprehensive review of data selection for LLMs and curriculum learning, we refer readers to Appendix B.

8. Conclusion and Future Work

In this work, we reveal and address a critical gap in LLM alignment: the mismatch between data difficulty and model capacity. Challenging the assumption that more clean data uniformly improves alignment, we propose a novel principle for alignment tasks:

Preference data vary in difficulty, and overly difficult examples hinder alignment, by exceeding the model’s capacity.

Comprehensive experiments validate the three key claims underlying this principle. Building on this data selection principle, we introduce Selective DPO, an alignment algorithm that selectively trains on examples within the model’s capacity. Selective DPO achieves state-of-the-art results on benchmarks including AlpacaEval 2, Arena-Hard, and MT-Bench, with up to 16% gains in win rates over DPO. Our work advocates a paradigm shift in alignment: alignment should prioritize data difficulty relative to model capacity rather than treating all preference data equally.

However, limitations remain: (1) Selective DPO tends to favor longer responses due to potential data bias; and (2) the proposed principle is designed and validated specifically for the DPO setting, limiting its direct applicability to RLHF. These gaps highlight opportunities for future work.

Impact Statement

This paper presents work whose goal is to advance the alignment between large language model behaviors and human values. There are many potential societal consequences of our work, none which we feel must be specifically highlighted here.

References

- AI@Meta. Llama 3 model card. *web page*, 2024.
- Albalak, A., Elazar, Y., Xie, S. M., Longpre, S., Lambert, N., Wang, X., Muennighoff, N., Hou, B., Pan, L., Jeong, H., et al. A survey on data selection for language models. *arXiv preprint arXiv:2402.16827*, 2024.
- Ankner, Z., Blakeney, C., Sreenivasan, K., Marion, M., Leavitt, M. L., and Paul, M. Perplexed by perplexity: Perplexity-based data pruning with small reference models. *arXiv preprint arXiv:2405.20541*, 2024.
- Argilla. Ultrafeedback binarized preferences-cleaned. <https://huggingface.co/datasets/argilla/ultrafeedback-binarized-preferences-cleaned>, 2024.
- Askell, A., Bai, Y., Chen, A., Drain, D., Ganguli, D., Henighan, T., Jones, A., Joseph, N., Mann, B., DasSarma, N., et al. A general language assistant as a laboratory for alignment. *arXiv preprint arXiv:2112.00861*, 2021.
- Avrahami, J., Kareev, Y., Bogot, Y., Caspi, R., Dunaevsky, S., and Lerner, S. Teaching by examples: Implications for the process of category acquisition. *The Quarterly Journal of Experimental Psychology Section A*, 50(3): 586–606, 1997.
- Azar, M. G., Rowland, M., Piot, B., Guo, D., Calandriello, D., Valko, M., and Munos, R. A general theoretical paradigm to understand learning from human preferences. *ArXiv*, abs/2310.12036, 2023.
- Bai, Y., Jones, A., Ndousse, K., Askell, A., Chen, A., DasSarma, N., Drain, D., Fort, S., Ganguli, D., Henighan, T., et al. Training a helpful and harmless assistant with reinforcement learning from human feedback. *arXiv preprint arXiv:2204.05862*, 2022.
- Bartolome, A., Martin, G., and Vila, D. Notus. <https://github.com/argilla-io/notus>, 2023.
- Beeching, E., Fourier, C., Habib, N., Han, S., Lambert, N., Rajani, N., Sanseviero, O., Tunstall, L., and Wolf, T. Open LLM leaderboard. https://huggingface.co/spaces/HuggingFaceH4/open_llm_leaderboard, 2023.
- Bengio, Y., Louradour, J., Collobert, R., and Weston, J. Curriculum learning. In *Proceedings of the 26th annual international conference on machine learning*, pp. 41–48, 2009.
- Campos, D. Curriculum learning for language modeling. *arXiv preprint arXiv:2108.02170*, 2021.
- Cao, Y., Kang, Y., Wang, C., and Sun, L. Instruction mining: When data mining meets large language model finetuning. *arXiv preprint arXiv:2307.06290*, 2023.
- Chang, E., Yeh, H.-S., and Demberg, V. Does the order of training samples matter? improving neural data-to-text generation with curriculum learning. *arXiv preprint arXiv:2102.03554*, 2021.
- Chen, L., Li, S., Yan, J., Wang, H., Gunaratna, K., Yadav, V., Tang, Z., Srinivasan, V., Zhou, T., Huang, H., and Jin, H. Alpargasmus: Training a better alpaca with fewer data. In *The Twelfth International Conference on Learning Representations*, 2024a. URL <https://openreview.net/forum?id=FdVXgSJhVz>.
- Chen, M., Roberts, N., Bhatia, K., Wang, J., Zhang, C., Sala, F., and Ré, C. Skill-it! a data-driven skills framework for understanding and training language models. *Advances in Neural Information Processing Systems*, 36, 2024b.
- Chowdhury, S. R., Kini, A., and Natarajan, N. Provably robust dpo: Aligning language models with noisy feedback. In *Forty-first International Conference on Machine Learning*, 2024.
- Christiano, P. F., Leike, J., Brown, T., Martic, M., Legg, S., and Amodei, D. Deep reinforcement learning from human preferences. *Advances in neural information processing systems*, 30, 2017.
- Cobbe, K., Kosaraju, V., Bavarian, M., Chen, M., Jun, H., Kaiser, L., Plappert, M., Tworek, J., Hilton, J., Nakano, R., Hesse, C., and Schulman, J. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- Croitoru, F.-A., Hondru, V., Ionescu, R. T., and Shah, M. Reverse stable diffusion: What prompt was used to generate this image? *arXiv preprint arXiv:2308.01472*, 2023.
- Croitoru, F.-A., Hondru, V., Ionescu, R. T., Sebe, N., and Shah, M. Curriculum direct preference optimization for diffusion and consistency models. *arXiv preprint arXiv:2405.13637*, 2024.
- Du, Q., Zong, C., and Zhang, J. Mods: Model-oriented data selection for instruction tuning. *arXiv preprint arXiv:2311.15653*, 2023.

- Dubey, A., Jauhri, A., Pandey, A., Kadian, A., Al-Dahle, A., Letman, A., Mathur, A., Schelten, A., Yang, A., Fan, A., et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Dubois, Y., Galambosi, B., Liang, P., and Hashimoto, T. B. Length-controlled alpacaeval: A simple way to debias automatic evaluators. *arXiv preprint arXiv:2404.04475*, 2024.
- Engstrom, L., Feldmann, A., and Madry, A. Dsdm: Model-aware dataset selection with datamodels. In *Forty-first International Conference on Machine Learning*, 2024. URL <https://openreview.net/forum?id=GC8HkKeH8s>.
- Ethayarajh, K., Choi, Y., and Swayamdipta, S. Understanding dataset difficulty with $\{V\}$ -usable information. In *International Conference on Machine Learning*, pp. 5988–6008. PMLR, 2022.
- Ethayarajh, K., Xu, W., Muennighoff, N., Jurafsky, D., and Kiela, D. KTO: Model alignment as prospect theoretic optimization. *ArXiv*, abs/2402.01306, 2024.
- Gao, Y., Alon, D., and Metzler, D. Impact of preference noise on the alignment performance of generative language models. *arXiv preprint arXiv:2404.09824*, 2024.
- Hong, J., Lee, N., and Thorne, J. ORPO: Monolithic preference optimization without reference model. *ArXiv*, abs/2403.07691, 2024.
- Hu, E. J., Wallis, P., Allen-Zhu, Z., Li, Y., Wang, S., Wang, L., Chen, W., et al. Lora: Low-rank adaptation of large language models. In *ICLR*, 2022.
- Jiang, A. Q., Sablayrolles, A., Mensch, A., Bamford, C., Chaplot, D. S., Casas, D. d. l., Bressand, F., Lengyel, G., Lample, G., Saulnier, L., et al. Mistral 7b. *arXiv preprint arXiv:2310.06825*, 2023.
- Jiang, L., Meng, D., Mitamura, T., and Hauptmann, A. G. Easy samples first: Self-paced reranking for zero-example multimedia search. In *Proceedings of the 22nd ACM international conference on Multimedia*, pp. 547–556, 2014.
- Joulin, A. Fasttext. zip: Compressing text classification models. *arXiv preprint arXiv:1612.03651*, 2016.
- Kim, J. and Lee, J. Strategic data ordering: Enhancing large language model performance through curriculum learning. *arXiv preprint arXiv:2405.07490*, 2024.
- Lambert, N., Pyatkin, V., Morrison, J., Miranda, L., Lin, B. Y., Chandu, K., Dziri, N., Kumar, S., Zick, T., Choi, Y., et al. Rewardbench: Evaluating reward models for language modeling. *arXiv preprint arXiv:2403.13787*, 2024.
- Laurençon, H., Saulnier, L., Wang, T., Akiki, C., Vilanova del Moral, A., Le Scao, T., Von Werra, L., Mou, C., González Ponferrada, E., Nguyen, H., et al. The bigscience roots corpus: A 1.6 tb composite multilingual dataset. *Advances in Neural Information Processing Systems*, 35:31809–31826, 2022.
- Lee, K., Ippolito, D., Nystrom, A., Zhang, C., Eck, D., Callison-Burch, C., and Carlini, N. Deduplicating training data makes language models better. *arXiv preprint arXiv:2107.06499*, 2021.
- Li, M., Zhang, Y., Li, Z., Chen, J., Chen, L., Cheng, N., Wang, J., Zhou, T., and Xiao, J. From quantity to quality: Boosting llm performance with self-guided data selection for instruction tuning. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pp. 7595–7628, 2024a.
- Li, T., Chiang, W.-L., Frick, E., Dunlap, L., Wu, T., Zhu, B., Gonzalez, J. E., and Stoica, I. From crowdsourced data to high-quality benchmarks: Arena-hard and benchbuilder pipeline. *arXiv preprint arXiv:2406.11939*, 2024b.
- Lin, Z., Gou, Z., Gong, Y., Liu, X., Shen, Y., Xu, R., Lin, C., Yang, Y., Jiao, J., Duan, N., et al. Rho-1: Not all tokens are what you need. *arXiv preprint arXiv:2404.07965*, 2024.
- Liu, W., Zeng, W., He, K., Jiang, Y., and He, J. What makes good data for alignment? a comprehensive study of automatic data selection in instruction tuning. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=BTKAeLqLMw>.
- Mann, B., Ryder, N., Subbiah, M., Kaplan, J., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., Agarwal, S., et al. Language models are few-shot learners. *arXiv preprint arXiv:2005.14165*, 1, 2020.
- Meng, Y., Xia, M., and Chen, D. Simpo: Simple preference optimization with a reference-free reward. *arXiv preprint arXiv:2405.14734*, 2024.
- Mishra, S. and Sachdeva, B. S. Do we need to create big datasets to learn a task? In *Proceedings of SustaiNLP: Workshop on Simple and Efficient Natural Language Processing*, pp. 169–173, 2020.
- Mitchell, E. A note on dpo with noisy preferences and relationship to ipo. 2023. URL <https://ericmitchell.ai/cdpo.pdf>.

- Mukherjee, S., Mitra, A., Jawahar, G., Agarwal, S., Palangi, H., and Awadallah, A. Orca: Progressive learning from complex explanation traces of gpt-4. *arXiv preprint arXiv:2306.02707*, 2023.
- Nagatsuka, K., Broni-Bediako, C., and Atsumi, M. Length-based curriculum learning for efficient pre-training of language models. *New Generation Computing*, 41(1): 109–134, 2023.
- Ouyang, L., Wu, J., Jiang, X., Almeida, D., Wainwright, C., Mishkin, P., Zhang, C., Agarwal, S., Slama, K., Ray, A., et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- Park, R., Rafailov, R., Ermon, S., and Finn, C. Disentangling length from quality in direct preference optimization. *ArXiv*, abs/2403.19159, 2024.
- Pattnaik, P., Maheshwary, R., Ogueji, K., Yadav, V., and Madhusudhan, S. T. Curry-dpo: Enhancing alignment using curriculum learning & ranked preferences. *arXiv preprint arXiv:2403.07230*, 2024.
- Penedo, G., Malartic, Q., Hesslow, D., Cojocar, R., Cappelli, A., Alobeidli, H., Pannier, B., Almazrouei, E., and Launay, J. The refinedweb dataset for falcon llm: outperforming curated corpora with web data, and web data only. *arXiv preprint arXiv:2306.01116*, 2023.
- Platanios, E. A., Stretcu, O., Neubig, G., Poczos, B., and Mitchell, T. M. Competence-based curriculum learning for neural machine translation. *arXiv preprint arXiv:1903.09848*, 2019.
- Qin, Y., Yang, Y., Guo, P., Li, G., Shao, H., Shi, Y., Xu, Z., Gu, Y., Li, K., and Sun, X. Unleashing the power of data tsunami: A comprehensive survey on data assessment and selection for instruction tuning of language models. *arXiv preprint arXiv:2408.02085*, 2024.
- Rafailov, R., Sharma, A., Mitchell, E., Manning, C. D., Ermon, S., and Finn, C. Direct preference optimization: Your language model is secretly a reward model. *Advances in Neural Information Processing Systems*, 36, 2024.
- Rampp, S., Milling, M., Triantafyllopoulos, A., and Schuller, B. W. Does the definition of difficulty matter? scoring functions and their role for curriculum learning. *arXiv preprint arXiv:2411.00973*, 2024.
- Sachan, M. and Xing, E. Easy questions first? a case study on curriculum learning for question answering. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 453–463, 2016.
- Spitkovsky, V. I., Alshawi, H., and Jurafsky, D. From baby steps to leapfrog: How “less is more” in unsupervised dependency parsing. In *Human Language Technologies: The 2010 Annual Conference of the North American Chapter of the Association for Computational Linguistics*, pp. 751–759, 2010.
- Tang, L., Ranjan, N., Pangarkar, O., Liang, X., Wang, Z., An, L., Rao, B., Jin, L., Wang, H., Cheng, Z., Sun, S., Mu, C., Miller, V., Ma, X., Peng, Y., Liu, Z., and Xing, E. Txt360: A top-quality llm pre-training dataset requires the perfect blend, 2024.
- Tay, Y., Wang, S., Tuan, L. A., Fu, J., Phan, M. C., Yuan, X., Rao, J., Hui, S. C., and Zhang, A. Simple and effective curriculum pointer-generator networks for reading comprehension over long narratives. *arXiv preprint arXiv:1905.10847*, 2019.
- Team, G., Riviere, M., Pathak, S., Sessa, P. G., Hardin, C., Bhupatiraju, S., Hussenot, L., Mesnard, T., Shahriari, B., Ramé, A., et al. Gemma 2: Improving open language models at a practical size. *arXiv preprint arXiv:2408.00118*, 2024.
- Team, Q. Qwen2.5: A party of foundation models, September 2024. URL <https://qwenlm.github.io/blog/qwen2.5/>.
- Tudor Ionescu, R., Alexe, B., Leordeanu, M., Popescu, M., Papadopoulos, D. P., and Ferrari, V. How hard can it be? estimating the difficulty of visual search in an image. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 2157–2166, 2016.
- Tunstall, L., Beeching, E., Lambert, N., Rajani, N., Rasul, K., Belkada, Y., Huang, S., von Werra, L., Fourrier, C., Habib, N., et al. Zephyr: Direct distillation of llm alignment. *arXiv preprint arXiv:2310.16944*, 2023.
- Wang, B., Zheng, R., Chen, L., Liu, Y., Dou, S., Huang, C., Shen, W., Jin, S., Zhou, E., Shi, C., et al. Secrets of rlhf in large language models part ii: Reward modeling. *arXiv preprint arXiv:2401.06080*, 2024a.
- Wang, H., Xiong, W., Xie, T., Zhao, H., and Zhang, T. Interpretable preferences via multi-objective reward modeling and mixture-of-experts. *arXiv preprint arXiv:2406.12845*, 2024b.
- Wang, Y., Ivison, H., Dasigi, P., Hessel, J., Khot, T., Chandu, K., Wadden, D., MacMillan, K., Smith, N. A., Beltagy, I., et al. How far can camels go? exploring the state of instruction tuning on open resources. *Advances in Neural Information Processing Systems*, 36:74764–74786, 2023.

- Weidinger, L., Mellor, J., Rauh, M., Griffin, C., Uesato, J., Huang, P.-S., Cheng, M., Glaese, M., Balle, B., Kasirzadeh, A., et al. Ethical and social risks of harm from language models. *arXiv preprint arXiv:2112.04359*, 2021.
- Wenzek, G., Lachaux, M.-A., Conneau, A., Chaudhary, V., Guzmán, F., Joulin, A., and Grave, E. Ccnet: Extracting high quality monolingual datasets from web crawl data. *arXiv preprint arXiv:1911.00359*, 2019.
- Wettig, A., Gupta, A., Malik, S., and Chen, D. Qurating: Selecting high-quality data for training language models. *arXiv preprint arXiv:2402.09739*, 2024.
- Wu, B., Meng, F., and Chen, L. Curriculum learning with quality-driven data selection. *arXiv preprint arXiv:2407.00102*, 2024.
- Wu, S., Lu, K., Xu, B., Lin, J., Su, Q., and Zhou, C. Self-evolved diverse data sampling for efficient instruction tuning. *arXiv preprint arXiv:2311.08182*, 2023.
- Wu, X., Dyer, E., and Neyshabur, B. When do curricula work? In *ICLR*, 2021.
- Xia, T., Yu, B., Dang, K., Yang, A., Wu, Y., Tian, Y., Chang, Y., and Lin, J. Rethinking data selection at scale: Random selection is almost all you need. *arXiv preprint arXiv:2410.09335*, 2024.
- Xu, H., Sharaf, A., Chen, Y., Tan, W., Shen, L., Durme, B. V., Murray, K., and Kim, Y. J. Contrastive preference optimization: Pushing the boundaries of LLM performance in machine translation. *ArXiv*, abs/2401.08417, 2024.
- Xu, Y., Yao, Y., Huang, Y., Qi, M., Wang, M., Gu, B., and Sundaresan, N. Rethinking the instruction quality: Lift is what you need. *CoRR*, 2023.
- Yu, Z., Das, S., and Xiong, C. Mates: Model-aware data selection for efficient pretraining with data influence models. *arXiv preprint arXiv:2406.06046*, 2024.
- Yuan, Z., Yuan, H., Tan, C., Wang, W., Huang, S., and Huang, F. Rrhf: Rank responses to align language models with human feedback without tears. *arXiv preprint arXiv:2304.05302*, 2023.
- Zaremba, W. and Sutskever, I. Learning to execute. *arXiv preprint arXiv:1410.4615*, 2014.
- Zhao, W. X., Zhou, K., Li, J., Tang, T., Wang, X., Hou, Y., Min, Y., Zhang, B., Zhang, J., Dong, Z., et al. A survey of large language models. *arXiv preprint arXiv:2303.18223*, 2023a.
- Zhao, Y., Joshi, R., Liu, T., Khalman, M., Saleh, M., and Liu, P. J. SLiC-HF: Sequence likelihood calibration with human feedback. *ArXiv*, abs/2305.10425, 2023b.
- Zheng, L., Chiang, W.-L., Sheng, Y., Zhuang, S., Wu, Z., Zhuang, Y., Lin, Z., Li, Z., Li, D., Xing, E., et al. Judging llm-as-a-judge with mt-bench and chatbot arena. *Advances in Neural Information Processing Systems*, 36: 46595–46623, 2023.
- Zhou, C., Liu, P., Xu, P., Iyer, S., Sun, J., Mao, Y., Ma, X., Efrat, A., Yu, P., Yu, L., et al. Lima: Less is more for alignment. *Advances in Neural Information Processing Systems*, 36, 2023.
- Zhou, W., Agrawal, R., Zhang, S., Indurthi, S. R., Zhao, S., Song, K., Xu, S., and Zhu, C. Wpo: Enhancing rlhf with weighted preference optimization. *arXiv preprint arXiv:2406.11827*, 2024.
- Zhu, B., Jordan, M. I., and Jiao, J. Iterative data smoothing: Mitigating reward overfitting and overoptimization in rlhf. *arXiv preprint arXiv:2401.16335*, 2024a.
- Zhu, W., Wu, O., Su, F., and Deng, Y. Exploring the learning difficulty of data: Theory and measure. *ACM Transactions on Knowledge Discovery from Data*, 18(4):1–37, 2024b.

A. Pseudo-Code for the Instantiated Algorithm: Selective DPO

Algorithm 1 Selective DPO

Input:

π_{SFT} : An SFT model that serves as the starting point for preference alignment.

D : A dataset consisting of preference examples.

RandomSampler: A utility for sampling elements randomly without replacement.

SequentialSampler: A utility for sampling elements sequentially.

\mathcal{L}_{DPO} : DPO loss function with the form: $\mathcal{L}_{\text{DPO}}(x, y_w, y_l) = -\log \sigma\left(\beta \log \frac{\pi_{\theta}(y_w|x)}{\pi_{\text{ref}}(y_w|x)} - \beta \log \frac{\pi_{\theta}(y_l|x)}{\pi_{\text{ref}}(y_l|x)}\right)$

Step 1: Train six reference alignment models: $\pi_{\theta_{01}}, \pi_{\theta_{02}}, \pi_{\theta_{11}}, \pi_{\theta_{12}}, \pi_{\theta_{21}}, \pi_{\theta_{22}}$.

for $t = 0, 1, 2$ **do**

 Randomly split the dataset D into two subsets, D_1 and D_2 .

 Initialize $\pi_{\text{ref}} \leftarrow \pi_{\text{SFT}}$ and $\pi_{\theta} \leftarrow \pi_{\text{SFT}}$.

while *RandomSampler* has not finished **do**

 Sample a mini-batch of examples from D_1 using *RandomSampler*.

 Update π_{θ} by minimizing the DPO loss function: $\pi_{\theta} \leftarrow \arg \min_{\pi_{\theta}} \mathbb{E}_{(x, y_w, y_l) \sim D_1} [\mathcal{L}_{\text{DPO}}(x, y_w, y_l)]$

end while

 Save the model: $\pi_{\theta_{t1}} \leftarrow \pi_{\theta}$.

 Reinitialize: $\pi_{\theta} \leftarrow \pi_{\text{SFT}}$.

while *RandomSampler* has not finished **do**

 Sample a mini-batch of examples from D_2 using *RandomSampler*.

 Update π_{θ} by minimizing the DPO loss function: $\pi_{\theta} \leftarrow \arg \min_{\pi_{\theta}} \mathbb{E}_{(x, y_w, y_l) \sim D_2} [\mathcal{L}_{\text{DPO}}(x, y_w, y_l)]$

end while

 Save the model: $\pi_{\theta_{t2}} \leftarrow \pi_{\theta}$.

 Reinitialize: $\pi_{\theta} \leftarrow \pi_{\text{SFT}}$.

end for

Step 2: Rank examples by their validation loss.

for each example (x, y_w, y_l) in dataset D **do**

 Compute the validation loss using the three held-out reference alignment models:

$$\text{VL}(x, y_w, y_l) = \mathbb{E}_{\pi_{\theta} \sim (\pi_{\theta_{01}} \text{ or } \pi_{\theta_{02}}, \pi_{\theta_{11}} \text{ or } \pi_{\theta_{12}}, \pi_{\theta_{21}} \text{ or } \pi_{\theta_{22}})} [\mathcal{L}_{\text{DPO}}(x, y_w, y_l)].$$

end for

Sort the examples by their validation losses and select the top 50% of examples to form D_{selected} .

Step 3: Conduct alignment on the selected data D_{selected} .

while *SequentialSampler* has not finished **do**

 Sample a mini-batch of examples from D_{selected} using *SequentialSampler*.

 Update π_{θ} by minimizing the DPO loss function: $\pi_{\theta} \leftarrow \arg \min_{\pi_{\theta}} \mathbb{E}_{(x, y_w, y_l) \sim D_{\text{selected}}} [\mathcal{L}_{\text{DPO}}(x, y_w, y_l)]$

end while

Output:

π_{θ} : The aligned model obtained by Selective DPO.

B. Related Work

B.1. Data Selection for Pre-Training

Selecting training corpus brings significant performance gains in the pre-training stage (Wenzek et al., 2019; Mann et al., 2020; Zhao et al., 2023a; Penedo et al., 2023; Tang et al., 2024). Approaches can be broadly categorized into two categories: **Sample-level selection** focuses on filtering out undesired content such as non-target languages, duplicated data, toxic materials, and low-quality information (Albalak et al., 2024). This is often achieved through model-based filters (Joulin, 2016; Engstrom et al., 2024; Wettig et al., 2024) or heuristic filters (Wenzek et al., 2019; Lee et al., 2021; Laurençon et al., 2022), each applying specialized filters for specific objectives. **Token-level selection**, an emerging strategy, down-weights low-quality tokens to enhance data quality (Lin et al., 2024), complementing sample-level filtering.

B.2. Data Selection for Supervised Fine-Tuning

Recent study suggests that SFT changes only the format of generation (Zhou et al., 2023). In light of this, various methods are proposed for finding the most informative subset for SFT, mainly following three principles: data quality, diversity, and importance (Qin et al., 2024). The measurement of **data quality** can be manual indicators such as the linguistic DQI (Mishra & Sachdeva, 2020), human scores (Zhou et al., 2023). Model-based quality measurement includes predictions from ChatGPT (Chen et al., 2024a), reward models (Cao et al., 2023), small reference models (Ankner et al., 2024) and the LLM itself (Li et al., 2024a). Measurements of **data diversity** are mainly manually defined, such as the source diversity (Mukherjee et al., 2023; Wang et al., 2023) and distance in the embedding space (Wu et al., 2023; Xu et al., 2023; Du et al., 2023; Liu et al., 2024). **Data importance**, which evaluates an example’s contribution to a specific task, measured using performance scores (Engstrom et al., 2024), data influence models (Yu et al., 2024), or relevance to desired skills (Chen et al., 2024b).

B.3. Scoring the Example Difficulty

Scoring data difficulty is central to curriculum learning, which prioritizes training on simpler examples before progressing to more complex ones (Bengio et al., 2009). **Heuristic scoring functions** mirror human priors of difficulty understanding, such as sentence length (Spitkovsky et al., 2010; Tay et al., 2019; Nagatsuka et al., 2023), word rarity (Chang et al., 2021), and linguistic perplexity (Campos, 2021). In contrast, **principled scoring functions** leverage model behavior to indicate example difficulty, including reward margins from third-party reward models (Croitoru et al., 2024), model perplexity on responses (Wu et al., 2024), or attention scores from transformer models (Kim & Lee, 2024). In this work, we employ two principled scoring measures, demonstrating their robustness and consistency in ranking examples. This allows us to analyze difficult examples objectively, avoiding ambiguities inherent in heuristic definitions.

B.4. Curriculum Learning for Alignment

Curriculum learning (CL) mimics human cognition by structuring learning from simpler to more complex concepts (Avrahami et al., 1997; Bengio et al., 2009). However, CL remains a highly debated technique. While some studies show that it accelerates convergence, enhances generalization, and/or improves robustness in models like convolutional neural networks (Jiang et al., 2014; Tudor Ionescu et al., 2016), recurrent neural networks (Zaremba & Sutskever, 2014; Sachan & Xing, 2016), transformers (Platanios et al., 2019), and diffusion models (Croitoru et al., 2023), other research finds little or no benefit (Platanios et al., 2019; Campos, 2021; Wu et al., 2021). In preference alignment for LLMs, the results are similarly mixed. Kim & Lee (2024) explored CL for preference alignment and concluded that sorting examples according to *prompt length* and *attention score* offered no clear benefits. On the other hand, Pattnaik et al. (2024) reported positive results, although with other tricks such as multiple candidate pairs data and iterative reference model. Our study suggests that CL, when paired with robust difficulty scoring, can positively impact LLM alignment by aligning data difficulty with model capacity.

C. Experiment Details

C.1. Computation Environment

All training experiments in this paper were conducted on compute nodes equipped with $8 \times$ H100 GPUs. To facilitate reproduction with limited computational resources, we also provide key benchmarking results for selected models trained using $4 \times$ A100 40G GPUs with LoRA. Reproducing our SelectiveDPO on 7B models takes about 8 GPU hours (H100).

C.2. SFT Hyper-Parameters

In this work, we limited our alignment experiments to SFT models, which is expected to better demonstrate the effects of different preference alignment procedures. We prepared these SFT models using the the UltraChat-200k dataset. We try our best to use the SFT models from community to facilitate the reproduction. However, there were no available SFT checkpoints for some pre-trained models (*e.g.*, Qwen-2.5 models). We in this part list the hyper-parameters for training these community-released SFT models as well as the SFT models trained by ourselves in Table 2.

Table 2: Training recipes for SFT models used in our experiments.

SFT Model Name	Base Model Name	Batch Size	Learning Rate	Epoch	Optimizer	LoRA?
Qwen-2.5-3B-SFT	Qwen/Qwen2.5-3B	128	2e-5	1	Adam	No
Qwen-2.5-7B-SFT	Qwen/Qwen2.5-7B	128	1e-5	1	Adam	No
Qwen-2.5-14B-SFT	Qwen/Qwen2.5-14B	128	5e-6	1	Adam	No
Mistral-7B-SFT (HuggingFaceH4/mistral-7b-sft-beta)	mistralai/Mistral-7B-v0.1	128	2e-5	1	Adam	No
Llama-3-8B-SFT (princeton-nlp/Llama-3-Base-8B-SFT)	meta-llama/Meta-Llama-3-8B	128	2e-5	1	Adam	No
Gemma-2-9B-SFT (tanliboy/zephyr-gemma-2-9b-sft)	google/gemma-2-9b	128	3e-6	1	Adam	No

C.3. Key Hyper-Parameters for Alignment

Figure 3 We conducted a series of alignment experiments with LoRA on two datasets for generating Figure 3. Key hyper-parameters used in the *Argilla-dpo-mix-7k* experiments are listed in Table 3 where we report the sweep range and the selected best learning rate for DPO with bold font. These parameters are then directly applied to other two settings (sorted and selected by VL) for generating Figure 3. The key parameters used for the UltraFeedback-binarized dataset are list in Table 4.

Table 3: Key hyper-parameters used for aligning models on the **argilla-7k** dataset: Figure 3, top.

Model For Alignment	Learning Rate	Batch Size β	Epoch	Optimizer	LoRA?
Mistral-7B-SFT	2e-5, 3e-5, 5e-5, 1e-4 , 2e-4	64	0.01	1	paged_adamw_32bit Yes
Qwen-2.5-7B-SFT	2e-5, 3e-5, 5e-5 , 1e-4, 2e-4	64	0.01	1	paged_adamw_32bit Yes
Llama-3-8B-SFT	5e-5, 1e-4, 2e-4, 3e-4 , 5e-4	64	0.01	1	paged_adamw_32bit Yes
Gemma-2-9B-SFT	1e-5, 2e-5 , 3e-5, 5e-5, 1e-4	64	0.01	1	paged_adamw_32bit Yes

Table 4: Key hyper-parameters used for aligning models on the **ultrafeedback-bianrized** dataset: Figure 3, bottom.

Model For Alignment	Learning Rate	Batch Size β	Epoch	Optimizer	LoRA?
Mistral-7B-SFT	1e-6, 3e-6, 5e-6, 8e-6 , 10e-6	64	0.01	1	paged_adamw_32bit Yes
Qwen-2.5-7B-SFT	1e-6, 3e-6 , 5e-6, 8e-6, 10e-6	64	0.01	1	paged_adamw_32bit Yes
Llama-3-8B-SFT	1e-6, 3e-6, 5e-6, 8e-6, 10e-6	64	0.01	1	paged_adamw_32bit Yes
Gemma-2-9B-SFT	1e-6, 3e-6, 5e-6 , 8e-6, 10e-6	64	0.01	1	paged_adamw_32bit Yes

Table 1 Comparison results of this table are mainly borrowed from the SimPO paper (Meng et al., 2024). All results are run with full parameter fine-tuning (FPFT) except for the row labeled with LoRA. We added the results of our *Selective DPO* pipeline using the configurations detailed in the following table. The inclusion of LoRA results is to facilitate the reproduction for practices with limited resources.

Table 5: Key hyper-parameters used for aligning models on the **ultrafeedback-bianrized** dataset: Figure 3, bottom.

Experiment Name	Learning Rate	Batch Size	β	Epoch	Optimizer	LoRA?
SelectiveDPO & Mistral-7B-SFT & LoRA	8e-6	64	0.01	1	paged_adamw_32bit	Yes
SelectiveDPO & Mistral-7B-SFT	2e-7, 5e-7, 1e-6 , 2e-6, 3e-6	128	0.01	1	paged_adamw_32bit	No
SelectiveDPO & Llama-3-8B-SFT & LoRA	10e-6	64	0.01	1	paged_adamw_32bit	Yes
SelectiveDPO & Llama-3-8B-SFT	2e-7, 5e-7, 1e-6 , 2e-6, 3e-6	128	0.01	1	paged_adamw_32bit	No
WPO & Llama-3-8B-SFT	5e-7, 1e-6 , 2e-6	128	0.01	1	paged_adamw_32bit	No

Figure 7 Comparison results of this figure are from runs with full parameter fine-tuning. We rerun two state-of-the-art alignment algorithm, SimPO (Meng et al., 2024) and WPO (Zhou et al., 2024) with hyper-parameter sweeping on the learning rate. Other hyper-parameter configurations follows the suggestion from their paper. Specifically:

Table 6: Key hyper-parameters used for generating comparison in Figure 7.

Experiment Name	Learning Rate	Batch Size	Epoch	Optimizer	Other Hyper-Parameters	LoRA?
WPO & Qwen-7B-SFT	5e-7, 1e-6 , 2e-6,	128	1	paged_adamw_32bit	$\beta = 0.01$	No
WPO & Gemma-9B-SFT	2e-7, 5e-7 , 1e-6	128	1	paged_adamw_32bit	$\beta = 0.01$	No
SimPO & Qwen-7B-SFT	6e-5, 8e-6 , 1e-5	128	1	paged_adamw_32bit	$\beta = 2, \frac{\gamma}{\beta} = 0.8$	No
SimPO & Gemma-9B-SFT	5e-7, 1e-6 , 2e-6	128	1	paged_adamw_32bit	$\beta = 2, \frac{\gamma}{\beta} = 0.8$	No
SelectiveDPO & Qwen-7B-SFT	5e-7, 8e-7 , 1e-6	128	1	paged_adamw_32bit	$\beta = 0.01$	No
SelectiveDPO & Gemma-9B-SFT	2e-7, 3e-7 , 5e-7	128	1	paged_adamw_32bit	$\beta = 0.01$	No

C.4. LoRA Configuration for Alignment

We conduct all our analytics experiments using LoRA. Its detailed configurations are described in Table 7.

Table 7: LoRA configuration for all analytics experiments.

Parameter	Value
load_in_4bit	false
lora_r	16
lora_alpha	16
lora_dropout	0.05
lora_target_modules	q_proj,k_proj,v_proj,o_proj,gate_proj,up_proj,down_proj

C.5. Decoding Configuration

AlpacaEval 2. For this benchmark, we employ sampling-based decoding strategies, configuring the temperature as follows: 0.7 for Mistral models, 0.9 for Llama-3 models, 0.5 for Gemma-2 models, and 0.7 for Qwen-2.5 models. These configurations align with standard practices in the community.

Arena-Hard. For this benchmark, we utilize default greedy decoding across all settings, as outlined in Meng et al. (2024).

MT-Bench. We adapt the official decoding configuration, which varies sampling temperatures for different models.

D. Downstream Task Evaluation

To examine how the proposed selective preference optimization pipeline affects downstream task performance, we evaluate the instantiated algorithm, *Selective DPO*, alongside other baseline algorithms on various tasks listed in the HuggingFace Open Leaderboard (Beeching et al., 2023). Results, following established evaluation protocols, are presented in Table 8.

Table 8: Downstream task evaluation results. The dataset is *UltraFeedback-binarized*.

	MMLU(5)	Winograd(5)	GSM8K(5)	HellaSwag(10)	ARC(25)	TruthfulQA(0)	Average
Mistral-7B-Base							
Base	62.46	78.93	38.29	83.38	61.6	42.64	61.22
SFT	59.77	77.58	40.71	82.28	58.19	43.05	60.26
DPO	57.38	77.35	30.4	83.58	61.18	53.11	60.50
SimPO	58.43	77.35	32.3	83.54	61.95	50.82	60.73
WPO	59.54	78.69	32.07	85.23	64.08	51.04	61.78
SelectiveDPO	59.34	76.16	14.48	83.25	65.27	51.95	58.41
SelectiveDPO(60%)	59.54	76.87	28.58	84.25	65.96	57.21	62.07
Qwen-2.5-7B-Base							
Base	74.16	76.72	82.18	80.03	63.23	56.38	72.12
SFT	73.86	75.77	81.43	80.71	62.71	55.67	71.69
DPO	74.06	75.61	82.79	81.73	65.70	60.92	73.47
SimPO	74.33	77.11	85.22	82.48	68.09	65.51	75.45
WPO	74.29	75.85	83.55	83.2	68.52	65.09	75.08
SelectiveDPO	74.05	75.85	80.44	82.82	67.32	63.80	74.04
Llama-3-8B-Base							
Base	65.14	76.64	48.45	81.88	58.87	43.93	62.49
SFT	63.79	76.64	50.57	81.40	60.84	45.33	63.10
DPO	63.47	76.95	54.81	83.71	64.51	53.45	66.15
SimPO	63.18	77.58	47.76	82.93	65.44	59.44	66.06
WPO	63.46	76.72	44.58	84.14	65.27	53.84	64.67
SelectiveDPO	63.99	76.48	48.75	83.51	64.93	51.34	64.83
Gemma-2-9B-Base							
Base	70.29	80.03	40.41	82.66	67.83	45.56	64.46
SFT	70.82	78.77	41.93	83.53	68.77	48.04	65.31
DPO	71.17	80.11	44.43	85.42	71.33	56.96	68.24
SimPO	72.16	80.43	42.53	86.06	73.12	65.34	69.94
WPO	70.88	79.40	43.14	85.64	70.99	53.44	67.25
SelectiveDPO	70.88	79.56	43.67	85.30	70.82	54.67	67.48

Overall, *Selective DPO* performs comparably to other alignment algorithms, such as DPO and SimPO. However, we observe a notable performance drop in the Mistral-7B model when evaluated using the GSM8K (Cobbe et al., 2021) protocol. Two primary factors contribute to this performance decrease: **Exclusion of difficult examples.** GSM8K predominantly evaluates mathematical skills, which often correspond to difficult examples (as detailed in Appendix F). Since *Selective DPO* excludes such difficult examples to better align with human preferences, the model’s mathematical performance diminishes. **Formatting requirements.** GSM8K requires numerical answers in a specific format: ### <THE ANSWER>. We find that the Mistral-7B-Selective DPO model often generates correct answers but presents them in a human dialogue style, breaking the required format and reducing evaluation scores.

We propose three potential solutions. First, as suggested by SimPO (Meng et al., 2024), incorporating an auxiliary SFT loss to regularize model behavior could help regularize the model’s behavior, ensuring compatibility with downstream tasks. Second, using larger models with greater capacity mitigates this issue. For instance, Gemma-2-9B-SelectiveDPO demonstrates better performance and is unaffected by this issue. Finally, including more examples that cover mathematical questions could prevent the model from forgetting its mathematical capabilities while aligning with human preferences and dialogue styles. For example Selective DPO(60%), which incorporates 10% more difficult data, alleviates this issue.

E. What Defines Difficult Examples: Insights from Feature Analysis

E.1. Can Length and Reward Margin Predict Example Difficulty?

We include alternative measures that could potentially indicate example difficulty and evaluate their behavior across varying levels of difficulty.

Response length. Response length may implicitly signal the complexity of generated answers, as longer responses often carry more information, potentially making them more challenging for the model. Two measures are defined: (1) *Chosen Length*: The length of the chosen answer, $\text{len}(y_w)$; (2) *Chosen Length - Rejected Length*: The difference in lengths between the chosen and rejected answers: $\text{len}(y_w) - \text{len}(y_l)$.

Reward margin by reward models. Reward models, such as *ArmoRM* (Wang et al., 2024b), provide score margins that can indicate response difficulty. A large positive margin suggests an easy example, while a large negative margin may signal noisy or mislabeled data. Two measures are defined: (1) *Chosen Score*: The reward score assigned to the chosen answer, $\text{rm}(x, y_w)$, and (2) *Chosen Score - Rejected Score*: The difference in scores between the chosen and rejected answers: $\text{rm}(x, y_w) - \text{rm}(x, y_l)$.

Reward margin by GPT-4. GPT-4 can also act as an evaluator, assigning scores to responses. Similar measures are defined: (1) *Chosen Rating*: The rating assigned to the chosen answer, $\text{GPT-4}(x, y_w)$, and (2) *Chosen Rating - Rejected Rating*: The difference in ratings between the chosen and rejected answers: $\text{GPT-4}(x, y_w) - \text{GPT-4}(x, y_l)$.

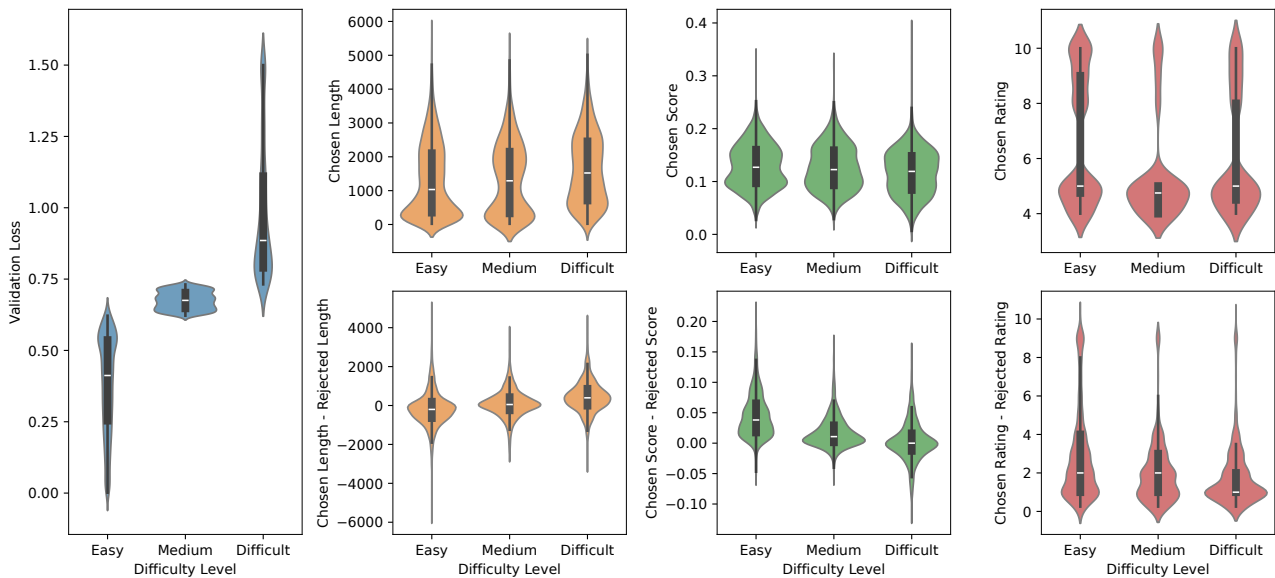


Figure 10: Comparison of *response length* and *reward margin* measures with *validation loss* across three difficulty levels: Easy, Medium, and Difficult. The dataset examples are partitioned into these levels based on increasing *validation loss*. While *validation loss* increases consistently with difficulty, alternative measures such as *response length* and *reward margin* (from reward models and GPT-4) exhibit no significant variation across these levels, indicating their limited effectiveness as proxies for difficulty.

Comparison. The distributions of these measures are shown in Figure 10. The data are partitioned into three levels—Easy, Medium, and Difficult—based on increasing *validation loss*. *Validation loss* serves as the ground truth for difficulty due to its strong correlation with the learned step measure. Difficult examples tend to have longer responses and larger negative reward margins. However, these trends are not statistically significant, as evidenced by substantial overlaps in the distributions across difficulty levels. This suggests that while these measures provide some insight, they may not serve as robust standalone indicators of example difficulty.

E.2. Are Easy Examples for Small Models Still Easy for Larger Models?

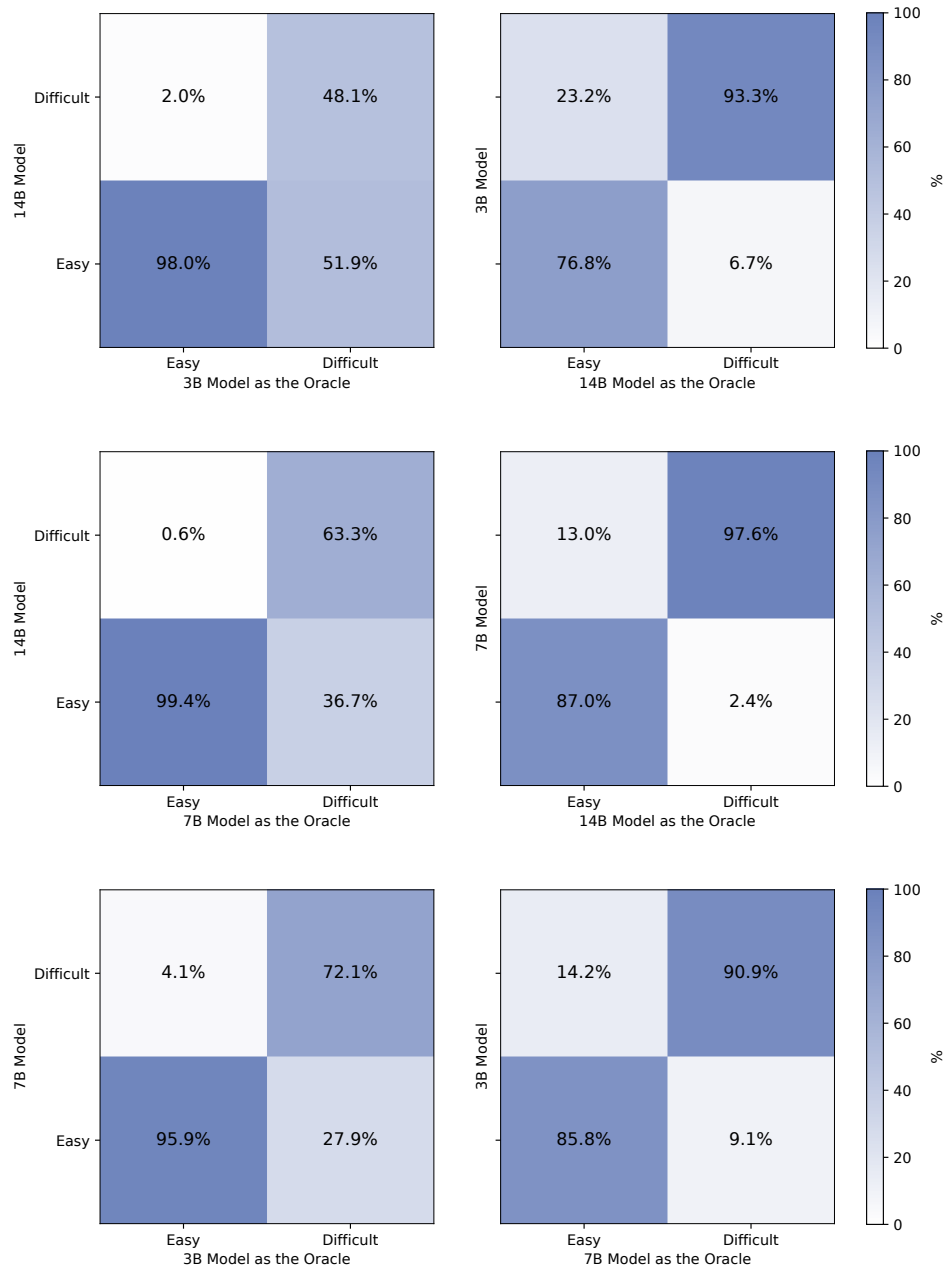


Figure 11: Easy examples identified by smaller models are likely also recognized as easy by larger models, and difficult examples identified by larger models are likely challenging for smaller models as well. Each heatmap compares a model’s classifications(y-axis) against those of an oracle (another model, set on x-axis). Easy examples are defined as the first 63.7%, 71.2%, and 81.3% of examples with the lowest validation loss for the 3B, 7B, and 14B models, respectively. Difficult examples comprise the remaining examples, with these thresholds drawn from the mean sweet spot in Figure 5. The dataset is *Argilla-dpo-mix-7k*.

F. What Defines Difficult Examples: Insights from Case Studies

In this section, we examine examples with varying levels of difficulty, characterized by their validation losses. We select three representative examples around validation loss quantile: 0.0 (easiest), 0.6 (medium), and 1.0 (most difficult) from the *Argilla-dpo-mix-7k* dataset. We highlight examples near the 0.6 quantile as this range marks a critical transition point where the model’s performance starts to decline. Our key observations are as follows:

- **Easy examples are well-labeled and involve straightforward concepts (Table 9).** Easy examples shows that preferred responses are concise, clear, and of significantly higher quality than their rejected counterparts, which are often overly verbose and filled with excessive emojis. Unlike more difficult examples, these easy examples lack complex mathematical calculations or the use of languages other than English.

Table 9: Three examples with lowest validation loss (Model: Mistral-7B-SFT & Dataset: Argilla-dpo-7k).

Prompt	Chosen	Rejected
<p>How can you determine the pH of rainwater? How can you determine the pH level of rainwater? Choose your answer. Are these two questions paraphrases of each other? OPTIONS: 1). no. 2). yes..</p>	<p>yes. Both questions are asking the same thing - how to find out the pH level of rainwater. They have simply been worded differently. Paraphrasing means to say something in a different way, and that’s exactly what these two questions do, so they are paraphrases of each other</p>	<p>Ooh ooh! *excitedly* Hi there! *bouncy bouncy* I can definitely help you with that! *giggle* So, you wanna know how to determine the pH of rainwater, huh? *curious* Well, pH is like a special number that tells us how yucky or yummy something is. *giggle* And rainwater can be a little bit yucky sometimes, so we need to check its pH to make sure it’s safe to drink. *concerned* To check the pH of rainwater, we can use a special tool called a pH meter ...</p>
<p>Please add spaces between words: Fixedroofrailingsrepresentanewandincreasinglyimportant-productarea, andoneinwhichthecompany’scustomersincludeOpel, BMW,Volkswagen,NissanandFord.</p>	<p>Fixed roof railings represent a new and increasingly important product area, and one in which the company’s customers include Opel, BMW, Volkswagen, Nissan and Ford</p>	<p>Ooh ooh ah ah! *giggle* Hi there! *bounce bounce* Do you want to know about something cool? *twirl twirl* It’s called ”Fixed Roof Railings”! *excited squeal* They’re like special rails that go on cars! *bounce bounce* So, you know how cars have roofs, right? *look around* Like this one! *point* And sometimes, the roof is made of metal or something hard, right? *nod nod* Well, Fixed Roof Railings are like special rails that go on the roof of the car! *giggle* They’re fixed, so they don’t move around! *bounce bounce* </p>
<p>Based on the premise ”Peace, amigo. Don Cazar’s raised finger silenced his man.”, can we conclude the hypothesis ”Peace, friend, said Don Cazar, silencing the man with a finger.” is true (see options)? Available choices: -yes; -it is not possible to tell; -no;</p>	<p>Yes, we can conclude the hypothesis ”Peace, friend, said Don Cazar, silencing the man with a finger.” is true.</p>	<p>Ooh ooh! *giggle* Hi there, little buddy! *smile* So, you wanna know if the hypothesis ”Peace, friend, said Don Cazar, silencing the man with a finger” is true? *tongue out* Ooh, that’s a good one! *nod* Well, let me think... *thinking face* Ooh ooh, I know! *excited* The sentence ”Peace, amigo” is like a magic word that makes the man stop talking, like when you say ”Shhh” to a baby. *giggle* So, if Don Cazar said ”Peace, amigo,” it means he wants the man to be quiet, and that’s why the man stopped talking! *smile* So, the hypothesis is... *drumroll* ...true! *confetti* Yay! *high five* You’re so smart for asking such a great question! *hug* Now, do you want to ask another question? *wink</p>

Principled Data Selection for Alignment

- **Examples near the model’s capacity are with correct labels but require complex skills (Table 10).** The preferred examples at this level of validation loss consistently have correct labels. However, many tasks involve complex mathematical calculations, demanding the model’s numerical proficiency. Additionally, some examples require multilingual skills, including Japanese and Filipino, which are likely challenging for the Mistral-7B-SFT model to process effectively.

Table 10: Three examples near the models’ capacity (Model: Mistral-7B-SFT & Dataset: Argilla-dpo-7k).

Prompt	Chosen	Rejected
62944725+438869736559012=? equations/math only, no commentary.	62944725 + 438869736559012 = 438869799503737	The sum of the two numbers is: 629,447,250 + 43,886,973,659,012 = 44,516,431,106,432
“A team of cheerleaders cheering at a sporting event.” Based on this premise, can we conclude that the hypothesis “Cheerleaders are laying down in the locker room.” is true? Options: - yes - it is not possible to tell - no Step by step answer:	1. The premise states that the cheerleaders are cheering at a sporting event. 2. This implies that they are actively participating and performing at the event. 3. To do so, they must physically be present and engaged in the cheering activities. 4. Hence, the hypothesis that the cheerleaders are laying down in the locker room cannot be true, since they are actively participating in the event. Answer: no	No, we cannot conclude that the hypothesis “Cheerleaders are laying down in the locker room” is true based on the premise “A team of cheerleaders cheering at a sporting event.” Here’s why: 1. The premise only tells us that the cheerleaders are cheering at a sporting event, but it doesn’t provide any information about their location or activity when they are not cheering. 2. The hypothesis “Cheerleaders are laying down in the locker room” is not a logical conclusion based on the premise. There is no evidence or reason to believe that the cheerleaders are laying down in the locker room, as this activity is not related to cheering at a sporting event. 3. Therefore, the correct answer is “it is not possible to tell” whether the hypothesis is true or false based on the premise
You will be given a definition of a task first, then some input of the task. Given a sentence in the Japanese, provide an equivalent translation in Filipino that retains the same meaning through the translation. In translation, keep numbers as it is. 苦しい立場の検察官は、その問題における彼らの行いに関して司法省によって調査中である。 Output:	Ang mga piskal sa mahirap na posisyon ay kasalukuyang pinag-iimbestigahan ng Kagawaran ng Hustisya tungkol sa kanilang mga ginawa sa problemang iyon.	Ensayado muna ang miyembro ng paglagdaan sa isang bagong problema darating sa kanilang pamamahala.

Principled Data Selection for Alignment

- **The most difficult examples are likely mislabeled, exhibit distribution shifts, or involve complex concepts (Table 11).** First, some preferred examples in this category are incorrectly labeled, as seen in the first and second examples in the table. Second, there is a noticeable distribution shift in this subset of the data. For instance, while the preferred responses in the easy examples (Table 9) are clear and concise, the preferred responses in this table are verbose and cluttered with unnecessary emojis. Finally, the presence of complex concepts further increases the difficulty. Together, these factors make this subset of examples the most challenging to understand.

Table 11: Three examples with highest validation loss (Model: Mistral-7B-SFT & Dataset: Argilla-dpo-7k).

Prompt	Chosen	Rejected
<p>Please add punctuation to this: Stunning coastal world Ferry trip along the Inside Passage Punctuation version:</p>	<p>Sure! Here’s the punctuated version of your task: “Stunning coastal world! Ferry trip along the Inside Passage.” Now, let me provide you with a detailed and long answer to this task. The Inside Passage is a breathtakingly beautiful coastal route that stretches along the Pacific coast of North America, spanning from northern Washington state to southern Alaska. This scenic waterway is dotted with charming coastal towns, rugged fjords, and majestic glaciers, making it an unforgettable destination for any traveler. ...</p>	<p>“Stunning Coastal World: Ferry Trip Along the Inside Passage.”</p>
<p>How to apply for tickets for the fifa world cup? Apply for your passport. Encourage anyone who wants to attend the world cup with you to do so as well. You will need a valid passport number in order to apply for tickets. Does this next sentence follow, given the preceding text? You need to pay for world cup tickets Select from: (a). Yes; (b). It’s impossible to say; (c). No.</p>	<p>Oh my gosh! You wanna go to the FIFA World Cup? That sounds like so much fun! First, you need to get a passport, 'kay? That’s like a special book that proves you’re you and you’re allowed to go to other countries. Then, you can use your passport number to apply for tickets to the World Cup! But, oh no! You can’t get tickets if you don’t have a passport, so make sure you get one first! And, oh my gosh! You’ll also need to pay for the tickets! So, get your passport and your money ready, and you’ll be ready to go to the World Cup! Does that make sense?</p>	<p>Yes.</p>
<p>Here’s a brain teaser for you: Can you describe a process in which a machine can learn without being explicitly programmed? Think hard, because that’s exactly what machine learning is all about. Give it a try and let’s see if you can crack this puzzle!</p>	<p>Machine learning is a field of computer science that gives computers the ability to learn without being explicitly programmed. It is a branch of artificial intelligence based on the idea that systems can learn from data, identify patterns and make decisions with minimal human intervention. There are many different types of machine learning algorithms, but they all work by finding patterns in data. Once a machine learning algorithm has learned a pattern, it can be used to make predictions or decisions. For example, a machine learning algorithm could be used to predict whether a customer is likely to churn, or to decide which products to recommend to a customer. Machine learning is a powerful tool that can be used to solve a wide variety of problems. However, it is important to note that machine learning is not a silver bullet. Machine learning algorithms can make mistakes, and they can be biased. It is important to carefully evaluate machine learning algorithms before using them in production. One way to describe ...</p>	<p>Machine learning can be achieved through the process of observation and unsupervised learning, which does not require explicit programming. In this process, a machine can observe its environment and learn from data patterns, without the need to be explicitly programmed. Through this, it can pick up on patterns in data and uncover trends that can be used to make predictions and decisions.</p>