Southern Newswire Corpus: A Large-Scale Dataset of Mid-Century Wire Articles Beyond the Front Page

Michael McRae

Trinity College Dublin mcraemi@tcd.ie

Abstract

I introduce a new large-scale dataset of historical wire articles from U.S. Southern newspapers, spanning 1960–1975 and covering multiple wire services (e.g., Associated Press, United Press International, Newspaper Enterprise Association). Unlike prior work focusing on front-page content, this dataset captures articles across the entire newspaper, offering broader insight into mid-century Southern coverage. The dataset includes a version that has undergone an LLM-based text cleanup pipeline to reduce OCR noise, enhancing its suitability for quantitative text analysis. Additionally, duplicate versions of articles are retained to enable analysis of editorial differences in language and framing across newspapers. Each article is tagged by wire service, facilitating comparative studies of editorial patterns across agencies. This resource opens new avenues for research in computational social science, digital humanities, and historical linguistics, providing a detailed perspective on how Southern newspapers relayed national and international news during a transformative period in American history. The dataset will be made available upon publication or request for research purposes.

1 Introduction

From the mid-20th century onward, U.S. newspapers relied extensively on wire services—especially the Associated Press (AP), United Press International (UPI), and the Newspaper Enterprise Association (NEA)—to provide timely national and international coverage to local communities. In Southern states, where local editors balanced syndication with the idiosyncrasies of regional politics and culture, wire content both shaped and reflected how readers engaged with pivotal events such as the Civil Rights Movement, Cold War politics, and the Vietnam War. By distributing stories to numerous subscribing papers, these agencies effectively curated much of the region's daily reading material, from front-page headlines to interior briefs and columns.

Existing digitisation efforts have made strides in extracting and analysing historical newspaper content, but they often concentrate on front-page articles or single wire services, leaving potentially significant material in the interior pages underexplored. Moreover, while large corpora of historical text now exist, many remain burdened by noisy optical character recognition (OCR), complicating fine-grained content analysis. Further, previous approaches often discard or merge multiple reprints of the same wire text into one observation, neglecting the observed phenomena that local editors often abridged or otherwise edited wire text while retaining the agency byline, generating subtle nuances in linguistic choice.

In this paper, I present the Southern Newswire Corpus, a novel dataset that moves beyond these limitations in four ways: 1) it captures wire articles throughout the newspaper (not just the front page), vastly increasing the scope of wire-sourced material; 2) it includes a raw OCR version and a second cleaned version, generated by a large language model (LLM) configured for text correction, substantially reducing OCR-induced noise; 3) it explicitly identifies major wire agencies (AP, UPI, NEA), facilitating cross-agency comparisons of coverage, tone, and editorial policy; and 4) reprints of the same wire text are treated uniquely. Each article is assigned an article_nw_id that denotes which wire dispatch it ultimately derives from.

I focus on Southern newspapers from 1960 to 1975, years marked by pivotal events such as the Civil Rights Movement, Vietnam War escalation, and significant shifts in local and national politics. Although these newspapers were published in the Southern United States, the wire articles they carried came from

national and international bureaus, providing coverage of a wide range of global issues. This combination offers a particularly rich vantage point for understanding how wire content—originating from distant locations or national headquarters—was communicated to local communities and shaped the public discourse in the South during a time of profound social and political change.

The dataset will be made available upon publication or request for research purposes.

Section 3 overviews the resulting dataset structure and key statistics; Section 4 detail methods for layout detection, OCR, duplication identification, and service tagging; and Section 5 discusses applications, limitations, and ethical considerations.

2 Related Work

Large-scale digitisation efforts such as Chronicling America [3] have made vast collections of historical U.S. newspaper scans available, prompting the development of methods to transform raw page images into structured text corpora. Early pipeline designs emphasized layout segmentation and OCR; for example, Tesseract has been widely used for text extraction from scanned pages, while more specialized Transformer-based OCR approaches [2] have recently emerged to tackle noisier archives. These processes typically produce article-level content by detecting bounding boxes for headlines and paragraphs.

Once article texts are extracted, another important challenge is reproduced-text detection, essential for identifying syndicated material like wire stories. Earlier approaches, such as the Viral Texts project [9], relied on n-gram overlaps to uncover reprinted content within historical collections. More recent methods leverage neural encoders to map near-duplicate articles into similar vector representations, improving robustness to noise or minor edits. Contrastive training of bi-encoder models has proven especially effective [4], as illustrated by Dell and colleagues' wire-article clustering pipeline. Furthermore, large language models (LLMs) now offer a potent means of post-OCR text cleanup, reducing character-level error rates and enhancing downstream tasks like entity recognition [1]. Combined, these advances in layout segmentation, deduplication, and correction underpin the construction of high-quality historical text datasets, including wire-focused resources such as Headlines [7], Newswire [6], and the present Southern Newswire Corpus, which applies these methods to an expanded set of newspapers and services while adding a fully corrected text option.

3 Dataset

3.1 Source Newspapers and Date Range

The newswire articles in Southern Newswire Corpus are constructed by detecting articles written by newswire services AP, UPI and NEA, in approximately 10 million digitised pages published in newspapers commercially located in the American South ¹ between 1960 and 1975. The newspapers include daily print newspapers as well as smaller weekly printed newspapers. All pages of each edition available are included in the pipeline. Each article is available in a raw OCR version as well as an LLM-corrected version, which reduces OCR noise to facilitate quantitative text analysis. The dataset covers multiple wire services, primarily AP, UPI, and NEA. Summary of the sample are provided in Table 1.

¹In this context, the South represents the Confederate States of America e.g., South Carolina, Mississippi, Florida, Alabama, Georgia, Louisiana, Texas, Virginia, Arkansas, Tennessee, and North Carolina.

Metric	Count
Total articles	57,547,723
Newswire articles	$9,\!571,\!254$
AP articles	7,429,704
UPI articles	2,024,254
NEA articles	117,296
Unique newswire articles	1,768,567
Unique AP articles	1,326,036
Unique UPI articles	393,015
Unique NEA articles	49,516

Table 1: Summary of article counts in the dataset.

Figure 1 shows that the overall article density is higher in the mid-1960s before tapering toward the early 1970s, while Figure 2a indicates that the total number of articles in Southern newspapers declines from around 1.5 million in 1960 to roughly half that amount by the mid-1970s, with the count of wire articles following a similar (but lower) trajectory. Figure 2b then breaks down wire articles by agency, revealing AP's steady dominance relative to UPI and NEA over the 15-year span. In addition, the proportion of total articles that are wire-sourced, hovers between 15% and 18% in the early 1960s, briefly climbing above 18% around the mid-decade, as shown in Figure 3. After 1965, however, the proportion trends downward, dipping to near 12% in the early 1970s before partially rebounding by 1975. This decline suggests that while wire content remained an important component of Southern newspapers throughout the period, its relative share of total articles in Southern Newswire Corpus gradually fell over time.



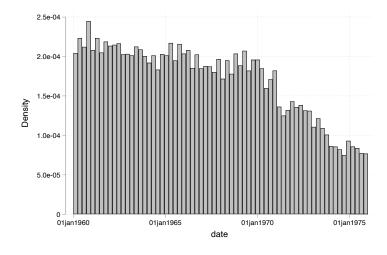


Figure 1: Density of all articles by date

In addition to article text and newswire metadata, I provide the newspaper source of each version of each article, including geo-referencing of newsroom headquarters. Utilising a novel dataset of daily newspaper circulation collected by the Audit Bureau of Circulation (ABC) from 1964, I calculate that the newspapers in Southern Newswire Corpus account for more than 50% of total daily circulation for 70% of all Southern counties (see Figure 4).

To generate topics for newswire articles, I employ a Latent Dirichlet Allocation (LDA) model to label article topic area for each article in Southern Newswire Corpus. I conduct a multi-sampling process whereby I divided the corpus into multiple sub-samples and trained an LDA model on each, extracting topic distributions from every sub-sample. Results are then aggregated across sub-samples for a unified topic representation and weighted based on topic prevalence. The most representative 50 topics from the combined distributions are selected and OpenAI's GPT-40 model is utilised to assign human-readable labels





- (a) Newswire vs. All Articles Over Time
- (b) AP, UPI, and NEA Proportions Over Time

Figure 2: Evolution of newswires (1960-1975)

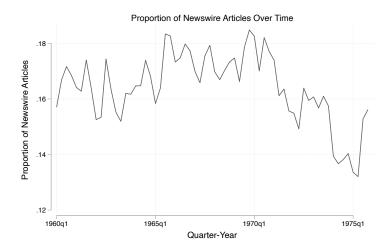


Figure 3: Evolution of proportional newswires out of all articles (1960 - 1975).

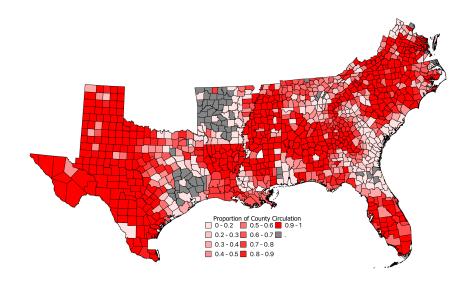


Figure 4: Proportion of total county daily newspaper circulation in 1964 by newspapers in Southern Newswire Corpus. Calculated from novel dataset of daily newspaper circulation collected by the Audit Bureau of Circulation (ABC) from 1964

to these topics. To simplify topics, I grouped closely related topics into broader categories. I experimented with transformer-based embeddings using BERTopic. Despite the method's strength in capturing semantic relationships, BERTopic produced a high level of noise, with many clusters lacking clear thematic boundaries and exhibiting significant overlap. The increased granularity, while informative in some contexts, resulted in less coherent and less stable topic assignments compared to other methods.

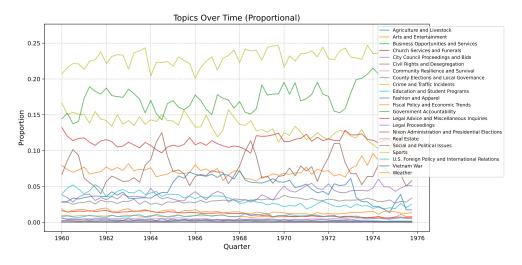


Figure 5: Proportion of topics over time of newswire articles

4 Methodology

4.1 Layout Analysis and OCR

To detect articles, headlines, advertisements, and other content regions in newspaper scans, I employ a layout detector trained on YOLOv10 (Medium). I train the layout detection model on a set of 4,000 labeled newspaper images containing 88974 annotated layout objects (e.g., articles, headlines, images, advertisements, masthead). Legibility classification is then conducted using an existing image classifier with a Mobilenet v3 backbone from the American Stories project [2]. After filtering out illegible blocks, recognised text regions undergo OCR via Tesseract. Finally, if an article spans multiple bounding boxes (e.g., a headline and an adjacent text block), I apply a rule-based association that uses bounding-box coordinates to merge them into a single structured observation, preserving the headline, author byline (where identifiable), and article text.

4.2 Identifying Wire Services

Each recognised article is classified by wire service (AP, UPI, or NEA) using three lightweight Sentence-BERT-based models, each fine-tuned to detect a single service from its textual cues. For training data, I collected articles with explicit bylines referencing one of the three agencies and supplemented them with unlabelled articles that mention typical dateline or style markers (e.g., "(AP)", "(UPI)", "From Our NEA Staff"), followed by manual verification. Training data includes 4000 articles: 1000 for each service and 1000 locally produced articles. Each model encodes the article text (including the headline and any byline) into a Sentence-BERT embedding [5], and a simple linear classifier predicts whether that article matches the wire service in question. Articles flagged by more than one model or not exceeding a minimum confidence threshold in any model are excluded from the dataset, minimising the possibility of incorrectly attributing copyrighted content. In practice, this conservative filtering strategy removes roughly 4% of candidate wire articles. The remaining items are assigned a wire service label and thus included in the final Southern Newswire Corpus.

4.3 Identifying Shared Wire Dispatches

To facilitate analysis of reprinted wire stories without discarding local modifications, I adopt the noise-robust de-duplication approach of Silcock et al. [8]. Their model, initially fine-tuned on historical newspaper data, encodes each article's text into a Sentence-BERT-like embedding. I then use approximate nearest-neighbour retrieval to locate articles with high semantic similarity published around the same date. Unlike a traditional deduplication pipeline, which might unify all reprints into a single "canonical" text, this method assigns a shared $article_nw_id$ to each cluster. This preserves every local version of a wire story, enabling comparison between local versions of the same underlying dispatch.

4.4 LLM-Based Text Correction

To provide a more refined version of the dataset, I developed a text-correction pipeline that uses Llama 3.2, a large language model configured for minimal rewriting. Specifically:

- Error Reduction. Llama 3.2 corrects common OCR artefacts such as misread characters, broken words, or stray punctuation, improving text clarity without introducing anachronistic spellings.
- Format Preservation. I preserve paragraph structure and avoid altering genuine historical language.
 Corrections are limited to unambiguous OCR errors, ensuring that archaic or dialect terms remain intact.

In practice, this LLM-based approach significantly boosts entity recognition accuracy and overall readability, while retaining the historical integrity of the text.

4.5 Copyright Considerations

Because these wire articles predate 1978, they fall under the public domain when no explicit copyright notices were included. I have removed AP stock market summaries, which remain under AP copyright, and excluded any items carrying explicit copyright statements. I thus believe the remaining articles are lawfully distributable under a permissive license.

5 Discussion and Future Directions

5.1 Research Applications.

By expanding beyond the front page, this dataset captures a broader range of historical themes that may not have been headline news but still circulated regionally. The corrected version supports robust NLP tasks such as topic modelling, network analysis of named entities, and large-scale language modelling fine-tuning on mid-century content. Cross-agency tagging lets researchers compare editorial or rhetorical variations among AP, UPI, and NEA.

5.2 Limitations.

1) Coverage Gaps: Some newspapers or date ranges remain undigitised. 2) OCR Artefacts: While LLM corrections significantly help, some subtle errors persist. 3) Historical Biases: Language from this era can include biases or insensitive terminology, which I have deliberately not filtered to maintain authenticity.

5.3 Future Work.

Moving forward, this dataset will be broadened to all US states from 1960 - 1975. I also intend to refine the text correction approach using open-source models, allowing entirely local processing of historical text rather than reliance on proprietary LLMs.

6 Conclusion

By capturing wire-sourced material across entire newspapers, distinguishing among multiple agencies, offering both raw and LLM-corrected versions, and maintaining variations of underlying wire dispatches, the **Southern Newswire Corpus** expands the opportunities for historical text analysis. Scholars from computational linguistics, digital humanities, and social sciences can now more easily explore how wire news was transmitted and transformed in the American South during a period of profound social and political change. Upon publication, the dataset will be made publicly accessible to support replication and further research.

Acknowledgments

Google Colab, Trinity High Performance Computer Clusters, Grattan Scholarship Funding, and the Trinity Research in Social Sciences Postgraduate Research Fellowship provided resources to extract and classify newspaper articles. I gratefully acknowledge prior research on large-scale wire detection and historical newspaper digitisation, which inspired and informed the methods used here. I also thank the libraries and archives that provide digitised scans of historical newspapers.

References

[1] T. Brown, B. Mann, N. Ryder, M. Subbiah, J. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, et al. Language models are few-shot learners. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.

- [2] M. Dell, J. Carlson, T. Bryan, E. Silcock, A. Arora, Z. Shen, L. D'Amico-Wong, Q. Le, P. Querubin, and L. Heldring. American stories: A large-scale structured text dataset of historical us newspapers. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 36, 2024.
- [3] L. of Congress. Chronicling america. https://chroniclingamerica.loc.gov/. Accessed: 2025-02-17.
- [4] N. Reimers and I. Gurevych. Sentence-BERT: Sentence embeddings using siamese BERT-networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. Association for Computational Linguistics, 2019.
- [5] N. Reimers and I. Gurevych. Sentence-bert: Sentence embeddings using siamese bert-networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. Association for Computational Linguistics, 2019.
- [6] E. Silcock, A. Arora, L. D'Amico-Wong, and M. Dell. Newswire: A large-scale structured database of a century of historical news. arXiv preprint, 2024.
- [7] E. Silcock, A. Arora, and M. Dell. A massive scale semantic similarity dataset of historical english. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 36, 2024.
- [8] E. Silcock, L. D'Amico-Wong, J. Yang, and M. Dell. Noise-robust de-duplication at scale. In *International Conference on Learning Representations (ICLR)*, 2020.
- [9] D. A. Smith, R. Cordell, and A. Mullen. Computational methods for uncovering reprinted texts in antebellum newspapers. *American Literary History*, 27(3):E1–E15, 2015.

7 appendix

7.1 Code Availability

All code used to create Southern Newswire Corpus will be made available via my website upon publication.

https://mike-mcrae.github.io/

7.2 Dataset

The dataset introduced in this paper, comprising historical wire articles from U.S. Southern newspapers (1960–1975), will be made available upon publication or upon reasonable request for research purposes. To ensure reproducibility, any code used for data processing and analysis will be shared through a public repository. Researchers interested in accessing the dataset prior to publication may contact the author directly to discuss potential collaborations or data use agreements.

7.3 Newswire Classifiers

I train and release three separate BERT-based classifiers to identify whether a newspaper article was produced by one of three major newswire services: Associated Press (AP), United Press International (UPI), and Newspaper Enterprise Association (NEA). Each model is a fine-tuned version of bert-base-uncased from the Hugging Face Transformers library, designed for binary classification with labels indicating the presence (1) or absence (0) of a specific newswire source.

The classifiers were trained on historical newspaper articles from the period 1960–1975 using a labeled corpus of public-domain articles. Each model was trained on 4,000 articles per round (1,000 from the target newswire and 3,000 from other sources). To enhance performance on short news snippets, we trained using only headlines, bylines, and the first 100 characters of articles. The training was conducted using a TPU (v2-8) in Google Colab over four epochs with a batch size of 64 and a learning rate of 2×10^{-5} , optimized with AdamW and a binary cross-entropy loss function.

The models achieve high classification performance, with F1-scores of 0.9925 for the AP model, 0.9999 for UPI, and 0.9876 for NEA, making them suitable for large-scale classification tasks involving historical news archives. The classifiers are publicly available on Hugging Face and can be accessed at:

https://huggingface.co/mikemcrae25/newswire_classifiers