

# Teaching LLMs According to Their Aptitude: Adaptive Reasoning for Mathematical Problem Solving

Xin Xu<sup>1,2\*</sup>, Yan Xu<sup>1,2</sup>, Tianhao Chen<sup>1</sup>,  
Yuchen Yan<sup>3</sup>, Chengwu Liu<sup>2,4</sup>, Zaoyu Chen<sup>2,5</sup>, Yufei Wang<sup>2</sup>,  
Yichun Yin<sup>2</sup>, Yasheng Wang<sup>2</sup>, Lifeng Shang<sup>2</sup>, Qun Liu<sup>2</sup>,

<sup>1</sup>The Hong Kong University of Science and Technology, <sup>2</sup>Huawei Noah’s Ark Lab,  
<sup>3</sup>Zhejiang University, <sup>4</sup>Peking University, <sup>5</sup>The Hong Kong Polytechnic University

Correspondence: Yan Xu (yxucb@connect.ust.hk)

## Abstract

Existing approaches to mathematical reasoning with large language models (LLMs) rely on Chain-of-Thought (CoT) for generalizability or Tool-Integrated Reasoning (TIR) for precise computation. While efforts have been made to combine these methods, they primarily rely on post-selection or predefined strategies, leaving an open question: whether LLMs can autonomously adapt their reasoning strategies based on their inherent capabilities. In this work, we propose **TATA** (Teaching LLMs According to Their Aptitude), an adaptive framework that enables LLMs to personalize their reasoning strategy spontaneously, aligning it with their intrinsic aptitude. TATA incorporates base-LLM-aware data selection during supervised fine-tuning (SFT) to tailor training data to the model’s unique abilities. This approach equips LLMs to autonomously determine and apply the appropriate reasoning strategy at test time. We evaluate TATA through extensive experiments on six mathematical reasoning benchmarks, using both general-purpose and math-specialized LLMs. Empirical results demonstrate that TATA effectively combines the complementary strengths of CoT and TIR, achieving superior or comparable performance with improved inference efficiency compared to TIR alone. Further analysis underscores the critical role of aptitude-aware data selection in enabling LLMs to make effective and adaptive reasoning decisions and align reasoning strategies with model capabilities.

## 1 Introduction

Mathematical reasoning is a cornerstone of human intelligence, and enabling machines to solve mathematical problems is crucial for many applications (Ahn et al., 2024; He et al., 2024). Recent years have seen rapid progress in leveraging LLMs for mathematical reasoning, with advancements in con-

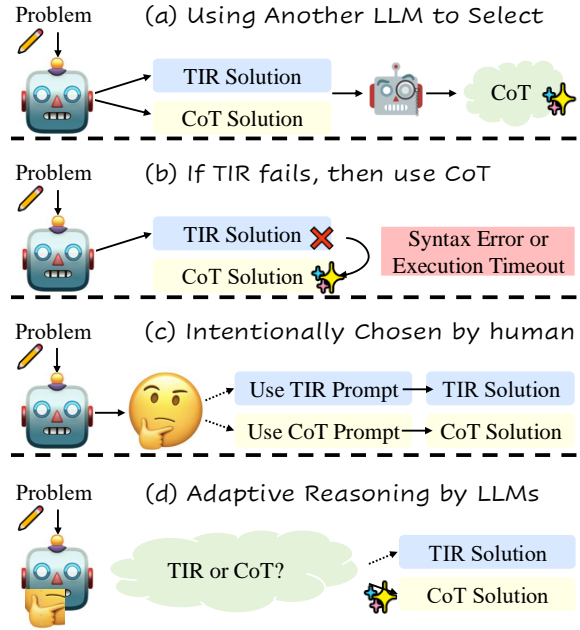


Figure 1: Illustration of our research question. (a) Zhao et al. (2023) post-select between CoT and TIR by another LLM. (b) Yue et al. (2023) choose CoT if TIR fails due to syntax error or execution timeout. (c) Yang et al. (2024a) controls the selection between CoT and TIR by predefined inference prompts. (d) We aim to teach LLMs to choose the appropriate one spontaneously according to their aptitude.

tinuing pretraining (Lewkowycz et al., 2022; Azerbayev et al., 2023; Shao et al., 2024), supervised fine-tuning (SFT) (Yu et al., 2023; Tong et al., 2024; Yan et al., 2024; Toshniwal et al., 2024), reinforcement learning (RL) (Shao et al., 2024; DeepSeek-AI et al., 2025), prompting (Wei et al., 2022; Zheng et al., 2023; Wang et al., 2023b), and evaluation (Tang et al., 2024; Xu et al., 2025b; Gao et al., 2024; Xu et al., 2025a). Among these, SFT has attracted significant attention, even in recent test-time scaling efforts (Muennighoff et al., 2025).

LLM math reasoning typically follows two paradigms: Chain-of-Thought (CoT) (Wei et al.,

\*Work done during internship at Huawei Noah’s Ark Lab.

2022), which uses natural language intermediate steps for flexibility and interpretability but lacks computational guarantees, and Tool-Integrated Reasoning (TIR) (Chen et al., 2022; Gao et al., 2023), which employs executable code for precise computations at the cost of higher resource demands due to interactive execution. In contrast, CoT requires only a single forward pass, making it more computationally efficient. Previous work often trains LLMs exclusively on CoT/TIR data (Tong et al., 2024; Shao et al., 2024; Yan et al., 2024; Gou et al., 2023; Wang et al., 2023a; Lu et al., 2024), or relies on external signals or predefined prompts to select between the two (Zhao et al., 2023; Yue et al., 2023; Yang et al., 2024b) (see Figure 1). Recent advancements in slow-thinking models, such as DeepSeek R1 (DeepSeek-AI et al., 2025), have demonstrated the potential of long CoT reasoning. Then a promising direction lies in enabling LLMs to adaptively incorporate tools during slow-thinking processes, combining the strengths of both CoT and TIR (Figure 1 (d)). A critical first step toward this goal is to teach base LLMs to adaptively select between CoT and TIR according to their inherent aptitude through SFT. By doing so, we can better unlock the model’s potential to use tools effectively while maintaining its generalization ability across diverse problem-solving scenarios (Figure 1 (d)).

In this work, we propose **Teaching LLMs According to Their Aptitude (TATA)**, an adaptive framework that enables LLMs to spontaneously select between CoT and TIR for math problem solving by using SFT data selection that aligns with LLM’s inherent aptitude. Unlike previous methods, TATA leverages base-LLM-aware data selection during SFT, ensuring that the training process not only suits the model’s potential but also mitigates the risk of catastrophic forgetting (Chu et al., 2025). By adaptively selecting between CoT and TIR based on the base model’s aptitude, TATA preserves and enhances the generalizability of the model, particularly for out-of-domain tasks.

Concretely, we begin with a dataset  $\mathcal{D}$ , which consists of  $N$  triplets, each containing a query, a CoT solution, and a TIR solution. We then construct an anchor set,  $\mathcal{D}_{\text{anchor}}$ , to evaluate the model’s performance. For each training query in  $\mathcal{D}$ , we assess the LLM’s accuracy on  $\mathcal{D}_{\text{anchor}}$  by providing either the CoT or TIR solution of the query as a one-shot example. Based on the model’s performance in each setting, we select the most effective reasoning paradigm for training queries and use it

to construct the SFT data,  $\mathcal{D}_{\text{SFT}}$ .

To assess the effectiveness of TATA, we conduct extensive evaluations across six mathematical reasoning benchmarks, utilizing both general-purpose LLMs (e.g. Llama-3-8B (AI@Meta, 2024)) and math-specialized LLMs (e.g. Qwen2.5-Math-7B (Yang et al., 2024b)) as base models. Experimental results demonstrate that TATA successfully personalizes reasoning strategies according to each LLM’s aptitude, leading to better performance across different models and benchmarks.

To summarize, our contributions are as follows:

1. We propose TATA, an adaptive framework that enables LLMs to spontaneously select between CoT and TIR for adaptive mathematical reasoning based on their inherent aptitudes.
2. Extensive experiments demonstrate that TATA effectively combines the strengths of both CoT and TIR, achieving comparable or even superior performance while offering higher inference efficiency compared to TIR.
3. Comprehensive analyses highlight the critical role of base-LLM-aware data selection for CoT and TIR, which is the core of our TATA framework.

## 2 Background

### 2.1 Rejection Fine-Tuning

Rejection fine-tuning (RFT) is a widely-adopted approach to enhance math reasoning abilities by augmenting the original training set using rejection sampling (Yuan et al., 2023). Suppose that the original training set  $\mathcal{D}_{\text{orig}} = \{(x_i, y_i)\}_{i=1}^N$  consists of  $N$  pairs of data points  $(x_i, y_i)$ . For each query  $x_i$ ,  $M$  responses are generated by a teacher model (e.g., GPT-4):  $\{x_i, y_i^j\}_{j=1}^M$ . If  $y_i^j \neq y_i$ , then the response  $y_i^j$  is discarded, leading to the augmented training set  $\mathcal{D}_{\text{aug}} = \{(x_i, y_i^j)\}_{i=1}^N \}_{j=1}^{M_i}$ , where  $M_i \leq M$  is the number of correct responses for query  $x_i$ . More details are given in Appendix A.1.

### 2.2 TIR Inference Pipeline

Tool-Integrated Reasoning (TIR) (Gou et al., 2023) combines natural language reasoning with Python code execution in an interleaved manner. When a Python code block is encountered, it is executed using a Python interpreter, and the resulting output, along with the previous context, is fed back into the LLM to facilitate further reasoning (see Algorithm 1). Solving math problems with TIR often requires multiple iterations of these interactions, which typically results in higher computational costs compared to CoT. However, TIR offers

more reliable results by leveraging external tools for computation. The whole inference pipeline of TIR is provided in Appendix A.2.

### 2.3 Implicit Instruction Tuning

In-Context Learning (ICL) can be viewed as implicit instruction tuning (IIT), i.e., “fine-tune” the demonstration implicitly (Li et al., 2023). Let  $\mathbf{X}_{\text{ins}}, \mathbf{X}_{\text{test}} \in \mathbb{R}^{d_{\text{in}}}$  be the few-shot demonstration inputs and the test input, respectively. Suppose  $\mathbf{W}_K, \mathbf{W}_V, \mathbf{W}_Q \in \mathbb{R}^{d_{\text{out}} \times d_{\text{in}}}$  are projection matrices to compute the attention queries, keys, and values. The self-attention is formulated as follows:

$$\begin{aligned} & \mathbf{W}_V[\mathbf{X}_{\text{ins}} \parallel \mathbf{X}_{\text{test}}] \text{Softmax} \left( \frac{\mathbf{W}_K[\mathbf{X}_{\text{ins}} \parallel \mathbf{X}_{\text{test}}]^\top \mathbf{Q}}{\sqrt{d_{\text{in}}}} \right) \\ & \approx \underbrace{\mathbf{W}_V \mathbf{X}_{\text{test}} (\mathbf{W}_K \mathbf{X}_{\text{test}})^\top}_{\text{Only test input.}} + \underbrace{\mathbf{W}_V \mathbf{X}_{\text{ins}} (\mathbf{W}_K \mathbf{X}_{\text{ins}})^\top}_{\text{Only instruction sample.}} \mathbf{Q}, \end{aligned}$$

where  $\parallel$  denotes concatenation. The first term only involves the test input  $\mathbf{X}_{\text{test}}$ , and the second term is related to few-shot exemplars, which can be interpreted as an IIT to the model parameters (Dai et al., 2022; Yang et al., 2023) (see Appendix A.3).

## 3 The TATA Framework

### 3.1 Problem Setting

Many advanced capabilities can be distilled through SFT (Muennighoff et al., 2025; Zhou et al., 2023b; DeepSeek-AI et al., 2025). Building on this, we aim to teach LLMs to spontaneously select between CoT and TIR using SFT by carefully selecting reasoning patterns tailored to different training queries. In this section, we formally formulate our research question as an SFT data selection problem.

**Data Structure** Suppose we have a candidate dataset  $\mathcal{D} = \{(x_i, y_i^j, z_i^j)\}_{i=1, j=1}^{N, M_i}$  consisting of triplets in the form  $(x_i, y_i^j, z_i^j)$  for the  $i$ -th training example, where  $1 \leq j \leq M_i$ . Here,  $x_i$  represents the  $i$ -th training problem, while  $y_i^j$  and  $z_i^j$  denote the  $j$ -th CoT solution and TIR solution to this problem, respectively. Notably, the TIR solution  $z_i^j$  is adapted from  $y_i^j$ , meaning both solutions follow the same steps to solve the mathematical problem  $x_i$ , but differ in their reasoning formats:  $y_i^j$  relies exclusively on natural language reasoning, whereas  $z_i^j$  incorporates Python code blocks to perform calculations for certain reasoning steps.

**Objective** Our objective is to construct an SFT dataset from the candidate dataset  $\mathcal{D} =$

$\{(x_i, y_i^j, z_i^j)\}_{i=1, j=1}^{N, M_i}$  by incorporating suitable reasoning patterns for different training queries. Specifically, for each problem  $x_i$  in  $\mathcal{D} = \{(x_i, y_i^j, z_i^j)\}_{i=1, j=1}^{N, M_i}$ , we need to decide whether to include its CoT solutions or TIR solutions in the SFT dataset. Formally, this involves determining whether  $\{(x_i, y_i^j)\}_{j=1}^{M_i} \subseteq D_{\text{SFT}}$  or  $\{(x_i, z_i^j)\}_{j=1}^{M_i} \subseteq D_{\text{SFT}}$ .<sup>\*</sup> For example, CoT-only SFT (Xu et al., 2024c) constructs the dataset such that  $\{(x_i, y_i^j)\}_{j=1}^{M_i} \subseteq D_{\text{SFT}}, \forall i$ . In contrast, TIR-only SFT (Gou et al., 2023) selects  $\{(x_i, z_i^j)\}_{j=1}^{M_i} \subseteq D_{\text{SFT}}, \forall i$ . Our work aims to go beyond static selection approaches by dynamically tailoring the reasoning paradigm to suit the specific requirements of each training query, while also accounting for the base LLM’s aptitude.

### 3.2 TATA Overview

*“Teach according to students’ aptitude.”*

— Confucius

**Motivation** Following the success of distillation through SFT (Muennighoff et al., 2025; DeepSeek-AI et al., 2025), we aim to enable LLMs to adaptively select appropriate reasoning strategies based on their own aptitude, guided by the control of SFT data selection (see Section 3.1). Intuitively, if an LLM demonstrates improved performance on certain queries when trained with CoT solutions instead of TIR solutions, it suggests its inclination toward CoT reasoning in those cases. This preference can be extrapolated to new cases, where the model is expected to favor CoT for similar problems during testing. The same principle applies to TIR-based reasoning. Inspired by IIT theory (see Section 2.3), LLMs can be indirectly “fine-tuned” with CoT or TIR examples through one-shot learning, thereby replacing the need for actual SFT.

**Overview** As depicted in Figure 2, our proposed framework, TATA, comprises four main steps: data construction, anchor construction, contribution quantification, and data selection. In the data construction stage, we adapt an original training set,  $\mathcal{D}_{\text{orig}}$ , containing CoT solutions, to form the candidate set  $\mathcal{D} = \{(x_i, y_i^j, z_i^j)\}_{i=1, j=1}^{N, M_i}$ . This candidate set includes triplets of queries, a CoT solution, and corresponding TIR solution. Next, during the anchor construction stage, a representative

<sup>\*</sup>We also consider scenarios where both CoT and TIR solutions for a query are included in the SFT dataset.

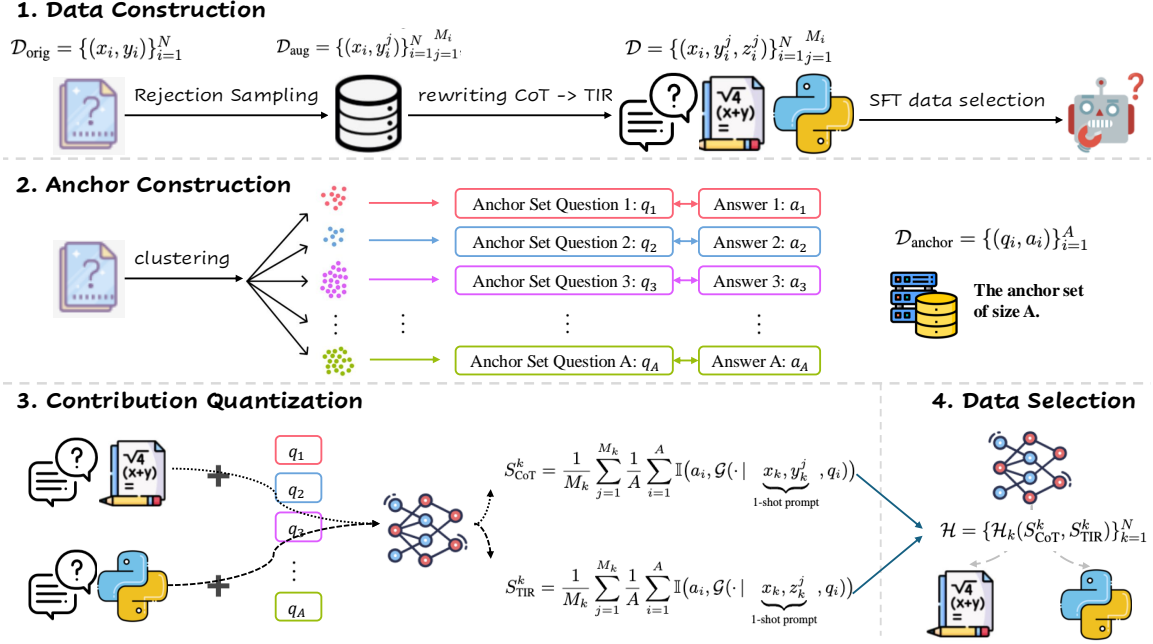


Figure 2: Overview of our **Teaching LLMs According to Their Aptitude (TATA)** framework. Here,  $\mathcal{D}_{\text{orig}}$  denotes the original training set,  $\mathcal{D}_{\text{aug}}$  represents the augmented training set obtained through rejection sampling with CoT only, and  $\mathcal{D}$  refers to the candidate set consisting of (query, CoT, TIR) triplets.  $\mathcal{D}_{\text{anchor}}$  is the anchor set of size  $A$ .  $S_{\text{CoT}}^k$  and  $S_{\text{TIR}}^k$  are scores calculated based on the LLMs’ aptitude on the anchor set, elicited using 1-shot prompts. Finally,  $\mathcal{H}$  represents the SFT data selection process. Fine-tuning on the resulting SFT data enables LLMs to spontaneously select between CoT and TIR at test time according to their aptitude.

anchor set of size  $A$  is generated from the original training set by clustering. In the contribution quantification stage, we compute two scores,  $S_{\text{CoT}}^k$  and  $S_{\text{TIR}}^k$ , for each query  $q_k$  in the candidate set  $\mathcal{D} = \{(x_i, y_i^j, z_i^j)\}_{i=1, j=1}^{N, M_i}$ . These scores indicate the impact of CoT and TIR solutions on the performance of LLMs using IIT (see Section 2.3). Finally, the data selection step formulates a decision based on  $S_{\text{CoT}}^k$  and  $S_{\text{TIR}}^k$ , determining whether to include CoT or TIR solutions for queries in  $\mathcal{D}$ .

### 3.3 TATA Details

**Data Construction** We start with an original math training set (e.g., MATH (Hendrycks et al., 2021) training set), denoted as  $\mathcal{D}_{\text{orig}} = \{(x_i, y_i)\}_{i=1}^N$ , which consists of  $N$  training examples, where the  $i$ -th problem is represented as  $x_i$  with its corresponding golden answer  $y_i$ . To further enhance the training set, we apply RFT (see Section 2.1), resulting in an augmented dataset,  $\mathcal{D}_{\text{aug}} = \{(x_i, y_i^j)\}_{i=1, j=1}^{N, M_i}$ , where  $y_i^j$  denotes the  $j$ -th augmented CoT solution for the  $i$ -th training problem  $x_i$ . Next, we convert each CoT solution  $y_i^j$  into the TIR format  $z_i^j$  by prompting a strong LLM (e.g., GPT-4o). During this process, the original logic in  $y_i^j$  is preserved, while Python blocks

are introduced to handle necessary computations. This transformation produces a candidate dataset  $\mathcal{D} = \{(x_i, y_i^j, z_i^j)\}_{i=1, j=1}^{N, M_i}$ , which is required for our problem setting (see Section 3.1).

**Anchor Construction** To evaluate the impact of specific CoT or TIR solutions on the performance of LLMs, we construct an anchor set, denoted by  $\mathcal{D}_{\text{anchor}} = \{(q_i, a_i)\}_{i=1}^A$ , where  $A$  is the size of the anchor set,  $q_i, a_i$  is the  $i$ -th question and corresponding ground-truth answer in  $\mathcal{D}_{\text{anchor}}$ . We expect  $\mathcal{D}_{\text{anchor}}$  to be diverse, ensuring that accuracy on this set fairly reflects the LLMs’ overall performance. To achieve this, we first encode all queries from  $\mathcal{D}_{\text{orig}}$  into vector representations using an embedding model (e.g., text-embedding-ada-002) and then cluster them into  $A$  distinct groups. The center of each cluster is selected to  $\mathcal{D}_{\text{anchor}}$ . This approach takes the semantic diversity of questions into account, making  $\mathcal{D}_{\text{anchor}}$  a reliable indicator of LLMs’ performance.

**Contribution Quantization** To quantify the contribution of CoT and TIR for each triplet  $(x_k, y_k^j, z_k^j)$  in  $\mathcal{D}$  to the LLMs’ math reasoning abilities, we implicitly “fine-tune” the LLMs using CoT and TIR formats separately through one-shot learning (see Section 2.3). For the  $k$ -th query  $x_k$  and its

corresponding CoT solutions  $y_k^j$  ( $1 \leq j \leq M_k$ ), we compute a CoT score, denoted as  $S_{\text{CoT}}^k$ , as follows:

$$S_{\text{CoT}}^k = \frac{1}{M_k} \sum_{j=1}^{M_k} \frac{1}{A} \sum_{i=1}^A \mathbb{I}(a_i, \mathcal{G}(\cdot | \underbrace{x_k, y_k^j}_{\text{1-shot prompt}}, q_i)),$$

where  $x_k$  and  $y_k^j$  serve as the one-shot prompt for the LLM  $\mathcal{G}$  to generate a response for the question  $q_i$  in the anchor set, and  $\mathbb{I}$  is an indicator function that returns 1 if the model’s generated answer matches the ground-truth answer  $a_i$  of question  $q_i$ , and 0 otherwise.  $S_{\text{CoT}}^k$  represents the average accuracy on the anchor set  $\mathcal{D}_{\text{anchor}}$  when using CoT format as the one-shot prompt, averaged over all CoT solutions  $y_k^j$  ( $1 \leq j \leq M_k$ ) for query  $x_k$ . Similarly, the TIR score,  $S_{\text{TIR}}^k$ , is defined as:

$$S_{\text{TIR}}^k = \frac{1}{M_k} \sum_{j=1}^{M_k} \frac{1}{A} \sum_{i=1}^A \mathbb{I}(a_i, \mathcal{G}(\cdot | \underbrace{x_k, z_k^j}_{\text{1-shot prompt}}, q_i)).$$

The only difference is that the TIR format  $z_k^j$  is used as the one-shot example instead of CoT.

**Data Selection** Currently, two scores,  $S_{\text{CoT}}^k$  and  $S_{\text{TIR}}^k$ , are associated with the  $k$ -th query  $q_k$  in the candidate set  $\mathcal{D}$ . The next step is to determine whether to include the CoT or the TIR solutions for this specific query  $q_k$  in  $\mathcal{D}$ . Specifically, the goal is to decide between  $\{(x_k, y_k^j)\}_{j=1}^{M_k} \subseteq D_{\text{SFT}}$  or  $\{(x_k, z_k^j)\}_{j=1}^{M_k} \subseteq D_{\text{SFT}}$ . We formalize this decision process with a decision function  $\mathcal{H}_k = (S_{\text{CoT}}^k, S_{\text{TIR}}^k)$ , where the final decision is represented as a series of decisions  $\mathcal{H} = \{\mathcal{H}_k\}_{k=1}^N$ , where  $N$  is the number of queries in candidate set  $\mathcal{D}$ . For instance, a simple decision function  $\mathcal{H}_k$  could involve consistently choosing CoT solutions, i.e.,  $\{(x_k, y_k^j)\}_{j=1}^{M_k} \subseteq D_{\text{SFT}}$  for all  $k$ . This corresponds to performing SFT exclusively on CoT data.

## 4 Experimental Results

### 4.1 Experimental Setup

**TATA Implementation** We select the training sets from GSM8K (Cobbe et al., 2021) and Math (Hendrycks et al., 2021) as  $\mathcal{D}_{\text{orig}}$ . For  $\mathcal{D}_{\text{aug}}$ , we use the DART-Math-Hard dataset (Tong et al., 2024). We employ GPT-4o to rewrite CoT solutions into TIR format using carefully curated prompts and filter out triplets with anomalous TIR responses (e.g., those that lack a definitive conclusion regarding the final answer). For embedding, we use text-embedding-ada-002 to encode all queries

in  $\mathcal{D}$  into 1,536-dimensional vectors. We set the size of  $\mathcal{D}_{\text{anchor}}$  to 100 for both the GSM8K and Math. To save computational cost, we randomly sample one pair of CoT and TIR solutions per candidate query, leading to a new candidate set,  $\mathcal{D}^* = \{(x_i, y_i^*, z_i^*)\}_{i=1}^N$ . For the decision function  $\mathcal{H}$ , we determine selection criteria based on two quantiles of the distribution of  $(S_{\text{CoT}} - S_{\text{TIR}})$ . More details are provided in Appendix B.1.

**Evaluation Benchmarks** We evaluate our approach using six benchmarks for both in-domain and out-of-domain (OOD) assessment. Specifically, we use the GSM8K and MATH test sets for in-domain evaluation. For OOD evaluation, we include the SVAMP (Patel et al., 2021), MAWPS (Koncel-Kedziorski et al., 2016), CollegeMath (Tang et al., 2024), and OlympiadBench-Math (He et al., 2024) (details in Appendix B.2)

**Evaluation Metrics** In addition to measuring accuracy on various benchmarks, we evaluate the generation time cost using the average number of total tokens per generation and quantify the cost of invoking Python interpreters by the average number of code executions (see Appendix B.3).

**Baselines** We include two widely used SFT approaches as our baselines: SFT exclusively on CoT data and SFT exclusively on TIR data. We also investigate several selection methods in Section 4.3.

Additional details, including the SFT setup and evaluation setup, are provided in Appendix B.4.

### 4.2 Main Results

Results presented in Table 1 demonstrate the effectiveness of our proposed TATA framework, which combines the strengths of CoT and TIR methods for mathematical reasoning tasks. Across various base models, model sizes, and benchmarks, TATA consistently achieves competitive or superior performance compared to standalone CoT and TIR approaches, highlighting its ability to leverage the complementary advantages of both methods.

**In-Domain Performance** For in-domain tasks (GSM8K and MATH), TATA achieves the highest average accuracy (ID AVG) in most cases, outperforming both CoT and TIR individually. This suggests that the integration of CoT’s step-by-step reasoning with TIR’s tool-assisted computations enhances the model’s ability to solve problems within its training domain. Notably, for larger models such as Qwen2.5-7B and Qwen2.5Math-7B, TATA

Model	Method	In-Domain			Out-of-Domain					AVG
		GSM8K	MATH	ID AVG	MAWPS	SVAMP	College	Olympiad	OOD AVG	
Qwen2.5-0.5B	CoT	<b>55.6</b>	32.5	44.0	<b>86.2</b>	58.9	26.3	6.7	44.5	44.4
	TIR	46.9	36.4	41.6	83.5	53.5	26.3	7.7	42.8	42.4
	TATA	52.8	<b>36.6</b>	<b>44.7</b>	85.9	<b>59.4</b>	<b>26.9</b>	<b>8.6</b>	<b>45.2</b>	<b>45.0</b>
Qwen2.5-1.5B	CoT	<b>78.3</b>	48.2	63.2	93.5	<b>82.5</b>	<b>37.9</b>	13.2	56.8	58.9
	TIR	70.8	<b>54.3</b>	62.6	91.7	79.8	36.0	<b>19.4</b>	56.7	58.7
	TATA	77.6	53.8	<b>65.7</b>	<b>94.2</b>	80.7	37.0	18.8	<b>57.7</b>	<b>60.4</b>
Qwen2.5-3B	CoT	<b>85.3</b>	53.8	69.6	<b>94.8</b>	<b>85.8</b>	41.5	16.3	59.6	62.9
	TIR	80.4	<b>61.4</b>	70.9	89.9	79.8	41.1	25.0	59.0	62.9
	TATA	84.0	61.3	<b>72.6</b>	94.7	85.3	<b>41.6</b>	<b>24.9</b>	<b>61.6</b>	<b>65.3</b>
Qwen2.5-7B	CoT	88.7	58.6	73.6	<b>96.1</b>	<b>88.1</b>	42.7	23.0	62.5	66.2
	TIR	86.8	<b>67.5</b>	77.2	92.1	84.3	44.2	<b>31.9</b>	63.1	67.8
	TATA	<b>89.5</b>	66.8	<b>78.2</b>	94.2	86.2	<b>43.4</b>	31.1	<b>63.7</b>	<b>68.5</b>
LLaMA-3-8B	CoT	<b>84.7</b>	46.5	65.6	91.6	81.6	30.2	13.3	54.2	58.0
	TIR	81.7	<b>56.2</b>	69.0	87.8	77.8	30.5	<b>21.9</b>	54.5	59.3
	TATA	84.0	55.1	<b>69.6</b>	<b>91.8</b>	<b>82.7</b>	<b>34.2</b>	21.5	<b>57.6</b>	<b>61.5</b>
Qwen2.5Math-1.5B	CoT	83.1	56.6	69.8	92.9	84.1	<b>44.3</b>	19.3	60.2	63.4
	TIR	78.8	<b>64.8</b>	71.8	92.3	83.3	42.4	<b>27.4</b>	61.4	64.8
	TATA	<b>83.2</b>	62.8	<b>73.0</b>	<b>94.0</b>	<b>85.6</b>	43.9	26.8	<b>62.6</b>	<b>66.0</b>
Qwen2.5Math-7B	CoT	<b>91.0</b>	61.5	76.2	94.8	87.9	45.7	23.9	63.1	67.5
	TIR	88.9	<b>73.6</b>	81.2	<b>95.4</b>	<b>89.4</b>	47.1	35.3	66.8	71.6
	TATA	89.8	73.0	<b>81.4</b>	95.2	88.1	<b>48.3</b>	<b>35.9</b>	<b>66.9</b>	<b>71.7</b>

Table 1: The accuracies (%) of our TATA framework, comparing with CoT and TIR methods. The best accuracies within each group are shown in **bold**. “ID AVG”, “OOD AVG”, and “AVG” denote the averages of these metrics across in-domain, out-of-domain, and all six benchmarks. “CoT”, “TIR”, and “TATA” indicate fine-tuning exclusively on CoT data, TIR data, and using our TATA framework, respectively, with the corresponding base LLM.

Model	Method	Acc $\uparrow$	Token $\downarrow$	# Code $\downarrow$
Qwen2.5-3B	TATA	65.3	383.4	1.43
	CoT	62.9 $-2.4$	385.2 $+1.8$	0 $-1.43$
	TIR	62.9 $-2.4$	411.3 $+27.9$	2.8 $+1.37$
Qwen2.5-7B	TATA	68.5	369.1	1.4
	CoT	66.2 $-2.3$	378.2 $+9.1$	0 $-1.40$
	TIR	67.8 $-0.7$	393.2 $+24.1$	2.63 $+1.23$
LLaMA-3-8B	TATA	61.5	371.7	1.32
	CoT	58 $-3.5$	386 $+14.3$	0 $-1.32$
	TIR	59.3 $-2.2$	392.5 $+20.8$	2.66 $+1.34$
Qwen2.5Math-1.5B	TATA	66.0	405.4	1.08
	CoT	63.4 $-2.6$	388.5 $+16.9$	0 $-1.08$
	TIR	64.8 $-1.2$	460.1 $+54.7$	3.23 $+2.15$
Qwen2.5Math-7B	TATA	71.7	393.8	1.26
	CoT	67.5 $-4.2$	379.9 $+13.9$	0 $-1.26$
	TIR	71.6 $-0.1$	417.8 $+24.0$	2.68 $+1.42$

Table 2: Results of inference costs. The three metrics, “Acc”, “Token”, and “# Code” represent the average accuracy (%), total tokens per generation, and number of code executions.

achieves ID AVG scores of 78.2% and 81.4%, respectively, demonstrating its scalability and effectiveness as model capacity increases.

**Out-of-Domain (OOD) Performance** The OOD results further underscore the robustness of TATA. Across diverse benchmarks such as MAWPS, SVAMP, CollegeMath, and OlympiadBench, TATA consistently achieves the highest OOD average scores, indicating its generalizability.

**Inference efficiency** The results in Table 2 demonstrate that our TATA not only improves accuracy but also enhances inference efficiency compared to standalone CoT and TIR methods. More detailed results are presented in Table 10. Across all model sizes, TATA achieves higher accuracy while maintaining lower token usage and fewer code executions than TIR, and it significantly reduces computational overhead compared to TIR without sacrificing the benefits of tool integration. For instance, with Qwen2.5-7B, TATA achieves a 2.3% accuracy improvement over CoT while using 9.1 fewer tokens per generation and only 1.4 code executions, compared to TIR’s 2.63 code executions. This balance between accuracy and efficiency highlights TATA’s ability to streamline reasoning processes, making it a computationally effective solution for mathematical reasoning tasks.

### 4.3 Ablation

Quantiles	50, 60	40, 60	30, 60	30, 65*	30, 70
AVG	44.8	44.8	44.9	<b>45.0</b>	44.8

Table 3: TATA is not sensitive to quantiles. \* denotes the quantiles we choose for Qwen2.5Math-0.5B.

**Quantile selection** As mentioned in Section 4.1, the data selection function  $\mathcal{H}$  is determined using two quantiles of the distribution  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$  (see Appendix B). These quantiles are selected through the grid search. As shown in Table 3, the performance of TATA is not very sensitive to the choice of these quantiles (see Appendix B).

**Ablation with  $\mathcal{H}$**  We evaluate the following variants of  $\mathcal{H}$ : 1. ‘‘Random’’: This variant uses the same ratio of CoT and TIR as TATA, but the queries are selected randomly. It serves as a strong baseline because it leverages knowledge about the ratio from TATA. 2. ‘‘CoT + TIR’’: This method includes all CoT and TIR solutions for each query without any data selection. 3. ‘‘TATA<sup>-</sup>’’: This variant uses only a single threshold for selection, employing the same strategy for both GSM8K and MATH datasets. More details on these variants can be found in Appendix C.2. From Table 4, we observe that TATA achieves the highest overall accuracy. Although ‘‘Random’’ uses the same ratio of queries relying on either CoT or TIR as TATA, it lags behind by 0.5%, underscoring the importance of the base LLM’s ability to differentiate between when to use CoT or TIR for different queries. Moreover, naively including all CoT and TIR solutions, (i.e. ‘‘CoT + TIR’’), results in a noticeable decline in performance, despite the larger size of the  $\mathcal{D}_{\text{SFT}}$  dataset. This highlights the critical role of effective data selection for CoT and TIR.

Method	Random	CoT + TIR	TATA <sup>-</sup>	TATA
AVG	61.0	58.2	60.2	<b>61.5</b>

Table 4: Ablation Results (in %).

## 5 Analysis and Discussion

### 5.1 Analysis of CoT scores and TIR scores

To further investigate how different LLMs exhibit varying reasoning patterns, we analyze the distribution of  $S_{\text{CoT}}^k$  and  $S_{\text{TIR}}^k$ . As illustrated in Figure 3 (see also Appendix C.3), different base LLMs display distinct distributions of  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$ , indicating varying inclinations towards CoT and TIR reasoning for queries in the candidate set  $\mathcal{D}^* = \{(x_i, y_i^*, z_i^*)\}_{i=1}^N$ . Interestingly, even base LLMs from the same family can demonstrate different tendencies towards CoT and TIR (e.g., Qwen2.5-0.5B vs. Qwen2.5-7B). Notably, Qwen2.5-7B exhibits

a stronger preference for CoT on GSM8K and for TIR on MATH, compared to Qwen2.5-0.5B.

### 5.2 Transferability of Data Selection between Different LLMs

To evaluate whether data selected by one LLM can benefit another LLM, we conducted additional experiments using Qwen2.5-0.5B to assess this type of transferability. Specifically, we fine-tuned Qwen2.5-0.5B on data selected by Qwen2.5-7B and LLaMA-3-8B, with the results in Table 5. As expected, compared to fine-tuning Qwen2.5-0.5B on its own selected data, fine-tuning on data selected by another LLM leads to a decline in TATA performance. This finding suggests that our TATA approach is base model-aware, emphasizing the principle of ‘‘teaching LLMs according to their aptitude.’’ Interestingly, using data selected by LLMs within the same family (e.g., Qwen2.5-7B) yields more consistent performance compared to data selected by LLMs from a different family (LLaMA-3-8B). Complete results are in Appendix C.4.

Selected by	ID AVG	OOD AVG	AVG
TATA	<b>44.7</b>	<b>45.2</b>	<b>45.0</b>
LLaMA-3-8B	43.8	44.2	44.1
Qwen2.5-7B	<u>44.5</u>	<u>44.6</u>	<u>44.6</u>

Table 5: The best results (in %) are highlighted in **bold**, while the second-best results are underlined.

### 5.3 Exploring Reinforcement Learning

Recent advancements in reinforcement learning (RL) (OpenAI, 2024; DeepSeek-AI et al., 2025) have demonstrated promising results in enhancing long CoT reasoning. To explore the role of RL in the spontaneous selection between CoT and TIR, we employ Direct Preference Optimization (DPO) to LLMs fine-tuned with our TATA framework (Rafailov et al., 2023) by constructing preference pairs based on the CoT and TIR scores of queries in the new candidate set  $\mathcal{D}^* = \{(x_i, y_i^*, z_i^*)\}_{i=1}^N$ . Detailed experimental setup and methodologies are provided in Appendix C.5. As shown in Table 6, DPO achieves results comparable to those of TATA. The complete results are provided in Table C.5. This suggests that the original data has already been effectively learned by the base LLM during the SFT stage, and applying additional DPO on the same dataset yields minor improvement. This observation aligns with LIMO (Ye et al., 2025), which argue that the capabilities of pretrained LLMs are

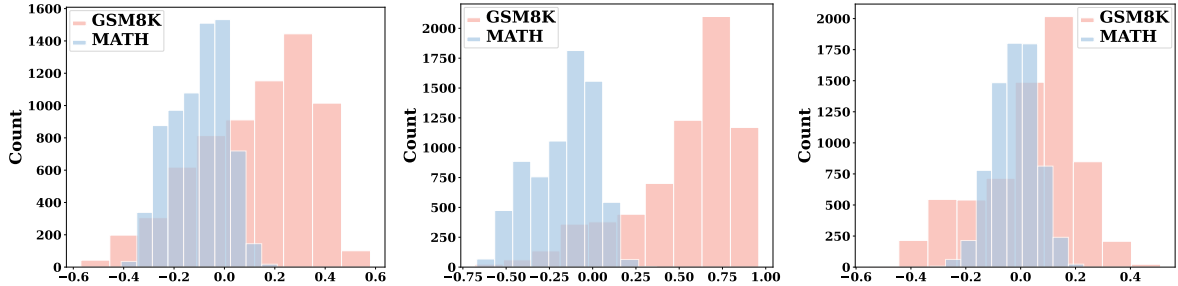


Figure 3: The distribution of  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$ : Qwen2.5-0.5B (left), Qwen2.5-7B (middle), LLaMA-3-8B (right).

latent, with both SFT and RL serving as different methods to elicit these inherent abilities.

Model	Method	Acc	Token	# Code
LLaMA-3-8B	TATA	61.5	371.7	<b>1.32</b>
	+DPO	<b>61.6</b>	<b>365.4</b>	1.34
Qwen2.5Math-7B	TATA	<b>71.7</b>	<b>393.8</b>	<b>1.26</b>
	+DPO	<b>71.7</b>	395.2	1.32

Table 6: DPO Results. The best results are in **bold**.

## 6 Related Work

**Math Reasoning with CoT and TIR** CoT and TIR are two widely recognized approaches for reasoning with LLMs. CoT offers interpretability and generalizability, while TIR can provide precise calculation results. Previous work on mathematical SFT has primarily focused on either CoT (Yu et al., 2023; Tong et al., 2024; Shao et al., 2024; Yan et al., 2024) or TIR (Yue et al., 2023; Gou et al., 2023; Wang et al., 2023a; Yin et al., 2024), with a few efforts to integrate both (Yue et al., 2023; Beeching et al., 2024; Yang et al., 2024b). For instance, MAMmoTH (Yue et al., 2023) mainly adopts TIR but switches to CoT when code execution fails due to errors or timeouts. However, it relies on separate prompts and manual inference controls to switch between them. Recent work has explored automatic selection between CoT and TIR (Zhao et al., 2023; Yue et al., 2024; Yu et al., 2024), such as using an auxiliary LLM to determine CoT/TIR (Zhao et al., 2023). However, these methods rely on external planners to select CoT/TIR, not by LLMs themselves. In contrast, our work seeks to enable LLMs to spontaneously select the appropriate reasoning strategy without relying on external planners or manual interventions.

**Data Selection** Data selection plays a crucial role in training LLMs (Albalak et al., 2024). Various

methods have been developed to optimize data usage at different stages of model training, ranging from pretraining (Brown et al., 2020; Wettig et al., 2024; Lin et al., 2025) to supervised fine-tuning (SFT) (Li et al., 2023; Pan et al., 2024; Xia et al., 2024; Zhou et al., 2023b). Our work focuses specifically on data selection between CoT and TIR given a math problem and a base LLM.

**Test-Time Scaling** Recent efforts in scaling test-time computation have explored refinement strategies (Snell et al., 2024; Xu et al., 2024b; Hou et al., 2025; Lee et al., 2025), which iteratively build on previous outputs, and MCTS-based approaches (Zhou et al., 2023a; Liu et al., 2024; Wu et al., 2024). The roles of SFT and RL have also been actively discussed (Chu et al., 2025). For example, OpenAI (2024); DeepSeek-AI et al. (2025) use RL to train LLMs for generating longer CoT reasoning, while Muennighoff et al. (2025); Ye et al. (2025) leverage SFT for scaling test-time computation. This work focuses on enabling adaptive mathematical reasoning in LLMs primarily through data selection during the SFT stage, with discussions on the potential use of RL in Section 5.3. While existing test-time scaling methods mainly target CoT, exploring adaptive selection between CoT and TIR could be an orthogonal direction.

## 7 Conclusion

We propose TATA, a novel and effective framework for mathematical reasoning with LLMs that enables models to dynamically align their reasoning strategies, CoT or TIR, with their intrinsic strengths. By incorporating base-LLM-aware data selection during SFT, TATA tailors reasoning strategies to each model, empowering them to select an appropriate paradigm for during inference autonomously. Extensive experiments demonstrate that TATA achieves superior or comparable performance across both in-domain and OOD bench-



marks while significantly improving inference efficiency compared to static TIR-based methods. Moreover, our analysis underscores the importance of aptitude-aware data selection in unlocking the potential of LLMs to make autonomous and effective reasoning decisions, paving the way for further advancements in reasoning capabilities of LLMs.

## Limitation

This study primarily focuses on the domain of mathematical reasoning. Extending the concept of adaptive tool use to more generalized reasoning scenarios represents a promising avenue for future research. The proposed approach concentrates on instance-level spontaneous selection between CoT and TIR. Investigating a more fine-grained, step-level selection strategy could be an interesting direction for future work. Our method mainly relies on the SFT stage, with the training data sourced from the GSM8K and MATH datasets. Further research incorporating reinforcement learning (e.g., (DeepSeek-AI et al., 2025)) or leveraging a more diverse set of training data (e.g., (Muennighoff et al., 2025; Ye et al., 2025)) could be interesting directions to explore.

## References

- Janice Ahn, Rishu Verma, Renze Lou, Di Liu, Rui Zhang, and Wenpeng Yin. 2024. [Large language models for mathematical reasoning: Progresses and challenges](#). In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics: Student Research Workshop*, pages 225–237, St. Julian’s, Malta. Association for Computational Linguistics.
- AI@Meta. 2024. [Llama 3 model card](#).
- Alon Albalak, Yanai Elazar, Sang Michael Xie, Shayne Longpre, Nathan Lambert, Xinyi Wang, Niklas Muennighoff, Bairu Hou, Liangming Pan, Haewon Jeong, et al. 2024. [A survey on data selection for language models](#). *ArXiv preprint*, abs/2402.16827.
- Zhangir Azerbayev, Hailey Schoelkopf, Keiran Paster, Marco Dos Santos, Stephen McAleer, Albert Q Jiang, Jia Deng, Stella Biderman, and Sean Welleck. 2023. [Llemma: An open language model for mathematics](#). *ArXiv preprint*, abs/2310.10631.
- Edward Beeching, Shengyi Costa Huang, Albert Jiang, Jia Li, Benjamin Lipkin, Zihan Qina, Kashif Rasul, Ziju Shen, Roman Soletskyi, and Lewis Tunstall. 2024. [Numinamath 7b cot](#). <https://huggingface.co/AI-MO/NuminaMath-7B-CoT>.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Wenhu Chen, Xueguang Ma, Xinyi Wang, and William W Cohen. 2022. [Program of thoughts prompting: Disentangling computation from reasoning for numerical reasoning tasks](#). *ArXiv preprint*, abs/2211.12588.
- Tianzhe Chu, Yuexiang Zhai, Jihan Yang, Shengbang Tong, Saining Xie, Dale Schuurmans, Quoc V Le, Sergey Levine, and Yi Ma. 2025. [Sft memorizes, rl generalizes: A comparative study of foundation model post-training](#). *ArXiv preprint*, abs/2501.17161.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. 2021. [Training verifiers to solve math word problems](#). *ArXiv preprint*, abs/2110.14168.
- Damai Dai, Yutao Sun, Li Dong, Yaru Hao, Shuming Ma, Zhifang Sui, and Furu Wei. 2022. [Why can gpt learn in-context? language models implicitly perform gradient descent as meta-optimizers](#). *ArXiv preprint*, abs/2212.10559.
- DeepSeek-AI, Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, Xiaokang Zhang, Xingkai Yu, Yu Wu, Z. F. Wu, Zhibin Gou, Zhihong Shao, Zhuoshu Li, Ziyi Gao, Aixin Liu, Bing Xue, Bingxuan Wang, Bochao Wu, Bei Feng, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, Damai Dai, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Han Bao, Hanwei Xu, Haocheng Wang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Qu, Hui Li, Jianzhong Guo, Jiashi Li, Jiawei Wang, Jingchang Chen, Jinyang Yuan, Junjie Qiu, Junlong Li, J. L. Cai, Jiaqi Ni, Jian Liang, Jin Chen, Kai Dong, Kai Hu, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Liang Zhao, Litong Wang, Liyue Zhang, Lei Xu, Leyi Xia, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Meng Li, Miaojuan Wang, Mingming Li, Ning Tian, Panpan Huang, Peng Zhang, Qiancheng Wang, Qinyu Chen, Qiushi Du, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, R. J. Chen, R. L. Jin, Ruyi Chen, Shanghao Lu, Shangyan Zhou, Shanhuang Chen,

- Shengfeng Ye, Shiyu Wang, Shuiping Yu, Shunfeng Zhou, Shuting Pan, S. S. Li, Shuang Zhou, Shaoqing Wu, Shengfeng Ye, Tao Yun, Tian Pei, Tianyu Sun, T. Wang, Wangding Zeng, Wanxia Zhao, Wen Liu, Wenfeng Liang, Wenjun Gao, Wenqin Yu, Wentao Zhang, W. L. Xiao, Wei An, Xiaodong Liu, Xiaohan Wang, Xiaokang Chen, Xiaotao Nie, Xin Cheng, Xin Liu, Xin Xie, Xingchao Liu, Xinyu Yang, Xinyuan Li, Xuecheng Su, Xuheng Lin, X. Q. Li, Xiangyue Jin, Xiaojin Shen, Xiaosha Chen, Xiaowen Sun, Xiaoxiang Wang, Xinnan Song, Xinyi Zhou, Xianzu Wang, Xinxia Shan, Y. K. Li, Y. Q. Wang, Y. X. Wei, Yang Zhang, Yanhong Xu, Yao Li, Yao Zhao, Yaofeng Sun, Yaohui Wang, Yi Yu, Yichao Zhang, Yifan Shi, Yiliang Xiong, Ying He, Yishi Piao, Yisong Wang, Yixuan Tan, Yiyang Ma, Yiyuan Liu, Yongqiang Guo, Yuan Ou, Yudian Wang, Yue Gong, Yuheng Zou, Yujia He, Yunfan Xiong, Yuxiang Luo, Yuxiang You, Yuxuan Liu, Yuyang Zhou, Y. X. Zhu, Yanhong Xu, Yanping Huang, Yaohui Li, Yi Zheng, Yuchen Zhu, Yunxian Ma, Ying Tang, Yukun Zha, Yuting Yan, Z. Z. Ren, Zehui Ren, Zhangli Sha, Zhe Fu, Zhean Xu, Zhenda Xie, Zhengyan Zhang, Zhewen Hao, Zhicheng Ma, Zhigang Yan, Zhiyu Wu, Zihui Gu, Zijia Zhu, Zijun Liu, Zilin Li, Ziwei Xie, Ziyang Song, Zizheng Pan, Zhen Huang, Zhipeng Xu, Zhongyu Zhang, and Zhen Zhang. 2025. *Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning*.
- Bofei Gao, Feifan Song, Zhe Yang, Zefan Cai, Yibo Miao, Qingxiu Dong, Lei Li, Chenghao Ma, Liang Chen, Runxin Xu, et al. 2024. *Omni-math: A universal olympiad level mathematic benchmark for large language models*. *ArXiv preprint*, abs/2410.07985.
- Luyu Gao, Aman Madaan, Shuyan Zhou, Uri Alon, Pengfei Liu, Yiming Yang, Jamie Callan, and Graham Neubig. 2023. *PAL: program-aided language models*. In *International Conference on Machine Learning, ICML 2023, 23-29 July 2023, Honolulu, Hawaii, USA*, volume 202 of *Proceedings of Machine Learning Research*, pages 10764–10799. PMLR.
- Zhibin Gou, Zhihong Shao, Yeyun Gong, Yujiu Yang, Minlie Huang, Nan Duan, Weizhu Chen, et al. 2023. *Tora: A tool-integrated reasoning agent for mathematical problem solving*. *ArXiv preprint*, abs/2309.17452.
- Chaoqun He, Renjie Luo, Yuzhuo Bai, Shengding Hu, Zhen Leng Thai, Junhao Shen, Jinyi Hu, Xu Han, Yujie Huang, Yuxiang Zhang, et al. 2024. *Olympiad-bench: A challenging benchmark for promoting agi with olympiad-level bilingual multimodal scientific problems*. *ArXiv preprint*, abs/2402.14008.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. 2021. *Measuring mathematical problem solving with the math dataset*. *ArXiv preprint*, abs/2103.03874.
- Zhenyu Hou, Xin Lv, Rui Lu, Jiajie Zhang, Yujiang Li, Zijun Yao, Juanzi Li, Jie Tang, and Yuxiao Dong. 2025. *Advancing language model reasoning through reinforcement learning and inference scaling*. *ArXiv preprint*, abs/2501.11651.
- Jian Hu, Xibin Wu, Zilin Zhu, Xianyu, Weixun Wang, Dehao Zhang, and Yu Cao. 2024. *Openrlhf: An easy-to-use, scalable and high-performance rlhf framework*. *ArXiv preprint*, abs/2405.11143.
- Kazuki Irie, Róbert Csordás, and Jürgen Schmidhuber. 2022. *The dual form of neural networks revisited: Connecting test time predictions to training patterns via spotlights of attention*. In *International Conference on Machine Learning, ICML 2022, 17-23 July 2022, Baltimore, Maryland, USA*, volume 162 of *Proceedings of Machine Learning Research*, pages 9639–9659. PMLR.
- Rik Koncel-Kedziorski, Subhro Roy, Aida Amini, Nate Kushman, and Hannaneh Hajishirzi. 2016. *MAWPS: A math word problem repository*. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1152–1157, San Diego, California. Association for Computational Linguistics.
- Kuang-Huei Lee, Ian Fischer, Yueh-Hua Wu, Dave Marwood, Shumeet Baluja, Dale Schuurmans, and Xinyun Chen. 2025. *Evolving deeper llm thinking*. *ArXiv preprint*, abs/2501.09891.
- Aitor Lewkowycz, Anders Andreassen, David Dohan, Ethan Dyer, Henryk Michalewski, Vinay V. Ramasesh, Ambrose Slone, Cem Anil, Imanol Schlag, Theo Gutman-Solo, Yuhuai Wu, Behnam Neyshabur, Guy Gur-Ari, and Vedant Misra. 2022. *Solving quantitative reasoning problems with language models*. In *Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 - December 9, 2022*.
- Yunshui Li, Binyuan Hui, Xiaobo Xia, Jiayi Yang, Min Yang, Lei Zhang, Shuzheng Si, Junhao Liu, Tongliang Liu, Fei Huang, et al. 2023. *One shot learning as instruction data prospector for large language models*. *ArXiv preprint*, abs/2312.10302.
- Zhenghao Lin, Zhibin Gou, Yeyun Gong, Xiao Liu, Ruochen Xu, Chen Lin, Yujiu Yang, Jian Jiao, Nan Duan, Weizhu Chen, et al. 2025. *Not all tokens are what you need for pretraining*. *Advances in Neural Information Processing Systems*, 37:29029–29063.
- Jiacheng Liu, Andrew Cohen, Ramakanth Pasunuru, Yejin Choi, Hannaneh Hajishirzi, and Asli Celikyilmaz. 2024. *Don't throw away your value model! generating more preferable text with value-guided monte-carlo tree search decoding*. In *First Conference on Language Modeling*.
- Zimu Lu, Aojun Zhou, Ke Wang, Houxing Ren, Weikang Shi, Junting Pan, Mingjie Zhan, and Hongsheng Li. 2024. *Mathcoder2: Better math reasoning from continued pretraining on model-translated mathematical code*. *ArXiv preprint*, abs/2410.08196.

- Niklas Muennighoff, Zitong Yang, Weijia Shi, Xiang Lisa Li, Li Fei-Fei, Hannaneh Hajishirzi, Luke Zettlemoyer, Percy Liang, Emmanuel Candès, and Tatsunori Hashimoto. 2025. [s1: Simple test-time scaling](#).
- OpenAI. 2024. Learning to reason with llms. <https://openai.com/index/learning-to-reason-with-llms/>. Accessed: 2024-09-23.
- Xingyuan Pan, Luyang Huang, Liyan Kang, Zhicheng Liu, Yu Lu, and Shanbo Cheng. 2024. [G-dig: Towards gradient-based diverse and high-quality instruction data selection for machine translation](#). *ArXiv preprint*, abs/2405.12915.
- Arkil Patel, Satwik Bhattamishra, and Navin Goyal. 2021. [Are NLP models really able to solve simple math word problems?](#) In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 2080–2094, Online. Association for Computational Linguistics.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D. Manning, Stefano Ermon, and Chelsea Finn. 2023. [Direct preference optimization: Your language model is secretly a reward model](#). In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Mingchuan Zhang, YK Li, Y Wu, and Daya Guo. 2024. [Deepseekmath: Pushing the limits of mathematical reasoning in open language models](#). *ArXiv preprint*, abs/2402.03300.
- Charlie Snell, Jaehoon Lee, Kelvin Xu, and Aviral Kumar. 2024. [Scaling llm test-time compute optimally can be more effective than scaling model parameters](#). *ArXiv preprint*, abs/2408.03314.
- Zhengyang Tang, Xingxing Zhang, Benyou Wan, and Furu Wei. 2024. [Mathscale: Scaling instruction tuning for mathematical reasoning](#). *ArXiv preprint*, abs/2403.02884.
- Yuxuan Tong, Xiwen Zhang, Rui Wang, Ruidong Wu, and Junxian He. 2024. [Dart-math: Difficulty-aware rejection tuning for mathematical problem-solving](#). *ArXiv preprint*, abs/2407.13690.
- Shubham Toshniwal, Wei Du, Ivan Moshkov, Branislav Kisanin, Alexan Ayrapetyan, and Igor Gitman. 2024. [Openmathinstruct-2: Accelerating ai for math with massive open-source instruction data](#). *ArXiv preprint*, abs/2410.01560.
- Ke Wang, Houxing Ren, Aojun Zhou, Zimu Lu, Sichun Luo, Weikang Shi, Renrui Zhang, Linqi Song, Mingjie Zhan, and Hongsheng Li. 2023a. [Mathcoder: Seamless code integration in llms for enhanced mathematical reasoning](#). *ArXiv preprint*, abs/2310.03731.
- Lei Wang, Wanyu Xu, Yihuai Lan, Zhiqiang Hu, Yunshi Lan, Roy Ka-Wei Lee, and Ee-Peng Lim. 2023b. [Plan-and-solve prompting: Improving zero-shot chain-of-thought reasoning by large language models](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2609–2634, Toronto, Canada. Association for Computational Linguistics.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. 2022. [Chain-of-thought prompting elicits reasoning in large language models](#). In *Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 - December 9, 2022*.
- Alexander Wettig, Aatmik Gupta, Saumya Malik, and Danqi Chen. 2024. [Qrating: Selecting high-quality data for training language models](#). *ArXiv preprint*, abs/2402.09739.
- Yangzhen Wu, Zhiqing Sun, Shanda Li, Sean Welleck, and Yiming Yang. 2024. [Inference scaling laws: An empirical analysis of compute-optimal inference for problem-solving with language models](#). *ArXiv preprint*, abs/2408.00724.
- Mengzhou Xia, Sadhika Malladi, Suchin Gururangan, Sanjeev Arora, and Danqi Chen. 2024. [Less: Selecting influential data for targeted instruction tuning](#). *ArXiv preprint*, abs/2402.04333.
- Ruijie Xu, Zengzhi Wang, Run-Ze Fan, and Pengfei Liu. 2024a. [Benchmarking benchmark leakage in large language models](#). *ArXiv preprint*, abs/2404.18824.
- Xin Xu, Shizhe Diao, Can Yang, and Yang Wang. 2024b. [Can we verify step by step for incorrect answer detection?](#) *ArXiv preprint*, abs/2402.10528.
- Xin Xu, Tong Xiao, Zitong Chao, Zhenya Huang, Can Yang, and Yang Wang. 2024c. [Can llms solve longer math word problems better?](#) *ArXiv preprint*, abs/2405.14804.
- Xin Xu, Qiyun Xu, Tong Xiao, Tianhao Chen, Yuchen Yan, Jiabin Zhang, Shizhe Diao, Can Yang, and Yang Wang. 2025a. [Ugphysics: A comprehensive benchmark for undergraduate physics reasoning with large language models](#). *ArXiv preprint*, abs/2502.00334.
- Xin Xu, Jiabin Zhang, Tianhao Chen, Zitong Chao, Jishan Hu, and Can Yang. 2025b. [Ugmathbench: A diverse and dynamic benchmark for undergraduate-level mathematical reasoning with large language models](#).
- Yuchen Yan, Jin Jiang, Yang Liu, Yixin Cao, Xin Xu, Xunliang Cai, Jian Shao, et al. 2024. [S<sup>3</sup> c-math: Spontaneous step-level self-correction makes large language models better mathematical reasoners](#). *ArXiv preprint*, abs/2409.01524.

- An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, et al. 2024a. [Qwen2. 5 technical report](#). *ArXiv preprint*, abs/2412.15115.
- An Yang, Beichen Zhang, Binyuan Hui, Bofei Gao, Bowen Yu, Chengpeng Li, Dayiheng Liu, Jianhong Tu, Jingren Zhou, Junyang Lin, et al. 2024b. [Qwen2. 5-math technical report: Toward mathematical expert model via self-improvement](#). *ArXiv preprint*, abs/2409.12122.
- Jiayi Yang, Binyuan Hui, Min Yang, Bailin Wang, Bowen Li, Binhua Li, Fei Huang, and Yongbin Li. 2023. [Iterative forward tuning boosts in-context learning in language models](#). *ArXiv preprint*, abs/2305.13016.
- Yixin Ye, Zhen Huang, Yang Xiao, Ethan Chern, Shijie Xia, and Pengfei Liu. 2025. [Limo: Less is more for reasoning](#).
- Shuo Yin, Weihao You, Zhilong Ji, Guoqiang Zhong, and Jinfeng Bai. 2024. [Mumath-code: Combining tool-use large language models with multi-perspective data augmentation for mathematical reasoning](#). *ArXiv preprint*, abs/2405.07551.
- Dian Yu, Yuheng Zhang, Jiahao Xu, Tian Liang, Linfeng Song, Zhaopeng Tu, Haitao Mi, and Dong Yu. 2024. [Teaching llms to refine with tools](#). *ArXiv preprint*, abs/2412.16871.
- Longhui Yu, Weisen Jiang, Han Shi, Jincheng Yu, Zhengying Liu, Yu Zhang, James T Kwok, Zhenguo Li, Adrian Weller, and Weiyang Liu. 2023. [Metamath: Bootstrap your own mathematical questions for large language models](#). *ArXiv preprint*, abs/2309.12284.
- Zheng Yuan, Hongyi Yuan, Chengpeng Li, Guanting Dong, Chuanqi Tan, and Chang Zhou. 2023. [Scaling relationship on learning mathematical reasoning with large language models](#). *ArXiv preprint*, abs/2308.01825.
- Murong Yue, Wenlin Yao, Haitao Mi, Dian Yu, Ziyu Yao, and Dong Yu. 2024. [Dots: Learning to reason dynamically in llms via optimal reasoning trajectories search](#). *ArXiv preprint*, abs/2410.03864.
- Xiang Yue, Xingwei Qu, Ge Zhang, Yao Fu, Wenhao Huang, Huan Sun, Yu Su, and Wenhua Chen. 2023. [Mammoth: Building math generalist models through hybrid instruction tuning](#). *ArXiv preprint*, abs/2309.05653.
- James Zhao, Yuxi Xie, Kenji Kawaguchi, Junxian He, and Michael Xie. 2023. [Automatic model selection with large language models for reasoning](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 758–783, Singapore. Association for Computational Linguistics.
- Chuanyang Zheng, Zhengying Liu, Enze Xie, Zhenguo Li, and Yu Li. 2023. [Progressive-hint prompting improves reasoning in large language models](#). *ArXiv preprint*, abs/2304.09797.
- Andy Zhou, Kai Yan, Michal Shlapentokh-Rothman, Haohan Wang, and Yu-Xiong Wang. 2023a. [Language agent tree search unifies reasoning acting and planning in language models](#). *ArXiv preprint*, abs/2310.04406.
- Chunting Zhou, Pengfei Liu, Puxin Xu, Srinivasan Iyer, Jiao Sun, Yuning Mao, Xuezhe Ma, Avia Efrat, Ping Yu, Lili Yu, Susan Zhang, Gargi Ghosh, Mike Lewis, Luke Zettlemoyer, and Omer Levy. 2023b. [LIMA: less is more for alignment](#). In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*.

## A Preliminaries

### A.1 Rejection Fine-Tuning

For training LLMs, the original training datasets are often insufficient. To mitigate this issue, many studies adopt Rejection Fine-Tuning (RFT) (Yuan et al., 2023; Yu et al., 2023; Tong et al., 2024) to augment the original dataset, thereby increasing the training data size and improving model performance. RFT is a fine-tuning approach that uses synthesized data generated via rejection sampling (Yuan et al., 2023).

Suppose the original training set is  $\mathcal{D}_{orig} = \{x_i, y_i\}_{i=1}^N$ , consisting of  $N$  data pairs  $(x_i, y_i)$ . The rejection sampling process works as follows: for each query  $x_i$ , a teacher model (e.g., GPT-4) generates  $M$  responses, resulting in  $\{x_i, y_i^j\}_{j=1}^M$ , where  $M$  is a predefined number (e.g.,  $M = 10$  in Yu et al. (2023)). This yields  $N \cdot M$  response examples in total. A filtering process is then applied: if a response  $y_i^j \neq y_i$ , it is discarded. The result is the augmented training set  $\mathcal{D}_{aug} = \{x_i, y_i\}_{i=1}^N \cup \{x_i, y_i^j\}_{i=1}^N \cup \{x_i, y_i^j\}_{i=1}^N$ , where  $M_i \leq M$  represents the number of correct responses for query  $x_i$ . Notably,  $M_i$  is often larger for simpler queries  $x_i$ , as these are more likely to produce correct responses.

RFT is widely employed for improving mathematical reasoning in LLMs (Yu et al., 2023; Tong et al., 2024; Xu et al., 2024c). Typically, the queries remain unchanged (Tong et al., 2024) or are altered in a controlled way (Yu et al., 2023). This is because the filtering stage of the rejection sampling process relies on the availability of ground-truth outputs.

### A.2 TIR Inference Pipeline

Tool-Integrated Reasoning (TIR) addresses mathematical problems by intertwining natural language reasoning with the execution of Python code. The process is initiated with generating a natural language reasoning step, denoted as  $r_1$ . When it is more advantageous to utilize programmatic tools, such as complex calculations, a Python code block,  $a_1$ , is created as guided by  $r_1$ . This code block is then run, and its result,  $o_1$ , is fed back into the model for further generation. This cycle is repeated until the maximal number of code blocks is reached or until the model concludes its answer within “\boxed{ }.” The entire reasoning path unfolds as  $\tau = r_1 a_1 o_1 \dots r_{n-1} a_{n-1} o_{n-1} r_n$ , where  $r_i$  is the  $i$ -th natural language reasoning step,  $a_i$  denotes the corresponding Python code block, and  $o_i$

represents the output from executing the code. The complete inference workflow is detailed in Algorithm 1 (from Gou et al. (2023)). From Algorithm 1, TIR usually requires multiple generations based on previous reasoning paths and outputs returned by Python interpreter, which is more computationally expensive than CoT. However, TIR can provide more precise calculation results than CoT.

---

#### Algorithm 1 Inference of TIR

---

**Require:** problem  $q$ , model  $\mathcal{G}$ , prompt  $p$ , external tools  $\mathcal{E}$ , stop condition  $Stop(\cdot)$ , maximum iteration rounds  $n$

- 1:  $\tau_0 \leftarrow ""$  ▷ Trajectory Initialization
- 2: **for**  $i \leftarrow 1$  to  $n$  **do**
- 3:    $r_i \sim \mathbb{P}_{\mathcal{G}}(\cdot | p \oplus q \oplus \tau_{i-1})$  ▷ Rationale Generation
- 4:   **if**  $Stop(r_i)$  **then** ▷ Stopping Criteria
- 5:     **return**  $\tau_{i-1} \oplus r_i$
- 6:   **end if**
- 7:    $a_i \sim \mathbb{P}_{\mathcal{G}}(\cdot | p \oplus q \oplus \tau_{i-1} \oplus r_i)$  ▷ Program Generation
- 8:    $o_i \leftarrow \mathcal{E}(a_i)$  ▷ Tool Execution
- 9:    $\tau_i \leftarrow \tau_{i-1} \oplus r_i \oplus a_i \oplus o_i$  ▷ Trajectory Update
- 10: **end for**
- 11: **return**  $\tau_n$

---

### A.3 Implicit Instruction Tuning

In-Context Learning (ICL) can be interpreted as a form of implicit instruction tuning, where the model is effectively "fine-tuned" using the given demonstrations in an implicit manner (Dai et al., 2022; Yang et al., 2023; Irie et al., 2022; Li et al., 2023). Let  $\mathbf{X}_{ins}, \mathbf{X}_{test} \in \mathbb{R}^{d_{in}}$  represent the few-shot demonstration inputs and the test input, respectively. We define the attention query vector as  $\mathbf{Q} = \mathbf{W}_Q \mathbf{X}_{test}^\top$ , while the attention key and value vectors are given by  $\mathbf{K} = \mathbf{W}_K [\mathbf{X}_{ins} \parallel \mathbf{X}_{test}]$  and  $\mathbf{V} = \mathbf{W}_V [\mathbf{X}_{ins} \parallel \mathbf{X}_{test}]$ , where  $\parallel$  denotes concatenation. The projection matrices  $\mathbf{W}_K, \mathbf{W}_V, \mathbf{W}_Q \in \mathbb{R}^{d_{out} \times d_{in}}$  are used to compute the attention queries, keys, and values. The self-attention mechanism for a single attention head in any given layer is formulated as follows:

$$\text{Attention}(\mathbf{K}, \mathbf{V}, \mathbf{Q}) = \mathbf{W}_V [\mathbf{X}_{ins} \parallel \mathbf{X}_{test}] \text{Softmax} \left( \frac{\mathbf{W}_K [\mathbf{X}_{ins} \parallel \mathbf{X}_{test}]^\top \mathbf{Q}}{\sqrt{d_{in}}} \right).$$

Applying an approximation, this can be rewritten as:

$$\mathbf{W}_V [\mathbf{X}_{ins} \parallel \mathbf{X}_{test}] (\mathbf{W}_K [\mathbf{X}_{ins} \parallel \mathbf{X}_{test}])^\top \mathbf{Q}.$$

By expanding this expression, we obtain:

$$\underbrace{\mathbf{W}_V \mathbf{X}_{test} (\mathbf{W}_K \mathbf{X}_{test})^\top}_{\text{Only test input.}} \mathbf{Q} + \underbrace{\mathbf{W}_V \mathbf{X}_{ins} (\mathbf{W}_K \mathbf{X}_{ins})^\top}_{\text{Only demonstration samples.}} \mathbf{Q}.$$

The whole approximation process can be given as follows:

$$\begin{aligned}
& \text{Attention}(\mathbf{K}, \mathbf{V}, \mathbf{Q}) \\
&= \mathbf{W}_V[\mathbf{X}_{\text{ins}}\|\mathbf{X}_{\text{test}}]\text{Softmax}\left(\frac{\mathbf{W}_K[\mathbf{X}_{\text{ins}}\|\mathbf{X}_{\text{test}}]^\top\mathbf{Q}}{\sqrt{d_{\text{in}}}}\right) \\
&\approx \mathbf{W}_V[\mathbf{X}_{\text{ins}}\|\mathbf{X}_{\text{test}}](\mathbf{W}_K[\mathbf{X}_{\text{ins}}\|\mathbf{X}_{\text{test}}])^\top\mathbf{Q} \\
&= \underbrace{\mathbf{W}_V\mathbf{X}_{\text{test}}(\mathbf{W}_K\mathbf{X}_{\text{test}})^\top}_{\text{Only test input.}}\mathbf{Q} + \underbrace{\mathbf{W}_V\mathbf{X}_{\text{ins}}(\mathbf{W}_K\mathbf{X}_{\text{ins}})^\top}_{\text{Only instruction sample.}}\mathbf{Q} \\
&= \underbrace{[\mathbf{W}_V\mathbf{X}_{\text{test}}(\mathbf{W}_K\mathbf{X}_{\text{test}})^\top]}_{\text{Only test input.}} + \underbrace{[\mathbf{W}_V\mathbf{X}_{\text{ins}}(\mathbf{W}_K\mathbf{X}_{\text{ins}})^\top]}_{\text{Only instruction sample.}}\mathbf{Q},
\end{aligned}$$

where the constant  $\sqrt{d_{\text{in}}}$  acts as a scaling factor. The first term,  $\mathbf{W}_V\mathbf{X}_{\text{test}}(\mathbf{W}_K\mathbf{X}_{\text{test}})^\top$ , corresponds to a zero-shot learning scenario where no demonstration samples are involved, and only the test input is considered. Meanwhile, the second term,  $\mathbf{W}_V\mathbf{X}_{\text{ins}}(\mathbf{W}_K\mathbf{X}_{\text{ins}})^\top$ , can be interpreted as an implicit adjustment to the model parameters. This adjustment is achieved through the meta-gradient mechanism (Dai et al., 2022; Yang et al., 2023; Irie et al., 2022), meaning the few-shot examples influence the model as if performing implicit instruction tuning.

## B Experimental Setup

### B.1 TATA Implementation Details

In this appendix, we give the implementation details of our TATA framework.

**Data Construction** For the original training set, denoted as  $\mathcal{D}_{\text{orig}} = \{(x_i, y_i)\}_{i=1}^N$ , we utilize the training sets of GSM8K (Cobbe et al., 2021) and MATH (Hendrycks et al., 2021). The GSM8K training set comprises 7,473 examples, while the MATH training set includes 7,500 examples. For simplicity, we directly adopt the DART-MATH-Hard dataset (Tong et al., 2024) as our  $\mathcal{D}_{\text{aug}}$ . DART-MATH-Hard, which is an augmented dataset derived from the GSM8K and MATH training sets through rejection sampling, contains approximately 0.6M examples in total. Notably, the number of responses varies across different training queries. To convert CoT solutions into TIR format, we use GPT-4o-2024-08-06 with a carefully designed prompt, as described in Table 7. While most CoT solutions are successfully transformed into TIR format, we observe some anomalies. For instance, some rewritten TIRs fail to conclude with a final answer, while some TIRs produce code with syntax errors. To address these issues, we filter out ill-formed TIRs using rule-based matching. After

filtering, we obtain a candidate dataset containing approximately 483K examples.

**Anchor Construction** For the embedding, we use text-embedding-ada-002 to encode all queries in our candidate set  $\mathcal{D}$  into 1,536-dimensional vectors. We then cluster these representations by K-means algorithm. We set the number of clusters to be 100 for both GSM8K and MATH (cluster separately). That is to say, the size of the anchor set is  $A = 100$ .

**Contribution Quantization** To compute the CoT and TIR scores, we use a new candidate set, denoted as  $\mathcal{D}^* = \{(x_i, y_i^*, z_i^*)\}_{i=1}^N$ . This new candidate set is constructed by randomly selecting one pair of CoT and TIR solutions for each training query from the original candidate set, thereby reducing computational costs. The CoT score is then simplified to:

$$S_{\text{CoT}}^k = \frac{1}{A} \sum_{i=1}^A \mathbb{I}(a_i, \mathcal{G}(\cdot | \underbrace{x_k, y^*}_{\text{1-shot prompt}}, q_i)),$$

A similar formulation is used for the TIR score.

**Data Selection** The distributions of  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$  on GSM8K and MATH reveal distinct patterns (see Section 5.1 and Appendix C.3): all base LLMs demonstrate a tendency to rely more on CoT for GSM8K queries, while preferring TIR for MATH queries. As a result, it is reasonable to select different decision functions,  $\mathcal{H}$ , for GSM8K and MATH. Specifically, for GSM8K, the dataset for supervised fine-tuning ( $D_{\text{SFT}}$ ) is defined as:

$$D_{\text{SFT}} = \bigcup_{k=1}^N \{(x_k, y_k^j)\}_{j=1}^{M_k} \cup \bigcup_{k \in A} \{(x_k, z_k^j)\}_{j=1}^{M_k},$$

where the index set  $A = \{k : S_{\text{CoT}}^k - S_{\text{TIR}}^k < \text{quantile}_1\}$ .

For MATH,  $D_{\text{SFT}}$  is defined as:

$$D_{\text{SFT}} = \bigcup_{k=1}^N \{(x_k, z_k^j)\}_{j=1}^{M_k} \cup \bigcup_{k \in B} \{(x_k, y_k^j)\}_{j=1}^{M_k},$$

where the index set  $B = \{k : S_{\text{CoT}}^k - S_{\text{TIR}}^k > \text{quantile}_2\}$ .

The thresholds  $\text{quantile}_1$  and  $\text{quantile}_2$  are determined through grid search. Notably, the performance of TATA is not sensitive to these quantiles (see Section 4.3 and Table 11). Additionally, we explored alternative decision functions  $\mathcal{H}$  in our ablation study, with further details provided in Section 4.3 and Appendix C.2.

Rewriting Prompt Template	
<p>You are a helpful mathematical assistant. A problem will be presented after “Problem:”, followed by a reference solution after “Original Solution:”. Your task is to rewrite the original solution. During rewriting, you tend to leverage Python (sympy is preferred) to facilitate solving the problem with step-by-step reasoning, especially for calculation and simplification. The specific requirements are as follows:</p> <ol style="list-style-type: none"> <li>1. Analyze the problem and write functions to solve it, ensuring that the functions do not require any arguments.</li> <li>2. Present the final result in <math>\LaTeX</math> using a <code>ANS</code> without any units.</li> <li>3. Utilize the ‘pi’ symbol and ‘Rational’ from Sympy for <math>\pi</math> and fractions, and simplify all fractions and square roots without converting them to decimal values.</li> <li>4. Avoid using sentences like “Reasoning step in natural language:”, “Reasoning in Python codes:”, and other similar phrases.</li> <li>5. Combine multiple calculation steps with Python code blocks where appropriate, avoiding unnecessary separate blocks. Limit the number of Python code blocks to fewer than 5 and use them wisely.</li> <li>6. The new solution format should be as follows:</li> </ol> <pre> “Reasoning step 1 in natural language without specific calculations “python Python code block 1 for calculation and simplification, please print out the final output using print “ “output The output for code block 1 “ ..... Reasoning step N in natural language without specific calculations “python Python code block N for calculation and simplification, please print out the final output using print “ “output The output for code block N “ Conclude the final answer.”  Problem: {problem}  Original Solution: {raw_answer}  New Solution: </pre>	

Table 7: The prompt for transforming CoT to TIR.

Model	Quantiles	Metric	In-Domain			Out-of-Domain					AVG
			GSM8K	MATH	ID AVG	MAWPS	SVAMP	College	Olympiad	OOD AVG	
Qwen2.5-0.5B	50, 60	Acc	52.2	37.2	44.7	86.4	55.7	27.5	9.9	44.9	44.8
		Token	313.5	503.1	408.3	224.3	304.7	496.1	748.2	443.3	431.7
		# Code	0.2	2.62	1.41	0.63	0.32	2.85	3.03	1.71	1.61
	40, 60	Acc	53.5	36.4	<b>45.0</b>	85.9	57.9	26.4	8.4	44.7	44.8
		Token	307.2	504.2	405.7	217.7	290.6	486.8	715.2	427.6	420.3
		# Code	0.24	2.5	1.37	0.56	0.3	2.7	2.84	1.6	1.52
	30, 60	Acc	53.1	37.0	<b>45.0</b>	86.2	56.3	26.7	10.2	44.8	44.9
		Token	312.7	507.5	410.1	218.6	298.1	482.4	720.6	429.9	423.3
		# Code	0.21	2.49	1.35	0.49	0.29	2.73	2.81	1.58	1.50
	30, 65*	Acc	52.8	36.6	44.7	85.9	59.4	26.9	8.6	<b>45.2</b>	<b>45.0</b>
		Token	309.7	508.7	409.2	217.3	292.9	500.9	743.0	438.5	428.8
		# Code	0.19	2.63	1.41	0.52	0.33	2.82	3.06	1.68	1.59
30, 70	Acc	52.2	37.1	44.7	86.4	55.7	27.6	9.9	44.9	44.8	
	Token	313.5	503.1	408.3	224.3	304.7	496.1	748.2	443.3	431.7	
	# Code	0.2	2.62	1.41	0.63	0.32	2.85	3.03	1.71	1.61	

Table 8: Performance across different quantiles using Qwen2.5-0.5B. The best accuracies within each group are shown in **bold**. The three metrics, “Acc”, “Token”, and “# Code” represent the average accuracy, total tokens per generation, and number of code executions. “Acc” is reported in %. “ID AVG”, “OOD AVG”, and “AVG” denote the averages of these metrics across in-domain, out-of-domain, and all six benchmarks. The two numbers in the “Quantiles” are the quantile of GSM8K and MATH, respectively. \* denote our chosen quantiles.

## B.2 Evaluation Benchmarks

We give a brief introduction of evaluated benchmarks mentioned in Section 4.1.

- **GSM8K** (Cobbe et al., 2021) is a grade-school math benchmark, consisting of 7,473 training examples and 1,319 test examples. It is available at [this link](#), and under [MIT License](#).
- **MATH** (Hendrycks et al., 2021) is a competition-level math dataset, including 5,000 test examples and 7,500 training examples. It is available at [this link](#), and under [MIT License](#).
- **MAWPS** (Koncel-Kedziorski et al., 2016) is a benchmark of math word problems (MWP), incorporating 238 test examples. It is under [MIT License](#) and can be found at <https://github.com/LYH-YF/MWPToolkit>.
- **SVAMP** (Patel et al., 2021) includes 1,000 simple MWPs, which is available at <https://github.com/LYH-YF/MWPToolkit>. It is under [MIT License](#).
- **CollegeMath** (Tang et al., 2024): This dataset comprises 2818 college-grade mathematical questions sourced from 9 different textbooks, covering 7 fields including linear algebra and differential equations. It is designed to evaluate generalization in intricate mathematical reasoning across various domains. It is available at [this link](#).
- **OlympiadBench-Math** (He et al., 2024): This collection comprises 675 high-level Olympiad mathematical problems selected from various competitions and represents a text-only English fraction of OlympiadBench. It is available at [this link](#).

## B.3 Evaluation Metrics

In addition to evaluating accuracy across the six benchmarks mentioned in Section 4.1, we also assess the computational costs associated with interacting with external Python interpreters. As described in Algorithm 1, TIR involves multiple interactions with Python interpreters. The associated time costs can be divided into two categories: the time required to execute Python code blocks and the increased generation costs caused by progressively longer input sequences. The first type of time cost is reflected in the number of interactions

with Python interpreters, i.e., the number of code executions. The second type can be approximated by the number of generated tokens, which includes both input and output tokens. Since the number of generations is equivalent to the number of code executions, we use the average total tokens per generation to evaluate this cost. Naturally, TIR incurs a higher number of generated tokens due to multiple generations with progressively longer contexts.

## B.4 SFT and Evaluation Setup

**SFT Setup** In our experiments, we utilize various base LLMs, including general-purpose models (e.g., LLaMA-3-8B (AI@Meta, 2024)) and math-specialized models (e.g., Qwen2.5-Math (Yang et al., 2024b)). The details of these base LLMs are outlined below:

- **Llama-3** (AI@Meta, 2024): LLaMA 3 Community License. We use Llama-3-8B as the base LLM in our experiments.
- **Qwen2.5** (Yang et al., 2024a): Qwen2.5 series are developed with dedication to math and coding. We used 0.5B, 1.5B, 3B, and, 7B models. They are licensed under [Apache 2.0](#).
- **Qwen2.5-Math** (Yang et al., 2024b): Qwen2.5-Math is a series of specialized math language models built upon the Qwen2.5 LLMs. We use 3B and 7B variants. They are under the same license as the Qwen2.5 series.

We set the maximum input length for all base models to be 4,096. During SFT, we employ the Adam optimizer with a learning rate of  $2 \times 10^{-5}$  and set batch size to 64, conducting training over three epochs. Unlike Beeching et al. (2024); Yang et al. (2024b), we use the same training prompt for both CoT and TIR. The prompt is provided in Table 9. We utilize 8 A100 GPUs to do SFT, and training a 7B model for 3 epochs with exclusively CoT data spends approximately 12 hours.

**Evaluation Setup** For evaluation, we adopt the same prompt used during SFT, as recommended by Tong et al. (2024). For TIR inference, please refer to Algorithm 1, where the maximum number of interactions is set to  $n = 6$ . CoT inference can be viewed as a special case of Algorithm 1 with  $n = 1$ .



Training and Inference Prompt Template
Below is an instruction that describes a task. Write a response that appropriately completes the request.
<b>### Instruction:</b> {instruction}
<b>### Response:</b>

Table 9: Training prompt for base LLMs.

## C More Fine-grained Results

### C.1 Main Results

The complete results of the main experiments are provided in Table 10. Besides the effectiveness of our proposed framework, the results also reveal distinct behaviors of CoT and TIR across different datasets, highlighting their complementary strengths. CoT excels on in-domain tasks like GSM8K, where step-by-step reasoning is crucial, achieving higher accuracy (e.g., 55.6% for Qwen2.5-0.5B) compared to TIR. However, TIR demonstrates superior performance on symbolic and computation-heavy tasks like MATH, leveraging tool integration to achieve higher accuracy (e.g., 67.5% for Qwen2.5-7B). On out-of-domain datasets, CoT shows strong generalization on structured problems like MAWPS and SVAMP, while TIR performs better on complex tasks like OlympiadBench, where precise computations are essential. This divergence underscores the importance of combining both approaches, as TATA balances CoT’s reasoning strength with TIR’s computational precision, achieving robust performance across diverse datasets.

### C.2 Ablation Study

As detailed in Appendix B, we use different decision function  $\mathcal{H}$  for GSM8K and MATH. Specifically, for GSM8K, the dataset for supervised fine-tuning ( $D_{\text{SFT}}$ ) is defined as:

$$D_{\text{SFT}} = \bigcup_{k=1}^N \{(x_k, y_k^j)\}_{j=1}^{M_k} \cup \bigcup_{k \in A} \{(x_k, z_k^j)\}_{j=1}^{M_k},$$

where the index set  $A = \{k : S_{\text{CoT}}^k - S_{\text{TIR}}^k < \text{quantile}_1\}$ .

For MATH,  $D_{\text{SFT}}$  is defined as:

$$D_{\text{SFT}} = \bigcup_{k=1}^N \{(x_k, z_k^j)\}_{j=1}^{M_k} \cup \bigcup_{k \in B} \{(x_k, y_k^j)\}_{j=1}^{M_k},$$

where the index set  $B = \{k : S_{\text{CoT}}^k - S_{\text{TIR}}^k > \text{quantile}_2\}$ . We consider this as the default choice of our TATA (i.e., TATA in Table 11).

We present the results of the  $\mathcal{H}$  ablation study in Table 11. The variants of  $\mathcal{H}$  evaluated are described as follows:

**Random** The key difference between “Random” and “TATA” lies in the selection of the index sets  $A$  and  $B$ . In the “Random” variant, we randomly select the index sets  $A$  and  $B$  while ensuring that  $|A|$  and  $|B|$  match those in the default TATA configuration. It is important to note that this is not purely a random selection, the number of queries using TIR or CoT is still determined by the default settings of TATA, making “Random” a strong baseline.

**CoT + TIR** In this variant, we include all CoT and TIR solutions in  $D_{\text{SFT}}$ , doubling the number of training examples compared to using only CoT or TIR individually. Formally, the dataset is defined as:

$$D_{\text{SFT}} = \bigcup_{k=1}^N \{(x_k, y_k^j)\}_{j=1}^{M_k} \cup \bigcup_{k=1}^N \{(x_k, z_k^j)\}_{j=1}^{M_k}.$$

**TATA<sup>-</sup>** The TATA<sup>-</sup> variant differs from the original TATA in that it uses a single quantile for selection. The dataset is formally defined as:

$$D_{\text{SFT}} = \bigcup_{k \in A} \{(x_k, y_k^j)\}_{j=1}^{M_k} \cup \bigcup_{k \in B} \{(x_k, z_k^j)\}_{j=1}^{M_k},$$

where the index set  $A = \{k : S_{\text{CoT}}^k - S_{\text{TIR}}^k > \text{quantile}\}$ , and  $B = A^c$ . In this setup, each query in the candidate set  $\mathcal{D}^* = \{(x_i, y_i^*, z_i^*)\}_{i=1}^N$  includes either CoT or TIR solutions but not both.

From Table 11, the selection function  $\mathcal{H}$  in our TATA gains the best results.

### C.3 Analysis of CoT scores and TIR scores

In Section 5.1, we presented representative results analyzing CoT and TIR scores. Here, we further provide the distributions of  $S_{\text{CoT}}^k$ ,  $S_{\text{TIR}}^k$ , and  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$  for various base LLMs in Figures 4, 5, 6, 7, 8, 9, and 10. From these figures, we have the following observations: 1. Different base LLMs exhibit varying tendencies towards CoT or TIR responding to the same candidate set queries. 2. Math-specialized LLMs (e.g.,

Model	Method	Metric	In-Domain			Out-of-Domain					AVG
			GSM8K	MATH	ID AVG	MAWPS	SVAMP	College	Olympiad	OOD AVG	
Qwen2.5-0.5B	CoT	Acc	<b>55.6</b>	32.5	44.0	<b>86.2</b>	58.9	26.3	6.7	44.5	44.4
		Token	305.4	526.8	416.1	195.7	286.2	544.3	768.9	448.8	437.9
		# Code	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	TIR	Acc	46.9	36.4	41.6	83.5	53.5	26.3	7.7	42.8	42.4
		Token	326.2	502.5	414.4	268.6	292.3	492.9	745.8	449.9	438.0
		# Code	3.16	2.72	2.94	2.76	2.93	2.91	3.03	2.91	2.92
	TATA	Acc	52.8	<b>36.6</b>	<b>44.7</b>	85.9	<b>59.4</b>	<b>26.9</b>	<b>8.6</b>	<b>45.2</b>	<b>45.0</b>
		Token	309.7	508.7	409.2	217.3	292.9	500.9	743.0	438.5	428.8
		# Code	0.19	2.63	1.41	0.52	0.33	2.82	3.06	1.68	1.59
Qwen2.5-1.5B	CoT	Acc	<b>78.3</b>	48.2	63.2	93.5	<b>82.5</b>	<b>37.9</b>	13.2	56.8	58.9
		Token	273.1	488.5	380.8	185.9	233.9	498.9	684.0	400.7	394.0
		# Code	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	TIR	Acc	70.8	<b>54.3</b>	62.6	91.7	79.8	36.0	<b>19.4</b>	56.7	58.7
		Token	324.0	474.5	399.2	275.0	295.4	454.1	689.9	428.6	418.8
		# Code	3.1	2.55	2.82	2.83	2.94	2.66	2.96	2.85	2.84
	TATA	Acc	77.6	53.8	<b>65.7</b>	<b>94.2</b>	80.7	37.0	18.8	<b>57.7</b>	<b>60.4</b>
		Token	273.1	480.5	376.8	181.8	235.0	453.3	692.7	390.7	386.1
		# Code	0.11	2.37	1.24	0.14	0.21	2.38	2.84	1.39	1.34
Qwen2.5-3B	CoT	Acc	<b>85.3</b>	53.8	69.6	<b>94.8</b>	<b>85.8</b>	41.5	16.3	59.6	62.9
		Token	259.8	469.2	364.5	180.8	230.3	491.3	679.7	395.5	385.2
		# Code	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	TIR	Acc	80.4	<b>61.4</b>	70.9	89.9	79.8	41.1	25.0	59.0	62.9
		Token	312.7	467.0	389.8	283.3	293.8	434.4	676.5	422.0	411.3
		# Code	3.04	2.57	2.8	2.94	2.89	2.56	2.81	2.8	2.8
	TATA	Acc	84.0	61.3	<b>72.6</b>	94.7	85.3	<b>41.6</b>	<b>24.9</b>	<b>61.6</b>	<b>65.3</b>
		Token	265.1	468.4	366.8	209.3	237.7	436.4	683.5	391.7	383.4
		# Code	0.07	2.44	1.25	0.55	0.26	2.49	2.8	1.52	1.43
Qwen2.5-7B	CoT	Acc	88.7	58.6	73.6	<b>96.1</b>	<b>88.1</b>	42.7	23.0	62.5	66.2
		Token	255.8	464.5	360.2	177.7	217.9	480.0	673.5	387.3	378.2
		# Code	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	TIR	Acc	86.8	<b>67.5</b>	77.2	92.1	84.3	44.2	<b>31.9</b>	63.1	67.8
		Token	306.4	452.3	379.4	261.6	272.0	430.6	636.3	400.1	393.2
		# Code	3.01	2.43	2.72	2.58	2.54	2.52	2.68	2.58	2.63
	TATA	Acc	<b>89.5</b>	66.8	<b>78.2</b>	94.2	86.2	<b>43.4</b>	31.1	<b>63.7</b>	<b>68.5</b>
		Token	258.1	452.8	355.5	195.3	222.0	433.9	652.4	375.9	369.1
		# Code	0.18	2.27	1.23	0.5	0.29	2.49	2.66	1.48	1.4
LLaMA-3-8B	CoT	Acc	<b>84.7</b>	46.5	65.6	91.6	81.6	30.2	13.3	54.2	58.0
		Token	246.4	471.0	358.7	173.3	236.8	511.7	676.7	399.6	386.0
		# Code	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	TIR	Acc	81.7	<b>56.2</b>	69.0	87.8	77.8	30.5	<b>21.9</b>	54.5	59.3
		Token	299.0	457.5	378.2	240.9	269.1	437.9	650.8	399.7	392.5
		# Code	2.96	2.51	2.74	2.42	2.64	2.69	2.76	2.63	2.66
	TATA	Acc	84.0	55.1	<b>69.6</b>	<b>91.8</b>	<b>82.7</b>	<b>34.2</b>	21.5	<b>57.6</b>	<b>61.5</b>
		Token	248.2	461.1	354.6	191.1	222.5	449.5	657.7	380.2	371.7
		# Code	0.12	2.33	1.23	0.27	0.21	2.39	2.6	1.37	1.32
Qwen2.5Math-1.5B	CoT	Acc	83.1	56.6	69.8	92.9	84.1	<b>44.3</b>	19.3	60.2	63.4
		Token	267.1	476.5	371.8	181.7	238.3	485.7	681.7	396.8	388.5
		# Code	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	TIR	Acc	78.8	64.8	71.8	92.3	83.3	42.4	<b>27.4</b>	61.4	64.8
		Token	332.2	516.6	424.4	324.5	335.6	479.0	772.5	477.9	460.1
		# Code	3.28	2.8	3.04	3.62	3.55	2.99	3.14	3.32	3.23
	TATA	Acc	83.2	62.8	<b>73.0</b>	<b>94.0</b>	<b>85.6</b>	43.9	26.8	<b>62.6</b>	<b>66.0</b>
		Token	266.2	508.9	387.5	199.4	247.1	467.1	743.6	414.3	405.4
		# Code	0.26	1.68	0.97	0.32	0.42	1.44	2.38	1.14	1.08
Qwen2.5Math-7B	CoT	Acc	<b>91.0</b>	61.5	76.2	94.8	87.9	45.7	23.9	63.1	67.5
		Token	254.7	470.6	362.6	177.0	223.5	484.1	669.2	388.5	379.9
		# Code	0.0	0.0	0.0	0.0	0.0	0.0	0.01	0.0	0.0
	TIR	Acc	88.9	<b>73.6</b>	81.2	<b>95.4</b>	<b>89.4</b>	47.1	35.3	66.8	71.6
		Token	311.8	490.9	401.4	261.2	272.2	456.8	713.7	426.0	417.8
		# Code	3.04	2.56	2.8	2.58	2.51	2.65	2.75	2.62	2.68
	TATA	Acc	89.8	73.0	<b>81.4</b>	95.2	88.1	<b>48.3</b>	<b>35.9</b>	<b>66.9</b>	<b>71.7</b>
		Token	264.7	487.2	376.0	193.7	229.7	476.9	710.6	402.7	393.8
		# Code	0.25	2.14	1.2	0.33	0.24	2.02	2.59	1.3	1.26

Table 10: Detailed results of our TATA framework. The best accuracies within each group are shown in **bold**. The three metrics, “Acc”, “Token”, and “# Code” represent the average accuracy (%), total tokens per generation, and number of code executions. “ID AVG”, “OOD AVG”, and “AVG” denote the averages of these metrics across in-domain, out-of-domain, and all six benchmarks. “CoT”, “TIR”, and “TATA” indicate fine-tuning exclusively on CoT data, TIR data, and using our TATA framework, respectively, with the corresponding base LLM.

Model	Method	Metric	In-Domain			Out-of-Domain					AVG
			GSM8K	MATH	ID AVG	MAWPS	SVAMP	College	Olympiad	OOD AVG	
LLaMA-3-8B	CoT	Acc	<b>84.7</b>	46.5	65.6	91.6	81.6	30.2	13.3	54.2	58.0
		Token	246.4	471.0	358.7	173.3	236.8	511.7	676.7	399.6	386.0
		# Code	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	TIR	Acc	81.7	56.2	69.0	87.8	77.8	30.5	<b>21.9</b>	54.5	59.3
		Token	299.0	457.5	378.2	240.9	269.1	437.9	650.8	399.7	392.5
		# Code	2.96	2.51	2.74	2.42	2.64	2.69	2.76	2.63	2.66
	Random	Acc	83.1	<b>56.4</b>	<b>69.8</b>	91.8	81.3	31.3	21.8	56.6	61.0
		Token	271.6	472.0	371.8	203.7	251.0	453.4	695.5	400.9	391.2
		# Code	0.21	2.35	1.28	0.36	0.33	2.44	2.83	1.49	1.42
	CoT + TIR	Acc	83.1	48.4	65.8	91.2	78.7	30.8	16.7	54.4	58.2
		Token	278.0	497.4	387.7	208.6	281.2	507.3	707.3	421.1	410.0
		# Code	0.83	0.51	0.67	0.68	0.95	0.51	1.09	0.81	0.76
TATA <sup>-</sup>	Acc	83.1	54.7	68.9	91.2	80.6	31.9	19.6	55.8	60.2	
	Token	285.4	472.1	378.8	226.7	253.9	474.3	692.2	411.8	400.8	
	# Code	1.4	2.31	1.86	1.23	1.2	2.34	2.49	1.81	1.83	
TATA	Acc	84.0	55.1	69.6	<b>91.8</b>	<b>82.7</b>	<b>34.2</b>	21.5	<b>57.6</b>	<b>61.5</b>	
	Token	248.2	461.1	354.6	191.1	222.5	449.5	657.7	380.2	371.7	
	# Code	0.12	2.33	1.23	0.27	0.21	2.39	2.6	1.37	1.32	

Table 11: Ablation Study using LLaMA-3-8B. The best accuracies within each group are shown in **bold**. The three metrics, “Acc”, “Token”, and “# Code” represent the average accuracy, total tokens per generation, and number of code executions. “Acc” is reported in %. “ID AVG”, “OOD AVG”, and “AVG” denote the averages of these metrics across in-domain, out-of-domain, and all six benchmarks.

Qwen2.5Math) demonstrate higher CoT and TIR scores compared to their general-purpose counterparts (e.g., Qwen2.5). This may be attributed to the inclusion of similar CoT and TIR data in their pretraining process. 3. Notably, Qwen2.5Math-7B achieves TIR scores approaching 0.8 accuracy on the MATH anchor set using only a 1-shot prompt from the candidate set, as shown in Figure 10 (middle). This suggests the potential for anchor set contamination (Xu et al., 2024a).

#### C.4 Transferability Results

The complete results of transferability results are given in Table 12.

#### C.5 DPO Results

The detailed settings of DPO are as follows:

**Preference Data Construction** The construction of the preference dataset used in DPO is guided by CoT and TIR scores, following a similar approach to the construction of  $\mathcal{D}_{\text{SFT}}$ . Specifically, two separate quantiles are used to select preference pairs for the GSM8K and MATH datasets. The preference dataset,  $\mathcal{D}_{\text{pre}}$ , is selected from the newly defined candidate set,  $\mathcal{D}^* = \{(x_i, y_i^*, z_i^*)\}_{i=1}^N$ , and is formally defined as:

$$\mathcal{D}_{\text{pre}} = \{(x_k, c_k, r_k)\}_{k \in A},$$

where  $c_k$  is the chosen (preferred) response for the query  $x_k$ , and  $r_k$  is the rejected response.

The index set  $A$  is defined as:

$$A = \{k : S_{\text{TIR}}^k - S_{\text{CoT}}^k < \text{quantile}'_1 \quad \text{or} \\ S_{\text{CoT}}^k - S_{\text{TIR}}^k > \text{quantile}'_2\},$$

where  $\text{quantile}'_1$  and  $\text{quantile}'_2$  are two quantiles optimized via grid search.

The rules for determining  $c_k$  (chosen response) and  $r_k$  (rejected response) are as follows:

$$c_k = \begin{cases} y_k & \text{if } S_{\text{CoT}}^k - S_{\text{TIR}}^k > \text{quantile}'_2, \\ z_k & \text{if } S_{\text{TIR}}^k - S_{\text{CoT}}^k < \text{quantile}'_1, \end{cases}$$

and

$$r_k = \begin{cases} y_k & \text{if } S_{\text{TIR}}^k - S_{\text{CoT}}^k < \text{quantile}'_1, \\ z_k & \text{if } S_{\text{CoT}}^k - S_{\text{TIR}}^k > \text{quantile}'_2. \end{cases}$$

This preference selection process ensures that the dataset  $\mathcal{D}_{\text{pre}}$  contains meaningful comparisons between CoT and TIR responses based on their relative scores.

**DPO Hyperparameters** We utilize OpenRLHF (Hu et al., 2024) to implement DPO. The maximum token length is set to 4,096, consistent with the SFT stage. The training process adopts a learning rate of  $5 \times 10^{-7}$ , a batch size of 256, and runs for one epoch. We use LLaMA-3-8B and Qwen2.5Math-7B, fine-tuned with TATA, as the starting point for DPO.

The complete results are presented in Table 13. As shown, DPO achieves comparable results with LLMs fine-tuned with TATA.

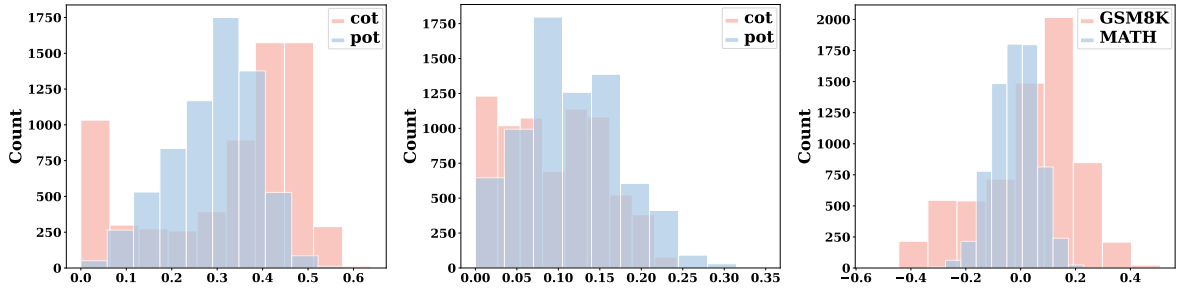


Figure 4: The distribution of  $S_{\text{CoT}}^k$  (left),  $S_{\text{TIR}}^k$  (middle), and  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$  (right) for LLaMA-3-8B.

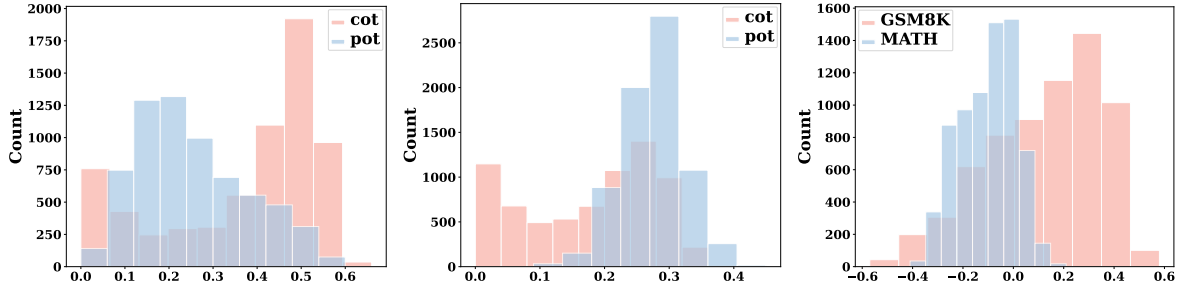


Figure 5: The distribution of  $S_{\text{CoT}}^k$  (left),  $S_{\text{TIR}}^k$  (middle), and  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$  (right) for Qwen2.5-0.5B.

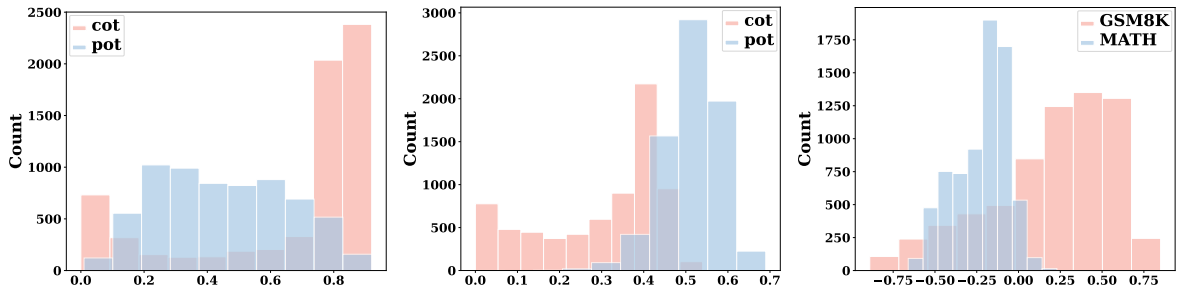


Figure 6: The distribution of  $S_{\text{CoT}}^k$  (left),  $S_{\text{TIR}}^k$  (middle), and  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$  (right) for Qwen2.5-1.5B.

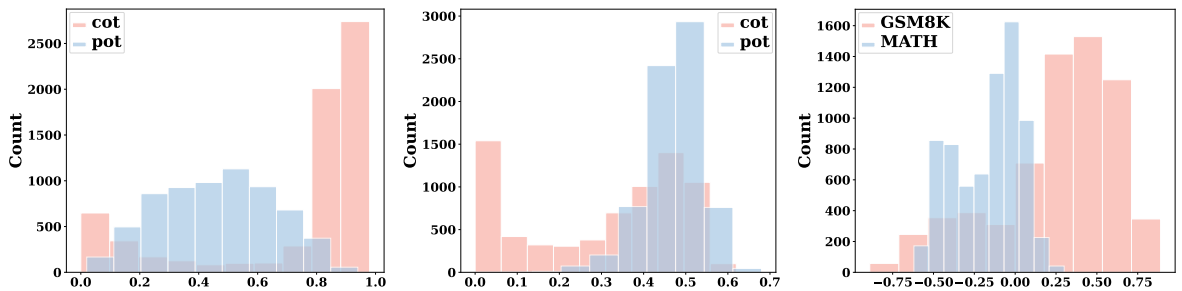


Figure 7: The distribution of  $S_{\text{CoT}}^k$  (left),  $S_{\text{TIR}}^k$  (middle), and  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$  (right) for Qwen2.5-3B.

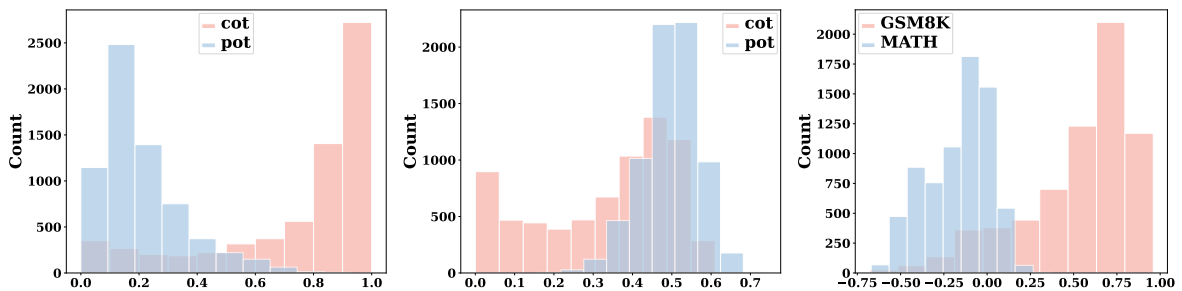


Figure 8: The distribution of  $S_{\text{CoT}}^k$  (left),  $S_{\text{TIR}}^k$  (middle), and  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$  (right) for Qwen2.5-7B.

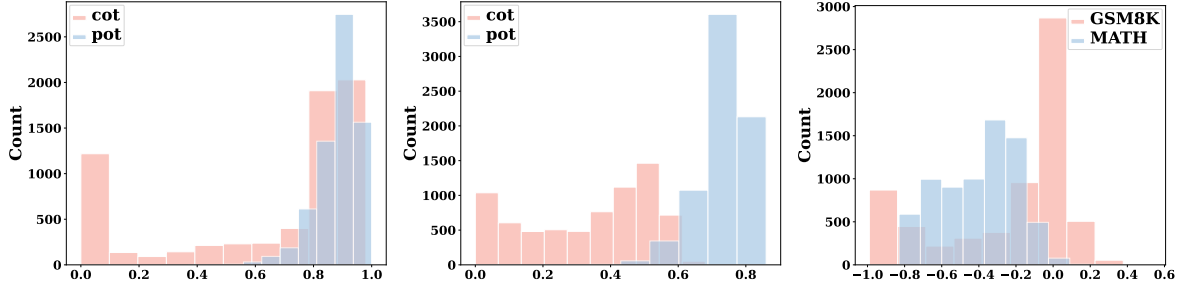


Figure 9: The distribution of  $S_{\text{CoT}}^k$  (left),  $S_{\text{TIR}}^k$  (middle), and  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$  (right) for Qwen2.5Math-1.5B.

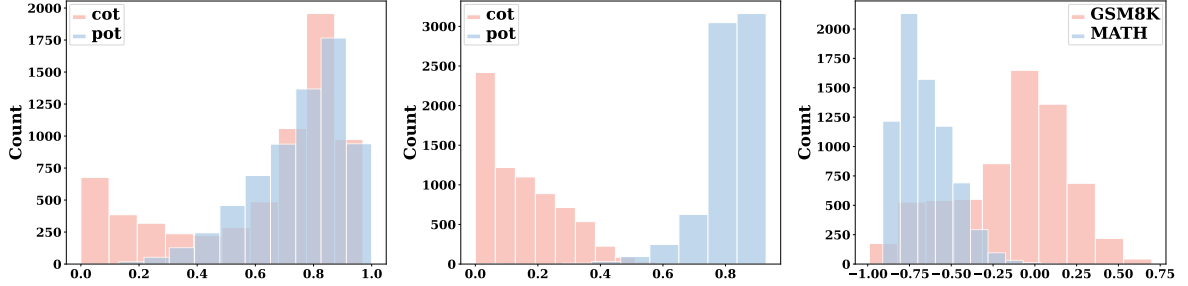


Figure 10: The distribution of  $S_{\text{CoT}}^k$  (left),  $S_{\text{TIR}}^k$  (middle), and  $(S_{\text{CoT}}^k - S_{\text{TIR}}^k)$  (right) for Qwen2.5Math-7B.

Model	Select By	Metric	In-Domain				Out-of-Domain				AVG
			GSM8K	MATH	ID AVG	MAWPS	SVAMP	College	Olympiad	OOD AVG	
Qwen2.5-0.5B	Qwen2.5-0.5B	Acc	<b>52.8</b>	36.6	<b>44.7</b>	85.9	<b>59.4</b>	<b>26.9</b>	<b>8.6</b>	<b>45.2</b>	<b>45.0</b>
		Token	309.7	508.7	409.2	217.3	292.9	500.9	743.0	438.5	428.8
		# Code	0.19	2.63	1.41	0.52	0.33	2.82	3.06	1.68	1.59
	LLaMA-3-8B	Acc	51.3	36.3	43.8	86.2	55.9	26.5	8.1	44.2	44.1
		Token	318.2	507.7	413.0	216.9	298.9	485.4	732.8	433.5	426.6
		# Code	0.28	2.49	1.39	0.52	0.52	2.45	2.73	1.56	1.5
Qwen2.5-7B	Acc	52.2	36.8	44.5	<b>86.7</b>	57.6	26.7	7.4	44.6	<b>44.6</b>	
	Token	312.5	499.4	406.0	228.6	308.2	489.3	744.5	442.6	430.4	
	# Code	0.4	2.53	1.46	0.85	0.68	2.75	2.94	1.81	1.69	

Table 12: Detailed results of transferability experiments using Qwen2.5-0.5B. The best accuracies within each group are shown in **bold**. The three metrics, “Acc”, “Token”, and “# Code” represent the average accuracy, total tokens per generation, and number of code executions. “Acc” is reported in %. “ID AVG”, “OOD AVG”, and “AVG” denote the averages of these metrics across in-domain, out-of-domain, and all six benchmarks.

Model	Method	Metric	In-Domain			Out-of-Domain					AVG
			GSM8K	MATH	ID AVG	MAWPS	SVAMP	College	Olympiad	OOD AVG	
LLaMA-3-8B	CoT	Acc	<b>84.7</b>	46.5	65.6	91.6	81.6	30.2	13.3	54.2	58.0
		Token	246.4	471.0	358.7	173.3	236.8	511.7	676.7	399.6	386.0
		# Code	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	TIR	Acc	81.7	<b>56.2</b>	69.0	87.8	77.8	30.5	<b>21.9</b>	54.5	59.3
		Token	299.0	457.5	378.2	240.9	269.1	437.9	650.8	399.7	392.5
		# Code	2.96	2.51	2.74	2.42	2.64	2.69	2.76	2.63	2.66
	TATA	Acc	84.0	55.1	<b>69.6</b>	<b>91.8</b>	<b>82.7</b>	<b>34.2</b>	21.5	<b>57.6</b>	61.5
		Token	248.2	461.1	354.6	191.1	222.5	449.5	657.7	380.2	371.7
		# Code	0.12	2.33	1.23	0.27	0.21	2.39	2.6	1.37	1.32
	+DPO	Acc	84.0	55.2	<b>69.6</b>	<b>91.8</b>	<b>82.7</b>	34.0	21.8	<b>57.6</b>	<b>61.6</b>
		Token	250.8	<b>453.6</b>	<b>352.2</b>	<b>185.0</b>	<b>219.1</b>	<b>435.9</b>	<b>647.9</b>	372.0	<b>365.4</b>
		# Code	0.14	2.38	1.26	0.25	0.17	2.42	2.7	1.38	1.34
Qwen2.5Math-7B	CoT	Acc	<b>91.0</b>	61.5	76.2	94.8	87.9	45.7	23.9	63.1	67.5
		Token	<b>254.7</b>	470.6	362.6	<b>177.0</b>	<b>223.5</b>	484.1	669.2	388.5	379.9
		# Code	0.0	0.0	0.0	0.0	0.0	0.0	0.01	0.0	0.0
	TIR	Acc	88.9	<b>73.6</b>	81.2	<b>95.4</b>	<b>89.4</b>	47.1	35.3	66.8	71.6
		Token	311.8	490.9	401.4	261.2	272.2	<b>456.8</b>	713.7	426.0	417.8
		# Code	3.04	2.56	2.8	2.58	2.51	2.65	2.75	2.62	2.68
	TATA	Acc	89.8	73.0	<b>81.4</b>	95.2	88.1	<b>48.3</b>	<b>35.9</b>	<b>66.9</b>	<b>71.7</b>
		Token	264.7	487.2	376.0	193.7	229.7	476.9	710.6	402.7	393.8
		# Code	0.25	2.14	1.2	0.33	0.24	2.02	2.59	1.3	1.26
	+DPO	Acc	89.8	73.1	<b>81.4</b>	95.2	88.1	<b>48.4</b>	35.4	66.8	<b>71.7</b>
		Token	267.0	<b>487.2</b>	377.1	193.8	229.4	474.8	718.9	404.2	395.2
		# Code	0.3	2.18	1.24	0.39	0.27	2.08	2.67	1.35	1.32

Table 13: Detailed DPO results. The best accuracies within each group are shown in **bold**. The three metrics, “Acc”, “Token”, and “# Code” represent the average accuracy, total tokens per generation, and number of code executions. “Acc” is reported in %. “ID AVG”, “OOD AVG”, and “AVG” denote the averages of these metrics across in-domain, out-of-domain, and all six benchmarks.