
MODEL PRIVACY: A UNIFIED FRAMEWORK TO UNDERSTAND MODEL STEALING ATTACKS AND DEFENSES

Ganghua Wang
School of Statistics
University of Minnesota
wang9019@umn.edu

Yuhong Yang
School of Statistics
University of Minnesota
yangx374@umn.edu

Jie Ding
School of Statistics
University of Minnesota
dingj@umn.edu

ABSTRACT

The use of machine learning (ML) has become increasingly prevalent in various domains, highlighting the importance of understanding and ensuring its safety. One pressing concern is the vulnerability of ML applications to model stealing attacks. These attacks involve adversaries attempting to recover a learned model through limited query-response interactions, such as those found in cloud-based services or on-chip artificial intelligence interfaces. While existing literature proposes various attack and defense strategies, these often lack a theoretical foundation and standardized evaluation criteria. In response, this work presents a framework called “Model Privacy”, providing a foundation for comprehensively analyzing model stealing attacks and defenses. We establish a rigorous formulation for the threat model and objectives, propose methods to quantify the goodness of attack and defense strategies, and analyze the fundamental tradeoffs between utility and privacy in ML models. Our developed theory offers valuable insights into enhancing the security of ML models, especially highlighting the importance of the attack-specific structure of perturbations for effective defenses. We demonstrate the application of model privacy from the defender’s perspective through various learning scenarios. Extensive experiments corroborate the insights and the effectiveness of defense mechanisms developed under the proposed framework.

Keywords Trustworthy Machine Learning, Model Attacks, Privacy, Adversarial Learning, Artificial Intelligence Security

1 Introduction

Machine learning (ML) has achieved remarkable success in many applications such as content recommendation on social media platforms, medical image diagnosis, and autonomous driving. However, there is a growing concern regarding the potential safety hazards coming with ML. One particularly critical threat to ML applications is model stealing attacks [Tramèr et al., 2016, Oliynyk et al., 2023], where adversaries attempt to recover the learned model itself through limited query-response interactions. ML models are often highly valuable due to their expensive creation process and proprietary techniques. If a third party can reconstruct the model, it may significantly harm the model owner’s interests, leading to financial losses and intellectual property breaches. Model stealing attacks target at trained models. This differs from attacks aimed at compromising datasets, which is often studied under the framework of differential privacy or its variants [see, e.g., Evfimievski et al., 2003, Dwork et al., 2006, Dong et al., 2022].

We exemplify a model stealing attack in Figure 1, which targets Machine-learning-as-a-service and an image classification task. In this scenario, the model owner trains a classification model and aims to monetize it by deploying it on a cloud server and providing paid service. Users can send queries, which in this case are images, to the server and receive model-generated labels as responses after paying for the service. However, model stealing attacks pose a serious threat to this monetization strategy, since a malicious user may easily rebuild a model with comparable accuracy to the original model based on a few query-response pairs. For instance, Tramèr et al. [2016] reported that 100 queries are sufficient for a successful model stealing attack on a classification model trained on the handwritten digits dataset, costing less than one dollar.

Empirical studies have shown that model stealing attacks can be very effective across a wide range of applications, such as classification tasks with logistic regression, random forests, and deep neural networks [Tramèr et al., 2016,

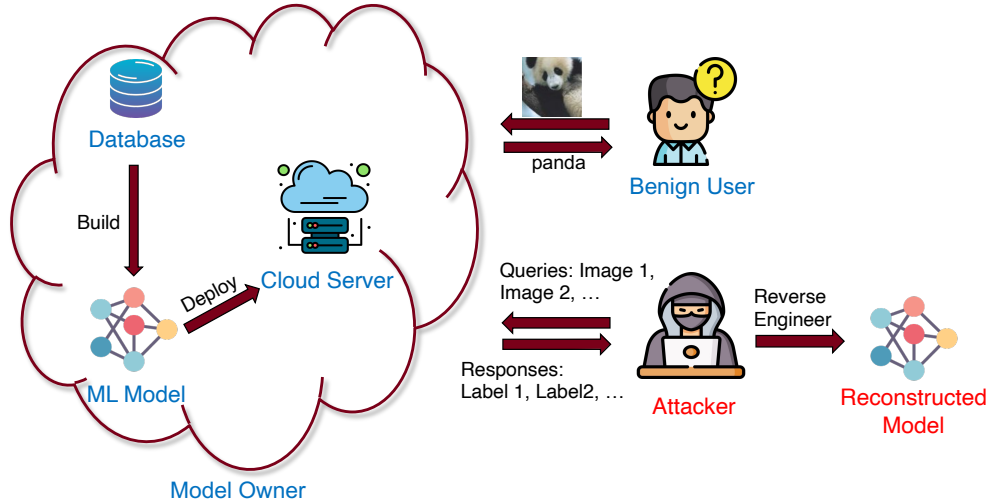


Figure 1: An illustration of a model stealing attack in the machine-learning-as-a-service scenario. Given a trained image classification model deployed on the cloud server, a user can send queries to and receive responses from the server. A malicious user, also called an attacker, aims to reconstruct this model based on query-response pairs.

Papernot et al., 2017, Orekondy et al., 2019]. Our experiments further demonstrate that for large language model-based classifiers, such as those based on GPT [Radford et al., 2018], BERT [Devlin et al., 2019], and XLNet [Yang et al., 2019], one could rebuild a model with similar predictive accuracy by querying only 5% of the original model’s training sample size, if there is no defense. The consequences of such attacks are significant: the attacker can stop paying for the service, potentially leading to financial losses for the model owner, or even compete with the original model owner using the stolen model. These risks highlight the urgent need for effective defense mechanisms to protect the integrity and value of ML models.

A large body of literature has been developed for both model stealing attacks and defenses [see, e.g., Tramèr et al., 2016, Papernot et al., 2017, Chandrasekaran et al., 2020, Milli et al., 2019, Kesarwani et al., 2018, Juuti et al., 2019, Lee et al., 2019, Orekondy et al., 2020, Wang et al., 2021, Oliynyk et al., 2023]. However, existing studies are often heuristic and based on practical experience, lacking a standard criterion for evaluating the effectiveness of attack and defense methods. This makes it challenging to compare different approaches. Moreover, the principles guiding which defense a service provider should adopt remain unclear. Establishing a theoretical foundation for this subject is therefore crucial, and this paper aims to address this gap.

We present a comprehensive framework named *model privacy*, serving as a foundation for analyzing model stealing attacks and defenses. Our contributions are three-fold:

1. Conceptual Formalization: We establish a clear conceptual foundation for model privacy. By formalizing the actions and objectives of both attackers and defenders in query-response-based interactions, we identify fundamental factors that influence their decision-making processes. We also propose methods for quantifying the effectiveness of model stealing attacks and defenses. To our knowledge, this is the first work that formally defines model stealing attacks and defenses.

2. Theoretical Analysis: We address fundamental questions in model privacy, especially focusing on the defender’s perspective. Our analysis examines the necessity of defense mechanism and identifies optimal defenses against attackers with known or unknown attack strategies. Specifically, we evaluate the privacy-utility tradeoffs of multiple defense strategies against four representative learning algorithms (k -nearest neighbors, polynomial regression, kernel ridge regression, and neural networks) and assess their worst-case privacy guarantees against unknown attackers. Additionally, we investigate scenarios where attacks are easier to defend against and the impact of side information on defense strategies.

3. Practical Implications: Our theoretic developments provide valuable insights and guidance for designing more effective model defenses. We demonstrate that crafting attack-specific, query-dependent perturbations is critical for effective defenses. We propose new defense mechanisms with theoretical guarantees, tailored for scenarios where attackers use polynomial regression, kernel regression, and neural networks to steal models. Based on our theoretical findings, we also develop a novel defense mechanism for classification tasks. Experimental results on both simulated

and real-world datasets show that our proposed defenses significantly enhance model privacy, requiring attackers to send many more queries to reconstruct a comparable model, or even making it impossible to do so.

The rest of this paper is organized as follows. Section 2 formulates the model privacy framework, including threat model, goodness quantification, and objectives. It also provides insights into the proposed concepts. Section 3 proposes practical measures for evaluating the goodness of attacks and defenses, and establishes the connection with the rebuilt model’s statistical risk. Section 4 introduces the setup and notations used throughout the paper. In Section 5, we apply the model privacy framework to understand the defender’s optimal decisions in various scenarios where the attacker’s learning algorithm is known. Section 6 focuses on defense analysis when the attacker’s learning algorithm is unknown to the defender. Numerical experiments on both simulated and real-world datasets are presented in Section 7 to corroborate our findings. We conclude the paper with further discussions in Section 8. The supplementary document includes proofs and additional theoretical and experimental results.

2 Formulation of the Model Privacy Framework

In Section 2.1, we present the background of model stealing attacks, highlighting the motivation and essential ingredients of the proposed framework. In Section 2.2, we propose methods to quantify the effectiveness of attack and defense strategies with economic interpretations. In Section 2.3, we characterize the objectives and actions of both the attacker and defender, providing a foundation for theoretically analyzing the unique challenges in model privacy.

2.1 Background and Essential Ingredients of Model Privacy

We begin with a classical machine learning setting. Suppose a model owner has created a function f^* from a large proprietary dataset to predict responses based on input X . The model owner provides query-based services by responding with \tilde{Y}_i for any input query X_i .

Meanwhile, a malicious user, or attacker, aims to build a model to either provide similar services and compete with the model owner or to discontinue paying for the service. Instead of collecting raw training data and training a model from scratch, the attacker exploits the model owner’s service to significantly reduce training costs. In particular, the attacker performs a model stealing attack to reconstruct a function \hat{f}_n that closely approximates f^* using n query-response pairs $Z_n := \{(X_i, \tilde{Y}_i), i = 1, \dots, n\}$. There are three essential ingredients for the attacker.

1. *Evaluation criterion* ℓ . To evaluate the goodness of an attack, the attacker has to assess the closeness between the target function f^* and the reconstructed function \hat{f}_n . This is measured via $\ell_A(\hat{f}_n, f^*)$, where ℓ_A is a loss function chosen according to the attacker’s interest. For example, if the attacker wants \hat{f}_n to be uniformly close to f^* , $\ell_A(f, g)$ could be the supremum norm $\sup_x |f(x) - g(x)|$ for two functions f and g . Alternatively, if the focus is on performance in a specific region S , $\ell_A(f, g)$ can be defined as $\int_{x \in S} |f(x) - g(x)| dx$.
2. *Attack strategy* (Q, T) . An attack strategy consists of a *query strategy* Q and a *learning algorithm* T . The query strategy Q determines how the attacker selects X_i ’s. There are two types of query strategies: “batch query”, where all n queries are sent to the model owner at once, and “sequential query”, where queries are sent one by one or in parts. Examples of batch query strategies include fixed designs (e.g., equally-spaced sampling over an interval) and random designs (e.g., IID sampling from a given distribution). Sequential query strategies may use previous responses to inform subsequent X_i choices. After collecting the query-response pairs Z_n , the attacker applies a learning algorithm T to construct \hat{f}_n . Common learning algorithms include linear regression, k -nearest neighbors, ensemble forests, and neural networks.
3. *Side information* \mathcal{S} . Attacker’s side information \mathcal{S}_A refers to any additional information available to the attacker beyond the query-response pairs. This can include properties of the defender’s model, such as knowing that f^* is non-negative or is a neural network with a particular architecture, or additional data collected from other sources. Side information can enhance the attacker’s learning capability.

Overall, the attacker aims to choose a favorable attack strategy that allows them to accurately recover f^* using a minimal number of queries.

Given this threat, the model owner aims to prevent the attacker from easily stealing the model. As such, we name this problem as enhancing *model privacy* and call the model owner the defender. There are also three key components for the defender.

1. *Evaluation criterion* ℓ . The defender seeks to maximize the dissimilarity between \hat{f}_n and f^* , evaluated through $\ell_D(\hat{f}_n, f^*)$. It should be noted that the defender’s loss function ℓ_D may differ from the attacker’s ℓ_A .

For example, an attacker who aims to steal a language model for a given downstream task may employ a loss function ℓ_A evaluated in the task-specific region S . Meanwhile, the defender might aim for a comprehensive defense, therefore using a different ℓ_D that evaluates the entire input space.

2. *Defense mechanism M* . The defender can enhance model privacy by adding perturbations to the responses, $\tilde{Y}_i = f^*(X_i) + e_i$, where e_i is a perturbation determined by a defense mechanism M . Larger perturbations can increase the deviation between \hat{f}_n and f^* . However, they also reduce the quality of service for benign users, which we refer to as *utility loss*. Every defense mechanism must navigate this trade-off between privacy and utility, which is referred to as the privacy-utility trade-off.
3. *Side information S* . The defender’s side information S_D refers to any knowledge about the attacker beyond the received queries. Examples include the attacker’s potential query strategies and learning algorithms. This information helps the defender deploy more targeted defense mechanisms, thereby bolstering model protection.

In summary, model privacy involves a competition between the attacker and defender, who engage in a non-cooperative and asymmetric interaction.

2.2 Goodness Quantification in Model Privacy: An Economic Perspective

Among key ingredients identified in Section 2.1, the attack strategy and defense mechanism are of most importance. This subsection provides an economic perspective on their effectiveness, offering simple and intuitive interpretations. Generally speaking, for the attacker, an attack strategy is considered *potent* if they can significantly reduce their cost to build a model by abusing the defender’s service, compared to collecting data and training a model from scratch themselves. We illustrate this with the following example.

Example 1 (Steal a Linear Function) *Suppose the defender has a linear function f^* and the attacker tries to rebuild it by fitting a linear model. Without any defense mechanism, the attacker can precisely reconstruct f^* with just a few query-response pairs by solving a linear equation. Without querying the defender, the attacker can also collect data from nature and then build a model. The needed sample size to obtain a model \hat{f}_n that is close to f^* , however, grows quickly as the distance between \hat{f}_n and f^* decreases. Thus, model stealing is economically advantageous for the attacker.*

We next elaborate on this idea. Let M_{Nature} denote a defense mechanism that adds perturbations such that (X_i, \tilde{Y}_i) ’s have the same distribution as the observations collected from the nature. Let $\hat{f}_n := T(Z_n)$ denote the attacker’s reconstructed function given query-response pairs $Z_n = \{(X_i, \tilde{Y}_i), i = 1, \dots, n\}$ and a learning algorithm T .

Definition 1 (Necessary Stealing Sample Size) *The sample size needed to rebuild a function \hat{f}_n that is ϵ -close to f^* under loss ℓ is defined as $n(\epsilon, \ell; f^*, M, Q, T) := \inf\{n : \mathbb{E}\{\ell(\hat{f}_n, f^*)\} \leq \epsilon\}$. Here, the expectation is taken over every randomness, including both the attack strategy (Q, T) and defense mechanism M .*

Definition 2 (Attack Strength) *We define the attack strength for an attack strategy (Q, T) with respect to the underlying function f^* and defense M as*

$$\text{AttStr}(Q, T \mid f^*, M, \ell_A) := \liminf_{\epsilon \rightarrow 0^+} \frac{n(\epsilon, \ell_A; f^*, M_{\text{Nature}}, Q, T) \times c_{\text{Nature}}}{n(\epsilon, \ell_A; f^*, M, Q, T) \times c_{\text{Steal}}},$$

where $c_{\text{Nature}}, c_{\text{Steal}}$ are the costs of collecting a single observation from nature and the defender, respectively. An attack strategy is called *potent* if $\text{AttStr} = \infty$.

From the attacker’s perspective, attack strength is the ratio of the model reconstruction costs incurred by collecting data naturally versus by stealing from the defender. It is more economical to steal the model when $\text{AttStr} > 1$, rather than collecting data independently. An attack with infinity strength indicates the cost of querying the defender is substantially lower compared to the cost of independent data collection.

In contrast to the attacker, the defender has to consider both the service quality for the benign users and the difficulty for the attacker to reconstruct f^* well. In one extreme, suppose a defender deploys a defense of returning pure white noise. Clearly, the attacker cannot rebuild any useful model based on the defender’s responses, but such a defense results in unacceptable service quality for benign users. We thus define the utility loss of a defense M to quantify the accuracy degradation from a benign user’s perspective, and define its defense strength as follows.

Definition 3 (Utility Loss) The utility loss of a defense mechanism M at sample size n is defined as

$$u_n(M) := \mathbb{E} \left\{ \frac{1}{n} \sum_{i=1}^n \ell_U(f^*(X_i), \tilde{Y}_i) \right\},$$

where \tilde{Y}_i is determined by M and queries, and ℓ_U is a loss function representing the benign users' interest.

Definition 4 (Defense Strength) The defense strength of a defense mechanism M with respect to f^* and an attack (Q, T) is

$$\text{DefStr}(M \mid f^*, Q, T, \ell_D) := \liminf_{\epsilon \rightarrow 0^+} \frac{n(\epsilon, \ell_D; f^*, M, Q, T) \times c_{\text{Steal}}}{n(\epsilon, \ell_D; f^*, M_{\text{Nature}}, Q, T) \times c_{\text{Nature}}}.$$

A defense mechanism M with utility loss $u_n(M)$ is said to be potent if $\text{DefStr} = \infty$.

Utility loss can be understood as the average difference between the perturbed response \tilde{Y}_i and the noiseless response $f^*(X_i)$. While utility loss seems to be associated with the sample size n , the defender can easily control it at any desired level, e.g., by scaling the magnitude of the injected perturbations. We therefore propose to only compare defense mechanisms with the same level of utility loss, and a defense with a larger strength is considered better.

2.3 Threat Model and Objectives of Model Privacy

Building upon the essential elements and goodness quantification approach presented in previous subsections, this subsection formally states the threat model and the objectives of both the attacker and defender, completing our model privacy framework.

Threat Model. We recall the attacker-defender interaction demonstrated in Figure 1. The attacker sends n queries X_1, \dots, X_n to the defender according to a query strategy Q , possibly in a sequential manner. Upon receiving the queries, the defender determines the perturbations $e_i = M(X_1, \dots, X_i), i = 1, \dots, n$ for sequential queries or $(e_1, \dots, e_n) = M(X_1, \dots, X_n)$ for batch queries, then returns responses $\tilde{Y}_i = f^*(X_i) + e_i$ to the attacker. Here, M is a defense mechanism, and $f^* : \mathcal{X} \rightarrow \mathcal{Y}$ is the defender's trained function that needs protection. For convenience, we assume $\mathcal{X} \in \mathbb{R}^d$ and $\mathcal{Y} \in \mathbb{R}$ throughout this paper, though the proposed definitions and concepts can be extended to general input and response spaces. Given query-response pairs $Z_n = \{(X_i, \tilde{Y}_i), i = 1, \dots, n\}$, the attacker uses a learning algorithm T to reconstruct a model $\hat{f}_n = T(Z_n)$. Specifically, T is a measurable mapping from Z_n to a measurable function of X .

Remark 1 The query strategy Q is actually sample-size specific, meaning Q is a collection of finite-dimensional distributions $\{Q_n, n = 1, 2, \dots\}$. For batch queries, Q_n is the joint distribution of X_1, \dots, X_n . For sequential queries, Q_n can be the conditional distribution of X_n given X_1, \dots, X_{n-1} and the responses $\tilde{Y}_1, \dots, \tilde{Y}_{n-1}$. This creates a triangular array of random variables $\{X_i^{(k)}, i = 1, \dots, k, k = 1, 2, \dots\}$, and X_i is the abbreviation of $X_i^{(i)}$. Consequently, many quantities in model privacy can depend on n and should be defined as a sequence or triangular array, such as defense mechanisms and responses. The rest of this paper mainly considers batch query strategies unless otherwise specified, thereby eliminating ambiguity related to sample size dependence.

Objectives. Both the attacker and defender aim to make the most advantageous decisions to maximize their benefits. We denote $P_A(Q, T; f^*, M)$ as the general notion of the attacker's benefit when adopting an attack strategy (Q, T) and facing the defender's model f^* and defense mechanism M . Similarly, the defender's benefit is denoted as $P_D(f^*, M; Q, T)$. Using the cost-based goodness quantification from Section 2.2 for example, the attacker's benefit can be defined as $P_A(Q, T; f^*, M) := \text{AttStr}(Q, T \mid f^*, M, \ell_A)$, and the defender's benefit can take the form of $P_D(f^*, M; Q, T) := \text{DefStr}(M \mid f^*, Q, T, \ell_D) \times \mathbb{1}_{u_n(M) \leq U_n}$, if the defender guarantees that the utility loss level is no greater than a pre-specified constant U_n for every n .

With respect to a given f^* and M , an attack strategy (Q^*, T^*) is called the best among a collection of attacks (Q, T) if

$$Q^*, T^* \in \arg \max_{Q \in \mathcal{Q}, T \in \mathcal{T}} P_A(Q, T; f^*, M). \quad (1)$$

Analogously, with respect to an attack strategy (Q, T) , a defense mechanism M^* is the best among a collection of defenses M if

$$M^* \in \arg \max_{M \in \mathcal{M}} P_D(f^*, M; Q, T). \quad (2)$$

In summary, the threat model and objectives outlined in this subsection establish a clear framework for understanding the interaction between attackers and defenders in model privacy. By defining the key elements, such as attack strategies, defense mechanisms, and their respective benefits, we can systematically analyze and develop strategies to enhance model privacy. This framework serves as a foundation for the subsequent sections, where we delve deeper into specific strategies and their theoretical underpinnings, aiming to protect ML models from being compromised by adversarial attacks.

3 Analysis via Statistical Risk

In this section, we demonstrate that understanding the stealing capability, characterized by the statistical risk of the rebuilt function $\mathbb{E}\{\ell(\hat{f}_n, f^*)\}$, is essential for evaluating the goodness of defenses and attacks.

To illustrate, we consider the cost-based quantification approach introduced in Section 2.2. Recall that both defense and attack strengths are determined by the necessary stealing sample size $n(\epsilon, \ell; f^*, M, Q, T) := \inf_n \{n : \mathbb{E}\{\ell(\hat{f}_n, f^*)\} \leq \epsilon\}$. Therefore, they can be derived once the rebuilt function's statistical risk is understood. The following two examples further elaborate on this insight, using the squared error loss as the loss function ℓ .

Example 2 (Steal in a Parametric Setting) *Suppose the defender has a linear function f^* and the attacker uses linear regression to steal it. Without any defense, the attacker can exactly recover f^* with a sufficiently large number of queries, as explained in Example 1. Therefore, the necessary stealing sample size is a fixed constant for any $\epsilon > 0$. In contrast, if the attacker collects data from nature containing IID noise with variance $\sigma^2 > 0$, the convergence rate of the linear regression estimator is $\mathbb{E}\|\hat{f}_n - f^*\|_2^2 \asymp \sigma^2/n$. As a result, the necessary stealing sample size is typically at the order of $1/\epsilon$ in this scenario, making the attack strength infinity when there is no defense.*

Example 3 (Stealing in a Non-Parametric Setting) *Now, suppose the attacker uses non-parametric learning algorithms, such as k -nearest neighbors. The convergence rate in this case is known for a variety of common function classes. Taking the Lipschitz function class on $[0, 1]^d$ for example, we typically have $\mathbb{E}\|\hat{f}_n - f^*\|_2^2 \asymp n^{-2/(d+2)}$ when IID noise is injected into the responses. Therefore, the necessary stealing sample size is at the order of $\epsilon^{-(d+2)/2}$. If the defender adds long-range dependent noise into the responses, we will prove in Section 6 that $\mathbb{E}\|\hat{f}_n - f^*\|_2^2 \asymp n^{-\gamma}$, where γ represents the degree of noise correlation. Consequently, the necessary stealing sample size $n(\epsilon, \ell; f^*, M, Q, T) \asymp \epsilon^{-1/\gamma}$, implying that adding long-range dependent noise is a potent defense when $\gamma < 2/(d+2)$.*

As seen from the examples above, the essential issue in goodness quantification is *how well an attacker can learn the underlying function with n queries*, which we call the stealing capability. The rebuilt model's statistical risk $\mathbb{E}\{\ell(\hat{f}_n, f^*)\}$ is critical in this evaluation. Based on the worst-case convergence rate over a function class \mathcal{F} that contains f^* , we define the following privacy level to capture the stealing capability under a defense M , which measures the goodness of M against a collection of possible attack strategies. Analogously, we define the stealing error to measure the goodness of an attack (Q, T) against a collection of possible defenses.

Definition 5 (Defender's Privacy level) *The (worst-case) privacy level of a defense mechanism M against a collection of query strategies \mathcal{Q} and learning algorithms \mathcal{T} at a sample size n is*

$$PL_n(M, \mathcal{F} \mid \mathcal{Q}, \mathcal{T}) := \inf_{Q \in \mathcal{Q}, T \in \mathcal{T}} \sup_{f^* \in \mathcal{F}} \mathbb{E}\{\ell_D(f^*, \hat{f}_n)\}.$$

Here, \hat{f}_n depends on Q, T, f^* , and M , since it is reconstructed from the query-response pairs. A defense mechanism M^* is called rate optimal within a collection of defenses \mathcal{M} if

$$PL_n(M^*, \mathcal{F} \mid \mathcal{Q}, \mathcal{T}) \asymp \sup_{M \in \mathcal{M}} PL_n(M, \mathcal{F} \mid \mathcal{Q}, \mathcal{T}).$$

Definition 6 (Attacker's Stealing Error) *The (worst-case) stealing error of an attack (Q, T) with respect to a collection of possible defenses \mathcal{M} at sample size n is defined as*

$$r_n(Q, T \mid \mathcal{F}, \mathcal{M}) := \sup_{f^* \in \mathcal{F}, M \in \mathcal{M}} \mathbb{E}\{\ell_A(f^*, \hat{f}_n)\}.$$

An attack strategy (Q^*, T^*) is called rate optimal within $(\mathcal{Q}, \mathcal{T})$ if $r_n(Q^*, T^* \mid \mathcal{F}, \mathcal{M}) \asymp \inf_{Q \in \mathcal{Q}, T \in \mathcal{T}} r_n(Q, T \mid \mathcal{F}, \mathcal{M})$.

Regarding interpretation, the privacy level provides a guarantee of a defense mechanism’s performance against a collection of potential attack strategies. For instance, if the attacker uses k -nearest neighbors algorithms with $k > 0$ to steal a Lipschitz function on $[0, 1]^d$, a defender injecting IID noise with a fixed noise variance achieves a privacy level at the order of $n^{-2/(d+2)}$, as proved in Theorem 1. Consequently, the defender can expect that the risk of the attacker’s reconstructed function is at least at the order of $n^{-2/(d+2)}$, regardless the choice of k . Analogously, the stealing error provides a guarantee on \hat{f}_n ’s performance from the attacker’s perspective, thus quantifying the effectiveness of an attack strategy.

The privacy level is closely related to the stealing error when the defender and attacker have the same evaluation criteria. In fact, for any given defense M and attack (Q, T) , we have $\text{PL}_n(M, \mathcal{F} \mid Q, T) = r_n(Q, T \mid \mathcal{F}, M)$ when $\ell_A = \ell_D$, since both privacy level and stealing error aim to describe the attacker’s stealing capability though from competing perspectives. Those two quantities can be less aligned when ℓ_A and ℓ_D are different. For instance, if ℓ_A and ℓ_D focus on distinct regions, it is possible that the privacy level is high while the stealing error is small, with further discussion in the supplementary document.

Connection to cost-based quantification. Given the same level of utility loss, a higher privacy level implies a larger necessary stealing sample size, hence a more potent defense. Furthermore, the rate optimal defense within \mathcal{M} can be roughly considered as the best defense mechanism under the cost-based quantification defined in Remark (2). Therefore, in this paper, we refer to a defense as the best if it is rate optimal. The defender’s objective can be rephrased as follows:

$$\text{(Defender’s Objective)} \quad \max_{M \in \mathcal{M}} \text{PL}_n(M, \mathcal{F} \mid \mathcal{Q}, \mathcal{T}), \text{ s.t. } u_n(M) = U_n.$$

Here, \mathcal{Q} and \mathcal{T} represent the potential attack strategies that the defender may encounter. For example, the defender may face an attacker using specific learning algorithms, such as polynomial regression and neural networks. In cases where the defender has no prior knowledge of the attacker’s strategy, \mathcal{Q} and \mathcal{T} encompass all possible attack strategies.

Similarly, a smaller stealing error $r_n(Q, T \mid \mathcal{F}, \mathcal{M})$ indicates to a more potent attack, and a rate optimal attack is considered the best attack strategy under the cost-based quantification. The attacker’s objectives can be rephrased as follows:

$$\text{(Attacker’s Objective)} \quad \min_{Q \in \mathcal{Q}, T \in \mathcal{T}} r_n(Q, T \mid \mathcal{F}, \mathcal{M}).$$

In addition to finding the best strategy, both the attacker and defender strive to understand several fundamental problems in model privacy. Given the urgent societal concern of defending against model stealing attacks in real-world AI applications, this paper focuses primarily on the defender’s perspective. We list some of the key problems below.

1. When is it necessary to defend a model?
2. What is the best defense strategy?
3. What kinds of attacks are easier to defend against?
4. How do other key ingredients listed in Section 2.1 affect decision-making?

Addressing those problems will provide theory-guided solutions for developing potent defense strategies to secure ML model services. These issues are further discussed in Sections 5 and 6. In particular, Section 5 discusses the defender’s decision-making given a known attack strategy, while Section 6 considers defending against an attacker with unknown attacks.

4 Setup and Notations

Setup. Unless specified otherwise, throughout the analysis in Sections 5 and 6, we assume the defender, attacker, and benign users all use the squared error loss. Specifically, $\ell_A(f, g) = \ell_D(f, g) = \|f - g\|_2^2$ for any two functions f and g , where the norm is with respect to query distribution μ , which will be introduced soon. Additionally, for any two scalars x and y , we have $\ell_U(x, y) = (x - y)^2$. As explained in Section 2.2, the defenses under comparison should have the same level of utility loss. Therefore, the defense mechanism set under consideration is $\mathcal{M}(U_n) = \{M : u_n(M) = U_n\}$, where $\{U_n, n = 1, \dots\}$ is a sequence of non-negative utility loss levels such that $U_n \lesssim 1$. In contrast to querying the defender, the attacker may obtain “nature-collected” data. We assume that those natural data contain IID noise with mean zero and a fixed variance $\sigma^2 > 0$, and its distribution follows μ as well. The following assumptions are frequently used throughout the analysis in Sections 5 and 6.

Assumption 1 (Same Query Behavior) *Both benign users and the attacker will send IID batch queries sampled from an absolutely continuous distribution μ on \mathbb{R}^d . We denote IID batch query strategy as Q_{IID} .*

Symbol	Meaning
n, d	Sample size (total number of queries sent by the attacker), dimension of input X
$f^*, \hat{f}_n, \mathcal{F}$	Defender's model, attacker's reconstructed model, and defender's function class
M, \mathcal{M}	Defense mechanism, and its possible collection
T, \mathcal{T}	Attacker's learning algorithm, and its possible collection
Q, \mathcal{Q}	Attacker's query strategy, and its possible collection
X_i, \tilde{Y}_i, e_i	A particular query, its response, and corresponding perturbation
Z_n	The query-response pairs $\{(X_i, \tilde{Y}_i), i = 1, \dots, n\}$
$\text{PL}_n(M, \mathcal{F} \mathcal{Q}, \mathcal{T})$	Privacy level of a defense mechanism against attack strategies $(\mathcal{Q}, \mathcal{T})$
$r_n(Q, T; \mathcal{F}, \mathcal{M})$	Stealing error of an attack strategy given defense mechanisms \mathcal{M}
$u_n(M)$	Utility loss of a defense mechanism
U_n	A given utility loss level

Table 1: A summary table of frequently used notations.

Assumption 2 (Bounded Input Space) *The input space $\mathcal{X} = [0, 1]^d$.*

Assumption 3 (Positive Density) *The density of μ satisfies $\mu(x) \geq c$ for all $x \in [0, 1]^d$ with some constant $c > 0$.*

Notations. For two non-negative sequences $\{a_n, n = 1, 2, \dots\}$ and $\{b_n, n = 1, 2, \dots\}$, $a_n \lesssim b_n$ means that $\limsup_{n \rightarrow \infty} a_n/b_n < \infty$, also denoted as $a_n = O(b_n)$; $a_n \gtrsim b_n$ means $b_n \lesssim a_n$; $a_n \asymp b_n$ means both $a_n \lesssim b_n$ and $a_n \gtrsim b_n$; and $a_n = o(b_n)$ means $\lim_{n \rightarrow \infty} a_n/b_n = 0$. A dot over $\lesssim, \gtrsim, \asymp$ means up to a polynomial of $\ln(n)$. We denote the expectation, probability, covariance, correlation, and indicator function as $\mathbb{E}, \mathbb{P}, \text{cov}, \text{corr}$, and $\mathbb{1}_{(\cdot)}$, respectively. For a vector $\mathbf{w} = (w_1, \dots, w_d)^\top \in \mathbb{R}^d$, its ℓ_p -norm ($p \geq 0$) is

$$\|\mathbf{w}\|_0 = \sum_{i=1}^d \mathbb{1}_{w_i=0}, \quad \|\mathbf{w}\|_p = \left\{ \sum_{i=1}^d |w_i|^p \right\}^{1/p} \text{ for } p > 0.$$

A function f is (C, α) -Hölder continuous if $|f(X) - f(X')| \leq C\|X - X'\|_2^\alpha$ holds for any X and X' on \mathcal{X} , where $C > 0$ and $\alpha > 0$. The k -th derivative of f is denoted as $f^{(k)}$. For $q > 0$, the $L_q(\mu)$ -norm of f is

$$\|f\|_\infty = \text{ess sup}_x |f(x)|, \quad \|f\|_q = \left(\int |f(x)|^q \mu(dx) \right)^{1/q} \text{ for } q > 0.$$

Hölder class $H(C, \alpha)$ is a collection of (C, α) -Hölder continuous functions. Lipschitz class $H(C, 1)$ is a special Hölder class with $\alpha = 1$. For ease of reference, we have summarized the key notations used throughout the paper in Table 1.

5 Defending against a Known Attack Learning Algorithm

This section examines the goodness of defense strategies when the defender knows that the attacker adopts a specific learning algorithm including k -nearest neighbors (k -NN) and polynomial regression. More learning scenarios are considered in the supplementary material, including kernel ridge regression, neural networks, and empirical risk minimization over general bounded function classes. In the supplement, we also explore the conditions under which defending is easier. Our findings help defenders assess the merits of different defense strategies and selecting the most suitable one. Recall that each defense mechanism M in comparison satisfies that $u_n(M) = U_n$, except for no defense. With this in mind, we investigate the following defense mechanisms:

1. No Defense (“ M_{NO} ”): the perturbation $e_i = 0$ for $i = 1, \dots, n$. Note that M_{NO} has zero utility loss, differently from other defenses that incur a positive utility loss.
2. IID Noising (“ M_{IID} ”): e_i 's are IID Gaussian with mean zero and variance $\sigma_n^2 = U_n > 0$.
3. Constant Noising (“ M_{Const} ”): $e_i = \tau_n, i = 1, \dots, n$, where $\tau_n = \pm\sqrt{U_n}$ is a constant for each n .

Guided by the developed theory, we also propose novel defenses that are rate optimal under some conditions. Throughout our discussion, we focus on regression tasks unless stated otherwise.

There are two unique challenges in the theoretical development of model privacy. The first challenge pertains to non-IID observations. Classical learning theory typically assumes that observations are IID or at least independent; however, the perturbations injected into model responses can have an arbitrary dependence structure. Therefore, traditional probabilistic tools that rely on independence are not applicable. This necessitates the development of new analytical tools. The second challenge involves the allowance for diminishing noise levels. Classical learning theory usually assumes a fixed noise level, but a vanishing noise is of particular interest under model privacy. Specifically, a vanishing noise means that the service quality remains almost unaffected for benign users, which is especially appealing to the model owner. Our findings indicate that it is possible for the model owner to defend against model stealing attacks while maintaining high service quality.

5.1 k -Nearest Neighbors

The k -nearest neighbors algorithm [see, e.g., Györfi et al., 2002], denoted by T_k , is a classical learning method that predicts the output at an input x using the average value of the observed responses near x . Specifically, the observations are sorted in ascending order of $\|X_i - x\|_2$ as $(X_{(1,n)}(x), \tilde{Y}_{(1,n)}(x)), \dots, (X_{(n,n)}(x), \tilde{Y}_{(n,n)}(x))$, and the fitted regression function is given by

$$\hat{f}_n(x) = k^{-1} \sum_{j=1}^k \tilde{Y}_{(j,n)}(x), \quad (3)$$

where k is a hyper-parameter decided by the attacker and may depend on n . In our analysis, the attacker's set of possible learning algorithms is $\mathcal{T}_{knn} = \{T_k : k > 0\}$, and the defender's function belongs to a Lipschitz class $\mathcal{F}_{knn} := H(C, 1)$. Theorem 1 summarizes the quantification of privacy level in terms of utility loss for each defense mechanism considered.

Theorem 1 *Suppose that $\lim_{n \rightarrow \infty} n^{2/d} U_n = \infty$. Under Assumptions 1, 2 and 3, the following hold:*

- (i) For M_{NO} , we have $PL_n(M_{NO}, \mathcal{F}_{knn} \mid Q_{IID}, \mathcal{T}_{knn}) \lesssim n^{-2/d}$.
- (ii) For M_{IID} , we have $PL_n(M_{IID}, \mathcal{F}_{knn} \mid Q_{IID}, \mathcal{T}_{knn}) \asymp (U_n/n)^{2/(d+2)}$.
- (iii) For M_{Const} , we have $PL_n(M_{Const}, \mathcal{F}_{knn} \mid Q_{IID}, \mathcal{T}_{knn}) \asymp U_n$.
- (iv) For any defense mechanism $M \in \mathcal{M}(U_n)$, we have $PL_n(M, \mathcal{F}_{knn} \mid Q_{IID}, \mathcal{T}_{knn}) \lesssim U_n$.

Based on Theorem 1, we can assess each defense's effectiveness and answer certain questions posed in Section 3. Three key observations are summarized below, where we may omit the attack strategy and function class in the notations for ease when there is no ambiguity.

1. **Defense is necessary:** Without defense, we have $PL_n(M_{NO}) \lesssim n^{-2/d}$, meaning that the necessary stealing sample size n to build an ϵ -close \hat{f}_n is at most at the order of $\epsilon^{-d/2}$. In contrast, when using nature-collected data with fixed noise variance σ^2 , the necessary stealing sample size is at the order of $\epsilon^{-(d+2)/2}$. Thus, querying the defender significantly reduces the attacker's necessary stealing sample size compared to collecting data from nature.
2. **Potent defense mechanisms exist:** Constant Noising M_{Const} is potent. When M_{Const} is deployed with $U_n = \sigma$, the necessary stealing sample is infinity for $\epsilon < \sigma$. As a result, the attacker cannot rebuild a good model under M_{Const} .
3. **Rate optimal defense:** M_{Const} is rate optimal because Theorem 1(iv) shows that $PL_n(M) \lesssim U_n$ for any defense mechanism $M \in \mathcal{M}(U_n)$, and M_{Const} achieves this rate.

Moreover, a higher privacy level implies a higher necessary stealing sample size. Therefore, a convenient way to compare the effectiveness of different defense mechanisms is comparing their privacy levels directly. For example, we can conclude that IID Noising is better than no defense since $PL_n(M_{IID})/PL_n(M_{NO}) \rightarrow \infty$ as $n \rightarrow \infty$. Similarly, Constant Noising is better than IID Noising because $PL_n(M_{Const})/PL_n(M_{IID}) \rightarrow \infty$.

5.2 Polynomial Regression

This subsection studies the scenario where the attacker's learning algorithm fits a polynomial function with model selection. For simplicity, we assume that X is univariate. The attacker considers the following nested polynomial function class:

$$\mathcal{G} = \left\{ f_q(\cdot; \beta_q) : X \rightarrow \phi_q(X)^T \beta_q, \phi_q(X) = (1, X^1, \dots, X^q)^T, \beta_q \in \mathbb{R}^{q+1}, q = 0, 1, \dots, q_n \right\},$$

Algorithm 1 Defense Mechanism ‘‘Order Disguise’’ (M_{Poly}) Against Polynomial Regression

Input: Defender’s model f^* , queries $X_i, i = 1, \dots, n$, budget of utility loss U_n , polynomial order to mislead attacker (target order) $k \in [p, q_n]$

- 1: $\Phi_k = (\phi_k(X_1), \dots, \phi_k(X_n))^T \in \mathbb{R}^{n \times (k+1)}$, $\mathbf{u} = (0, \dots, 0, 1)^T \in \mathbb{R}^{k+1}$
- 2: $\mathbf{e}_1 = \Phi_k \mathbf{u}$, $\mathbf{e}_2 = \Phi_k (\Phi_k^T \Phi_k)^{-1} \mathbf{u}$
- 3: $\tilde{\mathbf{e}}_i = \mathbf{e}_i / \|\mathbf{e}_i\|_2, i = 1, 2$
- 4: $\mathbf{e} = \tilde{\mathbf{e}}_1 + \text{sign}(\mathbf{e}_1^T \mathbf{e}_2) \tilde{\mathbf{e}}_2$ $\triangleright \text{sign}(x) = 1$ if $x > 0$, otherwise -1
- 5: $\mathbf{e} = \sqrt{n U_n} \mathbf{e} / \|\mathbf{e}\|_2$ \triangleright Normalize to the desired utility loss level

Output: $\hat{Y}_i = f^*(X_i) + e_i, i = 1, \dots, n$

where $q_n < n$ is the highest order of polynomials considered for each sample size n . To perform model selection, the attacker uses the generalized information criterion GIC_{λ_n} [see, e.g., Shao, 1997, Ding et al., 2018]. Specifically, for a given hyper-parameter λ_n for model complexity regularization, the attacker fits the following function:

$$\hat{f}_n = \arg \min_{f_q(\cdot; \beta_q) \in \mathcal{G}} \left[\frac{1}{n} \sum_{i=1}^n \{\tilde{Y}_i - f_q(X_i; \beta_q)\}^2 + \frac{\lambda_n \hat{\sigma}_{n,q}^2}{n} \right],$$

where $\hat{\sigma}_{n,q}^2$ is an estimator of the variance of the random error in the regression model, assumed to be upper bounded by a constant $B > 0$. The collection of possible learning algorithms is $\mathcal{T}_{\text{poly}} = \{T_{\lambda_n} : \lambda_n \geq 2, \lambda_n/n \rightarrow 0\}$. We assume that the defender’s model f^* lies in a family $\mathcal{F}_{\text{poly}} = \{f : X \rightarrow \phi_p(X)^T \beta_p, \beta_p \in \mathbb{R}^{p+1}, \beta_{p+1} \neq 0, \|f\|_2 \leq C\}$ with a fixed order p and constant $C > 0$.

In this scenario, we propose a defense mechanism named Order Disguise (M_{Poly}). It can mislead the attacker to overfit the underlying model, significantly amplifying the privacy level compared to utility loss. M_{Poly} involves constructing two perturbation directions \mathbf{e}_1 and \mathbf{e}_2 determined by the queries. While \mathbf{e}_2 traps the attacker into overfitting, \mathbf{e}_1 ensures that the fitted model performs poorly. The final perturbation \mathbf{e} is a combination of \mathbf{e}_1 and \mathbf{e}_2 , preserving the advantages of both. We formalize this insight in Theorem 2 and summarize the detailed steps of the proposed defense in Algorithm 1.

Theorem 2 *Suppose that (i) $n \cdot \mathbb{P}(|X| \geq [\mathbb{E}(X^{2q_n})/q_n^2]^{1/(2q_n)}) \rightarrow 0$ as $n \rightarrow \infty$ for a constant $\gamma > 0$, and (ii) $U_n \geq 2Bq_n \lambda_n/n$. Under Assumption 1, when the defender adopts Order Disguise (M_{Poly}), there exists an increasing sequence $\{k_n, n = 1, 2, \dots\}$ with $k_n \in [p, q_n]$ such that the attacker will fit a function \hat{f}_n with the highest order as k_n , and $\text{PL}_n(M_{\text{Poly}}, \mathcal{F}_{\text{poly}} | Q_{\text{IID}}, \mathcal{T}_{\text{poly}}) \gtrsim k_n^\gamma U_n$. As a specific case, when X follows a Gaussian distribution and $q_n \gtrsim \ln n$, we can take $\gamma = 2$ and $k_n = 4 \ln n$. Another example is when X follows a Beta distribution $\text{Beta}(\alpha, \beta)$ with $\beta > 1$ and $q_n \gtrsim n^{1/\beta}$, we can choose any $\gamma > 0$ and $k_n = n^{1/\delta}$ for any $\delta \in (1, \beta)$.*

Theorem 2 implies that by using the proposed Order Disguise defense mechanism, the defender can achieve a high privacy level while maintaining a small utility loss. The gain-to-loss ratio PL_n/U_n can even approach infinity. In contrast, without defense, $\text{PL}_n(M_{\text{NO}})$ is zero for sufficiently large n , as shown in Example 1. This implies that $\text{PL}_n(M_{\text{Const}}) \asymp U_n$ under the Constant Noising defense because the attacker will learn the underlying function plus the injected constant as a whole. Also, the classical linear regression theory indicates that the privacy level under IID Noising is typically at the order of U_n/n . While IID Noising and Constant Noising inject query-independent perturbations, Order Disguise utilizes the knowledge that the attackers use polynomial regression and carefully designs **query-specific perturbations** targeting such attackers, thus achieving a higher privacy level.

Remark 2 (Discussion on Technical Conditions) *The first condition in Theorem 2 ensures that there exists a direction where the overfitted model will have a large prediction error. It holds when the tail of X decays sufficiently fast and $\lim_{n \rightarrow \infty} q_n \rightarrow \infty$. For example, the tail of Beta distribution $\text{Beta}(\alpha, \beta)$ is dominated by the second parameter β , and a larger β indicates a faster speed of decay. Thus, we can guarantee the first condition when $\beta > 1$ and $q_n \gtrsim n^{1/\beta}$. The second condition on U_n ensures that the perturbation is large enough to cause the attacker to overfit, which is reasonably mild since $\lim_{n \rightarrow \infty} q_n \lambda_n/n \rightarrow 0$ is common in practice.*

6 Defending against an Unknown Attack Learning Algorithm

In this section, we study the defense against an attacker whose learning algorithm is unknown to the defender. Specifically, the attacker’s learning algorithm collection \mathcal{T} includes any measurable mappings from query-response

pairs to a measurable function of X . Our results address the minimum guaranteed privacy level provided by three defense mechanisms. As a demonstrative application of the developed theory, we make the following assumption in this section, and all proofs are included in Appendix.

Assumption 4 (Hölder function class) *The defender's function f^* belongs to a Hölder class $\mathcal{F} := H(C, \alpha)$ with $C > 0$ and $\alpha > 0$.*

6.1 IID Noising Defense

We first study the IID Noising defense M_{IID} , where the defender adds IID Gaussian noise with a common variance σ_n^2 to the responses. Its privacy level against an arbitrary attacker is derived as follows.

Theorem 3 *Under Assumptions 1, 2, 3 and 4, we have*

$$PL_n(M_{\text{IID}}, \mathcal{F} \mid Q_{\text{IID}}, \mathcal{T}) \begin{cases} \asymp (\sigma_n^2/n)^{2\alpha/(2\alpha+d)}, & \sigma_n^2 \gtrsim n^{-2\alpha/d} \\ \lesssim n^{-2\alpha/d}, & \sigma_n^2 \lesssim n^{-2\alpha/d}. \end{cases}$$

Notably, Theorem 3 *allows the noise variance σ_n^2 to vanish*. When the noise variance is fixed, the privacy level can be analyzed using classical minimax theory. However, the case where $\sigma_n^2 \rightarrow 0$ as $n \rightarrow \infty$ has received little attention in the existing literature. Gaining an understanding of this case is crucial for model privacy, as a defense with vanishing noise can still be potent, meaning that the attacker cannot steal a good model while the benign users' service quality is well maintained. Technically, to handle the case with vanishing noise, we need to derive the exact convergence rates of prediction error brought by randomness in queries and perturbations, respectively.

The privacy level derived in Theorem 3 also yields the limit of the attacker's stealing error since we assumed that the attacker and the defender use the same loss, as discussed in Section 3. For instance, under the IID Noising defense with $\sigma_n^2 \gtrsim n^{-2\alpha/d}$, an attacker uses k -NN can achieve the smallest stealing error at the order of $(\sigma_n^2/n)^{2\alpha/(2\alpha+d)}$.

Theorem 3 assumes that the attacker adopts an IID batch query strategy. The following theorem implies that in this regression task, IID batch query is the best choice for the attacker when $\sigma_n^2 \gtrsim n^{-2\alpha/d}$.

Theorem 4 (Non-IID Queries) *Under Assumptions 1, 2, 3 and 4, we have $PL_n(M_{\text{IID}}, \mathcal{F} \mid Q, \mathcal{T}) \gtrsim (\sigma_n^2/n)^{2\alpha/(2\alpha+d)}$ for every query strategy Q .*

6.2 Correlated Noising Defense

Using an IID Noising defense mechanism is often insufficient to prevent model stealing attacks. To enhance protection, the defender can add noise with correlation. One such choice is adding stationary noise with variance σ_n^2 . The correlation structure of noise is characterized by $r(|i-j|) := \text{corr}(e_i, e_j)$, where e_i is the perturbation added to the i -th response. For example, $r(k) = \mathbb{1}_{k=0}$ corresponds to an IID Noising defense mechanism M_{IID} , $\sum_{k=0}^{\infty} |r(k)| < \infty$ represents short-range dependent noise, and $r(k) \asymp k^{-\gamma}$ with $0 < \gamma < 1$, is a typical example of long-range dependent noise. Theorem 5 analyzes the privacy level of adding long-range dependent noise.

Theorem 5 *Let M_γ represent a defense mechanism that adds long-range dependent noise with $r(k) \asymp k^{-\gamma}$ for some $\gamma \in (0, 1)$ and $u_n(M_\gamma) = \sigma_n^2$. Under Assumptions 1, 2, 3 and 4, we have*

$$PL_n(M_\gamma, \mathcal{F} \mid Q_{\text{IID}}, \mathcal{T}) \begin{cases} \asymp (\sigma_n^2/n)^{2\alpha/(2\alpha+d)} + \sigma_n^2 n^{-\gamma}, & \sigma_n^2 \gtrsim n^{-2\alpha/d} \\ \lesssim n^{-2\alpha/d}, & \sigma_n^2 \lesssim n^{-2\alpha/d}. \end{cases}$$

Theorem 5 demonstrates that the correlation structure of noise can be tailored to impede the attacker's ability to learn the defender's model effectively. Compared to Theorem 3, adding long-range dependent noise instead of IID noise can significantly increase privacy level. Moreover, a stronger correlation (a smaller γ) in the noise leads to a higher privacy level.

Remark 3 (Influence of Query Strategy) *In the context of Theorem 5, Hall and Hart [1990], Wang [1996] showed that $PL_n(M_\gamma, \mathcal{F} \mid Q, \mathcal{T}) \asymp n^{-2\alpha\gamma/(2\alpha+\gamma)}$ when Q is an equally-spaced fixed design, $\sigma_n^2 \asymp 1$, and X is one-dimensional. This rate is slower compared to using an IID batch query. As a result, when the attacker uses a batch query strategy, the defender can add long-range dependent noise in the order of X_i 's values to hinder the attacker's ability to learn f^* . In contrast, if the attacker adopts a sequential query strategy that requests immediate responses, the defender can only add long-range noise in the order of queries, potentially allowing the attacker to learn f^* at a faster rate of convergence.*

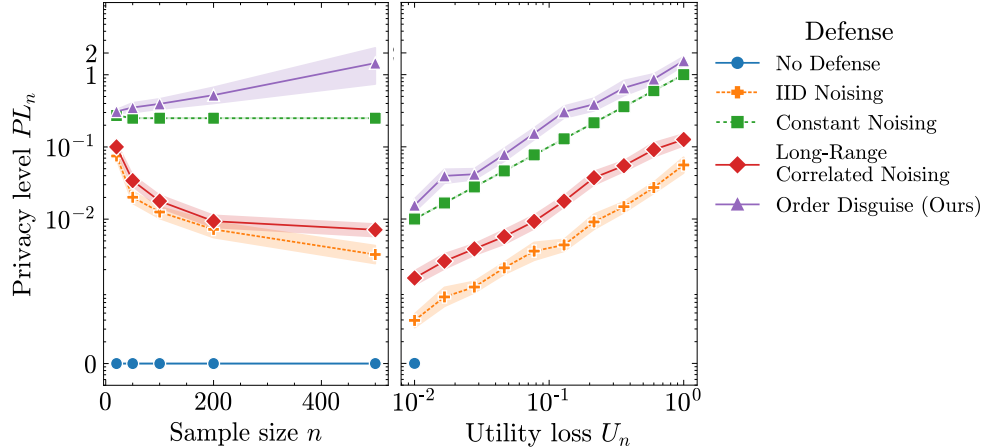


Figure 2: Goodness comparison of different defense mechanisms against an attacker using polynomial regression. Left: Privacy level at different sample sizes with the utility loss level $U_n = 0.25$. Right: Privacy level at different utility loss levels with the sample size $n = 100$. The shaded area reflects one standard error.

6.3 No Defense

To understand whether a defense is necessary, it is crucial to investigate the scenario where the defender does not apply any defense. Let M_{NO} denote the defense mechanism with no perturbation, under which $\tilde{Y}_i = f^*(X_i)$. For technical convenience, we assume the benign user has a uniform query distribution. Then, Theorem 6 gives the privacy level of no defense against an attacker whose query strategies \mathcal{Q}_{FIX} include all fixed designs. Here, a fixed design query strategy consists of pre-selected sets of data points X_1, \dots, X_n for each sample size n .

Theorem 6 *Under Assumptions 1, 2, 3 and 4, suppose the attacker’s query strategy collection \mathcal{Q} includes all fixed designs. Then, we have $PL_n(M_{NO}, \mathcal{F} \mid \mathcal{Q}_{FIX}, \mathcal{T}) \asymp n^{-2\alpha/d}$.*

Compared to Theorem 3, where the defender adds IID noise, the privacy level is significantly smaller when there is no defense. This implies that attackers have a strong incentive to steal from a defender with no defense.

7 Experimental Studies

To demonstrate the practical application of the proposed model privacy framework, we conduct experiments on both simulated and real-world datasets to corroborate our theoretical results. Specifically, our results indicate that a specialized defense mechanism is essential to thwart model stealing attacks. In addition to the widely studied regression tasks in the earlier sections, we also conduct experiments on classification tasks, which represent another vital application domain. Notably, our theoretical framework guides the implementation of defenses that significantly bolster model privacy across both task types. The full experiments details can be found in the supplementary materials.

7.1 Simulated Experiments

7.1.1 Polynomial Regression

Suppose the defender owns a quadratic function $f^*(x) = (2x - 1)^2$. The attacker performs polynomial regression with $q_n = n^{1/3}$ and selects the model using the Akaike information criterion (AIC) [Akaike, 1998]. We also conduct experiments where the attacker adopts Bayesian information criterion (BIC) or Bridge Criterion (BC) [Ding et al., 2017] as the selection criterion and found highly similar results compared to AIC. The squared error loss is used by both defender and attacker. We examine five defense mechanisms: No Defense, IID Noising, Constant Noising (see Section 5), Long-Range Correlated Noising (see Section 6.2), and our proposed defense Order Disguise (see Algorithm 1).

First, we study the privacy level of these defense methods under different sample sizes. For computational feasibility, the privacy level is evaluated on a function class containing a single function f^* for all experiments in this section. Specifically, we vary the number of queries, n , with values set at 20, 50, 100, 200, and 500. For all defense mechanisms,

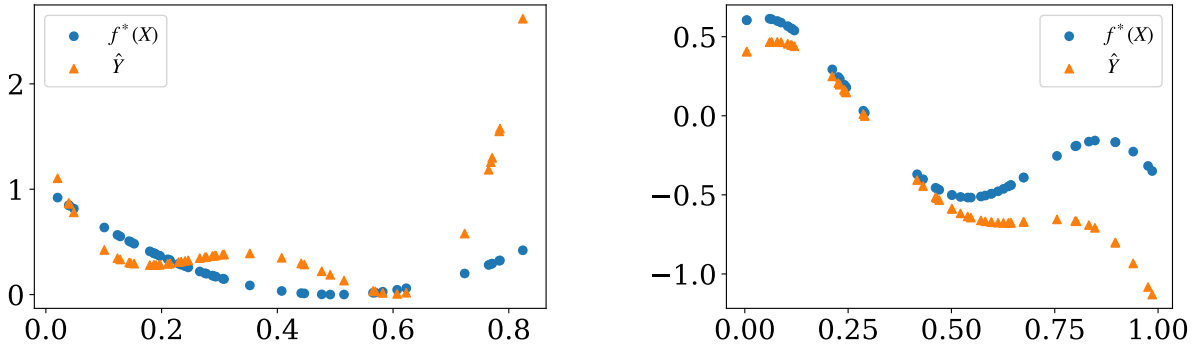


Figure 3: Examples showing the unprotected responses and perturbed responses under our proposed defense mechanism. Left: Using Algorithm 1 to defend against an attacker performing polynomial regression. Right: Using a defense proposed in the supplementary material to defend against an attacker performing kernel ridge regression.

the utility loss U_n is fixed at 0.25. Equivalently, the signal-to-noise ratio, defined as $\mathbb{E}[\{f^*(X)\}^2]/\mathbb{E}(e^2)$ with e being the perturbation, is around one. For each experiment, the attacker sends n IID queries sampled from a Beta distribution $Beta(1, 3)$ and receives responses from one of the five defense mechanisms. We then evaluate the privacy level of this defense mechanism using the test error of the rebuilt model on 1000 IID test data drawn from $Beta(1, 3)$. For every combination of sample size n and defense mechanism, we run 100 independent replicates.

We also investigate the privacy level at different utility loss levels. Keeping all other experimental conditions constant, we conduct additional experiments with a sample size of $n = 100$, varying the utility loss U_n from 0.01 to 1.

Findings. The results of both studies are summarized in Figure 2. Clearly, the attacker can easily steal the defender’s model when there is no defense, as the privacy level is zero with only 20 queries. Meanwhile, adding independent noise does not significantly improve the privacy level. The attacker can still efficiently learn a good model under IID Noising, making it not a potent defense. Although Long-Range Correlated Noising performs better than IID Noising, its privacy level remains significantly lower than that of adding perturbations with attack-specific correlation patterns, such as Constant Noising and our proposed defense Order Disguise.

Moreover, Order Disguise is the only defense mechanism that achieves a higher privacy level than utility loss, aligning with Theorem 2. The left panel in Figure 3 demonstrates how Order Disguise injects dependent perturbations into the responses. The shape of the perturbed responses resembles a polynomial function with a higher order than the truth, supporting our theoretical finding that Order Disguise can mislead the attacker into severe overfitting.

In summary, the experimental results on polynomial regression align well with our developed theory in Section 5.2, leading to three critical observations: (1) Defense is necessary; (2) Defenses using independent perturbations offer limited gains in the privacy level compared to no defense. (3) Defenses using dependent perturbations tailored to the attack scenario can be the most effective.

7.1.2 Penalized Regression with High-Dimensional Datasets

Suppose the defender owns a linear function $f^*(x) = X^T\beta$, where $\beta \in \mathbb{R}^d$ is the model parameter. The attacker performs penalized regression with built-in variable selection methods, such as LASSO [Tibshirani, 1996] and Elastic Net [Zou and Hastie, 2005]. We consider the high-dimensional regression case where the number of predictors d is larger or comparable to the number of queries n . We perform seven simulation examples including both sparse and dense structure of β . Similar results are observed across all simulation examples, thereby we describe simulation example 1 in detail as a demonstration. Full experimental details and results of other examples are included in Appendix.

Following the setting of Zou and Hastie [2005], Nan and Yang [2014], simulation example 1 generates 50 queries with $d = 40$. The model parameter β is chosen as $\beta_i = 3 \times \mathbb{1}_{i \leq 15}$ for $i = 1, \dots, 40$. The queries $X_i = (X_{i,1}, \dots, X_{i,40}), i = 1, \dots, 50$ are IID generated as follows: $X_{i,j} = Z_1 + \epsilon_{i,j}, Z_1 \sim N(0, 1), j = 1, \dots, 5; X_{i,j} = Z_2 + \epsilon_{i,j}, Z_2 \sim N(0, 1), j = 6, \dots, 10; X_{i,j} = Z_3 + \epsilon_{i,j}, Z_3 \sim N(0, 1), j = 11, \dots, 15; X_{i,j} \sim N(0, 1), j = 16, \dots, 40$. Here, Z_1, Z_2, Z_3 are IID standard Gaussian, $X_{i,j}$ are IID for $j \geq 16$, and $\epsilon_{i,j}$ are IID $N(0, 0.01)$. The penalty parameters for LASSO and Elastic Net are chosen with 5-fold cross-validation.

Algorithm 2 Defense Mechanism “Misleading Variable Projection” (MVP)

Input: Defender’s model f^* , queries $X_i, i = 1, \dots, n$, utility loss level U_n , variable sampling ratio ρ

- 1: Let $S = \{i : \beta_i \neq 0\}$ ▷ The set of non-significant variables
- 2: Randomly sample and keep ρ percent of S , and let $|S|$ be its cardinality
- 3: Let $X_{i,S} \in \mathbb{R}^{|S|}$ be the random variable constrained on the index set S
- 4: Let $X_S = (X_{1,S}, \dots, X_{n,S}) \in \mathbb{R}^{n \times |S|}$, $Y^* = (f^*(X_1), \dots, f^*(X_n)) \in \mathbb{R}^n$
- 5: Let $\hat{Y} = \mathcal{P}_S Y^*$, where $\mathcal{P}_S = X_S (X_S^T X_S)^{-1} X_S^T$ is the projection operator on the space spanned by X_S
- 6: Let $\mathbf{u} = \hat{Y} - Y^*$ and $c = \|\mathbf{u}\|_2$ ▷ Smallest distance from Y^* to the space of X_S
- 7: Let $\mathbf{v} = Y^* / \|Y^*\|_2$ ▷ Normalize Y^*
- 8: $\mathbf{e} = \sqrt{n} U_n \mathbf{u} / c$ if $\sqrt{n} U_n \leq c$ else $\mathbf{u} + \sqrt{n U_n^2 - c^2} \mathbf{v}$ ▷ Perturbation that push \tilde{Y} to the space of X_S

Output: $\tilde{Y}_i = f^*(X_i) + e_i, i = 1, \dots, n$

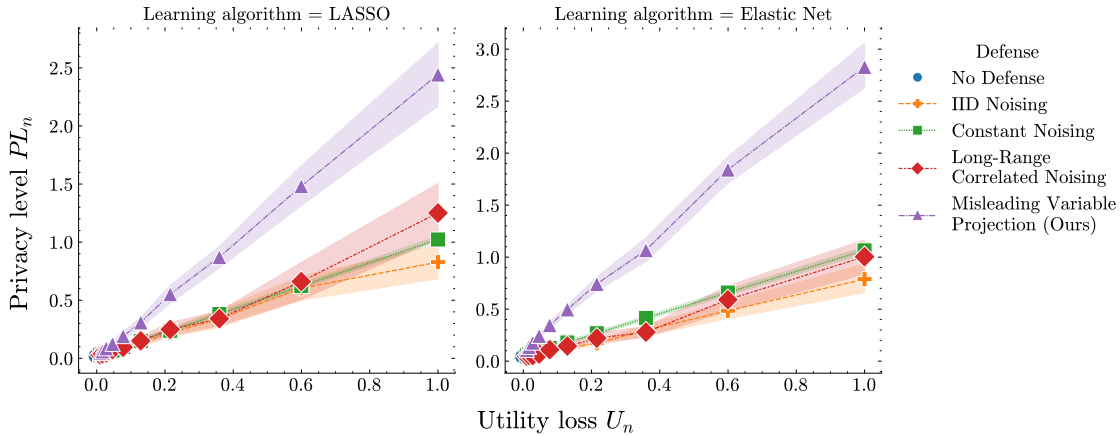


Figure 4: Goodness comparison of different defense mechanisms against an attacker performing penalized regression.

Five defenses are used for comparison: No Defense, IID Noising, Constant Noising, Long-Range Correlated Noising, and our proposed method Misleading Variable Projection (abbreviated as MVP, see Algorithm 2). MVP is designed to mislead the attacker into fitting a model with non-significant variables. Specifically, the defender chooses a set of non-significant variables and adds perturbations to minimize the distance from \hat{Y} to the space spanned by those variables. This leads the attacker to incorrectly identify non-significant variables as significant, resulting in a mis-specified model and poor prediction performance. The privacy level is evaluated on 400 test points, with results from 20 independent replicates presented in Figure 4.

Findings. The results in Figure 4 are consistent with previous experiments on the two regression tasks. Without defense, the attacker can rebuild a model with almost zero privacy level. Among all defenses, MVP provides the highest privacy level. Moreover, we empirically observe that MVP can deceive the attacker into selecting incorrect variables, as shown in Figure 5. To evaluate variable selection accuracy, we calculate the symmetric difference between the true significant variable set $S^* := \{i : \beta_i \neq 0\}$ and the set of variables selected by the attacker, denoted as \hat{S} . The symmetric difference is $|S^* \setminus \hat{S}| + |\hat{S} \setminus S^*|$, where $|S|$ is the cardinality of a set S . A smaller symmetric difference indicates a higher similarity between the two variable sets, thus a higher variable selection accuracy. From Figure 5, we find that MVP leads to the highest symmetric difference.

7.2 A real-world case study: hate speech detection

We consider a model owner who has trained a large language model-based hate speech detection model. Specifically, the defender’s model f^* is pretrained on the Toxic Comment Challenge Dataset [Sorensen et al., 2017], which contains 159,566 sentences from Wikipedia’s talk page edits, each labeled as either ‘normal’ or ‘toxic’. For an input sentence X , f^* will output a predicted probability $f^*(X) \in [0, 1]$ indicating the likelihood that the input is toxic.

An attacker, through querying the defender, aims to rebuild a detection function that performs comparably to f^* at a small cost. In our experiments, the attacker’s model \hat{f}_n comprises a sentence BERT model [Reimers and Gurevych,

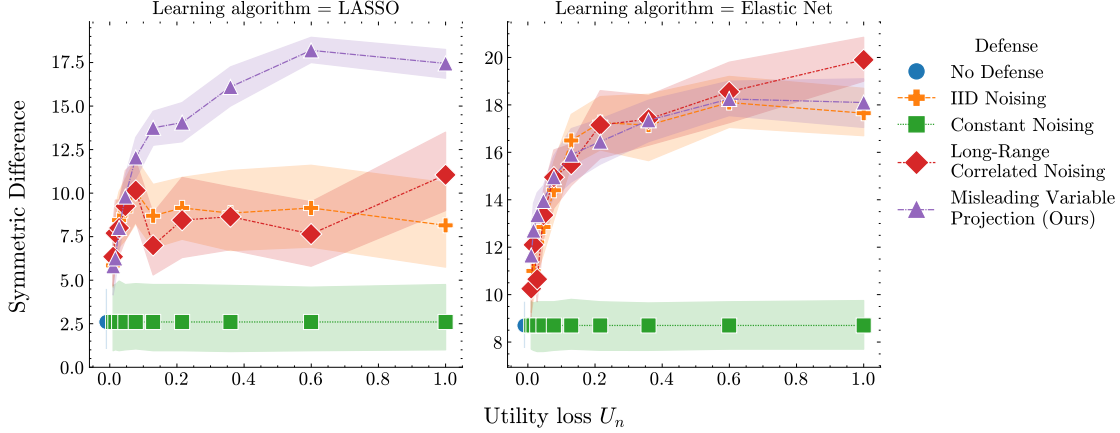


Figure 5: Variable selection reliability of different defense mechanisms against an attacker performing penalized regression.

Algorithm 3 Defense Mechanism “Misleading Shift” for Classification Tasks

Input: Defender’s model f^* , queries $X_i, i = 1, \dots, n$, scale parameter δ , number of classes K

1: Let $k := \arg \max_{1 \leq j \leq K} |\{i : f^*(X_i)_j = \max_{1 \leq l \leq K} f^*(X_i)_l\}|$ $\triangleright |\cdot|$ is the cardinality of a set and $f^*(X_i)_l$ is the l -th coordinate of $f^*(X_i) \in [0, 1]^K$

2: Let $c_k = (\mathbb{1}_{k=1}, \dots, \mathbb{1}_{k=K}) \in \{0, 1\}^K$ $\triangleright \mathbb{1}_{(\cdot)}$ is the indicator function

Output: $\tilde{Y}_i = \text{softmax}(\log(f^*(X_i)) + \delta c_k), i = 1, \dots, n$

2019] that transforms the input sentence to an embedding vector, followed by a fully connected two-layer ReLU neural network that predicts the probability. The attacker’s queries are sampled from the Toxic Comment Challenge Dataset or the Hate Speech Offensive Dataset [Davidson et al., 2017], mimicking situations where the attacker either has knowledge of the true data distribution or can only use a surrogate dataset, respectively. The number of queries n takes values of 1000, 2000, and 5000.

Five defenses are studied in the experiments, as detailed below. It is worth noting that our proposed defense, Misleading Shift, is the only defense that adds dependent perturbations conditional on queries.

1. No Defense, $\tilde{Y} = f^*(X)$.
2. Random Shuffle. It is a counterpart of IID Noising for classification tasks. Since the response \tilde{Y} is a predicted probability vector, a natural way to perturb the response is to randomly shuffle all its coordinates. In particular, let $\tilde{Y} = f^*(X)$ with probability $1 - \xi$; with probability ξ , \tilde{Y} takes one of the permutation of $f^*(X)$ ’s coordinates with equal probability.
3. Deceptive Perturbation proposed by Lee et al. [2019]. It perturbs confident responses that are close to zero or one towards the opposite side (without changing the most likely class), making them less confident.
4. Adaptive Misinformation proposed by Kariyappa and Qureshi [2020]. It first trains a confounding model that has low accuracy on the original task. Then, it replaces non-confident responses that are close to 0.5 with the confounding model’s outputs.
5. Misleading Shift. Inspired by the developed theory, we propose a method named Misleading Shift (see Algorithm 3). The idea is to perturb all responses towards the direction of the dominating class among the queries, thereby misleading the attacker to overfit this dominating class and enhancing model privacy.

As for the evaluation criterion, recall that the attacker aims to recover a model with high prediction performance in this real-world application. Therefore, we report the average accuracy and F1 score of the rebuilt model against the utility loss level of the defense over 10 independent replicates. The accuracy and F1 score are obtained on a test dataset randomly sampled from the Toxic Comment Challenge Dataset. Moreover, we include two baselines for comparison: the accuracy and F1 scores of the defender’s model f^* (‘Original Model’) and a naive model that predicts zero or one with equal probability (‘Naive Classifier’). The results are shown in Figures 6 and 7.

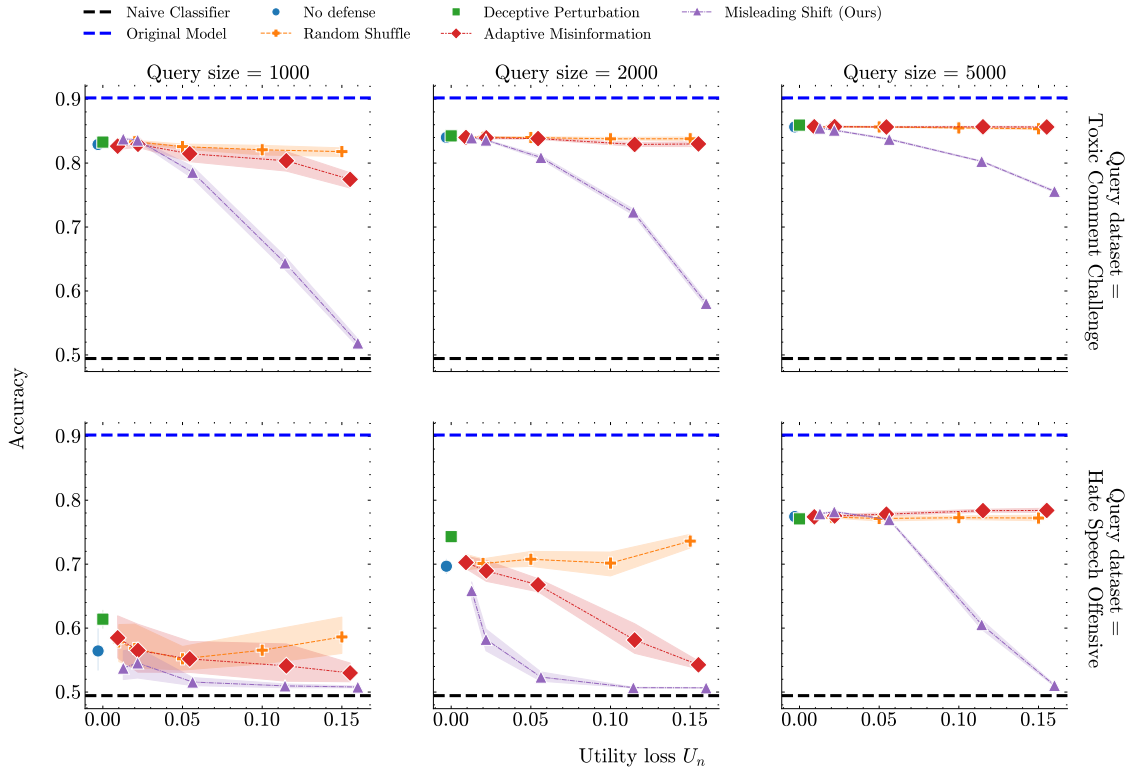


Figure 6: Average accuracy of the attacker’s rebuilt model for the hate speech detection task.

Findings. From the experiment results, it is clear that defense is necessary to prevent stealing attacks. Suppose the cost of querying one sentence from the defender is one cent, and the cost of obtaining a human-annotated sentence is also one cent. Then, the defender’s training cost of f^* is over \$1000. However, the attacker can steal a model achieving 90% of f^* ’s performance for as little as \$10 without defense. Even with a surrogate dataset, the reconstruction cost is around \$50, which is just 5% of the defender’s expense.

Also, the results show that adding independent perturbations conditional on queries does not significantly hinder the attacker. When the defender deploys Random Shuffle or Deceptive Perturbation, the attacker can still efficiently rebuild a good model as if there were no defense. Adaptive Misinformation also shows limited effectiveness, especially when queries come from the same distribution as the training data or when the number of queries is substantial.

In a stark contrast, our proposed defense, Misleading Shift, achieves high privacy gains across all utility loss levels. Misleading Shift adds a constant, attack-specific perturbation to all responses. This attack-specific dependent structure of perturbations exaggerates the trend of the majority class in the queries, thereby consistently misleading the attacker to overfit the majority class. This insight is corroborated by Figure 7, where the rebuilt model’s F1 score is close to zero under misleading shift, indicating that the model predicts most inputs as the same class.

8 Conclusions

This paper establishes a framework called model privacy to understand and mitigate the vulnerabilities of machine learning models against model stealing attacks. Driven by practical needs, we propose evaluation metrics to assess an attacker’s cost of stealing a model. An attack is considered potent if the attacker can reverse-engineer the defender’s model at a lower cost than gathering data and training a comparable model independently.

Within this framework, we have derived both theoretical and empirical results, yielding valuable insights into effective defense strategies. Our findings highlight three key points. Firstly, defense is generally necessary for protecting a model from being easily stolen. Without any defense, attackers can successfully reconstruct models across diverse architectures and attack scenarios. For instance, merely 1000 queries are sufficient to steal a large language model-based hate speech detector with 85% accuracy, while the original model required training on over 100,000 data points (see Subsection 7.2). Secondly, defenses that add IID perturbations are typically ineffective. The level of service degradation

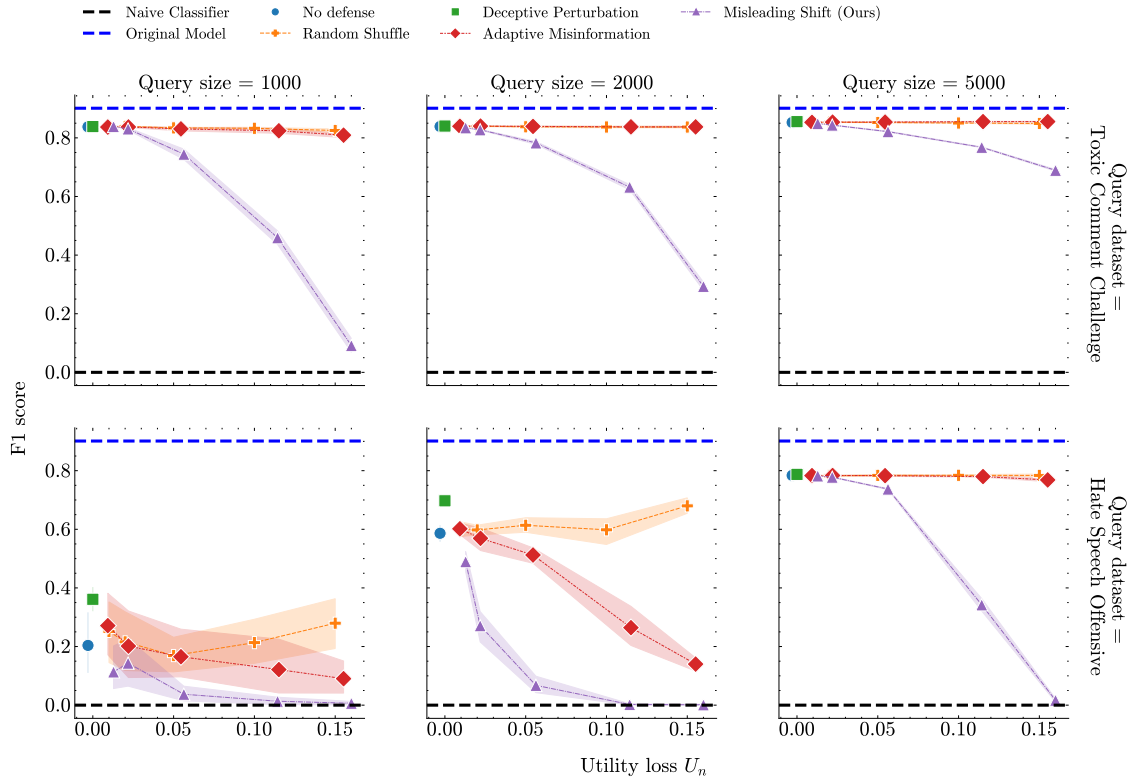


Figure 7: Average F1 score of the attacker’s rebuilt model for the hate speech detection task.

for benign users often outweighs any improvement in the model’s privacy level. Thirdly, the strategic disruption of the independence in perturbations is vital for enhancing model privacy. To demonstrate this, we have introduced novel theory-inspired defenses for both regression and classification tasks that significantly impair an attacker’s ability to steal models. In conclusion, the model privacy framework offers a unified perspective for assessing the effectiveness of various attack and defense strategies.

Looking ahead, several promising avenues exist for extending the model privacy framework. Firstly, a model engaging in the query-response-based interaction also risks revealing its parameters, hyper-parameters [Tramèr et al., 2016, Wang and Gong, 2018], and even exact values of the training data [Fredrikson et al., 2014, 2015]. Recognizing this vulnerability, an extension of model privacy is to modify the evaluation criteria to include the protection of any model-related quantities. Secondly, instead of stealing the defender’s model f^* , an attacker may be interested in a more ambitious goal of stealing the function f_N underlying the training data based on which f^* was obtained, such as demonstrated in our hate speech detection experiment. The model privacy framework can accommodate this scenario by assessing the differences between the reconstructed function \hat{f}_n and f_N , instead of f^* . Thirdly, it is natural to integrate model privacy with game theory when the defender and attacker are in an interactive setting. In such cases, both parties must make decisions dynamically and possibly in a sequential manner, adding complexity and depth to the strategic considerations within the model privacy framework.

References

- H. Akaike. Information theory and an extension of the maximum likelihood principle. In *Selected Papers of Hirotugu Akaike*, pages 199–213. Springer, 1998.
- V. Chandrasekaran, K. Chaudhuri, I. Giacomelli, S. Jha, and S. Yan. Exploring connections between active learning and model extraction. In *Proceedings of the 29th USENIX Security Symposium*, pages 1309–1326. USENIX Association, 2020.
- T. Davidson, D. Warmusley, M. Macy, and I. Weber. Automated hate speech detection and the problem of offensive language. In *Proceedings of the 11th International AAAI Conference on Web and Social Media*, pages 512–515, 2017.

- J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *North American Chapter of the Association for Computational Linguistics*, 2019.
- J. Ding, V. Tarokh, and Y. Yang. Bridging AIC and BIC: a new criterion for autoregression. *IEEE Transactions on Information Theory*, 64(6):4024–4043, 2017.
- J. Ding, V. Tarokh, and Y. Yang. Model selection techniques: An overview. *IEEE Signal Processing Magazine*, 35(6):16–34, 2018.
- J. Dong, A. Roth, and W. J. Su. Gaussian differential privacy. *Journal of the Royal Statistical Society: Series B*, 84(1):3–37, 2022.
- C. Dwork, F. McSherry, K. Nissim, and A. Smith. Calibrating noise to sensitivity in private data analysis. In *Proceedings of the 3rd Theory of Cryptography Conference*, pages 265–284. Springer, 2006.
- A. Evfimievski, J. Gehrke, and R. Srikant. Limiting privacy breaches in privacy preserving data mining. In *Proceedings of the 22nd ACM SIGMOD-SIGACT-SIGART Symposium on Principles of Database Systems*, pages 211–222. Association for Computing Machinery, 2003.
- M. Fredrikson, E. Lantz, S. Jha, S. Lin, D. Page, and T. Ristenpart. Privacy in pharmacogenetics: An End-to-End case study of personalized warfarin dosing. In *Proceedings of the 23rd USENIX Security Symposium*, pages 17–32. USENIX Association, 2014.
- M. Fredrikson, S. Jha, and T. Ristenpart. Model inversion attacks that exploit confidence information and basic countermeasures. In *Proceedings of the 22nd ACM SIGSAC Conference on Computer and Communications Security*, page 1322–1333. Association for Computing Machinery, 2015.
- L. Györfi, M. Kohler, A. Krzyzak, and H. Walk. *A distribution-free theory of nonparametric regression*, volume 1. Springer, 2002.
- P. Hall and J. D. Hart. Nonparametric regression with long-range dependence. *Stochastic Processes and their Applications*, 36(2):339–351, 1990.
- M. Juuti, S. Szyller, S. Marchal, and N. Asokan. Prada: Protecting against dnn model stealing attacks. In *Proceedings of the 2019 IEEE European Symposium on Security and Privacy*, pages 512–527, 2019.
- S. Kariyappa and M. K. Qureshi. Defending against model stealing attacks with adaptive misinformation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, June 2020.
- M. Kesarwani, B. Mukhoty, V. Arya, and S. Mehta. Model extraction warning in mlaas paradigm. In *Proceedings of the 34th Annual Computer Security Applications Conference*, page 371–380. Association for Computing Machinery, 2018.
- T. Lee, B. Edwards, I. Molloy, and D. Su. Defending against neural network model stealing attacks using deceptive perturbations. In *2019 IEEE Security and Privacy Workshops*, pages 43–49, 2019.
- S. Milli, L. Schmidt, A. D. Dragan, and M. Hardt. Model reconstruction from model explanations. In *Proceedings of the Conference on Fairness, Accountability, and Transparency*, page 1–9. Association for Computing Machinery, 2019.
- Y. Nan and Y. Yang. Variable selection diagnostics measures for high-dimensional regression. *Journal of Computational and Graphical Statistics*, 23(3):636–656, 2014.
- D. Oliynyk, R. Mayer, and A. Rauber. I know what you trained last summer: A survey on stealing machine learning models and defences. *ACM Computing Surveys*, 55(14s), 2023.
- T. Orekondy, B. Schiele, and M. Fritz. Knockoff nets: Stealing functionality of black-box models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019.
- T. Orekondy, B. Schiele, and M. Fritz. Prediction poisoning: Towards defenses against dnn model stealing attacks. In *International Conference on Learning Representations*, 2020.
- N. Papernot, P. McDaniel, I. Goodfellow, S. Jha, Z. B. Celik, and A. Swami. Practical black-box attacks against machine learning. In *Proceedings of the 2017 ACM on Asia Conference on Computer and Communications Security*, page 506–519. Association for Computing Machinery, 2017.
- A. Radford, K. Narasimhan, T. Salimans, and I. Sutskever. Improving language understanding by generative pre-training. 2018.
- N. Reimers and I. Gurevych. Sentence-bert: Sentence embeddings using siamese bert-networks. In *Conference on Empirical Methods in Natural Language Processing*, 2019.
- J. Shao. An asymptotic theory for linear model selection. *Statistica Sinica*, 7(2):221–242, 1997.

- J. Sorensen, J. Elliott, L. Dixon, M. McDonald, nithum, and W. Cukierski. Toxic comment classification challenge, 2017. URL <https://kaggle.com/competitions/jigsaw-toxic-comment-classification-challenge>.
- R. Tibshirani. Regression shrinkage and selection via the lasso. *Journal of the Royal Statistical Society Series B: Statistical Methodology*, 58(1):267–288, 1996.
- F. Tramèr, F. Zhang, A. Juels, M. K. Reiter, and T. Ristenpart. Stealing machine learning models via prediction apis. In *Proceedings of the 25th USENIX Conference on Security Symposium*, pages 601–618. USENIX Association, 2016.
- B. Wang and N. Z. Gong. Stealing hyperparameters in machine learning. In *Proceedings of the IEEE symposium on security and privacy*, pages 36–52. IEEE, 2018.
- X. Wang, Y. Xiang, J. Gao, and J. Ding. Information laundering for model privacy. In *International Conference on Learning Representations*, 2021.
- Y. Wang. Function estimation via wavelet shrinkage for long-memory data. *Annals of Statistics*, 24(2):466–484, 1996.
- Z. Yang, Z. Dai, Y. Yang, J. Carbonell, R. R. Salakhutdinov, and Q. V. Le. Xlnet: Generalized autoregressive pretraining for language understanding. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019.
- H. Zou and T. Hastie. Regularization and variable selection via the elastic net. *Journal of the Royal Statistical Society Series B: Statistical Methodology*, 67(2):301–320, 2005.