

Reasoning About Persuasion: Can LLMs Enable Explainable Propaganda Detection?

Maram Hasanain^{1†}, Md Arif Hasan², Mohamed Bayan Kmainasi^{3*}, Elisa Sartori⁴,
Ali Ezzat Shahroor¹, Giovanni Da San Martino⁴, Firoj Alam^{1†}

¹Qatar Computing Research Institute, Qatar, ²University of New Brunswick, Canada

³Qatar University, Qatar, ⁴University of Padova, Italy

{fialam, mhasanain}@hbkku.edu.qa, giovanni.dasanmartino@unipd.it

Abstract

There has been significant research on propagandistic content detection across different modalities and languages. However, most studies have primarily focused on detection, with little attention given to explanations justifying the predicted label. This is largely due to the lack of resources that provide explanations alongside annotated labels. To address this issue, we propose a multilingual (i.e., Arabic and English) explanation-enhanced dataset, the first of its kind. Additionally, we introduce an explanation-enhanced LLM for both label detection and rationale-based explanation generation. Our findings indicate that the model performs comparably while also generating explanations. We will make the dataset and experimental resources publicly available for the research community.¹

1 Introduction

The proliferation of propagandistic content in online and social media poses a significant challenge to information credibility, shaping public opinion through manipulative rhetorical strategies (Da San Martino et al., 2019). Automatic propaganda detection has been an active area of research, with studies focusing on textual (Barrón-Cedeno et al., 2019), multimodal (Dimitrov et al., 2021a), and multilingual approaches (Piskorski et al., 2023b; Zhang and Zhang, 2022). However, majority of existing systems lack the ability to provide a justification as a form of model prediction explanation, which could greatly benefit end-users, improving their critical media literacy and increasing their trust in system’s predictions.

Yu et al. (2021) developed interpretable models for propaganda detection in news articles, combining qualitative features with pre-trained language

* The contribution was made while the author was interning at the Qatar Computing Research Institute.

† Corresponding authors.

¹ Please contact the corresponding authors.

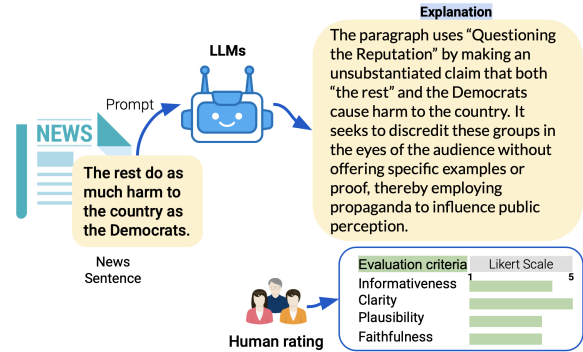


Figure 1: Example of a news sentence and its explanation and quality assessment process.

models to enhance transparency. More recently, Zavalokina et al. (2024) proposed an LLM-based approach for propaganda detection and natural explanations. However, their study fully relies on GPT-4 for detection and explanation generation. This approach has limitations, such as over-reliance on GPT-4, which may not perform well for non-English, medium- to low-resource languages. Additionally, to our knowledge, there are no datasets for propaganda detection that accompany explanations with annotated labels. To address this gap, we propose a large multilingual (i.e., Arabic and English) explanation-enhanced dataset for propaganda detection. We build upon existing datasets, including ArPro (Hasanain et al., 2024a) and the SemEval-2023 English dataset (Piskorski et al., 2023a), enhancing them with explanations. Given the complexity of manually generating explanations and the higher reliability reported for GPT-4-based explanation generation (Wang et al., 2023), we opted to use a stronger LLM for explanation generation and manually checked for quality assurance. Figure 1 demonstrate an example of news sentence, its explanation, and human evaluation process. The developed dataset can be used to train specialized LLMs for propaganda detection and to provide explanations for their predictions. To this end, our contributions to this study are as follows:

- We introduce an explanation-enhanced dataset

Split	# Articles	#items	Avg (W)	Avg Exp. (W)	% Prop.
Arabic					
Train	8,103	18,453	32.4	48.1	63.8%
Dev	822	1,318	32.6	47.9	64.4%
Test	835	1,326	35.1	48.7	61.3%
Total	8,913*	21,097	32.6	48.1	63.7%
English					
Train	250	4,472	24.0	61.2	26.9%
Dev	204	621	23.9	61.6	27.9%
Test	225	922	23.7	61.2	27.9%
Total	250*	6,015	24.0	61.2	27.2%

Table 1: Distribution of Arabic and English datasets. Exp.: explanation. Data items: annotated data elements including paragraphs and tweets. * Total unique articles. Prop.: Propagandistic. W: # Words

for propaganda detection, consisting of approximately 21k and 6k news paragraphs and tweets for Arabic and English, respectively.

- To ensure the quality of the LLM-generated explanations, we manually evaluate a sample of explanations for each language.
- Through comparative experiments, we demonstrate that our proposed LLM achieves similar performance to transformer-based model while also generating explanations for its predictions.

2 Dataset

In addition to investigating LLMs’ ability in explainable propaganda detection for a high-resource language, English, we also consider a lower-resource language, Arabic. In this work, we extend existing datasets with natural language annotation explanations generated by GPT-4o1, and evaluated by humans. This section gives an overview of the dataset creation approach.

2.1 Arabic Propaganda Dataset

Building upon the ArPro Arabic dataset (Hasanain et al., 2024a), we follow the same annotation approach to build a larger dataset by collecting and annotating 7K paragraphs. Furthermore, this extension includes collecting and annotating tweets, to examine propaganda use in social media. Eventually, our Arabic dataset comprises two types of annotated documents: tweets and news paragraphs. The news paragraphs are extracted from articles published by 300 distinct news agencies, capturing a broad spectrum of Arabic news sources. It covers a diverse range of writing styles and topics including 14 different topics such as news, politics, human rights, and science and technology. As for the tweets subset, we start from a manually con-

structed set of 14 keywords and phrases, covering the topic of Israeli-Palestinian war, targeting sub-topics popular during October and early November 2023. We use Twitter’s search API to search for tweets posted during the second week of November 2023 and matching the collected phrases, avoiding collecting retweets and replies, resulting in 5.7K tweets to annotate.

Data was annotated following a two-phase approach (Hasanain et al., 2024a). In the first phase, 3 annotators independently examine each data item (paragraph or tweet) and label it by whether it is propagandistic. In the second phase, 2 expert annotators examine annotations from the first phase and resolve any conflicts. Finally, the dataset set was split into training, development, and testing subsets following a stratified sampling approach.

2.2 English Propaganda Dataset

The English dataset is composed of 250 articles, collected from 42 unique news sources, coming from all political positions. The articles are manually cleaned of any artifacts mistakenly included during collection, such as links. The articles include topics that trended in the late 2023 and early 2024, with discussions of politics and the Israeli-Palestinian war covering 60% of the articles.

Each article is annotated by at least 2 annotators and reviewed by 1 curator, whose task is to resolve inconsistencies between annotations. During the whole process, random checks of the annotations are carried out to verify the quality and give feedback on inaccuracies. To create the dataset, the articles are divided into sentences and split into three subsets: training, development and testing.

2.3 Explanation Generation

We use GPT-4o1 to generate natural language explanations for gold propaganda annotations. This LLM is designed to have superior reasoning capabilities² which we believe are required for the task at hand. During pilot studies, we experimented with another highly-effective LLM, GPT-4o and a variety of prompts. Our manual evaluation of different samples in English and Arabic revealed that explanations generated by GPT-4o1 are better on average (following the quality assessment described in the next section). Eventually, the following prompt is used for explanation generation: “Generate one complete explanation shorter than

²<https://openai.com/index/introducing-openai-o1-preview/>

100 words on why the paragraph as a whole is [gold label (propagandistic/not propagandistic)]. Be very specific in this full explanation to the paragraph at hand. Your explanation must be fully in [language].”

Quality of Generated Explanations We verify the quality of the generated explanations by human evaluation. We used a 5-point Likert scale for various evaluation metrics selected from relevant studies on natural language explanation evaluation (Huang et al., 2024, 2023; Zavolokina et al., 2024), including *informativeness*, *clarity*, *plausibility*, and *faithfulness*. Evaluation was carried out for Arabic and English datasets using a random sample of 200 generated explanations. We provided detailed annotation instructions for the human evaluators and each explanation assessed by three evaluators (see in Appendix B).

In Table 2, we report the average scores for all evaluation metrics. We first compute the average across annotators for each explanation and then across all explanations. Results show that GPT-4o1 generally generates explanations that are of high quality, considering the metrics at hand, especially in terms of clarity.

Data	Faithfulness	Clarity	Plausibility	Informative.
Arabic	4.20	4.35	4.24	4.27
English	4.67	4.71	4.66	4.65

Table 2: Average Likert scale value for each human evaluation metric across different sets of explanations.

3 LLM for Detection and Explanation

Model For developing an explanation-enhanced LLM, we adapted Llama 3.1 8B Instruct, a robust open-source model with strong multilingual capabilities (Dubey et al., 2024). We selected the 8B variant over larger versions (70B, 45B) due to the high computational cost of fine-tuning and inference. Llama-3.1 8B has also shown strong performance in relevant multilingual tasks (Pavlyshenko, 2023; Kmainasi et al., 2024).

Instruction-following dataset. We constructed the instruction-following datasets with the aim of enhancing the model’s generalizability and to guide the LLM to follow user instructions, which is a standard approach to fine-tune an LLM (Zhang et al., 2023). To create versatile instructions, we prompt state-of-the-art LLMs including GPT-4o, and Claude-3.5-sonnet to generate instructions (See

Appendix C). Using each LLM, we created ten diverse English instructions per language. Each instruction is uniformly distributed across dataset samples. Each sample is structured as below equation.

$$a = \text{"Label: " } f(x) + \text{" Explanation: " } g(x), \quad (1)$$

where $x = I(\text{input_text})$

Training. Due to limited computational resources, we adopted Low-rank Adaptation (LoRA) (Hu et al., 2022) for training as a parameter-efficient fine-tuning technique. LoRA captures task-specific updates through low-rank matrices that approximate full weight updates.

Parameters Setup We fine-tune the model for two epochs using mixed-precision training with bfloat16 (bf16). LoRA hyperparameters are set with a rank and α of 128, a dropout rate of 0.1, and a learning rate of $2e-4$. Optimization is performed using AdamW (Loshchilov and Hutter, 2017), with a weight decay of 0.01 to regularize the model and mitigate overfitting by penalizing weights during optimization. The learning rate follows a cosine decay schedule, gradually decreasing over time to aid model convergence. We maintain a consistent LoRA learning rate of $2e-4$ across all trained models. Training is conducted on four NVIDIA A100 GPUs using Distributed Data Parallel (DDP) (Bai, 2022). We set a per-device batch size of 4 and use gradient accumulation with 2 steps, effectively achieving an overall batch size of 32.

Evaluation. For the evaluation, we used a zero-shot approach and selected a random instruction from our instruction sample as a prompt, which is a common approach reported in a prior study (Kmainasi et al., 2024). The temperature parameter was set to zero to ensure result reproducibility. Additionally, we implemented post-processing function to extract the labels and corresponding explanations.

Evaluation Metrics. To assess classification performance, we used macro and micro F_1 scores. For evaluating explanations, we used BERTScore (Zhang et al., 2020), which leverages contextual embeddings. Specifically, we computed the F_1 score using AraBERT (v2) (Antoun et al., 2020) for Arabic and BERT-base-uncased (Devlin et al., 2019) for English.³

Paragraph	Gold	Llama-Base	Llama-FT
Every single person when I came to them saying, ‘Can I get a half billion dollar bond?’	The paragraph is <i>not propagandistic</i> because it merely conveys an individual’s experience without attempting to manipulate the audience’s perception or promote a specific agenda.	The text appears to be <i>propagandistic</i> because it presents a personal anecdote that is likely intended to persuade or influence the audience, rather than providing a neutral statement.	The paragraph is <i>not propagandistic</i> because it presents a straightforward statement without employing manipulative language or techniques.

Table 3: Generated explanations by different models.

4 Results and Discussion

We compare our proposed fine-tuned Llama 3.1 8B Instruct model to baseline models: fine-tuned transformer models using AraBERT (as reported in Hasanain et al. (2024a)) and BERT-base for Arabic and English, respectively. These models are commonly-used for the task (Hasanain et al., 2023). Additionally, we compare the model’s performance to two LLMs: GPT-4o and un-finetuned Llama 3.1 8B Instruct. As table 4 shows, the performance of our fine-tuned Llama model achieves a Micro F1 score that is on par or better than other models. Specifically, the model significantly outperforms the other LLMs tested.

As for its performance in explanation, in reference to the gold explanations, we observe a 25% and 40% improvements over the base model for English and Arabic, respectively. The fine-tuned model shows better alignment with gold explanations as demonstrated by the example in Table 4.

Model	F1 _{Micro}	F1 _{Macro}	F1 _{BERT}
Arabic			
AraBERT	0.762	0.749	–
GPT-4o	0.575	0.567	–
Llama 3.1 8B (Base)	0.588	0.588	0.507
Llama 3.1 8B (FT)	0.769	0.750	0.706
English			
BERT-base	0.772	0.691	–
GPT-4o	0.649	0.630	–
Llama 3.1 8B (Base)	0.572	0.562	0.596
Llama 3.1 8B (FT)	0.770	0.649	0.747

Table 4: Performance of the proposed model and baselines. F1_{BERT} is the F1 score computed using BERTScore for the explanation.

³BERTScore was chosen over BLEU and ROUGE as it captures semantics, better reflecting explanation quality.

5 Related Work

Automatic detection of misinformation and propagandistic content has gained significant attention over the past years. Research has explored various problems, including cross-lingual propaganda analysis (Barrón-Cedeno et al., 2019), news article propaganda detection (Da San Martino et al., 2019), and misinformation and propaganda related to politics and war. Building on the seminal work of Da San Martino et al. (2019), resources have been developed for multilingual (Piskorski et al., 2023a; Hasanain et al., 2023) and multimodal setups (Dimitrov et al., 2021b; Hasanain et al., 2024b). Reasoning-based explanations in NLP have advanced fact-checking (Russo et al., 2023), hate speech detection (Huang et al., 2024), and propaganda detection (Zavolokina et al., 2024). While binary classifiers effectively identify propaganda, they often lack transparency, making interpretation difficult (Atanasova, 2024). Yu et al. (2021) showed that qualitative reasoning aids deception detection, while Atanasova (2024) emphasized explanation generation for better interpretability. Yet, explicit prediction reasoning for propaganda detection remains under-explored, particularly in multilingual settings. Our work addresses the gap by developing a multilingual explanation-enhanced dataset and proposing a specialized LLM.

6 Conclusions and Future Work

In this study, we introduce a multilingual dataset for propaganda detection and explanation, which is the *first* large dataset accompanied by explanations for the task. For Arabic, we have created a new propaganda-labeled dataset of size 13K samples, consisting of tweets and news paragraphs. Using GPT-4o1, we generated explanations for this dataset, as well as for ArPro (consisting of 8K instances), and for English starting from the SemEval-2023 dataset. To ensure the quality of the explanations, we manually evaluated them, and

our findings suggest that these explanations can serve as gold-standard references. We propose an explanation-enhanced LLM based on Llama-3.1 (8B) and demonstrate its comparable performance to strong baselines, while also providing high-quality explanations. For future work, we plan to extend the task to multilabel classification and span-level propaganda techniques detection.

7 Limitations

Generating manual explanations is inherently complex. However, providing a rationale alongside the predicted label enhances trust and reliability in automated systems. Given the challenges of manual explanation creation, we relied on GPT-4o1 – the most capable model at the time of writing – for generating explanations in this study. To ensure the reliability of these explanations, we conducted a manual evaluation based on four criteria: informativeness, clarity, plausibility, and faithfulness. This evaluation was performed on a small sample of 200 explanations per set. The preliminary evaluation scores suggest that we can rely such and use them as gold explanation. For both label prediction and explanation generation, we focused on a binary classification task. However, future work should extend this to multiclass and multilabel settings. Additionally, for fine-tuning, we explored a multilingual model (Llama 3.1 8B), leaving room for further investigations into other models, including language-centric models.

Ethics and Broader Impact

We enhanced existing datasets by incorporating explanations. To the best of our knowledge, the dataset does not include any personally identifiable information, eliminating privacy concerns. For the explanations, we provided detailed annotation guidelines. It is important to acknowledge that annotations are inherently subjective, which may introduce biases into the evaluation process. We encourage researchers and users of this dataset to critically assess these factors when developing models or conducting further studies.

References

Wissam Antoun, Fady Baly, and Hazem Hajj. 2020. AraBERT: Transformer-based model for Arabic language understanding. In *Proceedings of the 4th Workshop on Open-Source Arabic Corpora and Pro-*

cessing Tools, OSACT '20, pages 9–15, Marseille, France.

Pepa Atanasova. 2024. Generating fact checking explanations. In *Accountable and Explainable Methods for Complex Reasoning over Text*, pages 83–103. Springer.

Hao Bai. 2022. Modern distributed data-parallel large-scale pre-training strategies for nlp models. In *Proceedings of the 6th International Conference on High Performance Compilation, Computing and Communications*, pages 44–53.

Alberto Barrón-Cedeno, Giovanni Da San Martino, Israa Jaradat, and Preslav Nakov. 2019. Propopy: A system to unmask propaganda in online news. In *Proceedings of the AAAI Conference on Artificial Intelligence*, AAAI '19, pages 9847–9848.

Giovanni Da San Martino, Seunghak Yu, Alberto Barrón-Cedeño, Rostislav Petrov, and Preslav Nakov. 2019. [Fine-grained analysis of propaganda in news article](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 5636–5646, Hong Kong, China. Association for Computational Linguistics.

Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, NAACL-HLT '19, Minneapolis, Minnesota, USA.

Dimitar Dimitrov, Bishr Bin Ali, Shaden Shaar, Firoj Alam, Fabrizio Silvestri, Hamed Firooz, Preslav Nakov, and Giovanni Da San Martino. 2021a. Detecting propaganda techniques in memes. In *ACL-IJCNLP*.

Dimitar Dimitrov, Bishr Bin Ali, Shaden Shaar, Firoj Alam, Fabrizio Silvestri, Hamed Firooz, Preslav Nakov, and Giovanni Da San Martino. 2021b. Task 6 at SemEval-2021: Detection of persuasion techniques in texts and images. In *Proceedings of the 15th International Workshop on Semantic Evaluation*, SemEval '21, Bangkok, Thailand.

Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. 2024. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*.

Maram Hasanain, Fatema Ahmad, and Firoj Alam. 2024a. Can GPT-4 Identify Propaganda? Annotation and Detection of Propaganda Spans in News Articles. In *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 2724–2744.

- Maram Hasanain, Firoj Alam, Hamdy Mubarak, Samir Abdaljalil, Wajdi Zaghouni, Preslav Nakov, Giovanni Da San Martino, and Abed Freihat. 2023. [ArAIEval shared task: Persuasion techniques and disinformation detection in Arabic text](#). In *Proceedings of ArabicNLP 2023*, pages 483–493, Singapore (Hybrid). Association for Computational Linguistics.
- Maram Hasanain, Md. Arid Hasan, Fatema Ahmed, Reem Suwaileh, Md. Rafiul Biswas, Wajdi Zaghouni, and Firoj Alam. 2024b. [ArAIEval shared task: Propagandistic techniques detection in unimodal and multimodal arabic content](#). In *Proceedings of the Second Arabic Natural Language Processing Conference (ArabicNLP 2024)*. Association for Computational Linguistics.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. [Lora: Low-rank adaptation of large language models](#). In *The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022*. OpenReview.net.
- Fan Huang, Haewoon Kwak, and Jisun An. 2023. [Is chatgpt better than human annotators? potential and limitations of chatgpt in explaining implicit hate speech](#). In *Companion Proceedings of the ACM Web Conference 2023, WWW '23 Companion*, page 294–297, New York, NY, USA. Association for Computing Machinery.
- Fan Huang, Haewoon Kwak, Kunwoo Park, and Jisun An. 2024. [ChatGPT rates natural language explanation quality like humans: But on which scales?](#) In *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 3111–3132, Torino, Italia. ELRA and ICCL.
- Mohamed Bayan Kmainasi, Ali Ezzat Shahroor, Maram Hasanain, Sahinur Rahman Laskar, Naeemul Hasan, and Firoj Alam. 2024. [LlamaLens: Specialized multilingual llm for analyzing news and social media content](#). *Preprint*, arXiv:2410.15308.
- Ilya Loshchilov and Frank Hutter. 2017. [Decoupled weight decay regularization](#). In *International Conference on Learning Representations*.
- Bohdan M. Pavlyshenko. 2023. [Analysis of disinformation and fake news detection using fine-tuned large language model](#). *Preprint*, arXiv:2309.04704.
- Jakub Piskorski, Nicolas Stefanovitch, Giovanni Da San Martino, and Preslav Nakov. 2023a. [SemEval-2023 task 3: Detecting the category, the framing, and the persuasion techniques in online news in a multi-lingual setup](#). In *Proceedings of the 17th International Workshop on Semantic Evaluation (SemEval-2023)*, pages 2343–2361, Toronto, Canada. Association for Computational Linguistics.
- Jakub Piskorski, Nicolas Stefanovitch, Nikolaos Nikolaidis, Giovanni Da San Martino, and Preslav Nakov. 2023b. [Multilingual multifaceted understanding of online news in terms of genre, framing, and persuasion techniques](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3001–3022, Toronto, Canada. Association for Computational Linguistics.
- Daniel Russo, Serra Sinem Tekiroğlu, and Marco Guerini. 2023. [Benchmarking the generation of fact checking explanations](#). *Transactions of the Association for Computational Linguistics*, 11:1250–1264.
- Han Wang, Ming Shan Hee, Md Rabiul Awal, Kenny Tsu Wei Choo, and Roy Ka-Wei Lee. 2023. [Evaluating GPT-3 generated explanations for hateful content moderation](#). In *Proceedings of the Thirty-Second International Joint Conference on Artificial Intelligence*, pages 6255–6263.
- Seunghak Yu, Giovanni Da San Martino, Mitra Moshirami, James Glass, and Preslav Nakov. 2021. [Interpretable propaganda detection in news articles](#). In *Proceedings of the International Conference on Recent Advances in Natural Language Processing, RANLP '21*.
- Liudmila Zavolokina, Kilian Sprenkamp, Zoya Katashinskaya, Daniel Gordon Jones, and Gerhard Schwabe. 2024. [Think fast, think slow, think critical: Designing an automated propaganda detection tool](#). In *Proceedings of the 2024 CHI Conference on Human Factors in Computing Systems, CHI '24*, New York, NY, USA. Association for Computing Machinery.
- Shengyu Zhang, Linfeng Dong, Xiaoya Li, Sen Zhang, Xiaofei Sun, Shuhe Wang, Jiwei Li, Runyi Hu, Tianwei Zhang, Fei Wu, et al. 2023. [Instruction tuning for large language models: A survey](#). *arXiv preprint arXiv:2308.10792*.
- Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q Weinberger, and Yoav Artzi. 2020. [Bertscore: Evaluating text generation with bert](#). In *International Conference on Learning Representations*.
- Wenshan Zhang and Xi Zhang. 2022. [Cross-lingual propaganda detection](#). In *2022 IEEE International Conference on Big Data (Big Data)*, pages 4330–4336. IEEE.

A Annotation Platform

We present the screenshot of the interface designed for the evaluation of LLM generated explanation, which consisted of a paragraph, label, and explanation for the label, annotation guidelines, and four different evaluation metrics including informativeness, clarity, plausibility, and faithfulness. 5-point Likert scale is used for each evaluation metric and the annotator is asked to follow the annotation guideline to select an appropriate Likert scale value for each metric.

English Propaganda Explanation - Verification

<p>Paragraph:</p> <p>Also confirming that Americans are working with China to create these deadly bioweapons while then lying to our faces about it as Americans and people all across the planet are being killed by them, the research into how the satanic globalists can more easily kill Americans is, of course, being funded by the American taxpayer through the US Department of Agriculture, and as the Daily Mail story reports, this deadly research will not only take place in China but at sites in Georgia and Edinburgh, Scotland.</p>	<p>Label: Questioning_the_Reputation</p> <p>Explanation:</p> <p>The paragraph is propagandistic because it combines "Questioning the Reputation" by alleging that American entities and "satanic globalists" are covertly developing bioweapons with China, thus discrediting them, and uses "Loaded Language" like "deadly bioweapons" to stir fear and outrage, manipulating readers through unverified and emotionally charged accusations.</p>		
<p>Informativeness</p> <p>Select Informativeness ▾</p>	<p>Clarity</p> <p>Select Clarity ▾</p>	<p>Plausibility</p> <p>Select Plausibility ▾</p>	<p>Faithfulness</p> <p>Select Faithfulness ▾</p>

Annotation Guidelines

Figure 2: A screenshot of the annotation platform for the explanation evaluation of English propaganda.

B Annotation Setup

We recruited annotators who are native Arabic speakers and fluent in English, all holding at least a bachelor’s degree. Since they were proficient in English, they also worked on English news paragraphs. We provided annotation guidelines and necessary consultation. All annotators had prior experience with similar tasks. A total of six annotators participated in the evaluation task. In accordance with institutional requirements, each signed a Non-Disclosure Agreement (NDA). For their compensation, we hired a third-party company to manage payments at standard hourly rates based on location.

C Prompts

To generate instructions for the instruction-following dataset, we prompt the LLMs using the following prompt: *We are creating an English instruction-following dataset for an [language] dataset covering the task of propaganda detection with explanation. The user defined the task as follows: Detecting propaganda in a piece of text and explaining why this piece of text is propagandistic. Propaganda can be defined as a form of commu-*

nication aimed at influencing people’s opinions or actions toward a specific goal, using well-defined rhetorical and psychological techniques. For that task, the labels include: [‘non-propagandistic’, ‘propagandistic’]. Write 10 very diverse and concise English instructions making sure the labels provided above are part of the instruction. Only return the instructions without additional text.

D Data Release

Our proposed dataset will be released under the CC BY-NC-SA 4.0 – Creative Commons Attribution 4.0 International License: <https://creativecommons.org/licenses/by-nc-sa/4.0/>.