

UrduLLaMA 1.0: Dataset Curation, Preprocessing, and Evaluation in Low-Resource Settings

Layba Fiaz, Munief Hassan Tahir, Sana Shams, Sarmad Hussain

Center for Language Engineering,
Al-Khawarizmi Institute of Computer Science,
University of Engineering and Technology, Lahore
{firstname.secondname}@kics.edu.pk

Abstract

Multilingual Large Language Models (LLMs) often provide suboptimal performance on low-resource languages like Urdu. This paper introduces UrduLLaMA 1.0, a model derived from the open-source Llama-3.1-8B-Instruct architecture and continually pre-trained on 128 million Urdu tokens, capturing the rich diversity of the language. To enhance instruction-following and translation capabilities, we leverage Low-Rank Adaptation (LoRA) to fine tune the model on 41,000 Urdu instructions and approximately 50,000 English-Urdu translation pairs. Evaluation across three machine translation datasets demonstrates significant performance improvements compared to state-of-the-art (SOTA) models, establishing a new benchmark for Urdu LLMs. These findings underscore the potential of targeted adaptation strategies with limited data and computational resources to address the unique challenges of low-resource languages.

1 Introduction

The field of language modeling has experienced a transformative shift, driven by the rapid evolution of Large Language Models (LLMs) that have set new standards in natural language understanding and generation. While proprietary models like OpenAI’s ChatGPT (OpenAI, 2022) offer impressive capabilities, their closed nature restricts research accessibility. On the other hand, open models such as LLaMA (Grattafiori et al., 2024) and Mistral (Jiang et al., 2023) — though smaller in scale — have achieved competitive results across many languages. Nevertheless, both open and closed LLMs face significant challenges when applied to low-resource languages like Urdu. A primary hurdle is the inadequate representation of Urdu in training data, which results in limited vocabulary and poor encoding capabilities. This gap in data inclusion severely hampers the performance of LLMs on Urdu NLP tasks, as evidenced by recent benchmark

studies (Arif et al., 2024; Tahir et al., 2025). Overcoming this limitation is crucial to unlocking the full potential of LLMs for Urdu and other underrepresented languages. In this research, we tackle this challenge by developing an Urdu-specific LLM. We begin by continually pretraining Llama-3.1-8B-Instruct (Grattafiori et al., 2024) on 128 million Urdu tokens to enhance the model’s foundational representation of the language. This is followed by instruction fine tuning using 41,000 instructions to improve conversational capabilities, and additional fine tuning on 50,369 English-Urdu parallel sentence pairs to boost translation proficiency. The translation quality was evaluated using the BLEU score across three MT datasets, which showed that the UrduLLaMA 1.0 model outperformed the Llama-3.1-8B-Instruct base model. This trend was further validated through human evaluation, where two experts found that translations from the UrduLLaMA 1.0 model were more accurate than those generated by the base model.

The paper is structured as follows: Section 1 introduces the study and Section 2 presents the related work. Section 3 details the dataset curation and Section 4 explains the steps taken to preprocess the data. This is followed by Section 5, which describes the development process of UrduLLaMA 1.0 including the experimental and training details, and Section 6, which covers the evaluation and discussion leading to Section 7, which concludes the paper.

2 Related Work

Due to the lack of continual pretraining work on LLMs for Urdu, this section examines the closest related works. This includes models developed for Asian languages and low-resource languages built using the LLaMA framework.

Tamil-Llama (Balachandran, 2023), an Asian language model built on LLaMA 2 (Touvron et al., 2023), incorporates 16,000 Tamil tokens and uti-

lizes the Low-Rank Adaptation (LoRA) (Hu et al., 2021) technique for efficient training on Tamil datasets. The model was trained on an Nvidia A100 GPU with 80GB of VRAM for 48 hours, followed by instruct fine tuning on translated Alpaca datasets (Taori et al., 2023) and a custom subset of the OpenOrca (Lian et al., 2023) dataset for 60 hours using Microsoft Azure’s Standard NC24 ads A100v4 instance. Performance evaluations indicate significant improvements in Tamil text generation, with the Tamil-Llama 13B model outperforming OpenAI’s GPT-3.5-turbo on Tamil language tasks.

Taiwan-LLM (Lin and Chen, 2023), an LLM for Traditional Chinese, underwent continual pre-training on LLaMA 2 (Touvron et al., 2023) using 35.1 billion tokens and a diverse instruction set derived from 17 fine tuning datasets, including 20,000 user feedback instances. The training process leveraged the Transformer Reinforcement Learning (TRL) library (Hu et al., 2023), along with DeepSpeed ZeRO-2 (Rajbhandari et al., 2020) and FlashAttention-2 (Dao, 2023) to optimize memory usage and enhance training efficiency. Utilizing up to 48 NVIDIA H100 Tensor Core GPUs, Taiwan-LLM demonstrated superior performance in understanding and generating Traditional Chinese text, surpassing models such as GPT-4 and Claude-2.1.

PersianLLaMA (Abbasi et al., 2023), the first large-scale Persian language model, was trained from scratch on 184 million tokens from Persian Wikipedia and 9 billion tokens from the OSCAR dataset (Ortiz Suárez et al., 2020). The training process leveraged DeepSpeed (Rasley et al., 2020) and TencentPretrain (Zhao et al., 2023), two advanced frameworks for optimizing deep learning, utilizing two A100 GPUs with 80GB of VRAM over 12 days. Additionally, they conducted an experiment using LoRA (Hu et al., 2021) with the original English LLaMA weights, training on a single A100 GPU with 80GB of VRAM for over 70 hours. Their evaluations indicate that PersianLLaMA significantly outperformed its competitors in both understanding and generating Persian text.

Airavata (Gala et al., 2024) is an instruction-tuned model for Hindi, built by fine tuning OpenHathi (SarvamAI, 2023), on 404k instruction instances from diverse Hindi instruction-tuning datasets. OpenHathi (SarvamAI, 2023) is again a model built on the LLaMA 2 7B architecture. The training employed both full fine tuning and su-

pervised fine tuning using LoRA (Hu et al., 2021). Their results demonstrated that Airavata significantly outperforms OpenHathi on most tasks, highlighting the effectiveness of fine tuning in aligning the base model to a variety of tasks. The details regarding their training infrastructure were not provided in their paper.

SeaLLMs (Nguyen et al., 2024b) is an innovative series of language models focused on South-east Asian (SEA) languages. Built upon LLaMA 2 (Touvron et al., 2023) and Mistral 7B (Jiang et al., 2023), SeaLLMs underwent continued pretraining with an extended vocabulary, followed by a hybrid approach for instruction and alignment tuning. Their evaluation claims that SeaLLMs significantly outperform ChatGPT-3.5 in non-Latin languages, such as Thai, Khmer, Lao, and Burmese, by large margins, while remaining lightweight and cost-effective to operate. The authors did not provide detailed information regarding the training infrastructure in their paper.

A study related to Chinese LLaMA (Cui et al., 2024) extended different variants of LLaMA 2 (Touvron et al., 2023) by adding 20,000 Chinese tokens to the existing vocabulary. The model was pre-trained using LoRA (Hu et al., 2021) and fine tuned on Chinese instruction datasets formatted according to Alpaca (Taori et al., 2023). Training was conducted on A40 GPUs (48GB VRAM), with up to 48 GPUs used depending on the model size. The parameter-efficient training with LoRA was carried out using the PEFT library¹. Additionally, DeepSpeed (Rasley et al., 2020) was employed to optimize memory efficiency during training. Experimental results demonstrate that the newly proposed model significantly improves the original LLaMA’s ability to understand and generate Chinese content.

Another study (Chen et al., 2024b) conducted a two-stage continual pretraining of LLaMA 3 8B (Grattafiori et al., 2024) for Chinese. Initially, they performed experiments on TinyLLaMA (Zhang et al., 2024), and then applied their findings to train LLaMA 3 using 100B tokens, followed by fine tuning on Synthetic Scientific QA Data. The experiments were implemented using Hugging Face Transformers (Wolf et al., 2020), incorporating Flash Attention and DeepSpeed ZeRO (Rasley et al., 2020) to optimize training efficiency. The study leveraged computing resources provided by

¹<https://github.com/huggingface/peft>

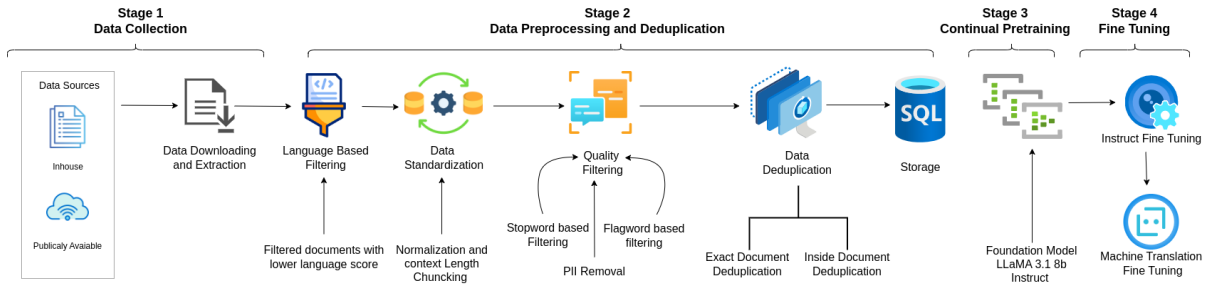


Figure 1: Development of UrduLLaMA 1.0

the Public Computing Cloud at Renmin University of China. Their extensive experiments on a number of evaluation benchmarks show that their approach can largely improve the performance of the backbone models, including both the general abilities and the scientific reasoning abilities without hurting the original capacities.

Latxa (Etxaniz et al., 2024) is a family of large language models for Basque ranging from 7 to 70 billion parameters. Latxa is based on Llama 2 (Touvron et al., 2023), which they continue pretraining on their own Basque corpus comprising of 4.2B tokens. The training of Latxa has been conducted using the GPT-Neox (Black et al., 2022) library. As infrastructure, they have leveraged the CINECA HPC Leonardo computing cluster located in Italy, which is powered by 3,456 nodes each containing 4x custom A100 64GB GPUs. They claimed that Latxa outperforms all previous open models they compared to by a large margin.

VinaLLaMA (Nguyen et al., 2023), an open-weight, state-of-the-art (SOTA) Large Language Model for the Vietnamese language, was built upon LLaMA 2 (Touvron et al., 2023) with an additional 800 billion trained tokens followed by fine tuning on 1 million sample instruction of Vietnamese and English. For our pretraining phase, they utilized a cluster consisting of eight nodes, each equipped with 8x Intel Habana Gaudi2 Processors. This phase was completed over the course of one week. In contrast, the fine tuning phase was conducted more rapidly, utilizing a single node of Google Cloud TPU v5e, and completed within a single day. They claim to achieve state-of-the-art results on different key benchmarks, showcasing fluency in Vietnamese and a deep understanding of their culture.

VI-MISTRAL-X (Vo, 2024) is another LLM designed expressly for the Vietnamese language. It performed continual pretraining on 8 billion tokens selected from CulturaX (Nguyen et al., 2024a),

on the Mistral architecture, using 8 Nvidia H100 80GB SXM5 GPUs. Following the pretraining phase, vi-mistral-x underwent a series of fine tuning processes aimed at aligning the model with specific NLP tasks. Through comprehensive testing on various benchmarks, they have shown that vi-mistral-x has outperformed existing Vietnamese LLMs in several key areas.

This literature review presents the absence of dedicated Urdu LLMs highlights a significant need for such resources. This paper introduces the first continual pretraining followed by fine tuning of Llama-3.1-8B-Instruct model for Urdu, leveraging a dataset of 128 million tokens and using the LoRA (Hu et al., 2021) training approach for instruct tuning. This pioneering effort aims to pave the way for future research and development of more sophisticated Urdu language models.

3 Dataset Curation

A pivotal challenge for building LLMs, particularly in low resource languages, is the availability of sizeable high-quality data for building foundation LLMs. As the quality and diversity of data significantly influence the capabilities of LLMs (Chen et al., 2024a), we supplemented our in-house dataset with data from several publicly available sources, including CC-100 (Wenzek et al., 2020), the Urdu corpus from OSCAR (Ortiz Suárez et al., 2020), the Urdu Web Corpus (Shafiq et al., 2020), Urdu data from XLSum (Hasan et al., 2021), and (Goldhahn et al., 2012). The raw text underwent a comprehensive pre-processing pipeline, outlined in Section 4, to ensure language-specific content, maintain quality, and remove duplicates. A summary of the collected datasets and the impact of processing is provided in Table 1.

Table 1: Summary of Token Count Reduction Across Different Data Sources for Urdu-LLaMA

Source	Original Token Count	Token Count After Processing	Reduction	Percentage Reduction (%)
Publicly Available Resources	798,260,573	541,151,638	257,108,935	32.20
Inhouse	639,786,525	606,053,446	33,733,079	5.30
UrduLLaMA 1.0 Dataset	1,438,047,098	1,147,205,084	290,842,014	-
UrduLLaMA 1.0 Dataset (in Billion)	1.43	1.14	0.29	-

4 Preprocessing Pipeline

This section outlines the pre-processing steps applied to construct our dataset. We primarily adopted approaches similar to those proposed by (Zeng et al., 2021), (Ennen et al., 2023), and (Lu et al., 2024). The steps are as follows:

- **Language Filtering:** This step was performed at the document level to retain only language-rich documents. Similar approaches have been adopted by others, such as the Falcon team (Penedo et al., 2023) for creating RefinedWeb, where they used the fastText language classifier from CCNet (Wenzek et al., 2020) at the document level. This method has also been utilized by (Nguyen et al., 2024a) for building CulturaX and by (Laurençon et al., 2022) for constructing the BigScience ROOTS corpus. In our case, we conducted language filtering using the CLE Urdu Language Identification API², applying a threshold of 0.9 to ensure the retention of predominantly Urdu documents. To validate our choice of the CLE Urdu Language Identification API, we conducted experiments comparing it with fastText, assessing the effectiveness of both in identifying Urdu content within documents containing varying proportions of Urdu and non-Urdu text. The results of which are summarized in Table 2, demonstrating that the CLE Urdu Language Identification API provided scores more aligned with the expected composition of test data.
- **Data Standardization:** Data standardization involves the normalization and transformation of text data to make it more manageable and comprehensible during the model training process (Lu et al., 2024). Since syntax of the Urdu language requires specialized techniques, we applied as described in (Nazir et al., 2024). Major steps include Unicode-based filtering, replacing non-standard characters with their standard forms, and handling

Urdu-specific features such as end symbols, poetic symbols, and quotation marks. Additionally, some documents had varying lengths, so we split the text to maintain an average context length of 512 tokens.

- **Quality Filtering:** To enhance the dataset’s quality, motivated by the data processing pipeline from (Laurençon et al., 2022) and (Nguyen et al., 2024a), we utilized various dataset metrics to identify and filter outlying documents. Filtering was applied based on stopword ratios, flagged word ratios, and empty documents. The threshold values for the stopword ratio and flagged word ratio were set at 0.1 and 0.025, respectively, which align with the threshold values used in the BigScience ROOTS project (Laurençon et al., 2022).

In addition to filtering, we implemented Personally Identifiable Information (PII) removal to protect sensitive data. We employed rule-based approach leveraging regular expressions regexes library to detect and remove sensitive information such as phone numbers, identification numbers, and email addresses. These measures ensured that the dataset was free from personally identifiable information, enhancing privacy and usability for model training.

- **Deduplication:**

Despite thorough data cleaning, the remaining dataset still contain a substantial amount of repeated data due to various reasons, including information being reposted on the web, multiple references to the same articles and plagiarism. The duplicated data can thus cause memorization and significantly hinder generalization for LLMs (Lee et al., 2022). Therefore deduplication is required as it decreases memorization of training data (Kandpal et al., 2022). Initially, deduplication was performed within individual datasets, followed by an overall deduplication across all datasets to address potential similarities among different sources. We applied deduplication at two

²https://tech.cle.org.pk/api_langid

Table 2: Language Identification Experiments with CLE Urdu Language Identification API and fastText

File Composition	CLE Urdu Language Identification API	fastText Model Score
80% Urdu, 20% non-urdu	0.827	lang: ur , prob: 0.991
50% Urdu, 50% non-urdu	0.503	lang: ur , prob: 0.847
25% Urdu, 75% non-urdu	0.257	lang: en , prob: 0.439
100% Urdu	1.000	lang: ur , prob: 0.997
100% Urdu (with urdu numerals)	1.000	lang: ur , prob: 0.994
Only Numericals	0.000	lang: ru , prob: 0.349

Note: The "lang" represents the detected language, "prob" represents the probability score. The language codes are as follows: "ur" = Urdu, "en" = English, "ru" = Russian.

levels with Table 3 summarizes the results of this process:

- Exact Document Deduplication:** We applied the SimHash technique, as used in the creation of WuDaoCorpora (Yuan et al., 2021) corpus, Roots Corpus for BigScience’s BLOOMZ model (Abadji et al., 2022) and (Laurençon et al., 2022), to perform deduplication. A hash was generated from the content of each document (ignoring spaces) to uniquely identify it. If a duplicate hash was found, the corresponding document was removed.
- Inside Document Deduplication:** The second step involved deduplicating individual lines within the documents. Following the approach outlined by (Laurençon et al., 2022), we performed a line-by-line comparison to identify and remove repeated content. Duplicate lines, regardless of their position within a document, were eliminated.

Table 3: Impact of Deduplication on Dataset

Step	Token Count
Original Dataset	1.43 Billion
After Processing	1.14 Billion
After Overall Deduplication	1.08 Billion

5 UrduLLaMA 1.0

Llama-3.1-8B-Instruct, as introduced in (Grattafiori et al., 2024) by Meta, is built upon an extensive pretraining corpus of 15 trillion tokens. We leverage this model architecture for continual pretraining due to its open-source availability and the inclusion of Urdu language

data in its training, making it a suitable choice for our research. The complete process of UrduLLaMA 1.0 making is illustrated in Figure 1, follows four key stages: data collection, data processing, continual pretraining, and fine tuning, each playing a vital role in enhancing the model’s linguistic understanding and task adaptability.

5.1 Continual Pretraining

The UrduLLaMA 1.0 model is trained on the Causal Language Modeling (CLM) task, enabling it to predict and generate the next word in a sequence. This stage plays a crucial role in refining LLaMA’s proficiency in Urdu by allowing the model to grasp the language’s intricate syntactic structures, semantic nuances, and unique linguistic traits. Leveraging its autoregressive nature, CLM mirrors the human process of language comprehension and generation, which is inherently context-dependent. Consequently, by the end of this initial training phase, LLaMA acquires the ability to generate and interpret Urdu text with contextual relevance and linguistic accuracy.

5.1.1 Pretraining Dataset

Due to hardware limitations, 128 million tokens were used for continual pretraining of Llama-3.1-8B-Instruct (Grattafiori et al., 2024) from the curated dataset as explained in Section 3.

5.1.2 Pretraining Setup

The foundational model of UrduLLaMA 1.0 is initialized with the original Llama-3.1-8B-Instruct weights and went through pretraining using the *bf16* precision setting. Our pretraining strategy involved full fine tuning, where all model parameters, including embeddings, LM heads, and attention

weights, were trained. The training utilized an AdamW optimizer with a learning rate of $2e-5$, and gradient accumulation steps of 1. Memory optimization techniques such as activation checkpointing, activation offloading, and memory-efficient FSDP wrapping were applied to manage the large model size effectively. Pretraining was conducted by utilizing 3 Nvidia L40 48GB GPUs. The model was trained for 3 epochs on the dataset, with the training process spanning approximately 2 weeks. The detailed parameters are described in Table 4.

Table 4: Continual Pretraining Hyperparameters

Configuration	Value
Base Model	LLaMA 3.1
Parameters	8B
Training Tokens	128 Million
Epochs	3
Batch Size	1
Initial Learning Rate	$2e-4$
Dropout Rate	0.1
Max Sequence Length	512
Training Precision	FP16

5.2 Instruct Tuning

Language models pre-trained using the causal language modeling (CLM) objective often struggle to follow user instructions and sometimes generate irrelevant or unintended content (Balachandran, 2023). This limitation arises because the CLM objective is designed to predict the next token in a sequence rather than understand or respond to instructions effectively (Ouyang et al., 2022). To address this issue and align the model’s behavior with user intentions, we employed instruction fine tuning. This step refines the LLM’s capabilities, allowing it to interpret and execute task-specific instructions more effectively in natural language. Rather than the traditional approach of adapting to specific datasets, instruction fine tuning focuses on a wide array of tasks articulated through language, ensuring the LLM’s adaptability without task-specific alterations.

5.2.1 Instruct Tuning Dataset

We instruct tuned our model using 41,000 instructions, sources from two main sources. The first

source included 26,000 instances from (Khalil, 2024), a cleaned and translated version of the Stanford Alpaca dataset (Ruebsamen, 2024). This refined dataset addresses key issues such as hallucination, responses, ambiguous instructions, and low-quality samples, ensuring higher-quality training data. The second source comprises 15,000 translated instances from the Dolly dataset (Saeed, 2023), an Urdu translation of the original Dolly dataset (Conover et al., 2023), covering a wide range of NLP tasks related instructions.

5.2.2 Instruct Tuning Setup

For the instruction fine tuning, we incorporated the LoRA method (Hu et al., 2021), where we integrated LoRA adapters into the attention vectors and subsequently trained the embeddings, LM heads, and the newly incorporated LoRA parameters. For the training infrastructure, we utilized Nvidia A100 40GB GPU. The detailed hyperparameters used for instructional fine tuning are listed in Table 5.

Table 5: Fine Tuning Hyperparameters

Configuration	Value
Training Data	41,000
Epochs	3
Batch Size	1
Initial Learning Rate	$2e-4$
Dropout Rate	0.1
Max Sequence Length	512
LoRA Rank	64
LoRA Alpha	128
Training Precision	FP16

5.3 Fine Tuning on Machine Translation Task

fine tuning is performed to adapt the pre-trained model, which has already learned general patterns and representations to specific task. Instead of focusing solely on specific linguistic pairs, fine tuning on machine translation datasets equipped our UrduLLaMA 1.0 to understand and translate text in a more sophisticated way, addressing domain-specific challenges. This process ensured that the UrduLLaMA 1.0 can effectively adapt to varied translation tasks, such as handling language-specific syntax, idiomatic expressions, and cultural nuances.

We fine tuned the model using an in-house Machine Translation MT Corpus. This dataset is col-

lected from various online sources covering diverse domains such as Banking³, Law⁴, Weather⁵, Agriculture⁶, and Food⁷. The dataset comprises 62,970 entries, with a train-test split of 50,376 and 12,594 respectively. The model is fine tuned using the training split using parameters described in Table 5.

6 Evaluation on Machine Translation Task

6.1 Automatic Evaluation

For automatic evaluation, we tested the model on a total of 16,299 instances, comprising test splits from the inhouse MT corpus, TICO-19 (Anastasopoulos et al., 2020), and the Tatoeba Challenge (Tiedemann, 2020). The TICO-19 dataset focuses on COVID-19-related domains such as health and public awareness, while the Tatoeba Challenge spans diverse domains for general-purpose translations. Specifically, the evaluation included 12,594 instances from the in-house test set, 2,042 instances from TICO-19, and 1,663 instances from the Tatoeba Challenge. This consistent test split was designed to align with SOTA models for a fair and reliable comparison.

Translation quality was assessed using the BLEU score⁸, consistent with the metrics employed in SOTA model evaluation, providing an objective and standardized measure of the model’s performance on Urdu translations. The SOTA models evaluated are Llama-3.1-8B-Instruct (Grattafiori et al., 2024), the base model used for continual pre-training; seamless-m4t-v2-large (Communication et al., 2023), a unified multilingual and multimodal translation model; and opus-mt-en-ur (Tiedemann and Thottingal, 2020), a lightweight machine translation system tailored for low-resource languages, including Urdu. The results, showcasing a detailed comparison of translation quality across all models, are presented in Table 6.

The results of this experiment are also confined in Figure 2. The results demonstrate that UrduLLaMA 1.0 significantly outperforms the base

³<https://www.sbp.org.pk/index.html>

⁴<https://lgcd.punjab.gov.pk/>

⁵<https://nwfc.pmd.gov.pk/new/weekly-outlook-en.php>

⁶<https://aari.punjab.gov.pk/>

⁷<https://shireenanwer.com/recipes/main-course/zafрани-koftay/>

⁸https://www.nltk.org/_modules/nltk/translate/bleu_score.html

Table 6: Performance Comparison of Different Models on Machine Translation Datasets

Model	In-house	TICO-19	Tatoeba Challenge
UrduLLaMA 1.0	28.01	13.12	15.16
Llama-3.1-8B-Instruct	10.87	10.04	12.49
opus-mt-en-ur	3.27	5.65	12.10
seamless-m4t-v2-large	17.44	19.22	22.76

Llama-3.1-8B-Instruct model across all datasets, highlighting the effectiveness of our approach in improving translation performance for Urdu. On the In-house dataset, UrduLLaMA 1.0 achieves the highest BLEU score, indicating its superior ability to handle domain-specific data. This suggests that fine tuning on Urdu text enhances the model’s ability to capture language-specific nuances and contextual meanings. In contrast, Llama-3.1-8B-Instruct shows lower performance, reinforcing that general-purpose multilingual models require adaptation for better Urdu translation. Interestingly, seamless-m4t-v2-large also performed well, though not surpassing UrduLLaMA 1.0, while opus-mt-en-ur struggles significantly, likely due to limited exposure to the dataset’s domain.

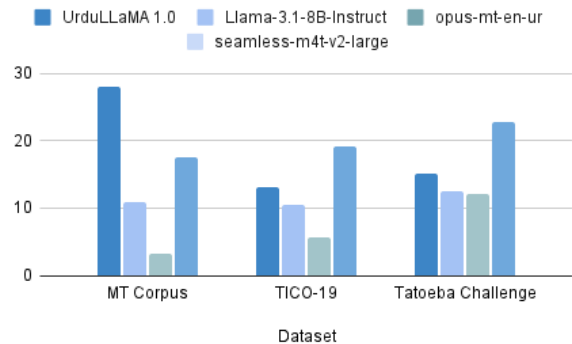


Figure 2: Automatic Evaluation of Different Models on MT Datasets

For the TICO-19 dataset, UrduLLaMA 1.0 again surpassed Llama-3.1-8B-Instruct and opus-mt-en-ur, demonstrating that fine tuning allows the model to generalize better to unseen test sets. However, seamless-m4t-v2-large achieved the highest BLEU score, suggesting that massively multilingual pre-trained models remain competitive on general purpose translation tasks and also indicating that pre-training alone is insufficient for high-quality Urdu translations.

In the Tatoeba Challenge dataset, UrduLLaMA 1.0 continues to outperform Llama-3.1-8B-Instruct

and opus-mt-en-ur, demonstrating the impact of targeted fine tuning. However, seamless-m4t-v2-large achieves the best performance, likely due to its extensive multilingual training data. OpusMT shows improvement compared to the MT corpus dataset but remained behind UrduLLaMA 1.0 and seamless-m4t-v2-large, emphasizing the advantage of fine tuning over purely pretrained models.

These results highlight the importance of adapting general-purpose LLMs for specific languages. Fine tuning Llama-3.1-8B-Instruct on Urdu data has proven to be an effective approach, significantly improving translation quality over the base model. While seamless-m4t-v2-large remains a strong competitor due to its broad multilingual capabilities, UrduLLaMA 1.0’s strong performance on in-domain data suggests that domain-specific fine tuning is crucial for optimal results.

6.2 Human Evaluation

For the human evaluation of MT, we conducted a blind review. Two native Urdu linguists participated in this evaluation, where each was presented with an English source sentence along with translations from the four models, without any indication of model identity. They were instructed to select the translation they found most accurate and natural. A total of 300 test sentences were used with 100 sentences per dataset were randomly selected for manual evaluation. The preferences of both linguists were then aggregated to compare model performance. This evaluation provides valuable insight into the comparative quality of Urdu MT, reflecting the preferences of native Urdu experts in assessing translation accuracy and fluency summarized in Table 7 and interpreted in Figure 3. The difference in trends between human and automatic evaluation is due to the larger amount of testing data used in automatic evaluation.

Table 7: Human Evaluation of Different Models on Machine Translation Datasets

Model	MT Corpus	TICO-19	Tatoeba Challenge
UrduLLaMA 1.0	23	25.5	24.5
Llama-3.1-8B-Instruct	51	9.5	3
opus-mt-en-ur	1	7	10.5
seamless-m4t-v2-large	25	58	62

The results show that seamless-m4t-v2-large provided better translations overall, and it is because of its specialized nature for translation and large amount of multilingual training data. However,

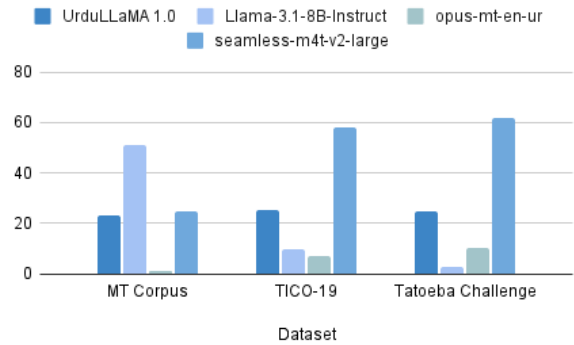


Figure 3: Human Evaluation of Different Models on MT Datasets

UrduLLaMA 1.0, while a more general model, showed improvements over its base version in TICO-19 and Tatoeba Challenge. This progress is promising, as it suggests that with further refinement and more diverse training data, UrduLLaMA 1.0 has the potential to rival specialized models. The observed improvements in UrduLLaMA 1.0 are encouraging and highlight its adaptability and potential for high-quality translation in broader contexts.

7 Conclusion

In this paper, we introduced UrduLLaMA 1.0, a model specifically tailored for the Urdu language. We presented a comprehensive data processing pipeline to curate and prepare high-quality training data, addressing the challenge of limited publicly available Urdu datasets. UrduLLaMA 1.0 was continuously pre-trained on a portion of this dataset using the Llama-3.1-8B-Instruct architecture, followed by instruction tuning to enable the model to understand and generate responses in a natural conversational format. This fine tuning leveraged a combination of the Alpaca and Dolly datasets. Furthermore, we performed fine tuning on a machine translation dataset to enhance the model’s translation capabilities. Our evaluation results demonstrate that UrduLLaMA 1.0 outperforms its base model, exhibiting substantial improvements in machine translation tasks for Urdu. This work represents a significant step toward advancing the performance of LLMs for low-resource languages like Urdu and sets a new benchmark for future research in this domain.

Limitations

Our model was trained on a limited portion of the Urdu dataset due to computational and cost constraints. As a result, it exhibits gaps in knowledge, particularly in capturing the nuances of Urdu culture and literature. While this version serves as a foundational step, its full potential can only be unlocked with access to a more extensive dataset to enhance its contextual understanding.

Additionally, detoxification processes were not incorporated during training, leaving the model uncensored and potentially prone to generating harmful or offensive content, which requires caution during deployment.

Evaluating LLMs also presents a significant challenge, especially for underrepresented languages like Urdu, due to the lack of standardized benchmarks outside the European linguistic domain. Although this paper introduces a tailored evaluation approach for Urdu machine translation, it remains limited in scope and does not comprehensively assess the model's performance across diverse applications.

Ethics Statement

This research utilizes publicly available, open-source datasets that do not contain personal or identifiable information, ensuring no associated risks. All work and ideas presented are original, with AI models used solely for grammatical correction and writing enhancement. Proper citations have been made for all models and datasets used. Moreover as a generative model, it retains the potential to generate harmful or offensive content if prompted inappropriately, underscoring the need for responsible usage and careful oversight during deployment.

References

- Julien Abadji, Pedro Ortiz Suarez, Laurent Romary, and Benoît Sagot. 2022. [Towards a cleaner document-oriented multilingual crawled corpus](#). In *Proceedings of the Thirteenth Language Resources and Evaluation Conference*, pages 4344–4355, Marseille, France. European Language Resources Association.
- Mohammad Amin Abbasi, Arash Ghafouri, Mahdi Firouzmandi, Hassan Naderi, and Behrouz Minaei Bidgoli. 2023. [Persianllama: Towards building first persian large language model](#).
- Antonios Anastasopoulos, Alessandro Cattelan, Zi-Yi Dou, Marcello Federico, Christian Federmann, Dmitry Genzel, Francisco Guzmán, Junjie Hu, Macduff Hughes, Philipp Koehn, Rosie Lazar, Will Lewis, Graham Neubig, Mengmeng Niu, Alp Öktem, Eric Paquin, Grace Tang, and Sylwia Tur. 2020. [TICO-19: the translation initiative for COvid-19](#). In *Proceedings of the 1st Workshop on NLP for COVID-19 (Part 2) at EMNLP 2020*, Online. Association for Computational Linguistics.
- Samee Arif, Abdul Hameed Azeemi, Agha Ali Raza, and Awais Athar. 2024. [Generalists vs. specialists: Evaluating large language models for Urdu](#). In *Findings of the Association for Computational Linguistics: EMNLP 2024*, pages 7263–7280, Miami, Florida, USA. Association for Computational Linguistics.
- Abhinand Balachandran. 2023. [Tamil-llama: A new tamil language model based on llama 2](#).
- Sidney Black, Stella Biderman, Eric Hallahan, Quentin Anthony, Leo Gao, Laurence Golding, Horace He, Connor Leahy, Kyle McDonell, Jason Phang, Michael Pieler, Usvsn Sai Prashanth, Shivanshu Purohit, Laria Reynolds, Jonathan Tow, Ben Wang, and Samuel Weinbach. 2022. [GPT-NeoX-20B: An open-source autoregressive language model](#). In *Proceedings of BigScience Episode #5 – Workshop on Challenges & Perspectives in Creating Large Language Models*, pages 95–136, virtual+Dublin. Association for Computational Linguistics.
- Hao Chen, Abdul Waheed, Xiang Li, Yidong Wang, Jindong Wang, Bhiksha Raj, and Marah I. Abdin. 2024a. [On the diversity of synthetic data and its impact on training large language models](#).
- Jie Chen, Zhipeng Chen, Jiapeng Wang, Kun Zhou, Yutao Zhu, Jinhao Jiang, Yingqian Min, Wayne Xin Zhao, Zhicheng Dou, Jiaxin Mao, Yankai Lin, Ruihua Song, Jun Xu, Xu Chen, Rui Yan, Zhewei Wei, Di Hu, Wenbing Huang, and Ji-Rong Wen. 2024b. [Towards effective and efficient continual pre-training of large language models](#).
- Seamless Communication, Loïc Barrault, Yu-An Chung, Mariano Cora Meglioli, David Dale, Ning Dong, Paul-Ambroise Duquenne, Hady Elsahar, Hongyu Gong, Kevin Heffernan, John Hoffman, Christopher Klaiber, Pengwei Li, Daniel Licht, Jean Maillard, Alice Rakotoarison, Kaushik Ram Sadagopan, Guillaume Wenzek, Ethan Ye, Bapi Akula, Peng-Jen Chen, Naji El Hachem, Brian Ellis, Gabriel Mejia Gonzalez, Justin Haaheim, Prangthip Hansanti, Russ Howes, Bernie Huang, Min-Jae Hwang, Hirofumi Inaguma, Somya Jain, Elahe Kalbassi, Amanda Kallet, Iliia Kulikov, Janice Lam, Daniel Li, Xutai Ma, Ruslan Mavlyutov, Benjamin Peloquin, Mohamed Ramadan, Abinesh Ramakrishnan, Anna Sun, Kevin Tran, Tuan Tran, Igor Tufanov, Vish Vogeti, Carleigh Wood, Yilin Yang, Bokai Yu, Pierre Andrews, Can Balioglu, Marta R. Costa-jussà, Onur Celebi, Maha Elbayad, Cynthia Gao, Francisco Guzmán, Justine Kao, Ann Lee, Alexandre Mourachko, Juan Pino, Sravya Popuri, Christophe Ropers, Safiyyah Saleem, Holger Schwenk, Paden Tomasello, Changhan Wang,

- Jeff Wang, and Skyler Wang. 2023. [Seamless4t: Massively multilingual & multimodal machine translation](#).
- Mike Conover, Matt Hayes, Ankit Mathur, Jianwei Xie, Jun Wan, Sam Shah, Ali Ghodsi, Patrick Wendell, Matei Zaharia, and Reynold Xin. 2023. [Free dolly: Introducing the world’s first truly open instruction-tuned llm](#).
- Yiming Cui, Ziqing Yang, and Xin Yao. 2024. [Efficient and effective text encoding for chinese llama and alpaca](#).
- Tri Dao. 2023. [Flashattention-2: Faster attention with better parallelism and work partitioning](#).
- Philipp Ennen, Po-Chun Hsu, Chan-Jan Hsu, Chang-Le Liu, Yen-Chen Wu, Yin-Hsiang Liao, Chin-Tung Lin, Da-Shan Shiu, and Wei-Yun Ma. 2023. [Extending the pre-training of bloom for improved support of traditional chinese: Models, methods and results](#).
- Julen Etxaniz, Oscar Sainz, Naiara Perez, Itziar Aldabe, German Rigau, Eneko Agirre, Aitor Ormazabal, Mikel Artetxe, and Aitor Soroa. 2024. [Latxa: An open language model and evaluation suite for basque](#).
- Jay Gala, Thanmay Jayakumar, Jaavid Aktar Husain, Aswath Kumar M, Mohammed Safi Ur Rahman Khan, Diptesh Kanojia, Ratish Puduppully, Mitesh M. Khapra, Raj Dabre, Rudra Murthy, and Anoop Kunchukuttan. 2024. [Airavata: Introducing hindi instruction-tuned llm](#).
- Dirk Goldhahn, Thomas Eckart, and Uwe Quasthoff. 2012. [Building large monolingual dictionaries at the Leipzig corpora collection: From 100 to 200 languages](#). In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC’12)*, pages 759–765, Istanbul, Turkey. European Language Resources Association (ELRA).
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurelien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Roziere, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny Livshits, Danny Wyatt, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Francisco Guzmán, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Govind Thattai, Graeme Nail, Gregoire Milon, Guan Pang, Guillem Cucurell, Hailey Nguyen, Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel Kloumann, Ishan Misra, Ivan Evtimov, Jack Zhang, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Karthik Prasad, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, Khalid El-Arini, Krithika Iyer, Kshitiz Malik, Kuenley Chiu, Kunal Bhalla, Kushal Lakhotia, Lauren Rantala-Yearly, Laurens van der Maaten, Lawrence Chen, Liang Tan, Liz Jenkins, Louis Martin, Lovish Madaan, Lubo Malo, Lukas Blecher, Lukas Landzaat, Luke de Oliveira, Madeline Muzzi, Mahesh Pasupuleti, Mannat Singh, Manohar Paluri, Marcin Kardas, Maria Tsimpoukelli, Mathew Oldham, Mathieu Rita, Maya Pavlova, Melanie Kambadur, Mike Lewis, Min Si, Mitesh Kumar Singh, Mona Hassan, Naman Goyal, Narjes Torabi, Nikolay Bashlykov, Nikolay Bogoychev, Niladri Chatterji, Ning Zhang, Olivier Duchenne, Onur Çelebi, Patrick Alrassy, Pengchuan Zhang, Pengwei Li, Petar Vasic, Peter Weng, Prajjwal Bhargava, Pratik Dubal, Praveen Krishnan, Punit Singh Koura, Puxin Xu, Qing He, Qingxiao Dong, Ragavan Srinivasan, Raj Ganapathy, Ramon Calderer, Ricardo Silveira Cabral, Robert Stojnic, Roberta Raileanu, Rohan Maheswari, Rohit Girdhar, Rohit Patel, Romain Sauvestre, Ronnie Polidoro, Roshan Sumbaly, Ross Taylor, Ruan Silva, Rui Hou, Rui Wang, Saghar Hosseini, Sahana Chennabasappa, Sanjay Singh, Sean Bell, Seohyun Sonia Kim, Sergey Edunov, Shaoliang Nie, Sharan Narang, Sharath Rapparthi, Sheng Shen, Shengye Wan, Shruti Bhosale, Shun Zhang, Simon Vandenhende, Soumya Batra, Spencer Whitman, Sten Sootla, Stephane Collot, Suchin Gururangan, Sydney Borodinsky, Tamar Herman, Tara Fowler, Tarek Sheasha, Thomas Georgiou, Thomas Scialom, Tobias Speckbacher, Todor Mihaylov, Tong Xiao, Ujjwal Karn, Vedanuj Goswami, Vibhor Gupta, Vignesh Ramanathan, Viktor Kerkez, Vincent Gonguet, Virginie Do, Vish Vogeti, Vitor Albiero, Vladan Petrovic, Weiwei Chu, Wenhan Xiong, Wenyin Fu, Whitney Meers, Xavier Martinet, Xiaodong Wang, Xiaofang Wang, Xiaoqing Ellen Tan, Xide Xia, Xinfeng Xie, Xuchao Jia, Xuwei Wang, Yaelle Goldschlag, Yashesh Gaur, Yasmine Babaei, Yi Wen, Yiwen Song, Yuchen Zhang, Yue Li, Yuning Mao, Zacharie Delpierre Coudert, Zheng Yan, Zhengxing Chen, Zoe Papanikos, Aaditya Singh, Aayushi Srivastava, Abha Jain, Adam Kelsey, Adam Shajnfeld, Adithya Gangidi, Adolfo Victoria, Ahuva Goldstand, Ajay Menon, Ajay Sharma, Alex Boesenberg, Alexei Baevski, Allie Feinstein, Amanda Kallet, Amit Sangani, Amos Teo, Anam Yunus, Andrei Lupu, Andres Alvarado, Andrew Caples, Andrew Gu, Andrew Ho, Andrew Poulton, Andrew Ryan, Ankit Ramchandani, Annie Dong, Annie Franco, Anuj Goyal, Aparajita Saraf, Arkabandhu Chowdhury, Ashley Gabriel, Ashwin Bharambe, Assaf Eisenman, Azadeh Yaz-

- dan, Beau James, Ben Maurer, Benjamin Leonhardi, Bernie Huang, Beth Loyd, Beto De Paola, Bhargavi Paranjape, Bing Liu, Bo Wu, Boyu Ni, Braden Hancock, Bram Wasti, Brandon Spence, Brani Stojkovic, Brian Gamido, Britt Montalvo, Carl Parker, Carly Burton, Catalina Mejia, Ce Liu, Changan Wang, Changkyu Kim, Chao Zhou, Chester Hu, Ching-Hsiang Chu, Chris Cai, Chris Tindal, Christoph Feichtenhofer, Cynthia Gao, Damon Civin, Dana Beaty, Daniel Kreymer, Daniel Li, David Adkins, David Xu, Davide Testuggine, Delia David, Devi Parikh, Diana Liskovich, Didem Foss, Dingkan Wang, Duc Le, Dustin Holland, Edward Dowling, Eissa Jamil, Elaine Montgomery, Eleonora Presani, Emily Hahn, Emily Wood, Eric-Tuan Le, Erik Brinkman, Esteban Arcaute, Evan Dunbar, Evan Smothers, Fei Sun, Felix Kreuk, Feng Tian, Filippos Kokkinos, Firat Ozgenel, Francesco Caggioni, Frank Kanayet, Frank Seide, Gabriela Medina Florez, Gabriella Schwarz, Gada Badeer, Georgia Swee, Gil Halpern, Grant Herman, Grigory Sizov, Guangyi, Zhang, Guna Lakshminarayanan, Hakan Inan, Hamid Shojanazeri, Han Zou, Hannah Wang, Hanwen Zha, Haroun Habeeb, Harrison Rudolph, Helen Suk, Henry Aspegren, Hunter Goldman, Hongyuan Zhan, Ibrahim Damlaj, Igor Molybog, Igor Tufanov, Ilias Leontiadis, Irina-Elena Veliche, Itai Gat, Jake Weissman, James Geboski, James Kohli, Janice Lam, Japhet Asher, Jean-Baptiste Gaya, Jeff Marcus, Jeff Tang, Jennifer Chan, Jenny Zhen, Jeremy Reizenstein, Jeremy Teboul, Jessica Zhong, Jian Jin, Jingyi Yang, Joe Cummings, Jon Carvill, Jon Shepard, Jonathan McPhie, Jonathan Torres, Josh Ginsburg, Junjie Wang, Kai Wu, Kam Hou U, Karan Saxena, Kartikay Khandwal, Katayoun Zand, Kathy Matosich, Kaushik Veeraraghavan, Kelly Michelena, Keqian Li, Kiran Jagadeesh, Kun Huang, Kunal Chawla, Kyle Huang, Lailin Chen, Lakshya Garg, Lavender A, Leandro Silva, Lee Bell, Lei Zhang, Liangpeng Guo, Licheng Yu, Liron Moshkovich, Luca Wehrstedt, Madian Khabsa, Manav Avalani, Manish Bhatt, Martynas Mankus, Matan Hasson, Matthew Lennie, Matthias Reso, Maxim Groshev, Maxim Naumov, Maya Lathi, Meghan Keneally, Miao Liu, Michael L. Seltzer, Michal Valko, Michelle Restrepo, Mihir Patel, Mik Vyatskov, Mikayel Samvelyan, Mike Clark, Mike Macey, Mike Wang, Miquel Jubert Hermoso, Mo Metanat, Mohammad Rastegari, Munish Bansal, Nandhini Santhanam, Natascha Parks, Natasha White, Navyata Bawa, Nayan Singhal, Nick Egebo, Nicolas Usunier, Nikhil Mehta, Nikolay Pavlovich Laptev, Ning Dong, Norman Cheng, Oleg Chernoguz, Olivia Hart, Omkar Salpekar, Ozlem Kalinli, Parkin Kent, Parth Parekh, Paul Saab, Pavan Balaji, Pedro Rittner, Philip Bontrager, Pierre Roux, Piotr Dollar, Polina Zvyagina, Prashant Ratanchandani, Pritish Yuvraj, Qian Liang, Rachad Alao, Rachel Rodriguez, Rafi Ayub, Raghotham Murthy, Raghu Nayani, Rahul Mitra, Rangaprabhu Parthasarathy, Raymond Li, Rebeccah Hogan, Robin Battey, Rocky Wang, Russ Howes, Ruty Rinott, Sachin Mehta, Sachin Siby, Sai Jayesh Bondu, Samyak Datta, Sara Chugh, Sara Hunt, Sargun Dhillon, Sasha Sidorov, Satadru Pan, Saurabh Mahajan, Saurabh Verma, Seiji Yamamoto, Sharadh Ramaswamy, Shaun Lindsay, Shaun Lindsay, Sheng Feng, Shenghao Lin, Shengxin Cindy Zha, Shishir Patil, Shiva Shankar, Shuqiang Zhang, Shuqiang Zhang, Sinong Wang, Sneha Agarwal, Soji Sajuyigbe, Soumith Chintala, Stephanie Max, Stephen Chen, Steve Kehoe, Steve Satterfield, Sudarshan Govindaprasad, Sumit Gupta, Summer Deng, Sungmin Cho, Sunny Virk, Suraj Subramanian, Sy Choudhury, Sydney Goldman, Tal Remez, Tamar Glaser, Tamara Best, Thilo Koehler, Thomas Robinson, Tianhe Li, Tianjun Zhang, Tim Matthews, Timothy Chou, Tzook Shaked, Varun Vontimitta, Victoria Ajayi, Victoria Montanez, Vijai Mohan, Vinay Satish Kumar, Vishal Mangla, Vlad Ionescu, Vlad Poenaru, Vlad Tiberiu Mihailescu, Vladimir Ivanov, Wei Li, Wenchen Wang, Wenwen Jiang, Wes Bouaziz, Will Constable, Xiaocheng Tang, Xiaojuan Wu, Xiaolan Wang, Xilun Wu, Xinbo Gao, Yaniv Kleinman, Yanjun Chen, Ye Hu, Ye Jia, Ye Qi, Yenda Li, Yilin Zhang, Ying Zhang, Yossi Adi, Youngjin Nam, Yu, Wang, Yu Zhao, Yuchen Hao, Yundi Qian, Yunlu Li, Yuzi He, Zach Rait, Zachary DeVito, Zef Rosnbrick, Zhaoduo Wen, Zhenyu Yang, Zhiwei Zhao, and Zhiyu Ma. 2024. [The llama 3 herd of models](#).
- Tahmid Hasan, Abhik Bhattacharjee, Md Saiful Islam, Kazi Samin, Yuan-Fang Li, Yong-Bin Kang, M. Sohel Rahman, and Rifat Shahriyar. 2021. [XL-sum: Large-scale multilingual abstractive summarization for 44 languages](#).
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2021. [Lora: Low-rank adaptation of large language models](#).
- Shengchao Hu, Li Shen, Ya Zhang, Yixin Chen, and Dacheng Tao. 2023. [On transforming reinforcement learning by transformer: The development trajectory](#).
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, Léo Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. 2023. [Mistral 7b](#).
- Nikhil Kandpal, Eric Wallace, and Colin Raffel. 2022. [Deduplicating training data mitigates privacy risks in language models](#).
- Mahwiz Khalil. 2024. [Urdu alpaca filtered dataset](#). Accessed: 2025-02-07.
- Hugo Laurençon, Lucile Saulnier, Thomas Wang, Christopher Akiki, Albert Villanova del Moral, Teven Le Scao, Leandro Von Werra, Chenghao Mou, Eduardo González Ponferrada, Huu Nguyen, Jörg Froberg, Mario Šaško, Quentin Lhoest, Angelina McMillan-Major, Gerard Dupont, Stella Biderman, Anna Rogers, Loubna Ben allal, Francesco De Toni, Giada Pistilli, Olivier Nguyen, Somaieh

- Nikpoor, Maraim Masoud, Pierre Colombo, Javier de la Rosa, Paulo Villegas, Tristan Thrush, Shayne Longpre, Sebastian Nagel, Leon Weber, Manuel Muñoz, Jian Zhu, Daniel Van Strien, Zaid Alyafeai, Khalid Almubarak, Minh Chien Vu, Itziar Gonzalez-Dios, Aitor Soroa, Kyle Lo, Manan Dey, Pedro Ortiz Suarez, Aaron Gokaslan, Shamik Bose, David Adelani, Long Phan, Hieu Tran, Ian Yu, Suhas Pai, Jenny Chim, Violette Lepercq, Suzana Ilic, Margaret Mitchell, Sasha Alexandra Luccioni, and Yacine Jernite. 2022. [The bigscience roots corpus: A 1.6tb composite multilingual dataset](#). In *Advances in Neural Information Processing Systems*, volume 35, pages 31809–31826. Curran Associates, Inc.
- Katherine Lee, Daphne Ippolito, Andrew Nystrom, Chiyuan Zhang, Douglas Eck, Chris Callison-Burch, and Nicholas Carlini. 2022. [Deduplicating training data makes language models better](#). In *Proceedings of the Machine Learning Research (PMLR)*, pages 8424–8445, Dublin, Ireland. Association for Computational Linguistics.
- W. Lian, B. Goodson, E. Pentland, A. Cook, C. Vong, and Teknium. 2023. [Openorca: An open dataset of gpt-augmented flan reasoning traces](#).
- Yen-Ting Lin and Yun-Nung Chen. 2023. [Taiwan llm: Bridging the linguistic divide with a culturally aligned language model](#).
- Yuting Lu, Chao Sun, Yuchao Yan, Hegong Zhu, Dongdong Song, Qing Peng, Li Yu, Xiaozheng Wang, Jian Jiang, and Xiaolong Ye. 2024. [A comprehensive survey of datasets for large language model evaluation](#). In *2024 5th Information Communication Technologies Conference (ICTC)*, pages 330–336.
- Shahzad Nazir, Muhammad Asif, Mariam Rehman, and Shahbaz Ahmad. 2024. [Machine learning based framework for fine-grained word segmentation and enhanced text normalization for low resourced language](#). *PeerJ Computer Science*, 10:e1704.
- Quan Nguyen, Huy Pham, and Dung Dao. 2023. [Vinalama: Llama-based vietnamese foundation model](#).
- Thuat Nguyen, Chien Van Nguyen, Viet Dac Lai, Hieu Man, Nghia Trung Ngo, Franck Dernoncourt, Ryan A. Rossi, and Thien Huu Nguyen. 2024a. [CulturaX: A cleaned, enormous, and multilingual dataset for large language models in 167 languages](#). In *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 4226–4237, Torino, Italia. ELRA and ICCL.
- Xuan-Phi Nguyen, Wenxuan Zhang, Xin Li, Mahani Aljunied, Zhiqiang Hu, Chenhui Shen, Yew Ken Chia, Xingxuan Li, Jianyu Wang, Qingyu Tan, Liying Cheng, Guanzheng Chen, Yue Deng, Sen Yang, Chaoqun Liu, Hang Zhang, and Lidong Bing. 2024b. [SeaLLMs - large language models for Southeast Asia](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 3: System Demonstrations)*, pages 294–304, Bangkok, Thailand. Association for Computational Linguistics.
- OpenAI. 2022. [Introducing chatgpt](https://openai.com/blog/chatgpt). <https://openai.com/blog/chatgpt>.
- Pedro Javier Ortiz Suárez, Laurent Romary, and Benoît Sagot. 2020. [A monolingual approach to contextualized word embeddings for mid-resource languages](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1703–1714, Online. Association for Computational Linguistics.
- Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. 2022. [Training language models to follow instructions with human feedback](#).
- Guilherme Penedo, Quentin Malartic, Daniel Hesslow, Ruxandra Cojocaru, Alessandro Cappelli, Hamza Alobeidli, Baptiste Pannier, Ebtesam Almazrouei, and Julien Launay. 2023. [The refinedweb dataset for falcon llm: Outperforming curated corpora with web data, and web data only](#).
- Samyam Rajbhandari, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. 2020. [Zero: Memory optimizations toward training trillion parameter models](#). In *Proceedings of the IEEE Conference on High Performance Computing, Networking, Storage, and Analysis*.
- Jeff Rasley, Samyam Rajbhandari, Olatunji Ruwase, and Yuxiong He. 2020. [Deepspeed: System optimizations enable training deep learning models with over 100 billion parameters](#). In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining, KDD '20*, page 3505–3506, New York, NY, USA. Association for Computing Machinery.
- Gene Ruesbamen. 2024. [Alpacadatanet](#). Accessed: 2025-02-07.
- Aaqib Saeed. 2023. [Databricks dolly 15k urdu dataset](https://huggingface.co/datasets/aaqibsaeed/databricks-dolly-15k-ur). <https://huggingface.co/datasets/aaqibsaeed/databricks-dolly-15k-ur>. Accessed: 2025-02-07.
- SarvamAI. 2023. [Openhathi series: An approach to build bilingual llms frugally](#). <https://www.sarvam.ai/blogs/openhathi-series>.
- Hafiz Muhammad Shafiq, Bilal Tahir, and Muhammad Amir Mehmood. 2020. [Towards building a urdu language corpus using common crawl](#). *Journal of Intelligent & Fuzzy Systems*, 39(2):2445–2455.
- Munief Hassan Tahir, Sana Shams, Layba Fiaz, Farah Adeeba, and Sarmad Hussain. 2025. [Benchmarking the performance of pre-trained llms across urdu nlp tasks](#). In *Proceedings of the First Workshop on*

- Challenges in Processing South Asian Languages (CHI PSAL 2025)*, pages 17–34, Lahore, Pakistan. International Committee on Computational Linguistics.
- Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yannick Dubois, Xi Li, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. 2023. Stanford alpaca: An instruction-following llama model. https://github.com/tatsu-lab/stanford_alpaca.
- Jörg Tiedemann. 2020. The tatoeba translation challenge – realistic data sets for low resource and multi-lingual MT. In *Proceedings of the Fifth Conference on Machine Translation*, pages 1174–1182, Online. Association for Computational Linguistics.
- Jörg Tiedemann and Santhosh Thottingal. 2020. OPUS-MT – building open translation services for the world. In *Proceedings of the 22nd Annual Conference of the European Association for Machine Translation*, pages 479–480, Lisboa, Portugal. European Association for Machine Translation.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajwal Bhargava, Shruiti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. *Llama 2: Open foundation and fine-tuned chat models*.
- James Vo. 2024. *Vi-mistral-x: Building a vietnamese language model with advanced continual pre-training*.
- Guillaume Wenzek, Marie-Anne Lachaux, Alexis Conneau, Vishrav Chaudhary, Francisco Guzmán, Armand Joulin, and Edouard Grave. 2020. *CCNet: Extracting high quality monolingual datasets from web crawl data*. In *Proceedings of the Twelfth Language Resources and Evaluation Conference*, pages 4003–4012, Marseille, France. European Language Resources Association.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. 2020. *Transformers: State-of-the-art natural language processing*. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online. Association for Computational Linguistics.
- Sha Yuan, Hanyu Zhao, Zhengxiao Du, Ming Ding, Xiao Liu, Yukuo Cen, Xu Zou, Zhilin Yang, and Jie Tang. 2021. *Wudaocorpora: A super large-scale chinese corpora for pre-training language models*. *AI Open*, 2:65–68.
- Wei Zeng, Xiaozhe Ren, Teng Su, Hui Wang, Yi Liao, Zhiwei Wang, Xin Jiang, ZhenZhang Yang, Kaisheng Wang, Xiaoda Zhang, Chen Li, Ziyang Gong, Yifan Yao, Xinjing Huang, Jun Wang, Jianfeng Yu, Qi Guo, Yue Yu, Yan Zhang, Jin Wang, Hengtao Tao, Dasen Yan, Zexuan Yi, Fang Peng, Fangqing Jiang, Han Zhang, Lingfeng Deng, Yehong Zhang, Zhe Lin, Chao Zhang, Shaojie Zhang, Mingyue Guo, Shanzhi Gu, Gaojun Fan, Yaowei Wang, Xuefeng Jin, Qun Liu, and Yonghong Tian. 2021. *Pangu-alpha: Large-scale autoregressive pretrained chinese language models with auto-parallel computation*.
- Peiyuan Zhang, Guangtao Zeng, Tianduo Wang, and Wei Lu. 2024. *Tinyllama: An open-source small language model*.
- Zhe Zhao, Yudong Li, Cheng Hou, Jing Zhao, Rong Tian, Weijie Liu, Yiren Chen, Ningyuan Sun, Haoyan Liu, Weiyan Mao, Han Guo, Weigang Gou, Taiqiang Wu, Tao Zhu, Wenhao Shi, Chen Chen, Shan Huang, Sihong Chen, Liqun Liu, Feifei Li, Xiaoshuai Chen, Xingwu Sun, Zhanhui Kang, Xiaoyong Du, Linlin Shen, and Kimmo Yan. 2023. *TencentPretrain: A scalable and flexible toolkit for pre-training models of different modalities*. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 3: System Demonstrations)*, pages 217–225, Toronto, Canada. Association for Computational Linguistics.