

Steering Language Model to Stable Speech Emotion Recognition via Contextual Perception and Chain of Thought

Zhixian Zhao^{1*}, Xinfu Zhu^{1*}, Xinsheng Wang², Shuiyuan Wang¹,
Xuelong Geng¹, Wenjie Tian¹, Lei Xie^{1†}

¹Audio, Speech and Language Processing Group (ASLP@NPU),
School of Computer Science, Northwestern Polytechnical University, Xi'an, China

²Hong Kong University of Science and Technology, Hong Kong, China

{zxzhao, xfzhu}@mail.nwpu.edu.cn, w.xinshawn@gmail.com,

{wangshuiyuan, xlgeng, twj}@mail.nwpu.edu.cn, lxie@nwpu.edu.cn

Abstract

Large-scale audio language models (ALMs), such as Qwen2-Audio, are capable of comprehending diverse audio signal, performing audio analysis and generating textual responses. However, in speech emotion recognition (SER), ALMs often suffer from hallucinations, resulting in misclassifications or irrelevant outputs. To address these challenges, we propose **C²SER**, a novel ALM designed to enhance the stability and accuracy of SER through Contextual perception and Chain of Thought (CoT). C²SER integrates the Whisper encoder for semantic perception and Emotion2Vec-S for acoustic perception, where Emotion2Vec-S extends Emotion2Vec with semi-supervised learning to enhance emotional discrimination. Additionally, C²SER employs a CoT approach, processing SER in a step-by-step manner while leveraging speech content and speaking styles to improve recognition. To further enhance stability, C²SER introduces self-distillation from explicit CoT to implicit CoT, mitigating error accumulation and boosting recognition accuracy. Extensive experiments show that C²SER outperforms existing popular ALMs, such as Qwen2-Audio and SECap, delivering more stable and precise emotion recognition. We release the training code, checkpoints, and test sets to facilitate further research¹.

1 Introduction

Audio is a multifaceted medium for communication, conveying speech prosody, vocal tone, and paralinguistic cues through its acoustic features. Large-scale audio-language models (ALMs) (Wang et al., 2024) have demonstrated substantial progress in understanding diverse forms of audio signals, which is crucial for advancing Artificial General Intelligence (AGI). With increasing data availability,

*Equal contribution.

†Corresponding authors.

¹Hugging Face Collection, GitHub Repository

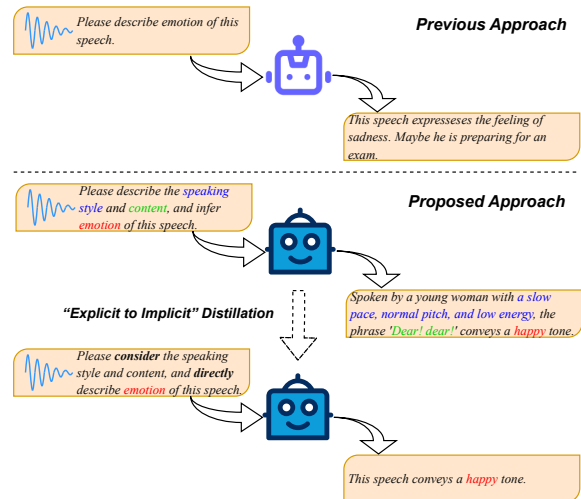


Figure 1: Overview of C²SER. C²SER overcomes the issue of hallucinations through contextual perception and chain of thought.

computational power, and model size, significant strides have been made in speech signal comprehension, analysis, and reasoning, leading to more natural and human-like text responses.

Speech emotions are crucial in communication, influencing how individuals interact and respond through variations in tone, rhythm, and intensity. However, ALMs still face challenges in speech emotion recognition (SER) (Bellver-Soler et al., 2024; Akman et al., 2025), which aims to accurately detect emotional states from spoken language. Speech emotions are inherently complex, encompassing diverse affective states, and their precise recognition is essential for enhancing communication effectiveness across diverse domains. Despite advancements in general audio understanding, ALMs often struggle with hallucinations in the SER task due to the intricate context of speech. These hallucinations lead to misclassifications, where the model may incorrectly interpret the emotional tone or generate irrelevant responses, undermining the model’s reliability in real-world appli-

cations.

In this work, we address the hallucination problem in ALM-based SER by incorporating detailed speech information and expanding the model’s reasoning length and depth. As illustrated in Figure 1, we introduce C²SER, a novel ALM designed to improve both the stability and accuracy of SER. C²SER integrates two critical components: contextual perception and a chain of thought (CoT), leveraging both speech content and speaking styles (e.g., speaking rate, pitch, energy) to facilitate emotion recognition. The encoder of Whisper (Radford et al., 2023), trained for automatic speech recognition (ASR), speech translation, and language identification, is employed for semantic perception. For acoustic perception, we introduce Emotion2Vec-S, a refined extension of Emotion2Vec (Ma et al., 2024b), designed to enhance the extraction of emotion-related information from audio. Emotion2Vec-S incorporates semi-supervised contrastive loss at the category level, improving emotional discrimination by combining self-supervised and semi-supervised learning.

Recognizing that speech emotions are influenced by both speech content and speaking styles, such as aggressive speech characterized by a loud volume potentially indicating anger, C²SER employs a CoT (Guo et al., 2025) training approach to incentivize reasoning capability. This approach decomposes the SER task into sequential steps: first perceiving speech content and speaking style, followed by emotion inference, with the assistance of prior context. This structured method imitates human thinking and reduces the possibility of hallucinations. To further enhance stability and prevent error propagation, especially in longer thought chains, C²SER introduces self-distillation, transferring knowledge from explicit to implicit CoT. This process helps minimize error accumulation, improving the model’s overall performance.

We validate the effectiveness of C²SER through extensive experiments using multiple speech corpora and compare C²SER with state-of-the-art models, including SECap (Xu et al., 2024) and Qwen2-Audio (Chu et al., 2024). To better simulate real-world context, we introduce a new SER test set, Emo-Emilia. Emo-Emilia is created through an automated labeling approach on the in-the-wild Emilia corpus and manually verified to ensure quality and diversity across various scenarios. Our experimental results demonstrate that C²SER significantly outperforms existing models on public test

sets and Emo-Emilia in terms of weighted accuracy (WA), unweighted accuracy (UA), and Macro F1 score, while notably reducing hallucination-related errors. These findings highlight the potential of C²SER to provide stable and reliable emotion recognition in diverse contexts.

The key contributions of our work are summarized as follows:

- We propose C²SER, a novel ALM that integrates contextual perception and chain of thought to mitigate hallucinations in SER.
- We introduce Emotion2Vec-S, working as the acoustic perception module in C²SER, which enhances the original Emotion2Vec model by incorporating semi-supervised contrastive loss at the category level, greatly improving emotional discrimination.
- We conduct comprehensive experiments and introduce a new emotional speech test set Emo-Emilia. The results demonstrate that C²SER outperforms several state-of-the-art ALMs, achieving a more stable SER.
- We release the code, checkpoints, and test sets to promote further research in the field of SER.

2 Related Work

2.1 Audio Language Model

Large language models (LLMs) have made significant strides in natural language processing (NLP), showcasing remarkable capabilities across a variety of tasks (Zhao et al., 2023). As audio is a critical medium of communication in human interactions and human-computer engagement, recent research has extended LLMs to integrate the audio modality, leading to the development of audio-language models (ALMs) (Wang et al., 2024). ALMs tackle tasks such as audio event detection, audio captioning, and speech recognition, serving as a cornerstone for comprehensive audio understanding (Chu et al., 2023).

With the rapid advancements in both LLMs and the audio domain, ALMs have gained significant attention for their powerful general audio comprehension abilities. A typical ALM architecture consists of three core components: an audio encoder for modality-specific feature extraction, an LLM for text generation, and a projection layer to bridge the gap between the audio and text modalities. In

addition to these foundational components, several studies have focused on refining ALM performance through innovative model architectures. For example, SALMONN (Tang et al., 2024) utilizes dual encoders to separately process speech and non-speech audio signals, effectively mitigating potential conflicts between different types of audio input. Other approaches have explored training strategies to enhance ALMs’ capabilities, with Qwen2-Audio (Chu et al., 2024) being a notable example. This model employs a comprehensive training pipeline that includes pretraining, supervised fine-tuning (SFT), and reinforcement learning from human feedback (RLHF).

While significant progress has been made in improving the generalization and intelligence of ALMs, their performance in speech emotion recognition (SER) remains unsatisfactory, primarily due to hallucinations. SER is particularly challenging because speech emotions are inherently complex and context-dependent (Yang et al., 2024), making it difficult for ALMs to interpret emotional states accurately. In many cases, the model may be misled by the content of the speech, leading to incorrect classifications or irrelevant responses.

2.2 Speech Emotion Recognition

Speech emotion is a key form of paralinguistic information that effectively conveys the speaker’s intent. Speech Emotion Recognition (SER) aims to automatically identify the emotional state of a speaker from their speech. The typical SER pipeline consists of three stages: speech preprocessing, feature extraction, and emotion classification (Khare et al., 2024). Early studies relied on manually engineered feature sets, such as MFCC, and simple neural network architectures like CNN and RNN, achieving basic performance on laboratory datasets (e.g., CREMA-D (Cao et al., 2014), IEMOCAP (Busso et al., 2008)).

To address the challenge of recognizing diverse emotional expressions in real-world environments, recent research has shifted towards self-supervised learning (SSL) models (Naini et al., 2024; Zhu and Sato, 2023), known for their powerful generalization capabilities. SSL models are trained on large-scale unlabeled speech data in an unsupervised manner, allowing them to extract rich, generalizable representations directly from raw speech waveforms. Popular SSL models, such as HuBERT (Hsu et al., 2021) and wav2vec 2.0 (Baevski et al., 2020), have demonstrated significant effec-

tiveness in extracting emotional features, serving as robust encoders for SER tasks. Additionally, researchers have explored emotion-specific SSL models designed to capture emotion-relevant features. A popular approach involves fine-tuning SSL models on emotionally labeled data for specific emotional tasks. A prominent example is Emotion2Vec (Ma et al., 2024b), which is pre-trained on emotional data through self-supervised online distillation. Emotion2Vec uses both utterance-level and frame-level loss as supervision, demonstrating remarkable improvements in emotion recognition across different languages.

Despite the advancements made in SER, mainstream emotional SSL models typically employ single-level constraints, such as utterance-level or category-level constraints. While Emotion2Vec combines utterance-level and frame-level losses that are actually constraints at the utterance level, it still struggles to distinguish similar emotional expressions, such as fear and sadness, potentially leading to confusion in emotion recognition.

3 Method

3.1 Framework Overview

C²SER is designed to mitigate hallucinations in speech emotion recognition (SER) and to deliver stable emotion recognition. As illustrated in Figure 2, the C²SER architecture consists of two primary components: a contextual perception module and a text-based large language model (LLM). The contextual perception module extracts detailed information regarding both the semantic and acoustic aspects, which the text LLM subsequently leverages via a chain-of-thought process to make final predictions.

More specifically, the contextual perception module comprises the following elements: a Whisper (Radford et al., 2023) encoder for semantic perception, Emotion2Vec-S for acoustic perception, and a connection model designed to align the feature dimensions with those required by the text LLM. Formally, given a speech waveform X , the Whisper encoder extract semantic representations $S = s_1, s_2, \dots, s_N$ and the Emotion2Vec-S extracts acoustic representations $A = a_1, a_2, \dots, a_M$ from X . Let $Y = y_1, y_2, \dots, y_T$ be the text descriptions and $P = p_1, p_2, \dots, p_L$ be the text prompts. The text LLM, parameterized by θ , takes S and A as input and predicts Y in an autoregressive manner. The overall process can be formulated as a condi-

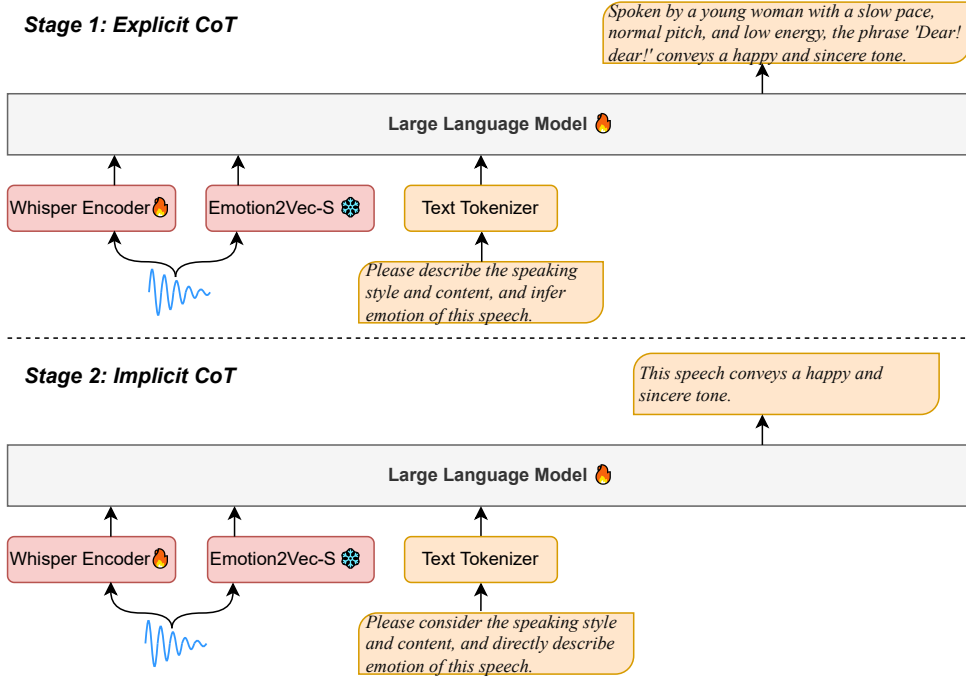


Figure 2: Detailed structure of C²SER. C²SER leverages speech content and speaking styles through chain-of-thought to assist speech emotion recognition.

tional probability:

$$P(Y|S, A, P; \theta) = \prod_{t=1}^T P(y_t | s_1, \dots, s_N, a_1, \dots, a_M, p_1, \dots, p_L, y_1, \dots, y_{t-1}; \theta). \quad (1)$$

3.2 Contextual Perception

Our contextual perception module is designed to extract both semantic and acoustic representations from speech, and it comprises a Whisper encoder and Emotion2Vec-S. Specifically, C²SER employs the Whisper-Medium model as its speech encoder. This model features two one-dimensional convolutional layers with a 2× downsampling factor, followed by 24 Transformer layers. Since Whisper is a supervised model trained for speech recognition and translation, its encoded representations S capture rich semantic information.

Emotion2Vec-S is built upon the universal speech emotion representation model, Emotion2Vec. Emotion2Vec follows the architecture of data2vec (Baevski et al., 2022), consisting of several standard Transformer blocks, and is pre-trained on open-source, unlabeled emotion data using self-supervised online distillation. It combines an utterance-level loss to capture global emotional features with a frame-level loss to capture contextual emotion nuances. Emotion2Vec has demon-

strated superior performance compared to previous state-of-the-art pre-trained universal models and emotion specialist models, which often require only the training of linear layers for the SER task on emotional speech corpora. However, because Emotion2Vec focuses solely on the emotional expressions within individual utterances, it potentially struggles to distinguish similar utterances that express different emotions, such as fear and sadness.

With the above observation, Emotion2Vec-S introduces a coarse-level supervision to Emotion2Vec. Vanilla Emotion2Vec expands data2vec.0 (Baevski et al., 2023) with a fixed number of utterance tokens and is trained with \mathcal{L}_{Utt} to learn the global emotion and \mathcal{L}_{Frm} to learn the context emotion. Inspired by CLIP (Radford et al., 2021), Emotion2Vec-S extends Emotion2Vec with a category-level contrastive loss \mathcal{L}_{Cate} . Specifically, let G be the global embedding of Emotion2Vec after average pooling. Emotion2Vec-S applies a contrastive loss on G by treating embeddings from utterances of the same emotion category as positive pairs and those from different categories as negative pairs. The model calculates cosine similarities between these embeddings, maximizing the similarity of positive pairs while minimizing that of negative pairs. The overall loss function for Emotion2Vec-S is formulated as follows:

$$\mathcal{L}_{e2v} = \mathcal{L}_{Frm} + \lambda_{utt}\mathcal{L}_{Utt} + \lambda_{cate}\mathcal{L}_{Cate}, \quad (2)$$

where λ_{utt} and λ_{cate} are hyperparameters that balance the contributions of the utterance-level and category-level losses, respectively.

3.3 Explicit Chain-of-Thought

Explicit CoT reasoning enhances the ability of LLMs to handle specific tasks by detailing intermediate steps, thereby guiding the model through its reasoning process (Yue et al., 2024; Yu et al., 2024). In C²SER, explicit CoT is employed to sequentially address the SER task. After the contextual perception module extracts detailed information regarding speech content and speaking styles, C²SER first generates speech transcripts and descriptive captions of speaking styles and then infers the final speech emotion based on the aggregated context.

Explicit CoT data. We leverage signal processing tools and text LLMs to construct training data for explicit CoT. Given an emotional speech corpus that includes text transcripts and emotion labels, we extract key attributes—such as speaking rate, pitch, and energy—and map these to discrete levels (e.g., low, medium, high). Next, we employ the GLM-4-9B-Chat model (Zeng et al., 2024) to generate a detailed reasoning path that combines text transcripts, extracted speech attributes, and corresponding emotion labels. This reasoning path serves as the explicit CoT training data.

Explicit CoT training. In the explicit CoT training stage, the text LLM is integrated with the contextual perception module, and the entire system is fine-tuned using the explicit CoT data. To further improve the reasoning capabilities of the model, structured text prompts are used, as illustrated in Figure 2 (stage 1), to guide the model through each intermediate reasoning step. As a result, after this stage of training, C²SER is able to recognize speech content and speaking styles, and subsequently infer the final emotion categories based on the complete speech context.

3.4 Implicit Chain-of-Thought

Although the explicit CoT approach enables C²SER to address SER step by step using detailed intermediate representations of speech content and speaking styles, it also introduces inefficiencies during inference and increases the risk of error accumulation (Yuen et al., 2024; Deng et al., 2024). To overcome these limitations, we propose a self-distillation strategy that transitions C²SER from explicit CoT to implicit CoT.

Implicit CoT Data. At this stage, we continue

to use the same speech dataset as used in the explicit CoT training; however, the processing of the reasoning path is simplified. Rather than generating detailed intermediate descriptions, the GLM-4-9B-Chat model directly produces descriptions only in terms of emotion labels for each speech segment.

Implicit CoT Training. During this phase, we fine-tune the model on a combination of explicit and implicit CoT data. To ensure that the model maintains its ability to infer emotion categories from rich speech context during the self-distillation process, we gradually transition the training data from explicit to implicit CoT data using a linear schedule. Furthermore, we employ customized text prompts, illustrated in Figure 2 (stage 2), to guide the model reasoning process under the implicit framework. This approach enables C²SER to efficiently generate accurate emotion predictions while addressing the inefficiencies and error propagation associated with explicit CoT.

4 Experiment Setup

4.1 Datasets

The statistics of the training corpora are summarized in Table 1, which covers seven emotions: anger, happiness, neutral, sadness, surprise, disgust and fear. We utilize six open-source corpora that contain both emotion and text labels, including IEMOCAP (Busso et al., 2008), MELD (Poria et al., 2019), MSP-Podcast (Martinez-Lucas et al., 2020), BIIC-Podcast (Upadhyay et al., 2023), ESD (Zhou et al., 2021), and MER2024 (Lian et al., 2024), alongside an internal corpus containing text labels for model training. To obtain emotion labels for the internal corpus, we apply using an efficient automated labeling method using Emotion2Vec² for annotating speech emotions and GLM-4-9B-Chat³ (Zeng et al., 2024) for annotating text emotions. We then take the intersection of the two annotations to ensure consistency and reliability. Additionally, we incorporate an internal speech corpus containing approximately 2400 hours of unlabeled data during the training of Emotion2Vec. The distributions of each emotion and the label construction for both explicit and implicit CoT are provided in Appendix A and Appendix B.

To comprehensively evaluate the model’s performance in downstream tasks, we follow the

²https://huggingface.co/Emotion2Vec/emotion2vec_plus_large

³<https://huggingface.co/THUDM/glm-4-9b-chat>

Table 1: Speech corpora used to train C²SER.

Dataset	Source	Lang	#Emotion	#Utterances	~ #Hours
IEMOCAP (Busso et al., 2008)	Act	English	5	5331	7.0
ESD (Zhou et al., 2021)	Act	Mix	5	31500	26.2
MER2024 (Lian et al., 2024)	TV	Chinese	5	4414	5.9
MELD (Poria et al., 2019)	TV	English	7	8851	7.4
BIIC-Podcast(V1.01) (Upadhyay et al., 2023)	Podcast	Chinese	6	67186	141.3
MSP-Podcast(V1.12) (Martinez-Lucas et al., 2020)	Podcast	English	6	156017	242.6
Internal dataset(Ours)	/	Mix	7	399369	785.3
Total	-	Mix	7	672668	1215.7

data allocation strategy of EmoBox (Ma et al., 2024a) and use multiple publicly available datasets, including MELD (Poria et al., 2019), ASVP-ESD (Landry et al., 2020), EmoV-DB (Adigwe et al., 2018), EMOVO (Costantini et al., 2014), ESD, MESD (Duville et al., 2021), M3ED (Zhao et al., 2022), and CASIA (Zhang and Jia, 2008). Furthermore, considering the complexity of speech emotions in real-world scenarios, we introduce a diverse speech emotion test set. Specifically, we apply the automated labeling approach to annotate Emilia (He et al., 2024), a large-scale multilingual and diverse speech generation resource with over 100,000 hours of speech data that captures a wide range of emotional contexts. We then manually verify the accuracy of the emotion labels. Each utterance is checked by at least two experts to ensure both accuracy and reliability. The final proposed test set, Emo-Emilia, consists of 1400 test samples, with 100 samples per emotion category across seven types in both Chinese and English (700 samples per language).

4.2 Implement Details

The architecture of Emotion2Vec-S is based on the original Emotion2Vec⁴ model, with the addition of a classifier consisting of three fully connected layers. λ_{utt} and λ_{cate} are set to 0.1 and 100, respectively. We employ the Whisper-medium⁵ encoder for semantic feature extraction. The connection module is composed of a 4-layer Transformer followed by a linear layer, with intermediate feature dimensions set to 2,560 in the feed-forward module. For the text LLM component, we utilize the Qwen2-7B-Instruct⁶ model (Chu et al., 2024) and fine-tune it using Low-Rank Adaptation (LoRA) (Hu et al., 2022). The LoRA rank is set to 8, the scaling factor

⁴https://huggingface.co/emotion2vec/emotion2vec_base

⁵<https://huggingface.co/openai/whisper-medium>

⁶<https://huggingface.co/Qwen/Qwen2-7B-Instruct>

is 32, and the dropout rate for LoRA matrices is 0.1.

To train Emotion2Vec-S, we employ 8 Nvidia 4090 GPUs, with a gradient accumulation step set to 2. The optimizer used is Adam, with a learning rate of 7.5×10^{-5} and a weight decay of 1×10^{-2} . The learning rate scheduler follows a cosine annealing strategy with a warm-up ratio of 5%. The remaining hyperparameters are consistent with those used in the vanilla Emotion2Vec model. To train the entire C²SER model, we utilize 2 Nvidia A6000 GPUs and employ the AdamW optimizer with the following parameters: $\beta_1 = 0.9$ and $\beta_2 = 0.99$. The initial learning rate is 5.0×10^{-5} , with a weight decay coefficient of 0.01. The learning rate scheduler uses WarmupLR, with the warm-up steps set to 15% of the total training steps. During C²SER training, Emotion2Vec-S is frozen to retain its ability to effectively extract emotional features from speech.

4.3 Comparison Systems and Evaluation Metrics

We conduct comparative experiments with several advanced models, including self-supervised learning (SSL) models (e.g., WavLM (Chen et al., 2022), Data2Vec (Baevski et al., 2022), Data2Vec 2.0 (Baevski et al., 2023)), and audio-language models (e.g., SECap (Xu et al., 2024), Qwen2-Audio (Chu et al., 2024), and SenseVoice-Small (An et al., 2024)). For SSL models, we follow the methodology of EmoBox (Ma et al., 2024a). First, features are extracted from the last Transformer layer of the pre-trained models and undergo uniform layer normalization to accelerate convergence. Then, a downstream network is applied to perform the SER task, which consists of a simple linear hidden layer, a ReLU activation function, a pooling layer, and a classification head. For ALMs, we train SECap on our speech corpora while directly using official checkpoints of Qwen2-

Table 2: Emotion2Vec-S performance on datasets of Chinese, English, Italian, Mexican and mixed languages. The best and the second best result is shown in **bold** and by underlined.

Model	UA(%) ↑	WA(%) ↑	F1(%) ↑	UA(%) ↑	WA(%) ↑	F1(%) ↑	UA(%) ↑	WA(%) ↑	F1(%) ↑
	M3ED (Chinese)			MELD (English)			ESD (Mixlingual)		
WavLM-base	22.76	42.79	22.03	23.44	44.71	24.25	72.90	72.90	72.55
data2vec base	19.44	37.32	19.24	<u>23.82</u>	<u>45.57</u>	<u>24.37</u>	65.05	65.05	64.55
data2vec2.0 base	<u>22.82</u>	41.42	<u>22.89</u>	24.79	46.65	25.28	<u>73.40</u>	<u>73.40</u>	<u>73.10</u>
Emotion2Vec	22.04	48.28	20.79	23.20	44.96	24.05	70.22	70.22	70.06
Emotion2Vec-F	20.80	48.14	18.35	19.91	41.82	20.35	64.18	64.18	63.96
Emotion2Vec-S	23.82	50.21	23.13	21.31	45.38	21.77	79.84	79.84	79.72
Model	CASIA (Chinese)			EmoV-DB (English)			ASVP-ESD (Mixlingual)		
WavLM-base	47.25	47.25	41.78	98.38	98.49	98.39	46.38	58.05	47.35
data2vec base	34.72	34.72	30.88	93.26	93.61	93.23	37.66	50.79	38.26
data2vec2.0 base	43.31	43.31	38.90	95.81	96.09	95.80	46.0	57.57	46.62
Emotion2Vec	<u>47.58</u>	<u>47.58</u>	<u>43.55</u>	96.71	96.90	96.74	48.60	<u>58.30</u>	49.60
Emotion2Vec-F	43.18	43.18	39.28	96.68	96.94	96.70	47.05	57.77	<u>48.25</u>
Emotion2Vec-S	62.95	62.95	60.2	<u>97.04</u>	<u>97.30</u>	<u>97.08</u>	<u>48.20</u>	58.88	<u>45.63</u>
Model	EMOVO (Italian)			MESD (Mexican)			Emo-Emilia (Mixlingual)		
WavLM-base	42.39	42.39	37.33	42.58	43.52	42.94	67.26	67.26	67.28
data2vec base	32.47	32.47	29.22	34.37	34.35	33.24	63.80	63.80	63.72
data2vec2.0 base	42.96	42.96	41.01	44.86	44.85	43.60	64.60	64.60	64.46
Emotion2Vec	41.02	41.02	38.60	50.56	50.48	50.10	<u>68.02</u>	<u>68.02</u>	<u>68.00</u>
Emotion2Vec-F	38.65	38.65	34.83	55.38	<u>55.36</u>	<u>55.18</u>	59.24	59.24	59.00
Emotion2Vec-S	<u>42.88</u>	<u>42.88</u>	<u>40.87</u>	59.57	59.62	59.28	80.66	80.66	80.58

Audio and SenseVoice-Small.

We evaluate the models using three key metrics: weighted average accuracy (WA), unweighted average accuracy (UA), and the Macro F1 score. WA represents the overall accuracy of the model, UA corresponds to the average class-wise accuracy, and the Macro F1 score provides a balanced evaluation, particularly useful in cases of class imbalance.

5 Experimental Results

5.1 Evaluation of Emotion2Vec-S

The results are presented in Table 2, where we compare Emotion2Vec-S with various SSL pre-trained models of similar model size and training corpora. Notably, Emotion2Vec-F refers to the Emotion2Vec model trained directly on the same corpora as Emotion2Vec-S, allowing us to investigate the impact of different datasets on model performance. The results demonstrate that Emotion2Vec-S consistently outperforms other models across most datasets. Interestingly, the performance gap between Emotion2Vec and Emotion2Vec-S indicates that the training corpus does influence the results, but it does not always lead to significant improvements. Nonetheless, Emotion2Vec-S consistently shows steady improvement compared to both Emotion2Vec-F and Emotion2Vec, validating the effectiveness of semi-supervised contrastive learning.

Furthermore, we observe that the models exhibit varying performance across different test

sets and languages. Specifically, Emotion2Vec-S outperforms comparison models by a significant margin on Chinese test sets while achieving competitive results on English datasets. Additionally, Emotion2Vec-S excels in multilingual test sets, particularly in ESD and Emo-Emilia. When extended to other languages, Emotion2Vec-S achieves the best results on the Mexican test set and ranks second on the Italian test set. Although Emotion2Vec-S is trained primarily on Chinese and English speech corpora, these results highlight its impressive generalization capabilities across different languages. Overall, these findings suggest that Emotion2Vec-S offers superior emotion discrimination compared to the original Emotion2Vec model, establishing it as a robust foundation model for extracting speech emotion representations.

5.2 Evaluation of C²SER

We compare C²SER with several leading audio-language models (ALMs) across various test sets. As shown in Table 3, C²SER outperforms most comparison models on the majority of datasets. Notably, even with only 3,500 randomly preserved utterances for evaluation in the ESD dataset, C²SER still achieves exceptional performance. We speculate that this can be attributed to the shared origin of the training and test sets, a factor that may also explain the Qwen2-Audio results on EmoV-DB. However, when compared to SECcap, which is trained on the same speech corpora, C²SER consistently

Table 3: C²SER performance on datasets of Chinese, English, Italian, Mexican and mixed languages. Models are tested in a zero-shot fashion. The best and the second best result is shown in **bold** and by underlined.

Model	UA(%)↑	WA(%)↑	F1(%)↑	UA(%)↑	WA(%)↑	F1(%)↑	UA(%)↑	WA(%)↑	F1(%)↑
	M3ED (Chinese)			MELD (English)			ESD (Mixlingual)		
Qwen2-Audio	19.53	41.38	15.50	<u>36.82</u>	54.56	37.33	56.26	56.26	33.06
SenseVoice-S	23.13	23.09	21.11	0.99	1.95	1.68	52.23	52.23	42.20
SECap	23.74	29.90	18.31	19.41	22.53	13.91	42.51	42.51	25.55
C ² SER(Explicit CoT)	<u>32.29</u>	<u>47.59</u>	<u>26.99</u>	30.36	51.39	27.45	<u>93.81</u>	<u>93.86</u>	<u>68.19</u>
C ² SER(Implicit CoT)	36.68	50.57	29.40	38.66	53.10	<u>33.10</u>	96.33	96.34	81.62
Model	CASIA (Chinese)			EmoV-DB (English)*			ASVP-ESD (Mixlingual)		
Qwen2-Audio	<u>48.17</u>	<u>48.17</u>	35.58	99.28	99.38	79.51	<u>43.44</u>	<u>48.01</u>	36.53
SenseVoice-S	33.58	33.58	24.32	39.01	42.13	33.11	16.55	16.19	21.57
SECap	33.75	33.75	23.54	28.85	30.26	17.10	25.07	27.95	19.42
C ² SER(Explicit CoT)	46.62	46.62	<u>37.51</u>	59.07	63.18	36.55	41.62	47.34	32.58
C ² SER(Implicit CoT)	53.33	53.33	42.85	<u>59.66</u>	<u>63.38</u>	<u>41.63</u>	43.86	48.54	<u>34.06</u>
Model	EMOVO (Italian)			MESD (Mexican)			Emo-Emilia (Mixlingual)		
Qwen2-Audio	35.88	35.88	26.22	23.60	23.55	21.62	39.07	39.07	31.91
SenseVoice-S	14.12	14.12	14.42	23.13	23.09	21.11	63.31	63.31	56.84
SECap	26.36	26.36	17.31	<u>28.40</u>	<u>28.39</u>	21.24	32.50	32.50	23.62
C ² SER(Explicit CoT)	<u>37.59</u>	<u>37.59</u>	<u>27.33</u>	28.15	28.09	21.75	68.29	68.29	<u>61.28</u>
C ² SER(Implicit CoT)	41.67	41.67	35.93	28.60	28.54	<u>21.66</u>	69.00	69.00	61.61

*Qwen2-Audio’s results on EmoV-DB may indicate data leakage (i.e., inclusion of the dataset in training).

outperforms SECap across all test datasets except MESD, where the performance of both models is similar. These results validate that incorporating speech context through the chain-of-thought approach effectively improves SER. Additionally, we observe significant improvements when comparing C²SER with explicit CoT to C²SER with implicit CoT. This performance gain highlights the success of self-distillation, which helps preserve reasoning capabilities while significantly reducing potential error accumulation in longer thought chains.

ALMs, including C²SER, also exhibit notable domain shifts across different languages. Specifically, C²SER outperforms comparison models on the M3ED and CASIA datasets, while achieving comparable results on MELD. Moreover, C²SER excels across all multilingual test sets. When extended to other languages, such as Italian, C²SER continues to lead. These findings demonstrate the strong language generalization capabilities of C²SER, indirectly suggesting that both contextual perception and chain-of-thought contribute to improving emotion recognition across diverse speech data.

5.3 Ablation Study

We conduct an ablation study to evaluate the contribution of each component in C²SER. The experimental results are presented in Table 4. Firstly, removing the Whisper encoder leads to a significant degradation in performance, with the model failing to converge during explicit CoT training due to the lack of semantic perception. Secondly, the model incorporating Emotion2Vec-S outperforms

the version without it, demonstrating that acoustic perception is crucial for capturing emotional expressions effectively. Finally, excluding CoT causes a substantial drop in performance. This result suggests the reasoning capability of C²SER is improved after CoT training, which leads to a more accurate and stable emotion recognition.

Table 4: Ablation study of C²SER on the Emo-Emilia test set.

Model	WA(%)↑	UA(%)↑	F1(%)↑
C ² SER	69.00	69.00	61.61
w/o Whisper encoder	32.07	32.07	34.56
w/o Emotion2Vec-S	57.93	57.93	51.10
w/o CoT	43.14	43.14	36.15

6 Conclusion

This paper proposes C²SER, a novel audio-language model designed to address hallucinations in speech emotion recognition. Specifically, C²SER introduces a contextual perception module of Whisper and Emotion2Vec-S, providing detailed semantic and acoustic information for the LLM decoder. Additionally, C²SER introduces a chain-of-thought to incorporate speech context for emotion recognition, incentivizing reasoning capability. Furthermore, C²SER proposes self-distillation, maintaining reasoning capability while minimizing error accumulation. Extensive experiments demonstrate that Emotion2Vec-S effectively captures emotion-related information, and C²SER achieves an accurate and stable SER compared to existing models.

Limitation

Although C²SER effectively addresses the hallucination problem in ALM-based SER, we identified the need for further improvements in the performance across different languages. This is mainly due to the imbalance in the training corpora of C²SER. We believe that scaling up data size and leveraging balanced corpora to train C²SER will effectively improve performance across different languages.

References

- Adaeze Adigwe, Noé Tits, Kevin El Haddad, Sarah Ostadabbas, and Thierry Dutoit. 2018. The emotional voices database: Towards controlling the emotion dimension in voice generation systems. *CoRR*, abs/1806.09514.
- Alican Akman, Qiyang Sun, and Björn W. Schuller. 2025. [Improving audio explanations using audio language models](#). *IEEE Signal Processing Letters*, 32:741–745.
- Keyu An, Qian Chen, Chong Deng, Zhihao Du, Changfeng Gao, Zhifu Gao, Yue Gu, Ting He, Hangrui Hu, Kai Hu, Shengpeng Ji, Yabin Li, Zerui Li, Heng Lu, Haoneng Luo, Xiang Lv, Bin Ma, Ziyang Ma, Chongjia Ni, Changhe Song, Jiaqi Shi, Xian Shi, Hao Wang, Wen Wang, Yuxuan Wang, Zhangyu Xiao, Zhijie Yan, Yexin Yang, Bin Zhang, Qinglin Zhang, Shiliang Zhang, Nan Zhao, and Siqi Zheng. 2024. Funaudiollm: Voice understanding and generation foundation models for natural interaction between humans and llms. *CoRR*, abs/2407.04051.
- Alexei Baevski, Arun Babu, Wei-Ning Hsu, and Michael Auli. 2023. Efficient self-supervised learning with contextualized target representations for vision, speech and language. In *International Conference on Machine Learning, ICML 2023, 23-29 July 2023, Honolulu, Hawaii, USA*, volume 202 of *Proceedings of Machine Learning Research*, pages 1416–1429. PMLR.
- Alexei Baevski, Wei-Ning Hsu, Qiantong Xu, Arun Babu, Jiatao Gu, and Michael Auli. 2022. data2vec: A general framework for self-supervised learning in speech, vision and language. In *International Conference on Machine Learning, ICML 2022, 17-23 July 2022, Baltimore, Maryland, USA*, volume 162 of *Proceedings of Machine Learning Research*, pages 1298–1312. PMLR.
- Alexei Baevski, Yuhao Zhou, Abdelrahman Mohamed, and Michael Auli. 2020. wav2vec 2.0: A framework for self-supervised learning of speech representations. In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Jaime Bellver-Soler, Iván Martín-Fernández, Jose M. Bravo-Pacheco, Sergio Esteban Romero, Fernando Fernández Martínez, and Luis Fernando D’Haro. 2024. Multimodal audio-language model for speech emotion recognition. In *Odyssey 2024: The Speaker and Language Recognition Workshop, Quebec City, Canada, June 18-21, 2024*, pages 288–295. ISCA.
- Carlos Busso, Murtaza Bulut, Chi-Chun Lee, Abe Kazemzadeh, Emily Mower, Samuel Kim, Jeanette N. Chang, Sungbok Lee, and Shrikanth S. Narayanan. 2008. IEMOCAP: interactive emotional dyadic motion capture database. *Lang. Resour. Evaluation*, 42(4):335–359.
- Houwei Cao, David G. Cooper, Michael K. Keutmann, Ruben C. Gur, Ani Nenkova, and Ragini Verma. 2014. CREMA-D: crowd-sourced emotional multimodal actors dataset. *IEEE Trans. Affect. Comput.*, 5(4):377–390.
- Sanyuan Chen, Chengyi Wang, Zhengyang Chen, Yu Wu, Shujie Liu, Zhuo Chen, Jinyu Li, Naoyuki Kanda, Takuya Yoshioka, Xiong Xiao, Jian Wu, Long Zhou, Shuo Ren, Yanmin Qian, Yao Qian, Jian Wu, Michael Zeng, Xiangzhan Yu, and Furu Wei. 2022. Wavlm: Large-scale self-supervised pre-training for full stack speech processing. *IEEE J. Sel. Top. Signal Process.*, 16(6):1505–1518.
- Yunfei Chu, Jin Xu, Qian Yang, Haojie Wei, Xipin Wei, Zhifang Guo, Yichong Leng, Yuanjun Lv, Jinzheng He, Junyang Lin, Chang Zhou, and Jingren Zhou. 2024. Qwen2-audio technical report. *CoRR*, abs/2407.10759.
- Yunfei Chu, Jin Xu, Xiaohuan Zhou, Qian Yang, Shiliang Zhang, Zhijie Yan, Chang Zhou, and Jingren Zhou. 2023. Qwen-audio: Advancing universal audio understanding via unified large-scale audio-language models. *CoRR*, abs/2311.07919.
- Giovanni Costantini, Iacopo Iaderola, Andrea Paoloni, and Massimiliano Todisco. 2014. EMOVO corpus: an italian emotional speech database. In *Proceedings of the Ninth International Conference on Language Resources and Evaluation, LREC 2014, Reykjavik, Iceland, May 26-31, 2014*, pages 3501–3504. European Language Resources Association (ELRA).
- Yuntian Deng, Yejin Choi, and Stuart M. Shieber. 2024. From explicit cot to implicit cot: Learning to internalize cot step by step. *CoRR*, abs/2405.14838.
- Mathilde Marie Duville, Luz María Alonso-Valerdi, and David Ibarra-Zarate. 2021. The mexican emotional speech database (MESD): elaboration and assessment based on machine learning*. In *43rd Annual International Conference of the IEEE Engineering in Medicine & Biology Society, EMBC 2021, Mexico, November 1-5, 2021*, pages 1644–1647. IEEE.
- Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma,

- Peiyi Wang, Xiao Bi, et al. 2025. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*.
- Haorui He, Zengqiang Shang, Chaoren Wang, Xuyuan Li, Yicheng Gu, Hua Hua, Liwei Liu, Chen Yang, Jiaqi Li, Peiyang Shi, et al. 2024. Emilia: An extensive, multilingual, and diverse speech dataset for large-scale speech generation. In *2024 IEEE Spoken Language Technology Workshop (SLT)*, pages 885–890. IEEE.
- Wei-Ning Hsu, Benjamin Bolte, Yao-Hung Hubert Tsai, Kushal Lakhotia, Ruslan Salakhutdinov, and Abdelrahman Mohamed. 2021. Hubert: Self-supervised speech representation learning by masked prediction of hidden units. *IEEE ACM Trans. Audio Speech Lang. Process.*, 29:3451–3460.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. Lora: Low-rank adaptation of large language models. In *The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022*. OpenReview.net.
- Smith K. Khare, Victoria Blanes-Vidal, Esmaeil S. Nadimi, and U. Rajendra Acharya. 2024. Emotion recognition and artificial intelligence: A systematic review (2014-2023) and research recommendations. *Inf. Fusion*, 102:102019.
- Dejoli Landry, Qianhua He, Haikang Yan, and Yanxiong Li. 2020. Asvp-esd: A dataset and its benchmark for emotion recognition using both speech and non-speech utterances. *Global Scientific Journals*, 8:1793–1798.
- Zheng Lian, Haiyang Sun, Licai Sun, Zhuofan Wen, Siyuan Zhang, Shun Chen, Hao Gu, Jinming Zhao, Ziyang Ma, Xie Chen, Jiangyan Yi, Rui Liu, Kele Xu, Bin Liu, Erik Cambria, Guoying Zhao, Björn W. Schuller, and Jianhua Tao. 2024. MER 2024: Semi-supervised learning, noise robustness, and open-vocabulary multimodal emotion recognition. In *Proceedings of the 2nd International Workshop on Multimodal and Responsible Affective Computing, MRAC 2024, Melbourne VIC, Australia, 28 October 2024- 1 November 2024*, pages 41–48. ACM.
- Ziyang Ma, Mingjie Chen, Hezhao Zhang, Zhisheng Zheng, Wenxi Chen, Xiquan Li, Jiabin Ye, Xie Chen, and Thomas Hain. 2024a. **Emobox: Multilingual multi-corpus speech emotion recognition toolkit and benchmark**. In *Interspeech 2024*, pages 1580–1584.
- Ziyang Ma, Zhisheng Zheng, Jiabin Ye, Jinchao Li, Zhifu Gao, Shiliang Zhang, and Xie Chen. 2024b. emotion2vec: Self-supervised pre-training for speech emotion representation. In *Findings of the Association for Computational Linguistics, ACL 2024, Bangkok, Thailand and virtual meeting, August 11-16, 2024*, pages 15747–15760. Association for Computational Linguistics.
- Luz Martinez-Lucas, Mohammed Abdelwahab, and Carlos Busso. 2020. The msp-conversation corpus. In *21st Annual Conference of the International Speech Communication Association, Interspeech 2020, Virtual Event, Shanghai, China, October 25-29, 2020*, pages 1823–1827. ISCA.
- Abinay Reddy Naini, Mary A. Kohler, Elizabeth Richerson, Donita Robinson, and Carlos Busso. 2024. Generalization of self-supervised learning-based representations for cross-domain speech emotion recognition. In *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2024, Seoul, Republic of Korea, April 14-19, 2024*, pages 12031–12035. IEEE.
- Soujanya Poria, Devamanyu Hazarika, Navonil Majumder, Gautam Naik, Erik Cambria, and Rada Mihalcea. 2019. MELD: A multimodal multi-party dataset for emotion recognition in conversations. In *Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers*, pages 527–536. Association for Computational Linguistics.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. 2021. Learning transferable visual models from natural language supervision. In *Proceedings of the 38th International Conference on Machine Learning, ICML 2021, 18-24 July 2021, Virtual Event*, volume 139 of *Proceedings of Machine Learning Research*, pages 8748–8763. PMLR.
- Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. 2023. Robust speech recognition via large-scale weak supervision. In *International Conference on Machine Learning, ICML 2023, 23-29 July 2023, Honolulu, Hawaii, USA*, volume 202 of *Proceedings of Machine Learning Research*, pages 28492–28518. PMLR.
- Changli Tang, Wenyi Yu, Guangzhi Sun, Xianzhao Chen, Tian Tan, Wei Li, Lu Lu, Zejun Ma, and Chao Zhang. 2024. SALMONN: towards generic hearing abilities for large language models. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.
- Shreya G. Upadhyay, Woan-Shiuan Chien, Bo-Hao Su, Lucas Goncalves, Ya-Tse Wu, Ali N. Salman, Carlos Busso, and Chi-Chun Lee. 2023. An intelligent infrastructure toward large scale naturalistic affective speech corpora collection. In *11th International Conference on Affective Computing and Intelligent Interaction, ACII 2023, Cambridge, MA, USA, September 10-13, 2023*, pages 1–8. IEEE.
- Bin Wang, Xunlong Zou, Geyu Lin, Shuo Sun, Zhuohan Liu, Wenyu Zhang, Zhengyuan Liu, AiTi Aw, and Nancy F. Chen. 2024. Audiobench: A universal

- benchmark for audio large language models. *CoRR*, abs/2406.16020.
- Yaoxun Xu, Hangting Chen, Jianwei Yu, Qiaochu Huang, Zhiyong Wu, Shi-Xiong Zhang, Guangzhi Li, Yi Luo, and Rongzhi Gu. 2024. Secap: Speech emotion captioning with large language model. In *Thirty-Eighth AAAI Conference on Artificial Intelligence, AAAI 2024, Thirty-Sixth Conference on Innovative Applications of Artificial Intelligence, IAAI 2024, Fourteenth Symposium on Educational Advances in Artificial Intelligence, EAAI 2014, February 20-27, 2024, Vancouver, Canada*, pages 19323–19331. AAAI Press.
- Qian Yang, Jin Xu, Wenrui Liu, Yunfei Chu, Ziyue Jiang, Xiaohuan Zhou, Yichong Leng, Yuanjun Lv, Zhou Zhao, Chang Zhou, and Jingren Zhou. 2024. Air-bench: Benchmarking large audio-language models via generative comprehension. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2024, Bangkok, Thailand, August 11-16, 2024*, pages 1979–1998. Association for Computational Linguistics.
- Longhui Yu, Weisen Jiang, Han Shi, Jincheng Yu, Zhengying Liu, Yu Zhang, James T. Kwok, Zhenguo Li, Adrian Weller, and Weiyang Liu. 2024. Meta-math: Bootstrap your own mathematical questions for large language models. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.
- Xiang Yue, Xingwei Qu, Ge Zhang, Yao Fu, Wenhao Huang, Huan Sun, Yu Su, and Wenhua Chen. 2024. Mammoth: Building math generalist models through hybrid instruction tuning. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.
- Robin Shing-Hei Yuen, Timothy Tin-Long Tse, and Jian Zhu. 2024. Internalizing ASR with implicit chain of thought for efficient speech-to-speech conversational LLM. *CoRR*, abs/2409.17353.
- Aohan Zeng, Bin Xu, Bowen Wang, Chenhui Zhang, Da Yin, Diego Rojas, Guanyu Feng, Hanlin Zhao, Hanyu Lai, Hao Yu, Hongning Wang, Jiadao Sun, Jiajie Zhang, Jiale Cheng, Jiayi Gui, Jie Tang, Jing Zhang, Juanzi Li, Lei Zhao, Lindong Wu, Lucen Zhong, Mingdao Liu, Minlie Huang, Peng Zhang, Qinkai Zheng, Rui Lu, Shuaiqi Duan, Shudan Zhang, Shulin Cao, Shuxun Yang, Weng Lam Tam, Wenyi Zhao, Xiao Liu, Xiao Xia, Xiaohan Zhang, Xiaotao Gu, Xin Lv, Xinghan Liu, Xinyi Liu, Xinyue Yang, Xixuan Song, Xunkai Zhang, Yifan An, Yifan Xu, Yilin Niu, Yuantao Yang, Yueyan Li, Yushi Bai, Yuxiao Dong, Zehan Qi, Zhaoyu Wang, Zhen Yang, Zhengxiao Du, Zhenyu Hou, and Zihan Wang. 2024. Chatglm: A family of large language models from GLM-130B to GLM-4 all tools. *CoRR*, abs/2406.12793.
- JTFLM Zhang and Huibin Jia. 2008. Design of speech corpus for mandarin text to speech. In *The blizzard challenge 2008 workshop*.
- Jinming Zhao, Tengan Zhang, Jingwen Hu, Yuchen Liu, Qin Jin, Xinchao Wang, and Haizhou Li. 2022. M3ED: multi-modal multi-scene multi-label emotional dialogue database. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2022, Dublin, Ireland, May 22-27, 2022*, pages 5699–5710. Association for Computational Linguistics.
- Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yupeng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, Yifan Du, Chen Yang, Yushuo Chen, Zhipeng Chen, Jinhao Jiang, Ruiyang Ren, Yifan Li, Xinyu Tang, Zikang Liu, Peiyu Liu, Jian-Yun Nie, and Ji-Rong Wen. 2023. A survey of large language models. *CoRR*, abs/2303.18223.
- Kun Zhou, Berrak Sisman, Rui Liu, and Haizhou Li. 2021. Seen and unseen emotional style transfer for voice conversion with a new emotional speech dataset. In *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2021, Toronto, ON, Canada, June 6-11, 2021*, pages 920–924. IEEE.
- Zhi Zhu and Yoshinao Sato. 2023. Deep investigation of intermediate representations in self-supervised learning models for speech emotion recognition. In *IEEE International Conference on Acoustics, Speech, and Signal Processing, ICASSP 2023 - Workshops, Rhodes Island, Greece, June 4-10, 2023*, pages 1–5. IEEE.

A Data Distribution

The emotion and language distributions of the training corpora are shown in Figures 3 and 4. As observed, neutral emotions account for nearly half of the dataset, while fear and disgust constitute less than 2%. The scarcity of fear and disgust data arises from challenges such as subjective annotation (e.g., difficulty in accurate identification), limited natural occurrences in contextual expressions, and technical barriers in detecting these emotions from speech or text. Additionally, the proportion of Chinese speech is approximately double that of English speech. We plan to develop more balanced training corpora to address these disparities.

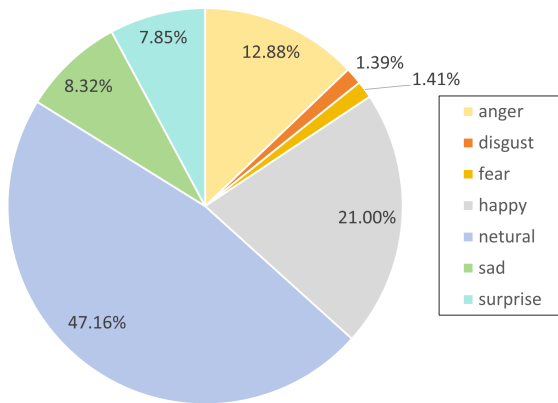


Figure 3: Distribution of each emotions.

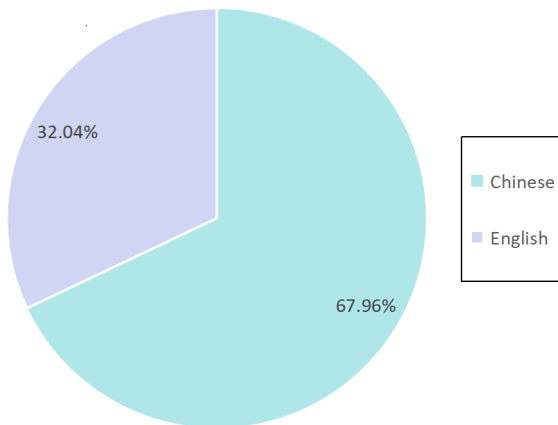


Figure 4: Distribution of different language.

B Explicit CoT Construction

To construct training data for both explicit and implicit CoT, we first use signal processing tools to collect relevant speech attributes, followed by

the generation of reasoning paths via a text-based LLM. Specifically, we compute pitch contours from speech using the PENN library⁷, and calculate the utterance-level mean. We extract energy from the speech using the pyloudnorm library⁸, which returns a value representing the loudness level. The speaking rate is determined by dividing the number of phonemes in the transcript by the utterance length. Silences at both the beginning and end of the speech waveforms are trimmed for accuracy. After collecting statistics for all utterances, we calculate the mean μ and standard deviation σ , and divide the values into three levels based on the Central Limit Theorem: 'Low' corresponds value below $\mu - \sigma$, 'Medium' corresponds values between $\mu - \sigma$ and $\mu + \sigma$, and 'High' corresponds values above $\mu + \sigma$.

After gathering speech attributes, we use GLM-4-9B-Chat to generate a CoT path conditioned on the speech attributes, original text transcripts, and emotion labels. A simple prompt is designed to guide GLM-4-9B-Chat to first produce speaking styles and speech content, followed by the final emotion. The template for this prompt is shown in Table 5.

C Evaluation Details

For all test sets, we retain utterances within the seven emotion categories: anger, happiness, neutral, sadness, surprise, disgust, and fear. Similar emotion labels, such as Amused, Joy, and Happy, are merged into the happiness category. During evaluation, SSL models are tested using leave-one-session-out five-fold cross-validation, with 20% of the training set used as the validation set for the Emo-Emilia test set. Evaluation on other test sets follows the EmoBox. Additionally, since the output of ALMs may include more than just emotion categories, we use Qwen2.5-14B-Chat⁹ to directly extract emotion labels from the descriptions generated by ALMs. The evaluation script is available in our repository.

To assess the performance of C²SER, we compare with the following systems.

Qwen2-Audio: A multimodal framework for comprehensive audio understanding and generation. Qwen2-Audio employs Whisper-large-V3 as

⁷<https://github.com/interactiveaudiolab/penn>

⁸<https://github.com/csteinmetz1/pyloudnorm>

⁹<https://huggingface.co/Qwen/Qwen2.5-14B-Instruct>

Table 5: Template for Explicit CoT data construction, **label** will be replaced with the corresponding value.

<p>Prompt: Based on the provided speech features—including a speaking rate of <speaking rate label>, a volume level of <energy label>, and a pitch of <pitch label>—along with the text content '<text label>' and the emotion <emotion label>, generate a natural and logical emotional description. Here is an example: 'The speaker spoke at a <speaking rate label> pace, with a <pitch label> tone and <energy label> level: "<text label>". Based on the analysis of speech characteristics, the emotion was inferred to be <emotion label>.' Ensure including all speech features and logic of the description."</p>	<p>Generated Example: The speaker spoke at a moderate pace, with a low-pitched tone and a soft volume: "together you sort of get this whole narrative of feedback where students are constantly feeling like you're watching and you're paying attention and you're giving them suggestions I often think about like a basketball." Based on the speech characteristics, the emotion was inferred to be disgust, revealing a sense of resentment or aversion towards the described situation.</p>
--	--

the audio encoder to capture subtle acoustic features and integrates the Qwen-7B LLM as the foundational component, enabling efficient alignment and generation between audio and text.

SenseVoice-Small: An encoder-only speech foundation model designed for rapid voice understanding. It employs a memory-equipped self-attention network (SAN-M) to enable fast and efficient inference.

SECap: A framework that generates high-quality style captions. It uses HuBERT to extract speech features, Q-Former as the Bridge-Net, and LLaMA as the text decoder to produce coherent style captions. We train SECap on the same data as C²SER.

D Category Accuracy of Emotion2Vec-S

We evaluate the category accuracy of Emotion2Vec-S using five-fold cross-validation, with 20% of the training set used as the validation set. The average results across each fold are shown in Figure 5. Emotion2Vec-S outperforms Emotion2Vec in recognition accuracy for all emotion categories. Disgust achieves the highest recognition accuracy, while happiness has relatively lower recognition accuracy. In all cases, the accuracy of Emotion2Vec-S is higher than that of Emotion2Vec. Overall, the performance is relatively balanced across the emotions.

E Category Accuracy of C²SER

We evaluate the category accuracy of C²SER through direct inference on the Emo-Emilia test set. The results are displayed in Figure 6. C²SER achieves higher accuracy than Qwen2-audio across

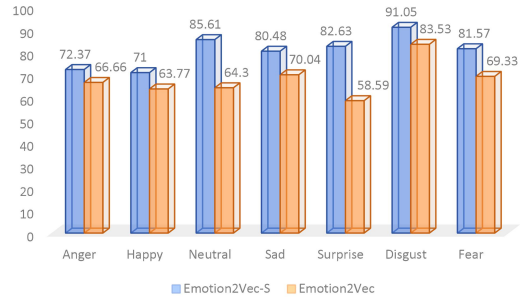


Figure 5: Category Accuracy (%) of Emotion2Vec-S on the Emo-Emilia test set.

all emotion categories. The recognition accuracy for anger, happiness, neutral, sadness, and surprise is above 90%, while the recognition accuracy for disgust and fear is below 20%. This imbalance in performance is likely attributed to the skewed distribution of the training corpus, as shown in Figure 3.

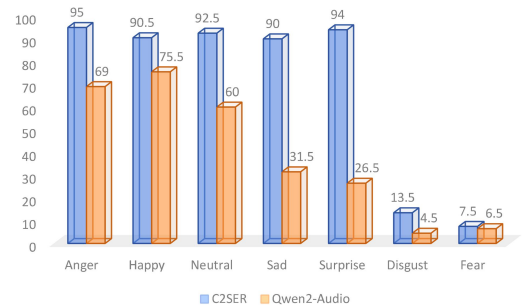


Figure 6: Category Accuracy (%) of C²SER on the Emo-Emilia test set.

Table 6: Effectiveness of CoT training on the Emo-Emilia test set.

CoT Phase	Model	UA(%) \uparrow	WA(%) \uparrow	F1(%) \uparrow
Inference	Qwen2-Audio	39.07	39.07	31.91
	Qwen2-Audio (Explicit CoT)	32.57	32.57	38.12
	Qwen2-Audio (Implicit CoT)	25.79	25.79	33.21
Training	C ² SER (Explicit CoT)	68.29	68.29	61.28
	C ² SER (Implicit CoT)	69.00	69.00	61.61

F Effectiveness of CoT training

To validate the effectiveness of the CoT training of C²SER, we use the exact text instructions on Qwen2-Audio to conduct CoT inference. The comparison results are shown in Table 6. Obviously, Qwen2-Audio is not well capable of CoT reasoning, whose performance is significantly lower than that of C²SER. This result reveals that our CoT training boosts the reasoning capabilities of ALMs, enabling them to incorporate speech context for more accurate emotion recognition. Furthermore, Qwen2-Audio with implicit CoT performs worse than with explicit CoT, as it suffers from severe hallucinations that generate irrelevant results. This suggests that without explicit CoT training, implicit CoT fails to effectively guide reasoning and emotion recognition.