

M2-omni: Advancing Omni-MLLM for Comprehensive Modality Support with Competitive Performance

Qingpei Guo* Kaiyou Song† Zipeng Feng† Ziping Ma† Qinglong Zhang Sirui Gao
 Xuzheng Yu Yunxiao Sun Tai-Wei Chang Jingdong Chen Ming Yang Jun Zhou
 Ant Group
 {qingpei.gqp, jingdongchen.cjd}@antgroup.com

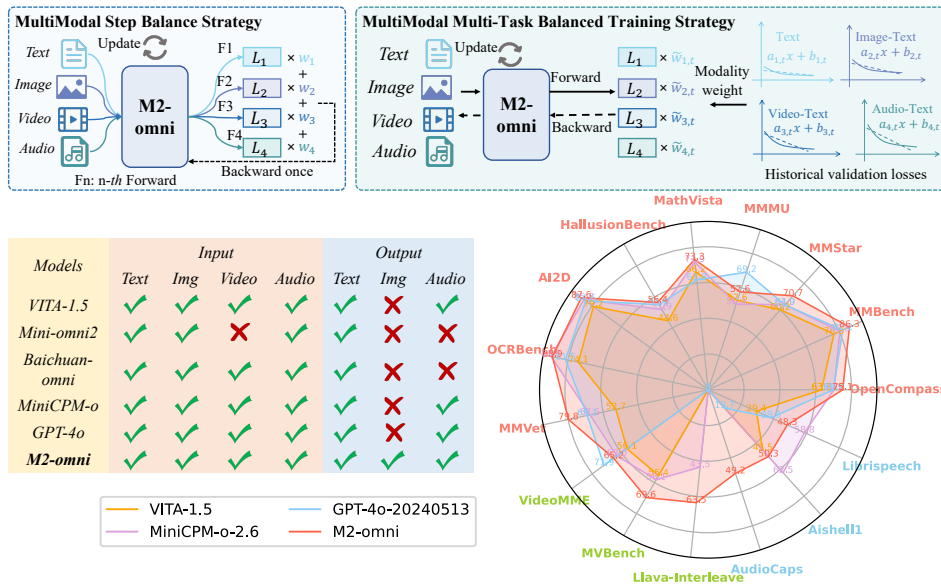


Figure 1: **Overall illustration of M2-omni.** (Top) M2-omni employs a multi-stage training with progressively modality alignment and multimodal multi-task balanced training strategy to achieve the optimal performance of each modality. (Left-bottom) M2-omni supports as many modalities and tasks as other omni-MLLMs combined. (Right-bottom) M2-omni achieves competitive performances on a broad range of multimodal tasks among its omni-MLLM counterparts. Note that the values on Librispeech [257] and Aishl11 [12] are taken the reciprocal for better visualization, and the results on Librispeech [257] and Aishl11 [12] of GPT-4o (GPT-4o-Realtime) are taken from [242]. More comprehensive results can be found in Sec. 5.

Abstract

We present M2-omni, a cutting-edge, open-source omni-MLLM that achieves competitive performance to GPT-4o. M2-omni employs a unified multimodal sequence modeling framework, which empowers Large Language Models (LLMs) to acquire comprehensive cross-modal understanding and generation capabilities. Specifically, M2-omni can process arbitrary combinations of audio, video, image,

*Corresponding author.

†Equal Contributors.

and text modalities as input, generating multimodal sequences interleaving with audio, image, or text outputs, thereby enabling an advanced and interactive real-time experience. The training of such an omni-MLLM is challenged by significant disparities in data quantity and convergence rates across modalities. To address these challenges, we propose a step balance strategy during pre-training to handle the quantity disparities in modality-specific data. Additionally, a dynamically adaptive balance strategy is introduced during the instruction tuning stage to synchronize the modality-wise training progress, ensuring optimal convergence. Notably, we prioritize preserving strong performance on pure text tasks to maintain the robustness of M2-omni’s language understanding capability throughout the training process. To our best knowledge, M2-omni is currently a very competitive open-source model to GPT-4o, characterized by its comprehensive modality and task support, as well as its exceptional performance. We expect M2-omni will advance the development of omni-MLLMs, thus facilitating future research in this domain.

1 Introduction

The recent breakthroughs in Large Language Models (LLMs) [2; 52; 167] have significantly accelerated the development of Multimodal LLMs (MLLMs) [156; 148; 35; 124; 206]. Omni-MLLM expands MLLM’s capabilities by incorporating additional non-linguistic modalities such as video, audio, and others, thereby facilitating a more comprehensive and multidimensional understanding of the world. A prominent example of Omni-MLLM is GPT-4o [156], which has demonstrated remarkable multimodal processing capabilities. GPT-4o features a novel, unified framework that can process arbitrary combinations of text, audio, image, and video inputs and generate outputs across multiple modalities, including text, audio, and image. Consequently, this enables more natural and intuitive human-computer interaction, marking a crucial milestone on the path toward AGI. The research community has been actively enriching Omni-MLLM by incorporating additional modalities and task support in recent years [115; 210; 221; 229; 230; 231; 58; 60; 242]. However, existing works fall short of matching GPT-4o’s comprehensive modality support and task versatility. Current omni-MLLM models are constrained by their limited support for either audio modalities [115; 210; 221; 229], which impede real-time interaction, or visual generation tasks [230; 58], thereby restricting their applicability in visual applications. To advance current Omni-MLLM towards a more sophisticated GPT-4o level counterpart, three primary challenges must be addressed: (1) developing a unified framework for multimodal understanding and generation tasks, (2) designing training strategies and pipelines that prevent performance degradation across all modalities, and (3) a detailed training protocol to achieve exceptional performance.

A fundamental challenge in building a unified multimodal framework arises from the disparate representational spaces required for understanding and generation tasks. These differences, as noted by [221], often lead to performance degradation in a shared model, particularly in terms of task-specific accuracy and generalization. In response to this challenge, we propose a unified modeling framework designed to effectively integrate multimodal understanding and generation tasks. Our framework features modality-specific processing pathways and utilizes a multi-stage training approach with progressive modality alignment, thereby mitigating interference between modalities and tasks. Specifically, for image generation tasks, building upon the works [108; 116; 211], we employ textual descriptions as an intermediate representation, thereby circumventing the need for direct alignment of latent image features. For speech generation, leverage the model to predict discrete audio tokens enabling real-time, streaming audio synthesis with minimal impact on the performance of other modality branches.

A particular challenge in training Omni-MLLMs is maintaining consistent performance across all modalities when involving many modalities or tasks. This performance degradation often arises from significant disparities in data quantity and convergence rates across different tasks. In this work, we introduce a step balance strategy during pre-training. At each training iteration, a mini-batch comprising samples from each modality is sampled to maintain a balanced representation across all modalities, thereby mitigating bias caused by imbalanced data distribution among modalities. Furthermore, during the instruction tuning stage, we employ a dynamically adaptive balance strategy to regulate the convergence rates across modalities. The underlying rationale is that if one modality

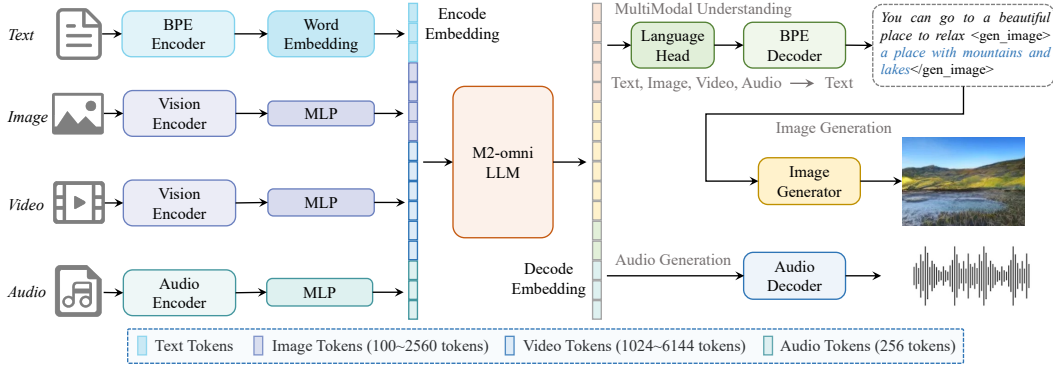


Figure 2: **Overall architecture of M2-omni.** M2-omni can process arbitrary combinations of text, image, video, and audio modalities as input, generating multimodal sequences interleaving with text, image, or audio outputs.

exhibits a slower convergence rate, it should be assigned a smaller gradient weight in model updates, thereby allowing faster-converging modalities to take precedence. Conversely, if a modality exhibits a faster convergence rate, it should be assigned a larger gradient weight. By adopting this balanced strategy, we can achieve enhanced performance across all modalities within the framework of omni-modal learning.

Currently, open-source omni-MLLMs still exhibit a significant performance discrepancy in multimodal understanding compared to GPT-4o, which limits their wide application in industrial scenarios. Compared to other omni-MLLM efforts, our M2-omni achieves state-of-the-art (SOTA) performance among publicly available omni-MLLMs. Specifically, our largest model, M2-omni-72B, achieved an average score of 75.1 on the OpenCompass benchmark for vision-and-text tasks. This score even surpasses the performance of many vision-language specific MLLMs and proprietary commercial models. Furthermore, we are publicly releasing the comprehensive training details, including data configurations and training procedures to develop M2-omni. This detailed resource is intended to serve as a valuable guide for the community, fostering research and development aimed at bridging the performance gap between open-source omni-MLLMs and GPT-4o.

To summarize, our contributions are as follows:

- We propose M2-omni, an advanced MLLM that demonstrates competitive performance among publicly available omni-MLLMs. M2-omni represents a milestone in comprehensive modality and task support, narrowing the performance gap with proprietary models like GPT-4o. We publicly release the M2-omni, as well as its comprehensive training details, including data configurations and training procedures.
- We propose a unified multimodal modeling framework that leverages a multi-stage training approach to achieve progressive modality alignment, enabling the effective integration of multimodal understanding and generation tasks. By implementing modality-specific processing pathways and innovative techniques such as text-based image generation and discrete token prediction-based speech generation, we minimize cross-modal interference while achieving comprehensive audio, video, image, and textual understanding and generation capabilities.
- To alleviate performance degradation when integrating multiple modalities, we propose a step balance strategy for pre-training and a dynamically adaptive balance strategy for SFT. This approach mitigates the impact due to significant variations in data volume and convergence rates across heterogeneous multimodal tasks.

Table 1: **Detailed pre-trained model configuration of M2-omni.**

Model Name	#Param	Vision Encoder	Audio Encoder	LLM	SD
M2-omni-9B	8.8B	ViT-600M [206]	paraformer-zh [65]	Llama3.1-8B [52]	SD-3-medium [55]
M2-omni-72B	71.8B			Llama3.3-70B [52]	

2 Unified Framework for MultiModal Understanding and Generation

2.1 Overall Architecture

We aim to build a unified framework that simultaneously supports multimodal understanding and generation tasks, while minimizing interference between different modality tasks through decoupled architecture design. Our encoding procedure is inspired by the design of UNIFIED-IO2 [132], which utilizes a modality-aware encoder to map diverse inputs (such as images, text, audio, and video) into a shared token representation space. Previous studies, such as Janus [220], have demonstrated that multimodal understanding and generation tasks can interfere with each other, mainly due to the disparate levels of information granularity required for image understanding and generation. In contrast to Janus [220], which employs separate pathways for visual encoding, we leverage textual descriptions as an intermediate representation for image generation tasks, effectively bypassing the need for direct alignment of latent image features. For speech generation, we adopt a discrete token prediction-based approach, which enables real-time, streaming audio synthesis while minimizing the impact on the performance of other modality branches. Figure 2 illustrates the overall architecture of the proposed model. We will elaborate on the details of each module below.

Vision Encoder. In M2-omni, the vision encoder extracts representations from images or whole videos. We utilize a NaViT [45] as the vision encoder, capable of processing videos and images of arbitrary resolution. To reduce the length of visual tokens, we concatenate adjacent 2×2 tokens into a single token and use an MLP to reduce the dimension to the original dimension, thereby downsampling the visual representation.

Audio Encoder. We utilize the SAN-M [64; 65] encoder to extract audio tokens. Subsequently, we apply 1×3 average pooling to the audio encoder’s output, aggregating every three adjacent tokens into a single token, which reduces the overall number of audio tokens. To accommodate the variability in audio token sequence lengths, we pad the compressed audio sequence with special `<audio_pad>` tokens, thereby ensuring that all sequences conform to a uniform length.

M2-omni LLM. The M2-omni LLM integrates the multimodal information and outputs the decoder embedding for unified multimodal understanding and generation. Our M2-omni LLM is initialized with pre-trained weights from the Llama3 [201; 52] series, specifically Llama3.1-8B or Llama3.3-70B. To facilitate unified positional encoding across textual, image, video, and audio modalities, and to enable the model to generalize to longer sequences during inference, we substitute the original 1D-RoPE [190] in Llama with M-RoPE [206].

Image Generator. To decouple the representation spaces of generation and understanding, building upon the insights from [108; 116; 211], we utilize textual descriptions as an intermediate representation for image generation. During training, we warp the image captions with two special tokens, i.e. `<gen_image>` and `</gen_image>`, allowing the model to generate textual descriptions for image generation in a flexible and unconstrained manner. At inference time, the M2-omni LLM generates the textual description, and the generated captions enclosed by the two special tokens are utilized as the textual condition for image generation. We employ an offline Stable Diffusion (SD) model [170] as the image generator.

Audio Decoder. Inspired by the approaches in [28; 231], we utilize the M2-omni LLM to predict discrete audio tokens for speech generation in an end-to-end style. The predicted discrete audio tokens are then fed into the pretrained CosyVoice [50] flow matching and vocoder model to generate audio streams. Given the similarity in form between audio discrete tokens and language tokens, we can repurpose the M2-omni LLM’s model structure to facilitate audio generation tasks, thereby enabling compatibility with multimodal understanding tasks.

Tab. 1 illustrates the detailed model configuration of M2-omni, and Fig. 3 demonstrates the data templates for image, video, and audio.

```

<start_header_id>system<end_header_id>

You are a helpful language, vision and audio assistant. You are able to understand the visual and audio
content that the user provides, and assist the user with a variety of tasks using natural language.
<eot_id><start_header_id>user<end_header_id>

<image>image.jpg</image>
Is the function continuous or discontinuous? <eot_id><start_header_id>assistant<end_header_id>

The function is continuous. <eot_id><start_header_id>user<end_header_id>

<video>video.mp4</video>
What happened in the video? <eot_id><start_header_id>assistant<end_header_id>

Two little boys are playing football on the lawn. <eot_id><start_header_id>user<end_header_id>

<audio>audio.opus</audio>
Describe the content of this audio. <eot_id><start_header_id>assistant<end_header_id>

Tomorrow the sun will rise as usual. <eot_id><start_header_id> user<end_header_id>

<image>image.jpg</image>
In which city is this building located? <eot_id><start_header_id>assistant<end_header_id>

This building is located in Rome. <gen_image>view of the Roman Forum</gen_image><eot_id>

```

Figure 3: Illustration of the templates of image, video, and audio.

2.2 Multi-Stage Training with Progressively Modality Alignment

Given a multimodal dataset, we employ modality-aware encoders to project diverse modality inputs, including images, text, audio, and video, into a unified token representation space. Formally, the input multimodal sequences are denoted as $x = (x_1, \dots, x_\ell)$, where ℓ represents the length of the sequence, and each x_i corresponds to a modality input token (e.g., image, text, audio, or video). In particular, we model the joint probability distribution of the multimodal sequence in an autoregressive manner, where each token is conditioned on the previous tokens, as shown in the following equation:

$$\log p_\theta(x) = \sum_{i=s}^{\ell-1} \log p_\theta(x_{i+1} | x_0, \dots, x_i), \quad (1)$$

Notably, s denotes the start index of discrete output tokens and only discrete output tokens $x_{>s}$ are considered as the modeling targets, θ denotes the parameters of the model. We introduce a multi-stage training framework that progressively achieves modality alignment by incrementally incorporating knowledge from multiple modalities. As shown in Fig. 4, the overall training procedure of our proposed M2-omni consists of three primary stages: pre-training, instruction tuning, and alignment tuning. Both the pre-training and instruction tuning stages are further divided into three sub-stages, each designed to incrementally incorporate additional modalities. The training hyperparameters and configurations are summarized in Tab. 2.

Pre-training

The pre-training stage primarily focuses on aligning multiple modalities with our M2-omni LLM, thereby enabling it to capture multimodal concept representations and develop cross-modal perception capabilities.

Stage 1. Encoder Alignment. This phase leverages image-text pairs, OCR data, and audio-text pairs for training, achieving alignment between the visual/audio encoders and M2-omni LLM. Moreover, by concatenating multiple image-text pairs into a single interleaved sequence, we enhance in-context understanding capabilities and attain a $1.5\times$ acceleration in training efficiency.

Stage 2. Image-Text Knowledge Enhancement. This stage concentrates on training with high-quality image-text pair data (selected from stage 1) and OCR data, with a specific focus on enhancing

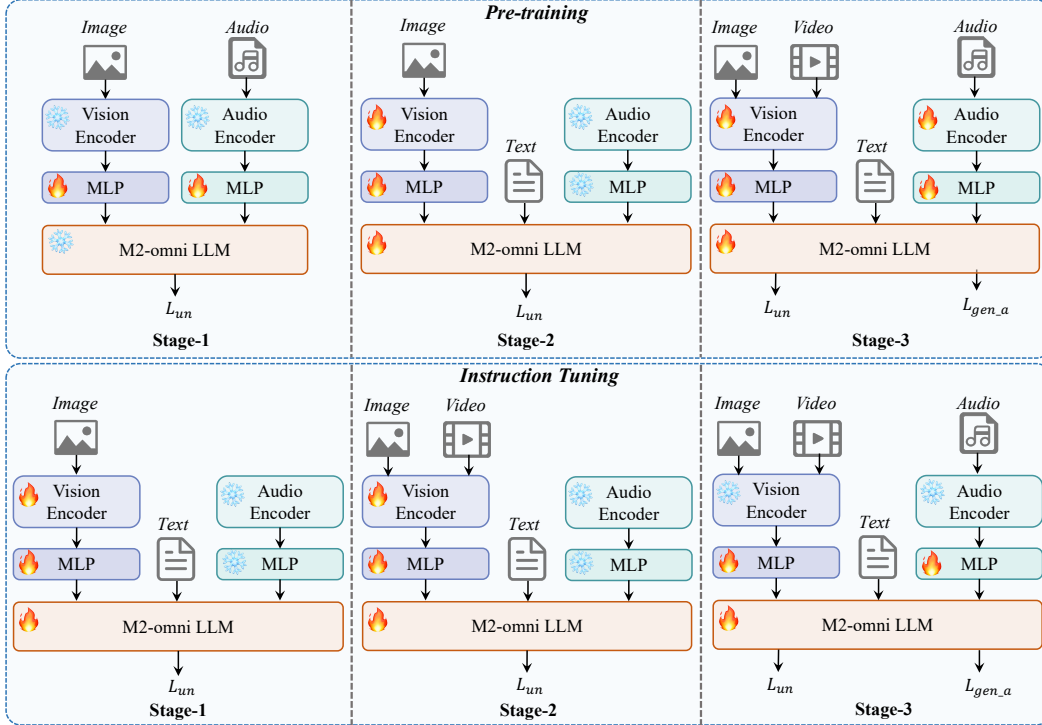


Figure 4: **Illustration of the training pipeline of M2-omni.** Both the pre-training and the instruction tuning contain three stages, designed to progressively absorb knowledge from more modalities and tasks. L_{un} and L_{gen_a} denote understanding and audio generation loss, respectively.

image-text fine-grained comprehension capabilities. This, in turn, facilitates improved understanding of interleaved image-text and video understanding tasks in stage 3. Furthermore, language-only pure text data is incorporated to prevent the degradation of M2-omni LLM’s language understanding capabilities.

Stage 3. MultiModal Joint Training. This stage integrates omni-modality knowledge in a single stage, thereby facilitating comprehensive modality alignment and unified representation learning. In this stage, we incorporate high-quality image-text pairs, video-text pairs, interleaved image-text sequences, audio-text pairs, and language-only data for end-to-end multimodal pre-training. To balance convergence rates across different modalities, a step balance strategy is employed in this stage, which will be introduced in Sec. 3.1.

Instruction Tuning

Instruction tuning aims to make models better understand the instructions from users and fulfill the demanded tasks.

Stage 1. Image-Text Instruction Tuning. This stage concentrates on enhancing the model’s instruction-following ability for image modality, particularly in specialized image-related tasks, such as science, OCR, documents, and charts, which were not adequately learned during pre-training.

Stage 2. Visual Instruction Tuning. This stage aims to enhance the model’s comprehensive capability on visual modality, including the capability on image-text, video-text, and interleaved image-text understanding.

Stage 3. Omni-Modality Instruction Tuning. This stage further integrates the audio modality and generation tasks, enabling the model to follow instructions on mixed multi-modal sequences. Our study reveals that coordinating the training progress of diverse modalities and tasks is challenging, as the model’s optimal performance across all modalities is hindered by inconsistent data volumes and

Table 2: **Detailed training hyperparameters and configurations for M2-omni.** The model configurations are meticulously tuned to achieve consistent performance across various modalities and tasks. Note that T, I, V, and A in the modalities row denote textual, image, video (and interleaved image-text), and audio, respectively. U and G in the task row denote understanding and generation tasks, respectively. LR denotes the learning rate, and AT represents the alignment tuning stage.

Settings	Pre-training			Instruction Tuning			AT
	Stage 1	Stage 2	Stage 3	Stage 1	Stage 2	Stage 3	
Data	PT-Stage-1-Data	PT-Stage-2-Data	PT-Stage-3-Data	IT-Stage-1-Data	IT-Stage-2-Data	IT-Stage-3-Data	AT-Data
Modalities	I&A	T&I	All	T&I	T&I&V	All	All
Tasks	U	U	U	U	U	U&G	U&G
Trainable	Connectors	Vision Encoder +Connector	Full Model	Full Model	Full Model	w/o Encoders	w/o Encoders
LR	2e-5	1e-5	2e-5	2e-5	2e-5	1e-5	5e-6
LR of Encoders	-	1e-6	2e-6	2e-6	2e-6	-	-
Weight Decay	0.05	0.05	0.05	0.05	0.05	0.05	0.05
Training Epochs	-	-	-	1	2	1	2
Max Image Tokens	320	320	320	1280	2560	2560	2560
Max Video Frames	-	-	8	-	16	128	128

convergence speeds among tasks. We propose a dynamic adaptive balance strategy to address this issue, which will be introduced in Sec. 3.2.

Alignment Tuning

This phase focuses on refining the quality and stylistic coherence of chat interactions, ensuring the model’s proficiency is maintained across all modalities. The instruction tuning stage equips the model with general multimodal conversational abilities. However, the model’s responses often suffer from limitations, including brevity, lack of fluency, irrelevance, inappropriate formatting, and hallucinations, which can compromise the user experience. To mitigate these limitations and further enhance the chat experience, a preference alignment tuning stage is introduced following the instruction tuning stage. This stage employs a unified training strategy that integrates DPO [165] and instruction tuning, as defined by the equation:

$$Loss_{at}(x) = L_{dpo}(x_{chosen}, x_{rejected}) + \lambda * L_{it}(x_{chosen}, x_{it}), \quad (2)$$

where L_{dpo} and L_{it} denotes the DPO loss and instruction tuning loss respectively. x_{chosen} and $x_{rejected}$ represent the chosen samples and rejected samples from the preference dataset, and x_{it} denotes the samples from the instruction dataset. In practice, we empirically set λ to 0.3. Additionally, we employ Low-Rank Adaptation (LoRA) [82] to update 5.0% of the LLM’s backbone weights, thereby preventing catastrophic forgetting.

3 MultiModal Multi-Task Balanced Strategy

3.1 Step Balance Strategy

During the multimodal joint training stage of pre-training, two primary challenges arise: balancing of *data samples* and *loss weights*. On the one hand, significant disparities in data quantity exist, which hinders the model’s performance on modalities with limited data. On the other hand, since losses from different modalities are not on the same scale, the training direction will be biased towards the modality task with a larger loss, leading to suboptimal convergence. To address these challenges, we propose a Step Balance strategy that combines data sample balance and loss weight balance to tackle these challenges simultaneously.

Data Sample Balance. Let $\{\mathcal{D}_1, \mathcal{D}_2, \dots, \mathcal{D}_M\}$ represent a collection of M different modalities of training data. Let \mathcal{L}_i denote the loss function associated with the i -th modality. In this pre-training stage, we explore different methods for updating the model, focusing on their effectiveness in balancing multimodal abilities. Notably, these methods are compared under the constraint that each mini-batch exclusively contains data from a single modality, ensuring a balanced and efficient training process. Three primary methods are explored:

Random Sample: A mini-batch is randomly drawn from the entire dataset. The sampling probability of each modality is proportional to its data volume:

$$\theta_{t+1} = \theta_t - \eta \nabla \mathcal{L}_i(\mathcal{B}_i), \quad (3)$$

where i is the index of the randomly selected modality, \mathcal{B}_i represents a mini-batch from modality i , θ_t and η represents the model weights at time t and the learning rate, respectively.

Round-robin: We alternate mini-batches of each dataset, updating the parameters on each mini-batch. This strategy ensures equal iteration steps across modalities and facilitates sufficient training for each modality.

$$\theta_{t+1} = \theta_t - \eta \nabla \mathcal{L}_{i_t}(\mathcal{B}_{i_t}), \quad (4)$$

where $i_t = (t \bmod M) + 1$ denotes the modality selected at time step t .

Accumulation: We alternate batches of each data type and compute gradients on each batch. These gradients are then weighted and summed, then are used to update the parameters. In other words, after forward-propagating one batch from each modality, we perform a single consolidated weight update incorporating information from all modalities.

$$\theta_{t+1} = \theta_t - \eta \sum_{i=1}^M \nabla \mathcal{L}_i(\mathcal{B}_i). \quad (5)$$

As demonstrated by our ablation studies in Sec. 5.3.1, the accumulation method consistently exhibits superior performance compared to the other two methods, which can be attributed to its improved gradient stability and adequate training for each modality.

Loss Weight Balance. A simple yet effective method is employed to determine modality-specific loss weights. The proposed method involves the following steps: 1) Train the model on a small subset of data $\mathcal{D}_i^{sub} \subset \mathcal{D}_i$ until convergence; 2) Record the converged loss value L_i^* ; 3) Calculate the normalization weight w_i using Equation 6:

$$w_i = \alpha \frac{1/L_i^*}{\sum_{j=1}^M 1/L_j^*}. \quad (6)$$

The normalization weights are subsequently applied to the parameter gradient update, as formulated in Equation (3),(4),(5). In practice, for data sample balance with accumulation strategy, we set α to 10 and update the model parameters as:

$$\theta_{t+1} = \theta_t - \eta \sum_{i=1}^M w_i \nabla \mathcal{L}_i(\mathcal{B}_i) \quad (7)$$

The step balance strategy is formally presented in Algorithm 1, which outlines the complete procedure.

3.2 Dynamic Adaptive Balance Strategy

In the Omni-Modality Instruction Tuning stage, we employ a dynamically adaptive balance strategy to regulate the convergence rates across modalities. Specifically, we treat each modality as a distinct training task, and leverage a multi-task learning (MTL) [42; 125] principle to balance the training progress of each modality (task): *modalities exhibiting gentler convergence slopes received reduced weights to prevent overfitting, whereas those displaying sharper slopes were assigned higher weights to facilitate enhanced learning*. In contrast to MTL methods [120; 69] that involve alternating training and validation cycles across entire datasets, our approach incorporates periodic validation segments at fixed intervals during training. These segments utilize a compact, predetermined validation subset to compute modality-specific validation losses, which enables us to track each modality’s training progress via its validation loss and convergence slope within a historical window. This approach enables dynamic adjustment of modality weights with minimal computational overhead, thereby enhancing performance across all modalities in the context of omni-modal learning. Here, we provide a detailed introduction to our dynamically adaptive balance strategy. The schematic diagram is shown in Fig. 5.

Algorithm 1 Step Balance Training Strategy during Pre-training

- 1: **Input:** Datasets $\{\mathcal{D}_1, \dots, \mathcal{D}_M\}$
 - 2: **Output:** Trained model parameters θ
 - 3: // small-scale datasets training to determine weights
 - 4: **for** each modality i **do**
 - 5: Train on \mathcal{D}_i^{sub} until convergence
 - 6: Record L_i^*
 - 7: Calculate w_i using Eq. (6)
 - 8: **end for**
 - 9: // Main training phase
 - 10: **while** not converged **do**
 - 11: **for** each modality i **do**
 - 12: Sample batch \mathcal{B}_i from \mathcal{D}_i
 - 13: Compute $\nabla_i = w_i \nabla \mathcal{L}_i(\mathcal{B}_i)$
 - 14: **end for**
 - 15: Update θ using $\sum_{i=1}^M \nabla_i$
 - 16: **end while**
-

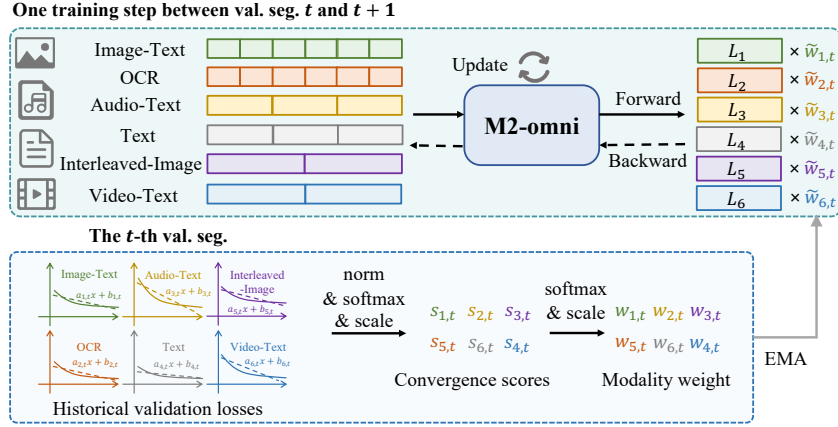


Figure 5: **Illustration of the dynamic adaptive balance strategy used during the Omni-Modality Instruction Tuning stage.** $\tilde{w}_{i,t}$ refers to the loss weight allocated to the i -th modality at the t -th validation segment.

Data Partition. We randomly split a validation subset from the training data for each modality, comprising $\sum_{i=1}^M S_i * B_i$ samples. Here, S_i denotes the number of validation steps per validation segment for the i -th modality, and B_i represents the validation batch size for that modality, M represents the number of modalities. The data in the validation subset is excluded from the model training process.

Convergence Slope Calculation. Different modalities often exhibit varying degrees of training difficulty, resulting in distinct numerical ranges of losses. To ensure fair weight allocation across modalities, we calculate the convergence slopes from the normalized validation loss:

$$\tilde{L}_{i,t}^{val} = \frac{L_{i,t}^{val} - \min\{\min\{L_{i,j}^{val}\}_{j=t-H+1}^t, \epsilon\}}{\max\{L_{i,j}^{val}\}_{j=t-H+1}^t - \min\{\min\{L_{i,j}^{val}\}_{j=t-H+1}^t, \epsilon\}}, \quad (8)$$

where $L_{i,t}^{val}$ represents the validation loss of the i -th modality at the t -th validation segment, H represents the historical window size, and ϵ is set to $1e^{-6}$ to prevent division by zero. Subsequently, we employ a linear regression model of the form $a_{i,t}x + b_{i,t}$ to fit the validation loss within the historical window, where the slope coefficient $a_{i,t}$ represents the current convergence rate of the modality.

Weight Allocation Adjustment. To ensure a balanced initialization and mitigate potential inaccuracies in the initial convergence trajectories, we set all modality-specific loss weight $\tilde{w}_{i,0}$

to 1 and maintain these fixed values throughout the first H validation segments. For the t -th validation segment (where $t > H$), we first compute the normalized slope $\tilde{a}_{i,t}$ and the convergence score $s_{i,t}$ for the i -th modality as follows:

$$\tilde{a}_{i,t} = \frac{M * a_{i,t}}{\sum_{j=1}^M |a_{j,t}|}, \quad s_{i,t} = \text{softmax}(\tilde{a}_{i,t}) * (-1 * \tilde{a}_{i,t}), \quad (9)$$

where the softmax operation is performed across the modality dimension. Next, we calculate the modal weight allocation $w_{i,t}$ of the current segment as follows:

$$w_{i,t} = M * \text{softmax}(f * s_{i,t}) \quad (10)$$

where f is a scaling factor that regulates the probability distribution of the weights. Multiplying by M ensures that the sum of the weights across all modalities equals M . To mitigate abrupt fluctuations caused by single-step weight updates and to enhance the stability of model training, we utilize an exponential moving average (EMA) mechanism to smoothly adjust the training weights for each modality as follows:

$$\tilde{w}_{i,t} = \alpha * \tilde{w}_{i,t-1} + (1 - \alpha) * w_{i,t} \quad (11)$$

where the smoothing factor α is set to 0.9. The adjusted modality-specific loss weight $\tilde{w}_{i,t}$ is used for all training steps until the next validation segment.

Through this dynamic adaptive balance strategy during instruction tuning, we observed that all modalities can achieve their superior performance compared to the corresponding single-modality model counterpart.

3.3 Language Proficiency Maintenance Strategies

An omni-MLLM should maintain robust linguistic capabilities, as language is also one of the modalities it supports. During both the pre-training and post-training stages of our omni-MLLM, we discovered that using solely multimodal data to unfreeze our M2-omni LLM leads to a significant decline in linguistic abilities, highlighting the importance of incorporating pure-text data sources. We attribute this phenomenon to the fact that the text accompanying multimodal data often lacks the diversity and complexity of pure text data, which can lead to a biased model. To mitigate this issue, we adopted a straightforward and efficient approach by incorporating a carefully controlled proportion of pure text data during the training whenever unfreezing the M2-omni LLM. Through extensive experimentation, we found that by carefully controlling the proportion of pure text data, specifically around 25%, we can effectively prevent the deterioration of multimodal capabilities while maintaining robust linguistic capabilities.

4 Data configurations

4.1 Pre-training Data

To align with the objectives of the pre-training phase, pre-training data is constructed adhering to two criteria: (1) aligning different modalities and (2) facilitating concept learning of world knowledge. Consequently, the resulting pre-training dataset exhibits diversity, aggregating multi-source data across various modalities.

[Image-Text] We primarily leverage a large-scale dataset comprising weakly labeled, web-crawled image-text pairs sourced from publicly accessible repositories, including [172; 179; 17; 228; 13; 61]. To focus on high-quality knowledge learning during the Image-Text Knowledge Enhancement pretraining stage, we incorporate two comprehensive caption datasets, namely [114; 46]. The aggregated dataset consists of approximately 2 billion image-text pairs.

[OCR] To enhance performance in text-oriented tasks, we incorporate the OCR caption task. We select a range of English OCR datasets, specifically [187; 11; 99; 217; 22]. In addition, we compile a large-scale collection of in-house Chinese OCR datasets, encompassing diverse samples from Chinese documents to scene texts.

[Audio-Text] Audio-text pairs are included for audio alignment. The dataset comprises a total of 30 million audio-text pairs, categorized into three task types: Automatic Speech Recognition (ASR) [91; 19; 257; 203; 154; 171; 204; 203; 12; 258; 195; 245; 239; 163; 193; 9; 101], Automatic

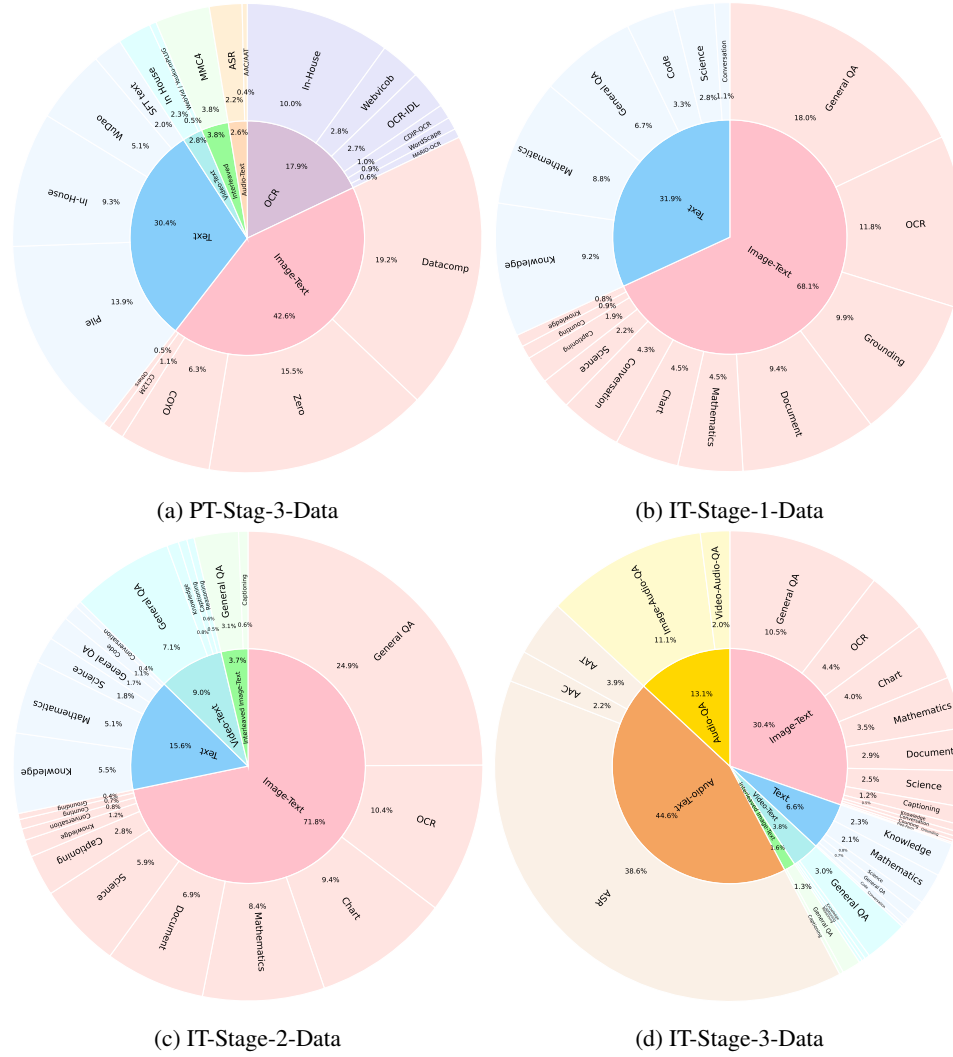


Figure 6: **Overview of the data configurations during pre-training and instruction tuning.** The numbers of image-text, OCR, text, audio-text, video-text, and interleaved image-text data are 0.33B, 0.14B, 0.15B, 25.4M, 27.3M, and 36.9M in PT-Stag-3-Data, respectively. The numbers of image-text and text data are 26.2M and 12.7M in IT-Stage-1-Data, respectively. The numbers of image-text, text, video-text, and interleaved image-text data are 17.2M, 3.7M, 2.2M, and 0.9M in IT-Stage-2-Data, respectively. And the numbers of image-text, text, video-text, interleaved image-text, audio-text, and audio-QA data are 17.2M, 3.7M, 2.2M, 0.9M, 25.4M, and 7.5M in IT-Stage-3-Data, respectively.

Audio Caption (AAC) [147; 47; 97; 141], and Automatic Audio Tagging (AAT) [66; 20]. These categories are aggregated from a diverse range of publicly accessible datasets.

[Interleaved Image-Text] Interleaved data naturally contains multiple images and accompanying text which are often interrelated, it has been demonstrated in [191; 146] to enhance the model’s few-shot capabilities in image-text tasks. The public interleaved image-text dataset Multimodal-C4 (MMC4) [270] is included.

[Video-Text] We sample video data from public datasets WebVid-10M [8] and Youku-mPLUG [234] to support bilingual video-text comprehension. Besides, we collected a large-scale in-house HD video dataset.

[Text] We utilize Pile [63] and Wudao [251] datasets and supplement them with in-house text-only datasets to maintain our M2-omni LLM’s linguistic abilities during pre-training.

The data configuration for each pre-training stage is carefully designed to align with the corresponding learning objectives, as illustrated in Sec. 2.2.

PT-Stage-1-Data. This stage utilizes coarse-grained image-text pairs, OCR data, and audio-text pairs for training, achieving alignment between visual/audio encoders and the M2-omni LLM. This stage involves a total of 2.17 billion samples.

PT-Stage-2-Data. We select 0.33B high-quality image-text pairs and 0.14B high-quality OCR pairs from PT-Stage-1-Data. Additionally, all detailed caption data are incorporated to enhance the model’s fine-grained understanding capabilities. Furthermore, 0.15B text-only data samples, mixed with image-text instruction pairs, are included to maintain language understanding capabilities in this stage.

PT-Stage-3-Data. This stage incorporates all the data from PT-Stage-2-Data, supplemented by three additional data types: audio-text, video-text, and interleaved image-text data. The data volumes of these three additional data types are determined through experiments to be 25.4M, 27.3M, and 36.9M, respectively. An overview of the data configuration of PT-Stage-3-Data is shown in Fig. 6(a).

More details of publicly accessible data used in pre-training stage can be found in Tab. S1.

4.2 Instruction Tuning Data

We collect both open-source and in-house multimodal instruction tuning data for training.

We first gather a comprehensive open-source dataset encompassing various multimodal instruction tuning data types, including image-text, video-text, audio-text pairs, and interleaved image-text data. High-quality language-only text instruction data are also collected to mitigate the catastrophic forgetting of the M2-omni LLM and preserve its linguistic abilities.

A primary challenge associated with the collected open-source data is the severe imbalance in data distribution. For instance, categories like science and mathematics exhibit a significant scarcity of data, which necessitates targeted data construction efforts. To address the data imbalance, we develop a data construction pipeline that generates high-quality instruction tuning data for long-tail categories. Specifically, we establish a taxonomy of academic disciplines and analyze the data distribution to identify long-tail categories that require supplementation. Subsequently, we leverage GPT-4 [2] to generate candidate topics for the targeted field and retrieve relevant images from web sources and our in-house data repositories. Furthermore, we employ GPT-4V [155] to generate question-answer pairs related to the image, based on the candidate topics. By leveraging this data construction engine, we generate a substantial volume of high-quality instruction tuning data.

The data configurations of each instruction tuning stage are as follows.

IT-Stage-1-Data. This stage encompasses a diverse range of tasks, comprising both image-text and pure text data, as illustrated in Figure 6(b). For image-text data, we strive to ensure coverage of diverse data types while maintaining a balanced distribution. We determine an optimal ratio of approximately 30% for text data through empirical evaluation, which helps maintain the M2-omni LLM conversational capabilities. A detailed list of the open-source data utilized in this stage is provided in Tabs. S2 to S4.

IT-Stage-2-Data. In this stage, we further augment the dataset by incorporating video-text and interleaved image-text data, as illustrated in Figure 6(c). Detailed lists of open-source data for image-text, video-text, and interleaved image-text are provided in Tables S5 and S6, Table S8, and Table S7, respectively.

IT-Stage-3-Data. Building upon IT-Stage-2-Data, this stage introduces three new modalities: audio-text data, audio-QA data, and free-form image generation data. We create audio-QA data by converting the question text from image-text and video-text data into audio, enabling the model to comprehend images or videos based on textual or auditory instructions. In this Omni-Modality Instruction Tuning stage, we leverage text and interleaved image-text data from the previous stage, while selectively incorporating high-quality video-text data to further boost the model’s video comprehension capabilities.

The detailed open-source data for video-text, audio-text, and audio-QA are provided in Tables S9, S10, and S11, respectively.

4.3 Alignment Tuning Data

As shown in Equation (2), this stage leverages data from two primary sources: preference data and instruction tuning data. Both datasets cover a range of tasks, including multi-turn conversations, VQA, chat, charts, math, OCR, and others.

A semi-automated approach is employed to construct the preference dataset. We first collect an in-house multimodal prompt dataset generated by actual users. Subsequently, we employ both the M2-omni model, fine-tuned through the SFT phase, and GPT-4o to generate corresponding responses for each collected multimodal prompt. Human annotators then identify the higher-quality response from the two generated responses and construct response preference pairs. We evaluate the response quality based on four dimensions: relevance, fluency, content richness, and format rationality. More evaluation details can be found in 5.1.6.

For the instruction tuning data, we sample from each modality within the Omni-Modality Instruction Tuning stage, and maintain a 1:1 ratio to preference data, as informed by empirical studies.

5 Experiments

In this section, we present a comprehensive evaluation of our M2-omni model, comprising both quantitative and qualitative analyses of its performance. Furthermore, we conduct ablation studies to analyze the contributions of several key design components to the performance of our M2-omni model, providing insights into their distinct impacts.

5.1 Quantitative Results

5.1.1 Image-Text Understanding

To evaluate the effectiveness of our M2-omni in image-text understanding, we benchmark it against state-of-the-art MLLMs on the OpenCompass [41] multimodal leaderboard, a widely recognized platform for multimodal evaluation. This leaderboard contains 8 different multimodal benchmarks, including complex VQA (MMBench [127], MMStar [25], MMMU [255], AI2D [94], and MMVet [249]), multimodal reasoning (MathVista [136]), hallucination evaluation (Hallusion-bench [72]), and OCR (OCRBench [128]). Tab. 3 shows the overall results. Our M2-omni-72B model achieves top-tier performance on most benchmarks, surpassing closed-source models like GPT-4o and Gemini-1.5-Pro. Furthermore, our M2-omni-9B model exhibits competitive performance among models of similar size, showcasing its robust capabilities in image-text understanding tasks.

5.1.2 Video & Interleaved Image-Text Understanding

We evaluate our model’s video and interleaved image-text understanding abilities on three mainstream benchmarks.

Video-MME [57]: Video-MME is a benchmark designed to evaluate MLLMs in full-spectrum video analysis. It encompasses a wide variety of video types across multiple domains and durations, featuring multimodal inputs such as video, subtitles, and audio. For this benchmark, testing is conducted with under 96 frames, and results are reported for both "with subtitles" and "without subtitles" settings.

MVBench [112]: MVBench serves as a video understanding benchmark aimed at thoroughly evaluating the temporal awareness of MLLMs in an open-world context. It includes 20 challenging video tasks that range from perception to cognition, which cannot be adequately addressed using a single frame. Testing for this benchmark utilizes dynamic sampling frames.

LLaVA-Interleave Bench [124]: LLaVA-Interleave Bench comprises a comprehensive suite of multi-image benchmarks collected from public datasets or generated via the GPT-4V API. It is created to assess the interleaved multi-image reasoning capabilities of MLLMs, with reported results for both "in-domain" and "out-domain" subsets.

As shown in Table 4, M2-omni-9B achieves the second-best results across VideoMME and MVBench (outperformed only by Qwen2-VL-7B but requiring significantly fewer frames). However, the performance gains do not scale up to M2-omni-72B due to limitations in the quantity of instruction-

Table 3: **Quantitative results on OpenCompass [41] multimodal leaderboard.** ‡ denotes closed-source models. Hall denotes HallusionBench.

Models	Params	Avg.	MM- Bench	MM- Star	MM- MU	Math- Vista	Hall AI2D	OCR- Bench	MMVet	
Step-1o‡	N/A	77.7	87.3	69.3	69.9	74.7	55.8	89.1	926	82.8
SenseNova‡	N/A	77.4	85.7	72.7	69.6	78.4	57.4	87.8	894	78.2
InternVL2.5-78B-MPO [209]	78B	77.0	87.7	72.1	68.2	76.6	58.1	89.2	909	73.5
Qwen2.5-VL-72B [6]	73.4B	76.2	87.8	71.1	67.9	70.8	58.8	88.2	881	76.7
TeleMM‡	N/A	75.9	79.9	70.8	66.6	75.7	60.6	88.5	891	75.7
InternVL2.5-38B-MPO [209]	38B	75.3	85.4	70.1	63.8	73.6	59.7	87.9	894	72.6
InternVL2.5-78B [33]	78B	75.2	87.5	69.5	70	71.4	57.4	89.1	853	71.8
Qwen2-VL-72B [206]	73.4B	74.8	85.9	68.6	64.3	69.7	58.7	88.3	888	73.9
InternVL2.5-38B [33]	38B	73.5	85.4	68.5	64.6	72.4	57.9	87.6	841	67.2
JT-VL-Chat-V3.0‡	N/A	73.4	81.7	67.5	59.3	71.9	53.9	87.2	967	69.2
Taiji‡	N/A	73.0	84.8	69	60.4	72.3	56.8	90.8	820	67.9
Step-1.5V‡	N/A	72.5	82.0	65.1	61.2	69.7	54.3	87.5	886	71.3
Gemini-1.5-Pro-002‡ [196]	N/A	72.1	82.8	67.1	68.6	67.8	55.9	83.3	770	74.6
InternVL2.5-26B-MPO [209]	26B	72.1	84.2	67.7	56.4	71.5	52.4	86.2	905	68.1
GPT-4o-20241120‡ [156]	NA	72.0	84.3	65.1	70.7	59.9	56.2	84.9	806	74.5
LLaVA-OneVision-72B [106]	73B	68.0	84.5	65.8	56.6	68.4	47.9	86.2	741	60.6
NVLM-D-72B [44]	79.4B	67.6	78.5	63.7	60.8	63.9	49.7	80.1	849	58.9
Molmo-72B [46]	73.3B	64.1	79.5	63.3	52.8	55.8	46.6	83.4	701	61.1
M2-omni-72B	71.8B	75.1	86.3	70.7	57.6	73.3	56.4	87.6	889	79.8
<i>Models smaller than 20B</i>										
Ola-7b [129]	8.88B	72.6	84.3	70.8	57.0	68.4	53.5	86.1	822	78.6
Qwen2.5-VL-7B [6]	8.29B	70.4	82.6	64.1	56.2	65.8	56.3	84.1	877	66.6
InternVL2.5-8B-MPO [209]	8B	70.3	82	65.2	54.8	67.9	51.7	84.5	882	68.1
MiniCPM-o-2.6 [242]	8.67B	70.2	80.6	63.3	50.9	73.3	51.1	86.1	889	67.2
Ovis1.6-Gemma2-9B [137]	10.2B	68.8	80.5	62.9	55.0	67.2	52.2	84.4	830	65.0
InternVL2.5-8B [33]	8B	68.1	82.5	63.2	56.2	64.5	49.0	84.6	821	62.8
POINTS1.5-Qwen2.5-7B [126]	8.3B	67.4	80.7	61.1	53.8	66.4	50.0	81.4	832	62.2
Valley-Eagle‡	8.9B	67.4	80.7	60.9	57.0	64.6	48.0	82.5	842	61.3
Qwen2-VL-7B [206]	8B	67.0	81.0	60.7	53.7	61.4	50.4	83	843	61.8
DeepSeek-VL2 [225]	16.1B	66.4	81.2	61.0	50.7	59.4	51.5	84.5	825	60.0
VITA-1.5 [60]	8.3B	63.3	76.8	60.2	52.6	66.2	44.6	79.2	741	52.7
Baichuan-Omni [115]	7B	-	75.6	-	47.3	51.9	47.8	-	700	65.4
LLaVA-OneVision-7B [106]	8B	61.2	76.8	56.7	46.8	58.5	47.5	82.8	697	50.6
Molmo-7B-D [46]	8B	58.9	70.9	54.4	48.7	47.3	47.7	79.6	694	53.3
M2-omni-9B	8.8B	69.7	80.7	60.5	51.2	68.3	51.8	84.5	883	72.3

tuned video data. Moreover, both our M2-omni-9B and M2-omni-72B greatly surpass all other baselines in multi-image benchmarks, both in-domain and out-of-domain, highlighting their potential as strong competitors for complex tasks.

5.1.3 Audio Understanding

We evaluate our M2-omni model’s audio understanding abilities on four mainstream benchmarks.

Multilingual LibriSpeech (MLS) [161]: The Multilingual LibriSpeech dataset is an extensive collection of read audiobooks sourced from Librivox, available in eight different languages. We utilize the English test set from this dataset to assess the model’s speech comprehension capabilities. The latest version of this corpus comprises approximately 50,000 hours.

Librispeech [257]: The Librispeech corpus comprises approximately 1,000 hours of transcribed speech audio data derived from read English audiobooks. The entire dataset is categorized into three training sets (100 hours of clean, 360 hours of clean, and 500 hours of other), two validation sets

Table 4: **Performance comparison on video and Interleave benchmarks** compared with existing approaches. * indicates officially released checkpoints evaluated by us. Best performance is marked **bold**.

Model	VideoMME		MVBench	Llava-Interleave	
	w/o subs	w subs	avg	in-domain	out-domain
MiniCPM-V-2.6 [242]	60.9	63.6	-	-	-
LLaVA-OneVision-7B [106]	58.2	-	-	-	-
Qwen2-VL-7B [206]	63.3	69.0	67.0	49.5*	51.0*
InternVL2-8B [34]	56.3	59.3	65.8	-	-
VITA-1.5 [60]	56.1	58.7	55.4	-	-
Baichuan-Omni [115]	58.2	-	60.9	-	-
MiniCPM-o-2.6 [242]	63.0*	65.3*	58.1*	43.5*	36.8*
M2-omni-9B	60.4	65.0	66.3	59.8	87.8
VideoLLaMA2-72B [36]	61.4	63.1	62.0	-	-
LLaVA-OneVision-72B [106]	66.2	69.5	59.4	-	-
Qwen2-VL-72B [206]	71.2	77.8	73.6	-	-
InternVL2-Llama3-76B [34]	64.7	67.8	69.6	-	-
M2-omni-72B	65.2	67.7	69.6	63.5	89.9
GPT-4v [155]	59.9	63.3	43.7	39.2	57.78
GPT-4o-20240513 [156]	71.9	77.2	-	-	-
Gemini-1.5-Pro [196]	75.0	81.3	-	-	-

(clean and other), and two test sets (clean and other). In this study, we assess our model’s audio comprehension capabilities using both the clean and other testsets.

Aishell1 [12]: The Aishell1 dataset comprises 178 hours of speech data, recorded by 400 speakers from various accent regions across China. It is organized into three subsets: a training set consisting of 340 speakers, a validation set with 40 speakers, and a test set featuring 20 speakers.

AudioCaps [97]: AudioCaps is a comprehensive dataset featuring audio event descriptions specifically curated for the purpose of audio captioning. The sounds within this collection are derived from the AudioSet dataset. We utilize this dataset to assess the audio captioning capabilities of our M2-omni.

The results are presented in Table 5, and our M2-omni-9B demonstrates competitive performance in speech recognition and audio captioning tasks. Specifically, our M2-omni-9B is comparable to GPT-4o-Realtime [156]. In addition, M2-omni-9B significantly outperforms all other baselines on AudioCaps benchmarks, while achieving the second-best results for the MLS English, Librispeech other, Librispeech-clean and Aishell1 benchmarks.

5.1.4 Audio Generation

In this section, we also evaluated our model on the commonly-used test set: SEED-TTS test-zh. **SEED-TTS** [4] serves as an out-of-domain evaluation test set, comprising diverse input texts and reference speeches from various domains. We present the experimental results for M2-omni-9B and the baseline models in Table 8. As shown in Table 8, our model outperforms MiniCPM-o-2.6 [242] in speech generation capability, achieving significant improvements in both evaluation metrics. However, our M2-omni-9B still lags behind traditional vertical speech generation models, highlighting the need for further research and development to bridge this gap.

5.1.5 Text-only Performance

In this section, we assess the performance of our proposed M2-omni-9B model and its initial counterpart, Llama3.1-8B [52]. To evaluate the models’ knowledge and examination capabilities, we employ a range of benchmarks, including AGIEVAL [267] and MMLU [79]. Furthermore, we utilize a diverse set of benchmarks to evaluate the models’ multi-step problem-solving capabilities, including MATH [80] for mathematical derivation, HellaSwag [256] for commonsense reasoning in

Table 5: **Quantitative results on speech recognition and audio captioning.** * indicates results from [242].

Models	MLS-English WER↓	Librispeech-other WER↓	Librispeech-clean WER↓	Aishell1 WER↓	AudioCaps CIDER↑
UIO2-L-1.1B [131]	-	-	-	-	45.7
UIO2-XL-3.2B [131]	-	-	-	-	45.7
UIO2-XXL-6.8B [131]	-	-	-	-	48.9
Whisper-large-v2 [164]	6.83	5.16	2.87	-	-
Paraformer-cn [65]	-	-	-	2.12	-
VITA-1.5 [59]	-	7.5	3.4	2.2	-
Mini-Omini2 [231]	-	9.8	4.8	-	-
Freeze-Omini [212]	-	10.5	4.1	2.8	-
MiniCPM-o-2.6 [242]	-	-	1.7	1.6	-
GPT-4o-Realtime [156]	-	-	2.6*	7.3*	-
M2-omni-9B	7.19	5.29	2.07	1.99	49.2

Table 6: **Quantitative results on language benchmarks.** * indicates officially released checkpoints evaluated using the tools provided by OpenCompass [41].

Tasks	MMLU	AGIEVAL	ARC-C	GPQA	MATH	HellaSwag	Avg. Accuracy
LLama3.1-8B	69.4	41.2*	83.4	30.4	51.9	75.1*	58.6
M2-omni-9B	68.5	43.7	78.7	32.3	51.8	80.1	59.2

real-world contexts, ARC-C [38] for scientific logical chains, and GPQA [168] for critical analysis in expert-level domains. For all evaluation datasets, we adopt a generation-based assessment approach with greedy decoding.

Our experimental results, presented in Tab. 6, demonstrate that the performance of our proposed M2-omni-9B model outperforms its initial counterpart, Llama3.1-8B across most evaluation datasets, which is attributed to our multi-stage language preservation strategy and the high-quality instruction tuning data used in our training process.

5.1.6 User Experience Evaluation

Evaluation Metric: Current benchmarks such as MMBench [127], MMStar [25], and MMMU [255] primarily focus on assessment through judgment-style questions. However, this assessment does not align with the users’ actual interactive experience with MLLMs. To address this limitation, drawing inspiration from SuperclueV [39], we develop evaluation criteria specifically for assessing the models’ performance on user experience, which contains four key dimensions: relevance, fluency, informativeness, and format rationality. *Relevance* assesses the extent to which the model’s responses align with both the provided prompts and the multimodal inputs. *Fluency* evaluates the naturalness, smoothness, clarity, comprehensibility, and anthropomorphic quality of the model’s responses. *Informativeness* measures the extent to which the model’s responses provide relevant information, knowledge, and analytical reasoning, enhancing their utility, detail, depth, and innovation. *Format rationality* examines the model’s ability to adaptively generate appropriately structured and clear formats, for presenting results based on varying prompt types.

Evaluation Dataset: We collect chat samples from the actual users’ multi-turn interaction dialogues, which cover a variety of tasks, including visual question answering (VQA), conversational interactions, chart interpretation, mathematical problem-solving, optical character recognition (OCR), and other related tasks. GPT-4o [156] is instructed to follow the evaluation criteria to generate initial reference answers for these collected samples. To ensure accuracy, human annotators refine the initial responses generated by GPT-4o. This process yields an evaluation dataset with nearly 300 samples, each with a corresponding ground truth.

Table 7: **Free-form dialogue generation evaluation results.**

Model	Relevance	Fluency	Informativeness
TextBind [108]	3.85	4.30	3.25
M2-omni-9B	4.60	4.80	3.80

Table 8: **Quantitative results on audio generation.** * indicates officially released checkpoints evaluated by us.

Model	SEED test-zh	
	CER(%)↓	SS↑
Human	1.26	0.755
Vocoder Resyn.	1.27	0.720
Seed-TTS [4]	1.12	0.796
FireRedTTS [74]	1.51	0.635
MaskGCT [214]	2.27	0.774
E2-TTS(32 NFE) [54]	1.97	0.730
F5-TTS(32 NFE) [31]	1.56	0.741
CosyVoice [49]	3.63	0.723
CosyVoice2 [51]	1.45	0.748
CosyVoice2-S [51]	1.45	0.753
CosyVoice2-S [51]	1.45	0.753
MiniCPM-o-2.6 [242]	8.03*	0.474*
M2-omni-9B	6.36	0.604

We utilize GPT-4o to evaluate the model’s responses against the ground truth, adhering to the standards outlined in Tab. 9. As shown in Tab. 10, our M2-omni model, after undergoing alignment tuning, demonstrates an average increase of 5.7%-23.4% in user experience performance, which is further validated by human annotations on selected cases. Meanwhile, our model’s performance on the OC benchmark across other modalities remains relatively consistent, thereby demonstrating the effectiveness of our unified training strategy, which integrates DPO and instruction tuning in the alignment tuning stage.

5.1.7 Free-Form Dialogue Generation

To evaluate the open-world multi-turn multimodal instruction following capabilities of our model, we create a test set consisting of 50 conversations derived from realistic scenarios. We utilize M2-omni-9B to generate arbitrarily interleaved text and images in proper conversation contexts. For quantitative results, following our user experience evaluation metric, we employ GPT-4o to rate each conversation on a scale of 0 to 5 across three evaluation dimensions: relevance, fluency, and informativeness. We carry out our quantitative results against recent work TextBind [108]. As shown in Tab. 7, M2-omni-9B exhibits overall better understanding and generating ability of multi-turn multimodal conversations. More qualitative cases can be found in Fig. 8.

5.2 Qualitative Results

In this section, we qualitatively assess the capabilities of our M2-omni, presenting examples of each modality and different tasks.

We show multimodal understanding abilities of our M2-omni in Fig. 7. M2-omni demonstrates promising capabilities in processing cross-modal problems, encompassing image understanding, video understanding, interleaved image-text understanding, and image-audio understanding. More examples can be found in the appendix, provided in Sec. A.

Fig. 8 illustrates the model’s ability to generate free-form dialogue, where our M2-omni can create images based on the conversation context without explicit user input, useful for explaining ideas to users.

Table 9: **Detailed model experience evaluation standards.**

Score	Description
1	Totally unsatisfied, totally unacceptable
2	Basically not satisfied, with many obvious problems
3	Generally satisfied, with a few obvious problems
4	Basically satisfied, minor flaws allowed
5	Completely satisfied, almost perfect

Table 10: **Detailed evaluation on user experience benchmark and OC benchmark. OC is short for the OpenCompass image-text understanding benchmark.**

Model	Relevance	Fluency	Informativeness	Format Rationality	Expr. Avg($\Delta\%$)	OC Avg(Δ)
M2-omni-9B	4.556	4.036	2.742	3.573	3.726	-
M2-omni-9B-Align	4.893	4.735	4.118	4.644	4.598(+23.4%)	-0.3
M2-omni-72B	4.942	4.689	3.267	4.265	4.351	-
M2-omni-72B-Align	4.946	4.875	3.961	4.615	4.598(+5.7%)	-0.2
InternVL2-26B [35]	4.886	4.76	4.15	4.52	4.577	-
GPT-4o [156]	5	4.878	3.854	4.831	4.64	-

5.3 Ablation Study

In this section, we conduct ablation studies to investigate the effectiveness of our step balance strategy and dynamic adaptive balance strategy in our M2-omni model. These experiments aim to provide insights into the impact of these key components on our M2-omni’s performance.

5.3.1 Step Balance Strategy

As described in Sec. 3.1, we investigate the impact of various data sample balancing strategies and loss weight balancing schemes on the multimodal joint training stage of pre-training. We evaluate the performance of candidate strategies on two VQA benchmarks, OK-VQA [140] and VQAv2 [70], and assess its image captioning performance using the Flickr30k [244] benchmark.

For pretrained models lacking in instruction following ability, to assess the effectiveness of our approach, we evaluate the performance of these models on VQA tasks using a few-shot approach and on image caption tasks using a zero-shot approach. Tab. 11 presents the results of our M2-omni pretrained models, which demonstrate the effectiveness of our step balance strategy.

5.3.2 Dynamic Adaptive Balance Strategy

We conducted a evaluation of our dynamic adaptive balance strategy across text-image, video, and audio modalities using constrained datasets. The evaluation was conducted on benchmark datasets specific to each modality: for text-image tasks, MMBench [127], OK-VQA [140], VQAv2 [70], TextVQA [185], and GQA [83] were employed; for video, MSVD-QA [233] and MSRVTT-QA [233] benchmarks were utilized; and for audio, we assessed performance on the AudioCaps [98] (AAC) and MLS [162]-English (ASR) tasks. The experimental outcomes are detailed in Table 12.

In contrast to actual training pipeline, our evaluation involved instruction tuning starting from pre-trained models. Specifically, for each modality, we initially trained single-modality baseline models (the ‘Sinle-modal Baselines’ in Table 12) individually over three epochs to establish the maximum achievable performance per modality. The results indicate that optimal performance was predominantly observed by the second epoch. However, the ASR task, due to its more complex patterns, had not fully converged even by the third epoch. Subsequently, we combined data from all three modalities to train a unified model (the ‘Mixture w/o MM-Bal.’ in Table 12). Under this multimodal training regimen, the image-text modality reached its optimal performance at the second epoch, while the video modality achieved peak performance as early as the first epoch and with performance consistently decreasing in subsequent epochs. In contrast, the audio modality demonstrated continuous improvement, attaining its best performance by the third epoch. These

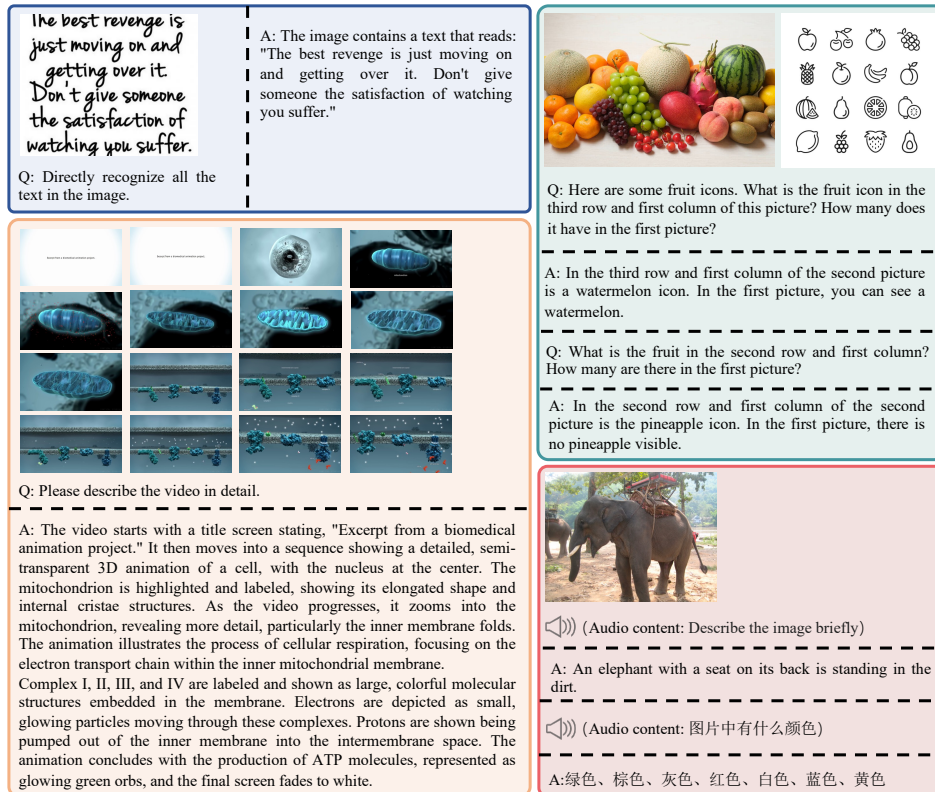


Figure 7: **Cases for multimodal understanding.** M2-omni shows great potential to solve various multimodal problems.

Table 11: **Ablation studies on step balancing strategy.** The loss weight setting [1,1,1] corresponds to the uniform weighting of the loss functions for image-text pairs, interleaved image-text, and video datasets. * and # represent the loss weight settings. * is obtained through experimental trials and parameter tuning. # is obtained by normalizing the loss weights using the inverse of the loss at convergence, as described in Section Sec. 3.1. We evaluate the few-shot performance on VQA tasks and the zero-shot performance on the captioning task of our pre-trained model.


Data Sample Balance	Loss Weight Balance	OK-VQA(4-shot)	VQAv2(4-shot)	Flickr30k(0-shot)
Random Sample	[1,1,1]	40.5	54.3	87.0
Round-robin	[1,1,1]	41.6	54.4	88.1
Accumulation	[1,1,1]	41.7	54.6	88.2
Accumulation	[0.2, 1.0, 0.03]*	39.7	52.5	87.1
Accumulation	[0.45, 0.36, 1.09]#	42.1	55.4	88.2

observations underscore the imbalance in training progress among different modalities when engaged in multimodal training.

To address this imbalance, we introduced the dynamic adaptive balance strategy within our M2-omni training framework. This strategy dynamically adjusts the loss weights for each modality based on their respective training progress. In the context of this evaluation, it accelerates the training of the audio modality while appropriately reducing the learning weights for the image-text and video modalities to prevent overfitting. The evaluation results for this balanced training approach are denoted as 'Mixture w/ MM-Bal.' in Table 12. The results demonstrate that, although some degree of imbalance among modalities persists, the balanced training strategy significantly alleviates the issues observed with simple mixed training: optimal performances across benchmarks are now concentrated around the second and third epochs, and performance across all modalities has been markedly enhanced. Moreover, under the balanced training strategy, the model achieved single-


Q: What's the differences between Chinese and American food culture?

A: Of course! Let's start with this image:



This shows a common scene in Chinese cuisine, where noodles are a staple food. In China, noodles can be served in various ways, such as stir-fried, boiled, or in soups. They are often enjoyed with a variety of side dishes and sauces.

Now, let's look at this image:



This represents American cuisine, which is known for its diversity due to the country's history of immigration and cultural fusion. American food can range from classic dishes like burgers and fries to more regional specialties like Southern barbecue or New England clam chowder. The key difference here is the emphasis on portion size and variety.

In summary, while both cuisines have their unique flavors and cooking methods, Chinese cuisine tends to focus on harmony and balance, whereas American cuisine is known for its variety and abundance. Both offer rich culinary experiences, but they cater to different tastes and preferences.


Q: I just opened a fried chicken restaurant, can you generate an ad for me? I hope to put it online to attract customers.

A: Sure! Here's a possible ad for your fried chicken restaurant:




Q: We also sell burgers, can you include burgers in your ad?

A: Absolutely! Here's an updated version of the ad that includes burgers:




Q: What about including cola?

A: Absolutely! Here's an updated version of the ad that includes cola:




Q: Who is him?



A: He is Steven Paul Jobs, who was the co-founder and former CEO of Apple Inc. He is known for his Visionary approach to technology and design.


Q: Can you show me a product designed by him?

A: Sure. One of the most iconic products designed under his leadership was the iMac, a line of all-in-one desktop computers. Please have a look at this.




Q: What are the attractions worth visiting in Beijing?


A: Beijing has many famous attractions worth visiting. For example, you can first try the Forbidden City. It is a magnificent palace where emperors once lived. Visitors can often feel the richness of history here.



Then, you can go to the China Science and Technology Museum, which has many interesting exhibitions showcasing China's most advanced scientific and technological achievements.



After a day of sightseeing, don't forget to try the street food stalls and try a variety of local specialties, such as the famous fried dumplings and fresh noodles.



Finally, check out the various local temples with their majestic statues and historic architecture.



These places can make you experience the diverse charm of Beijing.

Figure 8: Cases for Free-Form Dialogue Generation.

modality optimal performance in 7 out of 9 benchmarks. The best-performing model (at epoch 2) surpassed the optimal performance of each single-modality baseline in 6 out of 9 benchmarks (MMBench, OK-VQA, VQAv2, TextVQA, AudioCaps, MLS-English). Additionally, for the audio modality, the model at epoch 3 outperformed the single-modality baselines in 5 out of 9 benchmarks (OK-VQA, VQAv2, MSRVT-T-QA, AudioCaps, MLS-English), with significant improvements in audio performance. These experimental results highlight the effectiveness of our dynamic adaptive balance strategy.

6 Conclusion

In this study, we propose M2-omni, a highly competitive omni-MLLM model to GPT-4o, characterized by its comprehensive modality and task support, as well as its exceptional performance. M2-omni demonstrates competitive performance across a diverse range of tasks, including image understanding, video understanding, interleaved image-text understanding, audio understanding and generation, as well as free-form image generation. We employ a multi-stage training approach to train M2-omni, which enables progressive modality alignment. To address the challenge of maintaining consistent performance across all modalities, we propose a step-wise balance strategy for pretraining and a dynamically adaptive balance strategy for instruction tuning, which can effectively mitigate

Table 12: **Ablation results of the dynamic adaptive balance strategy.** Results for unimodal baselines are derived from the following single-modal models: † Image-Text Model, ‡ Video-Text Model, and § Audio-Text Model. The best result for each benchmark is **bolded**, while the best result for each model across all epochs is underlined.

Models		MM- Bench	OK- VQA	VQAv2	Text- VQA	GQA	MSVD- QA	MSRVTT QA	Audio Caps	MLS- English(↓)
Single-modal Baselines	ep1	68.0 [†]	56.4 [†]	74.8 [†]	<u>70.4[†]</u>	58.4 [†]	72.3 [‡]	59.3 [‡]	29.0 [§]	11.4 [§]
	ep2	77.8[†]	59.8 [†]	<u>76.9[†]</u>	69.8 [†]	60.6 [†]	76.5[‡]	<u>60.1[‡]</u>	39.9 [§]	9.33 [§]
	ep3	77.3 [†]	58.0 [†]	76.8 [†]	69.1 [†]	<u>60.8[†]</u>	74.4 [‡]	58.6 [‡]	39.5 [§]	<u>8.96[§]</u>
Mixture w/o MM-Bal.	ep1	70.5	55.9	75.7	70.2	57.7	<u>75.1</u>	<u>59.6</u>	27.5	12.1
	ep2	<u>75.8</u>	<u>58.8</u>	<u>77.0</u>	<u>70.5</u>	61.1	73.4	58.5	33.5	9.45
	ep3	75.6	58.4	76.5	69.5	60.1	70.2	56.9	<u>39.6</u>	<u>8.98</u>
Mixture w/ MM-Bal.	ep1	74.7	59.6	76.0	71.2	59.0	73.1	58.7	35.5	9.27
	ep2	77.8	61.7	77.2	71.8	60.5	74.8	58.5	41.2	8.31
	ep3	77.1	60.5	77.0	69.8	<u>60.7</u>	74.6	60.2	44.1	8.04

the impact of significant variations in data volume and convergence rates across heterogeneous multimodal tasks. We publicly release M2-omni, along with its comprehensive training details, including data configurations and training procedures, to facilitate future research in this domain.

References

- [1] Manoj Acharya, Kushal Kafle, and Christopher Kanan. Tallyqa: Answering complex counting questions. In *AAAI*, 2019. 44, 47
- [2] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023. 2, 12
- [3] Kriti Aggarwal, Aditi Khandelwal, Kumar Tanmay, Owais Mohammed Khan, Qiang Liu, Monojit Choudhury, Hardik Hansrajbhai Chauhan, Subhojit Som, Vishrav Chaudhary, and Saurabh Tiwary. Dublin–document understanding by language-image network. *arXiv preprint arXiv:2305.14218*, 2023. 44, 47
- [4] Philip Anastassiou, Jiawei Chen, Jitong Chen, Yuanzhe Chen, Zhuo Chen, Ziyi Chen, Jian Cong, Lelai Deng, Chuang Ding, Lu Gao, Mingqing Gong, Peisong Huang, Qingqing Huang, Zhiying Huang, Yuanyuan Huo, Dongya Jia, Chumin Li, Feiya Li, Hui Li, Jiabin Li, Xiaoyang Li, Xingxing Li, Lin Liu, Shouda Liu, Sichao Liu, Xudong Liu, Yuchen Liu, Zhengxi Liu, Lu Lu, Junjie Pan, Xin Wang, Yuping Wang, Yuxuan Wang, Zhen Wei, Jian Wu, Chao Yao, Yifeng Yang, Yuanhao Yi, Junteng Zhang, Qidi Zhang, Shuo Zhang, Wenjie Zhang, Yang Zhang, Zilin Zhao, Dejian Zhong, and Xiaobin Zhuang. Seed-tts: A family of high-quality versatile speech generation models. *CoRR*, abs/2406.02430, 2024. 15, 17
- [5] Gilles Baechler, Srinivas Sunkara, Maria Wang, Fedir Zubach, Hassan Mansoor, Vincent Etter, Victor Cărbune, Jason Lin, Jindong Chen, and Abhanshu Sharma. Screenai: A vision-language model for ui and infographics understanding, 2024. 45, 48
- [6] Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibao Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, Humen Zhong, Yuanzhi Zhu, Mingkun Yang, Zhaohai Li, Jianqiang Wan, Pengfei Wang, Wei Ding, Zheren Fu, Yiheng Xu, Jiabo Ye, Xi Zhang, Tianbao Xie, Zesen Cheng, Hang Zhang, Zhibo Yang, Haiyang Xu, and Junyang Lin. Qwen2.5-vl technical report, 2025. URL <https://arxiv.org/abs/2502.13923>. 14
- [7] Max Bain, Arsha Nagrani, Gül Varol, and Andrew Zisserman. Frozen in time: A joint video and image encoder for end-to-end retrieval. In *IEEE International Conference on Computer Vision*, 2021. 50
- [8] Max Bain, Arsha Nagrani, Gül Varol, and Andrew Zisserman. Frozen in time: A joint video and image encoder for end-to-end retrieval. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 1728–1738, 2021. 11, 39

- [9] Ltd Beijing Century TAL Education Technology Co. Tal datasets, 2021. <https://ai.100tal.com/openData/voice>. 10, 39, 50
- [10] Ali Furkan Biten, Ruben Tito, Andres Mafra, Lluís Gomez, Marçal Rusinol, Ernest Valveny, CV Jawahar, and Dimosthenis Karatzas. Scene text visual question answering. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 4291–4301, 2019. 45, 48
- [11] Ali Furkan Biten, Ruben Tito, Lluís Gomez, Ernest Valveny, and Dimosthenis Karatzas. Ocr-idl: Ocr annotations for industry document library dataset. *arXiv preprint arXiv:2202.12985*, 2022. 10, 39, 44, 47
- [12] Hui Bu, Jiayu Du, Xingyu Na, Bengu Wu, and Hao Zheng. AISHELL-1: an open-source mandarin speech corpus and a speech recognition baseline. In *20th Conference of the Oriental Chapter of the International Coordinating Committee on Speech Databases and Speech I/O Systems and Assessment, O-COCOSDA*, pages 1–5. IEEE, 2017. 1, 10, 15, 39, 50
- [13] Minwoo Byeon, Beomhee Park, Haecheon Kim, Sungjun Lee, Woonhyuk Baek, and Saehoon Kim. Coyo-700m: Image-text pair dataset. <https://github.com/kakaobrain/coyo-dataset>, 2022. 10, 39
- [14] Shihao Cai, Keqin Bao, Hangyu Guo, Jizhi Zhang, Jun Song, and Bo Zheng. Geogpt4v: Towards geometric multi-modal large language models with geometric image generation. *arXiv preprint arXiv:2406.11503*, 2024. 45, 48
- [15] Yuanqiang Cai, Longyin Wen, Libo Zhang, Dawei Du, and Weiqiang Wang. Rethinking object detection in retail stores. In *The 35th AAAI Conference on Artificial Intelligence (AAAI 2021)*, 2021. 44, 47
- [16] Shuaichen Chang, David Palzer, Jialin Li, Eric Fosler-Lussier, and Ningchuan Xiao. Mapqa: A dataset for question answering on choropleth maps. In *NeurIPS 2022 First Table Representation Workshop*, 2022. 44, 47
- [17] Soravit Changpinyo, Piyush Sharma, Nan Ding, and Radu Soricut. Conceptual 12m: Pushing web-scale image-text pre-training to recognize long-tail visual concepts. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 3558–3568, 2021. 10, 39
- [18] Guiming Hardy Chen, Shunian Chen, Ruifei Zhang, Junying Chen, Xiangbo Wu, Zhiyi Zhang, Zhihong Chen, Jianquan Li, Xiang Wan, and Benyou Wang. Allava: Harnessing gpt4v-synthesized data for a lite vision-language model. *arXiv preprint arXiv:2402.11684*, 2024. 44, 46, 47
- [19] Guoguo Chen, Shuzhou Chai, Guan-Bo Wang, Jiayu Du, Wei-Qiang Zhang, Chao Weng, Dan Su, Daniel Povey, Jan Trmal, Junbo Zhang, Mingjie Jin, Sanjeev Khudanpur, Shinji Watanabe, Shuaijiang Zhao, Wei Zou, Xiangang Li, Xuchen Yao, Yongqing Wang, Zhao You, and Zhiyong Yan. Gigaspeech: An evolving, multi-domain ASR corpus with 10, 000 hours of transcribed audio. In Hynek Hermansky, Honza Cernocký, Lukás Burget, Lori Lamel, Odette Scharenborg, and Petr Motlíček, editors, *Annual Conference of the International Speech Communication Association, Interspeech*, pages 3670–3674. ISCA, 2021. 10, 39, 50
- [20] Honglie Chen, Weidi Xie, Andrea Vedaldi, and Andrew Zisserman. Vggsound: A large-scale audio-visual dataset. In *2020 IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP*, pages 721–725. IEEE, 2020. 11, 39, 50
- [21] Jiaqi Chen, Jianheng Tang, Jinghui Qin, Xiaodan Liang, Lingbo Liu, Eric P. Xing, and Liang Lin. Geoqa: A geometric question answering benchmark towards multimodal numerical reasoning, 2022. URL <https://arxiv.org/abs/2105.14517>. 45, 48
- [22] Jingye Chen, Yupan Huang, Tengchao Lv, Lei Cui, Qifeng Chen, and Furu Wei. Textdiffuser: Diffusion models as text painters. *Advances in Neural Information Processing Systems*, 36, 2024. 10, 39
- [23] Keqin Chen, Zhao Zhang, Weili Zeng, Richong Zhang, Feng Zhu, and Rui Zhao. Shikra: Unleashing multimodal llm’s referential dialogue magic. *arXiv preprint arXiv:2306.15195*, 2023. 45
- [24] Lin Chen, Jisong Li, Xiaoyi Dong, Pan Zhang, Conghui He, Jiaqi Wang, Feng Zhao, and Dahua Lin. Sharegpt4v: Improving large multi-modal models with better captions. *arXiv preprint arXiv:2311.12793*, 2023. 44, 47
- [25] Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Jiaqi Wang, Yu Qiao, Dahua Lin, et al. Are we on the right way for evaluating large vision-language models? *arXiv preprint arXiv:2403.20330*, 2024. 13, 16

- [26] Lin Chen, Xilin Wei, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Bin Lin, Zhenyu Tang, et al. Sharegpt4video: Improving video understanding and generation with better captions. *arXiv preprint arXiv:2406.04325*, 2024. 49
- [27] Ling-Hao Chen, Shunlin Lu, Ailing Zeng, Hao Zhang, Benyou Wang, Ruimao Zhang, and Lei Zhang. Motionllm: Understanding human behaviors from human motions and videos. *arXiv preprint arXiv:2405.20340*, 2024. 49
- [28] Qian Chen, Yafeng Chen, Yanni Chen, Mengzhe Chen, Yingda Chen, Chong Deng, Zhihao Du, Ruize Gao, Changfeng Gao, Zhifu Gao, Yabin Li, Xiang Lv, Jiaqing Liu, Haoneng Luo, Bin Ma, Chongjia Ni, Xian Shi, Jialong Tang, Hui Wang, Hao Wang, Wen Wang, Yuxuan Wang, Yunlan Xu, Fan Yu, Zhijie Yan, Yexin Yang, Baosong Yang, Xian Yang, Guanrou Yang, Tianyu Zhao, Qinglin Zhang, Shiliang Zhang, Nan Zhao, Pei Zhang, Chong Zhang, and Jinren Zhou. Minmo: A multimodal large language model for seamless voice interaction, 2025. 4
- [29] Wenhui Chen, Hongmin Wang, Jianshu Chen, Yunkai Zhang, Hong Wang, Shiyang Li, Xiyu Zhou, and William Yang Wang. Tabfact: A large-scale dataset for table-based fact verification. *arXiv preprint arXiv:1909.02164*, 2019. 44, 47
- [30] Xingyu Chen, Zihan Zhao, Lu Chen, JiaBao Ji, Danyang Zhang, Ao Luo, Yuxuan Xiong, and Kai Yu. WebSRC: A dataset for web-based structural reading comprehension. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 4173–4185, 2021. URL <https://aclanthology.org/2021.emnlp-main.343>. 45, 48
- [31] Yushen Chen, Zhikang Niu, Ziyang Ma, Keqi Deng, Chunhui Wang, Jian Zhao, Kai Yu, and Xie Chen. F5-TTS: A fairytaler that fakes fluent and faithful speech with flow matching. *CoRR*, abs/2410.06885, 2024. 17
- [32] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, Bin Li, Ping Luo, Tong Lu, Yu Qiao, and Jifeng Dai. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *arXiv preprint arXiv:2312.14238*, 2023. 48
- [33] Zhe Chen, Weiyun Wang, Yue Cao, Yangzhou Liu, Zhangwei Gao, Erfei Cui, Jinguo Zhu, Shenglong Ye, Hao Tian, Zhaoyang Liu, et al. Expanding performance boundaries of open-source multimodal models with model, data, and test-time scaling. *arXiv preprint arXiv:2412.05271*, 2024. 14
- [34] Zhe Chen, Weiyun Wang, Hao Tian, Shenglong Ye, Zhangwei Gao, Erfei Cui, Wenwen Tong, Kongzhi Hu, Jiapeng Luo, Zheng Ma, et al. How far are we to gpt-4v? closing the gap to commercial multimodal models with open-source suites. *arXiv preprint arXiv:2404.16821*, 2024. 15, 49
- [35] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 24185–24198, 2024. 2, 18, 44, 47
- [36] Zesen Cheng, Sicong Leng, Hang Zhang, Yifei Xin, Xin Li, Guanzheng Chen, Yongxin Zhu, Wenqi Zhang, Ziyang Luo, Deli Zhao, et al. Videollama 2: Advancing spatial-temporal modeling and audio understanding in video-llms. *arXiv preprint arXiv:2406.07476*, 2024. 15
- [37] Chee Kheng Chng, Yuliang Liu, Yipeng Sun, Chun Chet Ng, Canjie Luo, Zihan Ni, ChuanMing Fang, Shuaitao Zhang, Junyu Han, Errui Ding, et al. Icdar2019 robust reading challenge on arbitrary-shaped text-rrc-art. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*, pages 1571–1576. IEEE, 2019. 45, 48
- [38] Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge. *arXiv:1803.05457v1*, 2018. 16
- [39] CLUE benchmark. Superclue-v, 2024. URL <https://github.com/CLUEbenchmark/SuperCLUE-V>. 16
- [40] Mike Conover, Matt Hayes, Ankit Mathur, Jianwei Xie, Jun Wan, Sam Shah, Ali Ghodsi, Patrick Wendell, Matei Zaharia, and Reynold Xin. Free dolly: Introducing the world’s first truly open instruction-tuned llm. *online*, 2023. URL <https://www.databricks.com/blog/2023/04/12/dolly-first-open-commercially-viable-instruction-tuned-llm>. 46
- [41] OpenCompass Contributors. Opencompass: A universal evaluation platform for foundation models. <https://github.com/open-compass/opencompass>, 2023. 13, 14, 16

- [42] Michael Crawshaw. Multi-task learning with deep neural networks: A survey. *arXiv preprint arXiv:2009.09796*, 2020. 8
- [43] Ganqu Cui, Lifan Yuan, Ning Ding, Guanming Yao, Wei Zhu, Yuan Ni, Guotong Xie, Zhiyuan Liu, and Maosong Sun. Ultrafeedback: Boosting language models with high-quality feedback, 2023. 46
- [44] Wenliang Dai, Nayeon Lee, Boxin Wang, Zhuolin Yang, Zihan Liu, Jon Barker, Tuomas Rintamaki, Mohammad Shoeybi, Bryan Catanzaro, and Wei Ping. Nvlm: Open frontier-class multimodal llms. *arXiv preprint*, 2024. 14
- [45] Mostafa Dehghani, Basil Mustafa, Josip Djolonga, Jonathan Heek, Matthias Minderer, Mathilde Caron, Andreas Steiner, Joan Puigcerver, Robert Geirhos, Ibrahim M Alabdulmohsin, et al. Patch n’pack: Navit, a vision transformer for any aspect ratio and resolution. *Advances in Neural Information Processing Systems*, 36, 2024. 4
- [46] Matt Deitke, Christopher Clark, Sangho Lee, Rohun Tripathi, Yue Yang, Jae Sung Park, Mohammadreza Salehi, Niklas Muennighoff, Kyle Lo, Luca Soldaini, et al. Molmo and pixmo: Open weights and open data for state-of-the-art multimodal models. *arXiv preprint arXiv:2409.17146*, 2024. 10, 14, 44, 47
- [47] Konstantinos Drossos, Samuel Lipping, and Tuomas Virtanen. Clotho: an audio captioning dataset. In *2020 IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP*, pages 736–740. IEEE, 2020. 11, 39, 50
- [48] Yifan Du, Hangyu Guo, Kun Zhou, Wayne Xin Zhao, Jinpeng Wang, Chuyuan Wang, Mingchen Cai, Ruihua Song, and Ji-Rong Wen. What makes for good visual instructions? synthesizing complex visual reasoning instructions for visual instruction tuning, 2023. 44, 47
- [49] Zhihao Du, Qian Chen, Shiliang Zhang, Kai Hu, Heng Lu, Yexin Yang, Hangrui Hu, Siqi Zheng, Yue Gu, Ziyang Ma, Zhifu Gao, and Zhijie Yan. Cosyvoice: A scalable multilingual zero-shot text-to-speech synthesizer based on supervised semantic tokens. *CoRR*, abs/2407.05407, 2024. 17
- [50] Zhihao Du, Qian Chen, Shiliang Zhang, Kai Hu, Heng Lu, Yexin Yang, Hangrui Hu, Siqi Zheng, Yue Gu, Ziyang Ma, et al. Cosyvoice: A scalable multilingual zero-shot text-to-speech synthesizer based on supervised semantic tokens. *arXiv preprint arXiv:2407.05407*, 2024. 4
- [51] Zhihao Du, Yuxuan Wang, Qian Chen, Xian Shi, Xiang Lv, Tianyu Zhao, Zhifu Gao, Yexin Yang, Changfeng Gao, Hui Wang, Fan Yu, Huadai Liu, Zhengyan Sheng, Yue Gu, Chong Deng, Wen Wang, Shiliang Zhang, Zhijie Yan, and Jingren Zhou. Cosyvoice 2: Scalable streaming speech synthesis with large language models, 2024. 17
- [52] Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024. 2, 4, 15
- [53] Caption Emporium. Textocr-gpt4o. <https://huggingface.co/datasets/CaptionEmporium/TextOCR-GPT4o>, 2024. 47
- [54] Sefik Emre Eskimez, Xiaofei Wang, Manthan Thakker, Canrun Li, Chung-Hsien Tsai, Zhen Xiao, Hemin Yang, Zirun Zhu, Min Tang, Xu Tan, Yanqing Liu, Sheng Zhao, and Naoyuki Kanda. E2 TTS: embarrassingly easy fully non-autoregressive zero-shot TTS. *CoRR*, abs/2406.18009, 2024. 17
- [55] Patrick Esser, Sumith Kulal, Andreas Blattmann, Rahim Entezari, Jonas Müller, Harry Saini, Yam Levi, Dominik Lorenz, Axel Sauer, Frederic Boesel, et al. Scaling rectified flow transformers for high-resolution image synthesis, 2024. URL <https://arxiv.org/abs/2403.03206>, 2, 2024. 4
- [56] Miquel Farré, Andi Marafioti, Lewis Tunstall, Leandro Von Werra, and Thomas Wolf. Finevideo. <https://huggingface.co/datasets/HuggingFaceFV/finevideo>, 2024. 49
- [57] Chaoyou Fu, Yuhan Dai, Yondong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, et al. Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis. *arXiv preprint arXiv:2405.21075*, 2024. 13
- [58] Chaoyou Fu, Haojia Lin, Zuwei Long, Yunhang Shen, Meng Zhao, Yifan Zhang, Shaoqi Dong, Xiong Wang, Di Yin, Long Ma, Xiawu Zheng, Ran He, Rongrong Ji, Yunsheng Wu, Caifeng Shan, and Xing Sun. Vita: Towards open-source interactive omni multimodal llm, 2024. URL <https://arxiv.org/abs/2408.05211>. 2

- [59] Chaoyou Fu, Haojia Lin, Xiong Wang, Yi-Fan Zhang, Yunhang Shen, Xiaoyu Liu, Yangze Li, Zuwei Long, Heting Gao, Ke Li, Long Ma, Xiawu Zheng, Rongrong Ji, Xing Sun, Caifeng Shan, and Ran He. Vita-1.5: Towards gpt-4o level real-time vision and speech interaction, 2025. [16](#)
- [60] Chaoyou Fu, Haojia Lin, Xiong Wang, Yi-Fan Zhang, Yunhang Shen, Xiaoyu Liu, Yangze Li, Zuwei Long, Heting Gao, et al. Vita-1.5: Towards gpt-4o level real-time vision and speech interaction. *arXiv preprint arXiv:2501.01957*, 2025. [2](#), [14](#), [15](#)
- [61] Samir Yitzhak Gadre, Gabriel Ilharco, Alex Fang, Jonathan Hayase, Georgios Smyrnis, Thao Nguyen, Ryan Marten, Mitchell Wortsman, Dhruva Ghosh, Jieyu Zhang, et al. Datacomp: In search of the next generation of multimodal datasets. *Advances in Neural Information Processing Systems*, 36, 2024. [10](#), [39](#)
- [62] Jiahui Gao, Renjie Pi, Jipeng Zhang, Jiacheng Ye, Wanjun Zhong, Yufei Wang, Lanqing Hong, Jianhua Han, Hang Xu, Zhenguo Li, et al. G-llava: Solving geometric problem with multi-modal large language model. *arXiv preprint arXiv:2312.11370*, 2023. [48](#)
- [63] Leo Gao, Stella Biderman, Sid Black, Laurence Golding, Travis Hoppe, Charles Foster, Jason Phang, Horace He, Anish Thite, Noa Nabeshima, et al. The pile: An 800gb dataset of diverse text for language modeling. *arXiv preprint arXiv:2101.00027*, 2020. [11](#), [39](#)
- [64] Zhifu Gao, Shiliang Zhang, Ming Lei, and Ian McLoughlin. San-m: Memory equipped self-attention for end-to-end speech recognition. *arXiv preprint arXiv:2006.01713*, 2020. [4](#)
- [65] Zhifu Gao, Shiliang Zhang, Ian McLoughlin, and Zhijie Yan. Paraformer: Fast and accurate parallel transformer for non-autoregressive end-to-end speech recognition. *arXiv preprint arXiv:2206.08317*, 2022. [4](#), [16](#)
- [66] Jort F. Gemmeke, Daniel P. W. Ellis, Dylan Freedman, Aren Jansen, Wade Lawrence, R. Channing Moore, Manoj Plakal, and Marvin Ritter. Audio set: An ontology and human-labeled dataset for audio events. In *2017 IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP*, pages 776–780. IEEE, 2017. [11](#), [39](#), [50](#)
- [67] Philippe Gervais, Asya Fadeeva, and Andrii Maksai. Mathwriting: A dataset for handwritten mathematical expression recognition, 2024. URL <https://arxiv.org/abs/2404.10690>. [45](#), [48](#)
- [68] Glaive.ai. glaive-code-assistant, 2023. URL <https://huggingface.co/datasets/glaiveai/glaive-code-assistant>. [46](#)
- [69] Zi Gong, Hang Yu, Cong Liao, Bingchang Liu, Chaoyu Chen, and Jianguo Li. Cobra: Convergence balancer for multitask finetuning of large language models. *arXiv preprint arXiv:2410.06741*, 2024. [8](#)
- [70] Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 6904–6913, 2017. [18](#), [44](#), [47](#), [50](#)
- [71] Shuhao Gu, Jialing Zhang, Siyuan Zhou, Kevin Yu, Zhaohu Xing, Liangdong Wang, Zhou Cao, Jintao Jia, Zhuoyi Zhang, Yixuan Wang, Zhenchong Hu, Bo-Wen Zhang, Jijie Li, Dong Liang, Yingli Zhao, Yulong Ao, Yaoqi Liu, Fangxiang Feng, and Guang Liu. Infinity-mm: Scaling multimodal performance with large-scale and high-quality instruction data, 2024. URL <https://arxiv.org/abs/2410.18558>. [45](#), [47](#)
- [72] Tianrui Guan, Fuxiao Liu, Xiyang Wu, Ruiqi Xian, Zongxia Li, Xiaoyu Liu, Xijun Wang, Lichang Chen, Furong Huang, Yaser Yacoob, Dinesh Manocha, and Tianyi Zhou. Hallusionbench: An advanced diagnostic suite for entangled language hallucination and visual illusion in large vision-language models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 14375–14385, June 2024. [13](#)
- [73] Anisha Gunjal, Jihan Yin, and Erhan Bas. Detecting and preventing hallucinations in large vision language models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 18135–18143, 2024. [45](#), [47](#)
- [74] Haohan Guo, Kun Liu, Feiyu Shen, Yi-Chen Wu, Feng-Long Xie, Kun Xie, and Kaituo Xu. Fireredtts: A foundation text-to-speech framework for industry-level generative speech applications. *CoRR*, abs/2409.03283, 2024. [17](#)
- [75] Ankush Gupta, Andrea Vedaldi, and Andrew Zisserman. Synthetic data for text localisation in natural images. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2016. [45](#), [48](#)

- [76] Danna Gurari, Qing Li, Abigale J. Stangl, Anhong Guo, and Jeffrey P. Bigham. Vizwiz grand challenge: Answering visual questions from blind people. *IEEE*, 2018. 44, 47
- [77] Xuehai He, Yichen Zhang, Luntian Mou, Eric Xing, and Pengtao Xie. Pathvqa: 30000+ questions for medical visual question answering. *arXiv preprint arXiv:2003.10286*, 2020. 44
- [78] Xuehai He, Weixi Feng, Kaizhi Zheng, Yujie Lu, Wanrong Zhu, Jiachen Li, Yue Fan, Jianfeng Wang, Linjie Li, Zhengyuan Yang, Kevin Lin, William Yang Wang, Lijuan Wang, and Xin Eric Wang. Mmworld: Towards multi-discipline multi-faceted world model evaluation in videos. *arXiv preprint arXiv: 2406.08407*, 2024. 49
- [79] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding, 2021. URL <https://arxiv.org/abs/2009.03300>. 15
- [80] Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset, 2021. URL <https://arxiv.org/abs/2103.03874>. 15
- [81] Anwen Hu, Haiyang Xu, Jiabo Ye, Ming Yan, Liang Zhang, Bo Zhang, Chen Li, Ji Zhang, Qin Jin, Fei Huang, et al. mplug-docowl 1.5: Unified structure learning for ocr-free document understanding. *arXiv preprint arXiv:2403.12895*, 2024. 44, 47
- [82] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models, 2021. URL <https://arxiv.org/abs/2106.09685>. 7
- [83] Drew A Hudson and Christopher D Manning. Gqa: A new dataset for real-world visual reasoning and compositional question answering. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6700–6709, 2019. 18, 44, 47, 50
- [84] Yunseok Jang, Yale Song, Chris Dongjoo Kim, Youngjae Yu, Youngjin Kim, and Gunhee Kim. Video question answering with spatio-temporal reasoning. *IJCV*, 2019. 49, 50
- [85] Jiaming Ji, Jiayi Zhou, Hantao Lou, Boyuan Chen, Donghai Hong, Xuyao Wang, Wenqi Chen, Kaile Wang, Rui Pan, Jiahao Li, Mohan Wang, Josef Dai, Tianyi Qiu, Hua Xu, Dong Li, Weipeng Chen, Jun Song, Bo Zheng, and Yaodong Yang. Align anything: Training all-modality models to follow instructions with language feedback. <https://arxiv.org/abs/2412.15838>, 2024. 45, 46, 47
- [86] Jiaming Ji, Jiayi Zhou, Hantao Lou, Boyuan Chen, Donghai Hong, Xuyao Wang, Wenqi Chen, Kaile Wang, Rui Pan, Jiahao Li, Mohan Wang, Josef Dai, Tianyi Qiu, Hua Xu, Dong Li, Weipeng Chen, Jun Song, Bo Zheng, and Yaodong Yang. Align anything: Training all-modality models to follow instructions with language feedback, 2024. URL <https://arxiv.org/abs/2412.15838>. 49
- [87] Baoxiong Jia, Ting Lei, Song-Chun Zhu, and Siyuan Huang. Egotaskqa: Understanding human tasks in egocentric videos. *Advances in Neural Information Processing Systems*, 35:3343–3360, 2022. 49
- [88] Justin Johnson, Bharath Hariharan, Laurens Van Der Maaten, Li Fei-Fei, C Lawrence Zitnick, and Ross Girshick. Clevr: A diagnostic dataset for compositional language and elementary visual reasoning. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2901–2910, 2017. 45, 48
- [89] Kushal Kafle, Scott Cohen, Brian Price, and Christopher Kanan. Dvqa: Understanding data visualizations via question answering. In *CVPR*, 2018. 44, 47
- [90] Samira Ebrahimi Kahou, Vincent Michalski, Adam Atkinson, Ákos Kádár, Adam Trischler, and Yoshua Bengio. Figureqa: An annotated figure dataset for visual reasoning. *arXiv preprint arXiv:1710.07300*, 2017. 44, 47
- [91] Wei Kang, Xiaoyu Yang, Zengwei Yao, Fangjun Kuang, Yifan Yang, Liyong Guo, Long Lin, and Daniel Povey. Libriheavy: A 50, 000 hours ASR corpus with punctuation casing and context. In *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP*, pages 10991–10995. IEEE, 2024. 10, 39, 50
- [92] Shankar Kantharaj, Rixie Tiffany Ko Leong, Xiang Lin, Ahmed Masry, Megh Thakkar, Enamul Hoque, and Shafiq Joty. Chart-to-text: A large-scale benchmark for chart summarization. *arXiv preprint arXiv:2203.06486*, 2022. 44, 47

- [93] Sahar Kazemzadeh, Vicente Ordonez, Mark Matten, and Tamara Berg. Referitgame: Referring to objects in photographs of natural scenes. In *Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP)*, pages 787–798, 2014. 45
- [94] Aniruddha Kembhavi, Mike Salvato, Eric Kolve, Minjoon Seo, Hannaneh Hajishirzi, and Ali Farhadi. A diagram is worth a dozen images, 2016. 13, 45, 48
- [95] Aniruddha Kembhavi, Minjoon Seo, Dustin Schwenk, Jonghyun Choi, Ali Farhadi, and Hannaneh Hajishirzi. Are you smarter than a sixth grader? textbook question answering for multimodal machine comprehension. In *Proceedings of the IEEE Conference on Computer Vision and Pattern recognition*, pages 4999–5007, 2017. 45, 48
- [96] Matthew Kenney. phi-arxiv-physics-instruct, 2023. 46
- [97] Chris Dongjoo Kim, Byeongchang Kim, Hyunmin Lee, and Gunhee Kim. Audiocaps: Generating captions for audios in the wild. In Jill Burstein, Christy Doran, and Tamar Solorio, editors, *Proceedings of the Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT*, pages 119–132. Association for Computational Linguistics, 2019. 11, 15, 39, 50
- [98] Chris Dongjoo Kim, Byeongchang Kim, Hyunmin Lee, and Gunhee Kim. Audiocaps: Generating captions for audios in the wild. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 119–132, 2019. 18
- [99] Donghyun Kim, Teakgyu Hong, Moonbin Yim, Yoonsik Kim, and Geewook Kim. On web-based visual corpus construction for visual document understanding. In *International Conference on Document Analysis and Recognition*, pages 297–313. Springer, 2023. 10, 39
- [100] Yoonsik Kim, Moonbin Yim, and Ka Yeon Song. Tablevqa-bench: A visual question answering benchmark on multiple table domains, 2024. URL <https://arxiv.org/abs/2404.19205>. 44
- [101] Matěj Korvas, Ondřej Plátek, Ondřej Dušek, Lukáš Žilka, and Filip Jurčiček. Free English and Czech telephone speech corpus shared under the CC-BY-SA 3.0 license. In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC)*, page To Appear, 2014. 10, 39, 50
- [102] Sunjun Kweon, Yeonsu Kwon, Seonhee Cho, Yohan Jo, and Edward Choi. Open-wikitable: Dataset for open domain question answering with complex reasoning over table. *arXiv preprint arXiv:2305.07288*, 2023. 44
- [103] Jason J Lau, Soumya Gayen, Asma Ben Abacha, and Dina Demner-Fushman. A dataset of clinically generated visual questions and answers about radiology images. *Scientific data*, 5(1):1–10, 2018. 45, 48
- [104] Hugo Laurençon, Andrés Marafioti, Victor Sanh, and Léo Tronchon. Building and better understanding vision-language models: insights and future directions, 2024. URL <https://arxiv.org/abs/2408.12637>. 45, 48
- [105] Paul Lerner, Olivier Ferret, Camille Guinaudeau, Hervé Le Borgne, Romaric Besançon, Jose G Moreno, and Jesús Lovón Melgarejo. ViQuAE, a dataset for knowledge-based visual question answering about named entities. In *Proceedings of The 45th International ACM SIGIR Conference on Research and Development in Information Retrieval*, 2022. 45, 48
- [106] Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Peiyuan Zhang, Yanwei Li, Ziwei Liu, and Chunyuan Li. Llava-onevision: Easy visual task transfer, 2024. URL <https://arxiv.org/abs/2408.03326>. 14, 15
- [107] Feng Li, Renrui Zhang, Hao Zhang, Yuanhan Zhang, Bo Li, Wei Li, Zejun Ma, and Chunyuan Li. Llava-next-interleave: Tackling multi-image, video, and 3d in large multimodal models, 2024. URL <https://arxiv.org/abs/2407.07895>. 48
- [108] Huayang Li, Siheng Li, Deng Cai, Longyue Wang, Lema Liu, Taro Watanabe, Yujia Yang, and Shuming Shi. Textbind: Multi-turn interleaved multimodal instruction-following in the wild, 2024. URL <https://arxiv.org/abs/2309.08637>. 2, 4, 17
- [109] Jia LI, Edward Beeching, Lewis Tunstall, Ben Lipkin, Roman Soletskyi, Shengyi Costa Huang, Kashif Rasul, Longhui Yu, Albert Jiang, Ziju Shen, Zihan Qin, Bin Dong, Li Zhou, Yann Fleureau, Guillaume Lample, and Stanislas Polu. Numinamath. [<https://huggingface.co/AI-MO/NuminaMath-CoT>] (https://github.com/project-numina/aimo-progress-prize/blob/main/report/numina_dataset.pdf), 2024. 46

- [110] Jiapeng Li, Ping Wei, Wenjuan Han, and Lifeng Fan. Intentqa: Context-aware video intent reasoning. In *IEEE/CVF International Conference on Computer Vision, ICCV 2023, Paris, France, October 1-6, 2023*, pages 11929–11940. IEEE, 2023. 49
- [111] KunChang Li, Yinan He, Yi Wang, Yizhuo Li, Wenhai Wang, Ping Luo, Yali Wang, Limin Wang, and Yu Qiao. Videochat: Chat-centric video understanding. *arXiv preprint arXiv:2305.06355*, 2023. 50
- [112] Kunchang Li, Yali Wang, Yinan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen, Ping Luo, et al. Mvbench: A comprehensive multi-modal video understanding benchmark. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22195–22206, 2024. 13
- [113] Lei Li, Yuqi Wang, Runxin Xu, Peiyi Wang, Xiachong Feng, Lingpeng Kong, and Qi Liu. Multimodal arxiv: A dataset for improving scientific comprehension of large vision-language models, 2024. URL <https://arxiv.org/abs/2403.00231>. 44, 47
- [114] Xiaotong Li, Fan Zhang, Haiwen Diao, Yueze Wang, Xinlong Wang, and Ling-Yu Duan. Densefusion-1m: Merging vision experts for comprehensive multimodal perception. *arXiv preprint arXiv:2407.08303*, 2024. 10
- [115] Yadong Li, Haoze Sun, Mingan Lin, Tianpeng Li, Guosheng Dong, Tao Zhang, Bowen Ding, Wei Song, Zhenglin Cheng, Yuqi Huo, Song Chen, Xu Li, Da Pan, Shusen Zhang, Xin Wu, Zheng Liang, Jun Liu, Tao Zhang, Keer Lu, Yaqi Zhao, Yanjun Shen, Fan Yang, Kaicheng Yu, Tao Lin, Jianhua Xu, Zenan Zhou, and Weipeng Chen. Baichuan-omni technical report, 2024. URL <https://arxiv.org/abs/2410.08565>. 2, 14, 15
- [116] Zhaowei Li, Wei Wang, YiQing Cai, Xu Qi, Pengyu Wang, Dong Zhang, Hang Song, Botian Jiang, Zhida Huang, and Tao Wang. Unifiedmllm: Enabling unified representation for multi-modal multi-tasks with large language model, 2024. URL <https://arxiv.org/abs/2408.02503>. 2, 4
- [117] Zhuowan Li, Xingrui Wang, Elias Stengel-Eskin, Adam Kortylewski, Wufei Ma, Benjamin Van Durme, and Alan L Yuille. Super-clevr: A virtual benchmark to diagnose domain robustness in visual reasoning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14963–14973, 2023. 45, 48
- [118] Wing Lian, Guan Wang, Bley Goodson, Eugene Pentland, Austin Cook, Chanvichet Vong, and "Teknum". Slimorca: An open dataset of gpt-4 augmented flan reasoning traces, with verification, 2023. URL <https://huggingface.co/Open-Orca/SlimOrca>. 46
- [119] Adam Dahlgren Lindström and Savitha Sam Abraham. Clevr-math: A dataset for compositional language, visual and mathematical reasoning. *arXiv preprint arXiv:2208.05358*, 2022. 45, 48
- [120] Bingchang Liu, Chaoyu Chen, Zi Gong, Cong Liao, Huan Wang, Zhichao Lei, Ming Liang, Dajun Chen, Min Shen, Hailian Zhou, et al. Mftcoder: Boosting code llms with multitask fine-tuning. In *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, pages 5430–5441, 2024. 8
- [121] Fangyu Liu, Guy Edward Toh Emerson, and Nigel Collier. Visual spatial reasoning. *Transactions of the Association for Computational Linguistics*, 2023. 44, 47
- [122] Fuxiao Liu, Kevin Lin, Linjie Li, Jianfeng Wang, Yaser Yacoob, and Lijuan Wang. Aligning large multi-modal model with robust instruction tuning. *arXiv preprint arXiv:2306.14565*, 2023. 44, 45, 47
- [123] Fuxiao Liu, Xiaoyang Wang, Wenlin Yao, Jianshu Chen, Kaiqiang Song, Sangwoo Cho, Yaser Yacoob, and Dong Yu. Mmc: Advancing multimodal chart understanding with large-scale instruction tuning. *arXiv preprint arXiv:2311.10774*, 2023. 44, 47
- [124] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, 2024. 2, 13
- [125] Shengchao Liu, Yingyu Liang, and Anthony Gitter. Loss-balanced task weighting to reduce negative transfer in multi-task learning. In *Proceedings of the AAAI conference on artificial intelligence*, volume 33, pages 9977–9978, 2019. 8
- [126] Yuan Liu, Le Tian, Xiao Zhou, Xinyu Gao, Kavio Yu, Yang Yu, and Jie Zhou. Points1. 5: Building a vision-language model towards real world applications. *arXiv preprint arXiv:2412.08443*, 2024. 14
- [127] Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multi-modal model an all-around player? In *European conference on computer vision*, pages 216–233. Springer, 2025. 13, 16, 18

- [128] Yuliang Liu, Zhang Li, Mingxin Huang, Biao Yang, Wenwen Yu, Chunyuan Li, Xu-Cheng Yin, Cheng-Lin Liu, Lianwen Jin, and Xiang Bai. Ocrbench: on the hidden mystery of ocr in large multimodal models. *Science China Information Sciences*, 67(12), December 2024. ISSN 1869-1919. doi: 10.1007/s11432-024-4235-6. URL <http://dx.doi.org/10.1007/s11432-024-4235-6>. 13
- [129] Zuyan Liu, Yuhao Dong, Jiahui Wang, Ziwei Liu, Winston Hu, Jiwen Lu, and Yongming Rao. Ola: Pushing the frontiers of omni-modal language model with progressive modality alignment. *arXiv preprint arXiv:2502.04328*, 2025. 14
- [130] Shangbang Long, Siyang Qin, Dmitry Panteleev, Alessandro Bissacco, Yasuhisa Fujii, and Michalis Raptis. Towards end-to-end unified scene text detection and layout analysis. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022. 44, 47
- [131] Jiasen Lu, Christopher Clark, Sangho Lee, Zichen Zhang, Savva Khosla, Ryan Marten, Derek Hoiem, and Aniruddha Kembhavi. Unified-io 2: Scaling autoregressive multimodal models with vision, language, audio, and action. *arXiv preprint arXiv:2312.17172*, 2023. 16
- [132] Jiasen Lu, Christopher Clark, Sangho Lee, Zichen Zhang, Savva Khosla, Ryan Marten, Derek Hoiem, and Aniruddha Kembhavi. Unified-io 2: Scaling autoregressive multimodal models with vision language audio and action. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 26439–26455, June 2024. 4
- [133] Pan Lu, Liang Qiu, Jiaqi Chen, Tony Xia, Yizhou Zhao, Wei Zhang, Zhou Yu, Xiaodan Liang, and Song-Chun Zhu. Iconqa: A new benchmark for abstract diagram understanding and visual language reasoning. In *The 35th Conference on Neural Information Processing Systems (NeurIPS) Track on Datasets and Benchmarks*, 2021. 45, 48
- [134] Pan Lu, Swaroop Mishra, Tony Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering. In *The 36th Conference on Neural Information Processing Systems (NeurIPS)*, 2022. 45, 48
- [135] Pan Lu, Liang Qiu, Kai-Wei Chang, Ying Nian Wu, Song-Chun Zhu, Tanmay Rajpurohit, Peter Clark, and Ashwin Kalyan. Dynamic prompt learning via policy gradient for semi-structured mathematical reasoning. In *International Conference on Learning Representations (ICLR)*, 2023. 44, 47
- [136] Pan Lu, Hritik Bansal, Tony Xia, Jiacheng Liu, Chunyuan Li, Hannaneh Hajishirzi, Hao Cheng, Kai-Wei Chang, Michel Galley, and Jianfeng Gao. Mathvista: Evaluating mathematical reasoning of foundation models in visual contexts. In *International Conference on Learning Representations (ICLR)*, 2024. 13
- [137] Shiyin Lu, Yang Li, Qing-Guo Chen, Zhao Xu, Weihua Luo, Kaifu Zhang, and Han-Jia Ye. Ovis: Structural embedding alignment for multimodal large language model. *arXiv:2405.20797*, 2024. 14
- [138] Ziyang Luo, Can Xu, Pu Zhao, Qingfeng Sun, Xiubo Geng, Wenxiang Hu, Chongyang Tao, Jing Ma, Qingwei Lin, and Daxin Jiang. Wizardcoder: Empowering code large language models with evol-instruct, 2023. 46
- [139] Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Khan. Videogpt+: Integrating image and video encoders for enhanced video understanding. *arXiv preprint arXiv:2406.09418*, 2024. 49
- [140] Kenneth Marino, Mohammad Rastegari, Ali Farhadi, and Roozbeh Mottaghi. Ok-vqa: A visual question answering benchmark requiring external knowledge. In *Proceedings of the IEEE/cvf conference on computer vision and pattern recognition*, pages 3195–3204, 2019. 18, 44, 50
- [141] Irene Martín-Morató and Annamaria Mesaros. Diversity and bias in audio captioning datasets. In Frederic Font, Annamaria Mesaros, Daniel P. W. Ellis, Eduardo Fonseca, Magdalena Fuentes, and Benjamin Elizalde, editors, *Proceedings of the 6th Workshop on Detection and Classification of Acoustic Scenes and Events DCASE*, pages 90–94, 2021. 11, 39, 50
- [142] Ahmed Masry, Do Long, Jia Qing Tan, Shafiq Joty, and Enamul Hoque. ChartQA: A benchmark for question answering about charts with visual and logical reasoning. In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 2263–2279, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.findings-acl.177. URL <https://aclanthology.org/2022.findings-acl.177>. 44, 47
- [143] Ahmed Masry, Megh Thakkar, Aayush Bajaj, Aaryaman Kartha, Enamul Hoque, and Shafiq Joty. Chartgemma: Visual instruction-tuning for chart reasoning in the wild, 2024. URL <https://arxiv.org/abs/2407.04172>. 44, 47

- [144] Minesh Mathew, Dimosthenis Karatzas, R Manmatha, and CV Jawahar. Docvqa: A dataset for vqa on document images. *corr abs/2007.00398* (2020). *arXiv preprint arXiv:2007.00398*, 2020. 44, 47
- [145] Minesh Mathew, Viraj Bagal, Rubèn Pérez Tito, Dimosthenis Karatzas, Ernest Valveny, and C. V Jawahar. Infographicvqa, 2021. URL <https://arxiv.org/abs/2104.12756>. 45, 48
- [146] B McKinzie, Z Gan, J Fauconnier, S Dodge, B Zhang, P Dufter, D Shah, X Du, F Peng, F Weers, et al. Mm1: methods, analysis & insights from multimodal llm pre-training. *arxiv. Preprint posted online on April*, 18, 2024. 11
- [147] Xinhao Mei, Chutong Meng, Haohe Liu, Qiuqiang Kong, Tom Ko, Chengqi Zhao, Mark D. Plumbley, Yuexian Zou, and Wenwu Wang. Wavcaps: A chatgpt-assisted weakly-labelled audio captioning dataset for audio-language multimodal research. *IEEE ACM Trans. Audio Speech Lang. Process.*, 32:3339–3354, 2024. 11, 39, 50
- [148] Meta. Llama 3.2: Revolutionizing edge ai and vision with open, customizable models, 2024. URL <https://ai.meta.com/blog/llama-3-2-connect-2024-vision-edge-mobile-devices/>. 2
- [149] Nitesh Methani, Pritha Ganguly, Mitesh M. Khapra, and Pratyush Kumar. Plotqa: Reasoning over scientific plots. In *The IEEE Winter Conference on Applications of Computer Vision (WACV)*, March 2020. 44, 47
- [150] Anand Mishra, Shashank Shekhar, Ajeet Kumar Singh, and Anirban Chakraborty. Ocr-vqa: Visual question answering by reading text in images. In *2019 international conference on document analysis and recognition (ICDAR)*, pages 947–952. IEEE, 2019. 45, 48, 50
- [151] Arindam Mitra, Hamed Khanpour, Corby Rosset, and Ahmed Awadallah. Orca-math: Unlocking the potential of slms in grade school math, 2024. 46
- [152] Kegan Nan, Rui Xie, Penghao Zhou, Tieshan Fan, Zhenheng Yang, Zhijie Chen, Xiang Li, Jian Yang, and Ying Tai. Openvid-1m: A large-scale high-quality dataset for text-to-video generation. *arXiv preprint arXiv:2407.02371*, 2024. 49
- [153] Beijing Academy of Artificial Intelligence (BAAI). Infinity instruct. *arXiv preprint arXiv:2406.XXXX*, 2024. 46
- [154] Patrick K. O’Neill, Vitaly Lavrukhin, Somshubra Majumdar, Vahid Noroozi, Yuekai Zhang, Oleksii Kuchaiev, Jagadeesh Balam, Yuliya Dovzhenko, Keenan Freyberg, Michael D. Shulman, Boris Ginsburg, Shinji Watanabe, and Georg Kucsco. Spgispeech: 5, 000 hours of transcribed financial audio for fully formatted end-to-end speech recognition. In Hynek Hermansky, Honza Cernocký, Lukás Burget, Lori Lamel, Odette Scharenborg, and Petr Motlíček, editors, *Annual Conference of the International Speech Communication Association, Interspeech*, pages 1434–1438. ISCA, 2021. 10, 39, 50
- [155] OpenAI. GPT-4V(ision) system card. <https://openai.com/index/gpt-4v-system-card/>, 2023. 12, 15
- [156] OpenAI. Gpt-4o system card, 2024. URL <https://arxiv.org/abs/2410.21276>. 2, 14, 15, 16, 18
- [157] Vicente Ordonez, Girish Kulkarni, and Tamara Berg. Im2text: Describing images using 1 million captioned photographs. *Advances in neural information processing systems*, 24, 2011. 39
- [158] Baolin Peng, Chunyuan Li, Pengcheng He, Michel Galley, and Jianfeng Gao. Instruction tuning with gpt-4. *arXiv preprint arXiv:2304.03277*, 2023. 46
- [159] Renjie Pi, Jianshu Zhang, Jipeng Zhang, Rui Pan, Zhekai Chen, and Tong Zhang. Image textualization: An automatic framework for creating accurate and detailed image descriptions, 2024. 44, 47
- [160] Jordi Pont-Tuset, Jasper Uijlings, Soravit Changpinyo, Radu Soricut, and Vittorio Ferrari. Connecting vision and language with localized narratives, 2020. URL <https://arxiv.org/abs/1912.03098>. 45, 47
- [161] Vineel Pratap, Qiantong Xu, Anuroop Sriram, Gabriel Synnaeve, and Ronan Collobert. Mls: A large-scale multilingual dataset for speech research. In *Annual Conference of the International Speech Communication Association, Interspeech*, pages 2757–2761. ISCA, 2020. 14
- [162] Vineel Pratap, Qiantong Xu, Anuroop Sriram, Gabriel Synnaeve, and Ronan Collobert. Mls: A large-scale multilingual dataset for speech research. *ArXiv*, abs/2012.03411, 2020. 18
- [163] Ltd. Primewords Information Technology Co. Primewords chinese corpus set 1, 2018. <https://www.primewords.cn>. 10, 39, 50

- [164] Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. Robust speech recognition via large-scale weak supervision. In *International Conference on Machine Learning, ICML*, volume 202 of *Proceedings of Machine Learning Research*, pages 28492–28518. PMLR, 2023. 16
- [165] Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model, 2024. URL <https://arxiv.org/abs/2305.18290>. 7
- [166] Daniel Reich and Tanja Schultz. Uncovering the full potential of visual grounding methods in vqa, 2024. URL <https://arxiv.org/abs/2401.07803>. 44, 50
- [167] Machel Reid, Nikolay Savinov, Denis Teplyashin, Dmitry Lepikhin, Timothy Lillicrap, Jean-baptiste Alayrac, Radu Soricut, Angeliki Lazaridou, Orhan Firat, Julian Schrittwieser, et al. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. *arXiv preprint arXiv:2403.05530*, 2024. 2
- [168] David Rein, Betty Li Hou, Asa Cooper Stickland, Jackson Petty, Richard Yuanzhe Pang, Julien Dirani, Julian Michael, and Samuel R. Bowman. Gpqa: A graduate-level google-proof q&a benchmark, 2023. URL <https://arxiv.org/abs/2311.12022>. 16
- [169] Mengye Ren, Ryan Kiros, and Richard Zemel. Exploring models and data for image question answering. *Advances in neural information processing systems*, 28, 2015. 44, 50
- [170] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10684–10695, 2022. 4
- [171] Anthony Rousseau, Paul Deléglise, and Yannick Estève. TED-LIUM: an automatic speech recognition dedicated corpus. In Nicoletta Calzolari, Khalid Choukri, Thierry Declerck, Mehmet Ugur Dogan, Bente Maegaard, Joseph Mariani, Jan Odijk, and Stelios Piperidis, editors, *Proceedings of the Eighth International Conference on Language Resources and Evaluation, LREC*, pages 125–129. European Language Resources Association (ELRA), 2012. 10, 39, 50
- [172] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. Laion-5b: An open large-scale dataset for training next generation image-text models. *Advances in Neural Information Processing Systems*, 35:25278–25294, 2022. 10, 39
- [173] Dustin Schwenk, Apoorv Khandelwal, Christopher Clark, Kenneth Marino, and Roozbeh Mottaghi. A-okvqa: A benchmark for visual question answering using world knowledge. In *European conference on computer vision*, pages 146–162. Springer, 2022. 45, 47
- [174] Sanket Shah, Anand Mishra, Naganand Yadati, and Partha Pratim Talukdar. Kvqa: Knowledge-aware visual question answering. In *Proceedings of the AAAI conference on artificial intelligence*, volume 33, pages 8876–8884, 2019. 45, 48
- [175] Haz Sameen Shahgir, Khondker Salman Sayeed, Abhik Bhattacharjee, Wasi Uddin Ahmad, Yue Dong, and Rifat Shahriyar. IllusionVQA: A challenging optical illusion dataset for vision language models. In *First Conference on Language Modeling*, 2024. URL <https://openreview.net/forum?id=7ysaJGs7zY>. 45, 47
- [176] Hao Shao, Shengju Qian, Han Xiao, Guanglu Song, Zhuofan Zong, Letian Wang, Yu Liu, and Hongsheng Li. Visual cot: Unleashing chain-of-thought reasoning in multi-modal language models, 2024. 44, 47
- [177] Shuai Shao, Zeming Li, Tianyuan Zhang, Chao Peng, Gang Yu, Xiangyu Zhang, Jing Li, and Jian Sun. Objects365: A large-scale, high-quality dataset for object detection. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 8430–8439, 2019. 39
- [178] Shuai Shao, Zeming Li, Tianyuan Zhang, Chao Peng, and Jian Sun. Objects365: A large-scale, high-quality dataset for object detection. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2020. 45
- [179] Piyush Sharma, Nan Ding, Sebastian Goodman, and Radu Soricut. Conceptual captions: A cleaned, hypernymed, image alt-text dataset for automatic image captioning. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2556–2565, 2018. 10, 39

- [180] Baoguang Shi, Cong Yao, Minghui Liao, Mingkun Yang, Pei Xu, Linyan Cui, Serge Belongie, Shijian Lu, and Xiang Bai. Icdar2017 competition on reading chinese text in the wild (rctw-17). In *2017 14th iapr international conference on document analysis and recognition (ICDAR)*, volume 1, pages 1429–1434. IEEE, 2017. 45, 48
- [181] Wenhao Shi, Zhiqiang Hu, Yi Bin, Junhua Liu, Yang Yang, See-Kiong Ng, Lidong Bing, and Roy Ka-Wei Lee. Math-llava: Bootstrapping mathematical reasoning for multimodal large language models. *arXiv preprint arXiv:2406.17294*, 2024. 45, 48
- [182] Xiangxi Shi and Stefan Lee. Benchmarking out-of-distribution detection in visual question answering. In *2024 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, 2024. 45, 47
- [183] Mohit Shridhar, Xingdi Yuan, Marc-Alexandre Côté, Yonatan Bisk, Adam Trischler, and Matthew Hausknecht. ALFWorld: Aligning Text and Embodied Environments for Interactive Learning. In *Proceedings of the International Conference on Learning Representations (ICLR)*, 2021. URL <https://arxiv.org/abs/2010.03768>. 44
- [184] Oleksii Sidorov, Ronghang Hu, Marcus Rohrbach, and Amanpreet Singh. Textcaps: a dataset for image captioning with reading comprehension. In *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part II 16*, pages 742–758. Springer, 2020. 44, 50
- [185] Amanpreet Singh, Vivek Natarajan, Meet Shah, Yu Jiang, Xinlei Chen, Dhruv Batra, Devi Parikh, and Marcus Rohrbach. Towards vqa models that can read. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8317–8326, 2019. 18, 45, 48, 50
- [186] Amanpreet Singh, Guan Pang, Mandy Toh, Jing Huang, Wojciech Galuba, and Tal Hassner. TextOCR: Towards large-scale end-to-end reasoning for arbitrary-shaped scene text. In *The Conference on Computer Vision and Pattern Recognition*, 2021. 45, 48
- [187] Ian Soboroff. Complex document information processing (cdip) dataset. *National Institute of Standards and Technology*, 2022. 10, 39
- [188] Tomasz Stanisławek, Filip Graliński, Anna Wróblewska, Dawid Lipiński, Agnieszka Kaliska, Paulina Rosalska, Bartosz Topolski, and Przemysław Biecek. Kleister: key information extraction datasets involving long documents with complex layouts. In *International Conference on Document Analysis and Recognition*, pages 564–579. Springer, 2021. 44
- [189] StarThomas1002. video blink. https://huggingface.co/datasets/StarThomas1002/video_blink, 2024. 49
- [190] Jianlin Su, Murtadha Ahmed, Yu Lu, Shengfeng Pan, Wen Bo, and Yunfeng Liu. Roformer: Enhanced transformer with rotary position embedding. *Neurocomputing*, 568:127063, 2024. 4
- [191] Quan Sun, Yufeng Cui, Xiaosong Zhang, Fan Zhang, Qiyang Yu, Yueze Wang, Yongming Rao, Jingjing Liu, Tiejun Huang, and Xinlong Wang. Generative multimodal models are in-context learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14398–14409, 2024. 11
- [192] Yipeng Sun, Zihan Ni, Chee-Kheng Chng, Yuliang Liu, Canjie Luo, Chun Chet Ng, Junyu Han, Errui Ding, Jingtuo Liu, Dimosthenis Karatzas, et al. Icdar 2019 competition on large-scale street view text with partial labeling-rrc-lsvt. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*, pages 1557–1562. IEEE, 2019. 45, 48
- [193] Ltd. Surfing Technology Co. St-cmds-20170001-1, free st chinese mandarin corpus, 2017. <https://www.surfing.ai>. 10, 39, 50
- [194] Ryota Tanaka, Kyosuke Nishida, and Sen Yoshida. Visualmrc: Machine reading comprehension on document images. In *AAAI*, 2021. 44, 47
- [195] Zhiyuan Tang, Dong Wang, Yanguang Xu, Jianwei Sun, Xiaoning Lei, Shuaijiang Zhao, Cheng Wen, Xingjun Tan, Chuandong Xie, Shuran Zhou, Rui Yan, Chenjia Lv, Yang Han, Wei Zou, and Xiangang Li. KeSpeech: An open source speech dataset of Mandarin and its eight subdialects. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2021. 10, 39, 50
- [196] Gemini Team, Petko Georgiev, Ving Ian Lei, and et al. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context, 2024. URL <https://arxiv.org/abs/2403.05530>. 14, 15
- [197] Rubèn Tito, Dimosthenis Karatzas, and Ernest Valveny. Hierarchical multimodal transformers for multi-page docvqa, 2023. URL <https://arxiv.org/abs/2212.05935>. 48

- [198] Shengbang Tong, Ellis Brown, Penghao Wu, Sanghyun Woo, Manoj Middepogu, Sai Charitha Akula, Jihan Yang, Shusheng Yang, Adithya Iyer, Xichen Pan, Ziteng Wang, Rob Fergus, Yann LeCun, and Saining Xie. Cambrian-1: A fully open, vision-centric exploration of multimodal llms, 2024. URL <https://arxiv.org/abs/2406.16860>. 45, 46, 47
- [199] Yuxuan Tong, Xiwen Zhang, Rui Wang, Ruidong Wu, and Junxian He. Dart-math: Difficulty-aware rejection tuning for mathematical problem-solving, 2024. URL <https://arxiv.org/abs/2407.13690>. 46
- [200] Shubham Toshniwal, Wei Du, Ivan Moshkov, Branislav Kisanin, Alexan Ayrapetyan, and Igor Gitman. Openmathstruct-2: Accelerating ai for math with massive open-source instruction data. *arXiv preprint arXiv:2410.01560*, 2024. 46
- [201] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023. 4
- [202] Andreas Veit, Tomas Matera, Lukas Neumann, Jiri Matas, and Serge Belongie. Coco-text: Dataset and benchmark for text detection and recognition in natural images, 2016. URL <https://arxiv.org/abs/1601.07140>. 45, 48
- [203] Changhan Wang, Anne Wu, and Juan Miguel Pino. Covost 2: A massively multilingual speech-to-text translation corpus. *CoRR*, abs/2007.10310, 2020. 10, 39, 50
- [204] Haoxu Wang, Fan Yu, Xian Shi, Yuezhong Wang, Shiliang Zhang, and Ming Li. Slidespeech: A large scale slide-enriched audio-visual corpus. In *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP*, pages 11076–11080. IEEE, 2024. URL <https://doi.org/10.1109/ICASSP48485.2024.10448079>. 10, 39, 50
- [205] Junke Wang, Lingchen Meng, Zejia Weng, Bo He, Zuxuan Wu, and Yu-Gang Jiang. To see is to believe: Prompting gpt-4v for better visual instruction tuning. *arXiv preprint arXiv:2311.07574*, 2023. 44
- [206] Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, et al. Qwen2-vl: Enhancing vision-language model’s perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*, 2024. 2, 4, 14, 15
- [207] Weihang Wang, Qingsong Lv, Wenmeng Yu, Wenyi Hong, Ji Qi, Yan Wang, Junhui Ji, Zhuoyi Yang, Lei Zhao, Xixuan Song, Jiazheng Xu, Bin Xu, Juanzi Li, Yuxiao Dong, Ming Ding, and Jie Tang. Cogvlm: Visual expert for pretrained language models, 2023. 44, 47
- [208] Weiyun Wang, Min Shi, Qingyun Li, Wenhai Wang, Zhenhang Huang, Linjie Xing, Zhe Chen, Hao Li, Xizhou Zhu, Zhiguo Cao, et al. The all-seeing project: Towards panoptic visual recognition and understanding of the open world. *arXiv preprint arXiv:2308.01907*, 2023. 44, 47
- [209] Weiyun Wang, Zhe Chen, Wenhai Wang, Yue Cao, Yangzhou Liu, Zhangwei Gao, Jinguo Zhu, Xizhou Zhu, Lewei Lu, Yu Qiao, and Jifeng Dai. Enhancing the reasoning ability of multimodal large language models via mixed preference optimization. *arXiv preprint arXiv:2411.10442*, 2024. 14
- [210] Xinlong Wang, Xiaosong Zhang, Zhengxiong Luo, Quan Sun, Yufeng Cui, Jinsheng Wang, Fan Zhang, Yueze Wang, Zhen Li, Qiyang Yu, Yingli Zhao, Yulong Ao, Xuebin Min, Tao Li, Boya Wu, Bo Zhao, Bowen Zhang, Liangdong Wang, Guang Liu, Zheqi He, Xi Yang, Jingjing Liu, Yonghua Lin, Tiejun Huang, and Zhongyuan Wang. Emu3: Next-token prediction is all you need, 2024. URL <https://arxiv.org/abs/2409.18869>. 2
- [211] Xinyu Wang, Bohan Zhuang, and Qi Wu. Modaverse: Efficiently transforming modalities with llms. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024. 2, 4
- [212] Xiong Wang, Yangze Li, Chaoyou Fu, Yunhang Shen, Lei Xie, Ke Li, Xing Sun, and Long Ma. Freeze-omni: A smart and low latency speech-to-speech dialogue model with frozen llm, 2024. 16
- [213] Xiyao Wang, Yuhang Zhou, Xiaoyu Liu, Hongjin Lu, Yuancheng Xu, Feihong He, Jaehong Yoon, Taixi Lu, Gedas Bertasius, Mohit Bansal, et al. Mementos: A comprehensive benchmark for multimodal large language model reasoning over image sequences. *arXiv preprint arXiv:2401.10529*, 2024. 49
- [214] Yuancheng Wang, Haoyue Zhan, Liwei Liu, Ruihong Zeng, Haotian Guo, Jiachen Zheng, Qiang Zhang, Shunsi Zhang, and Zhizheng Wu. Maskgct: Zero-shot text-to-speech with masked generative codec transformer. *CoRR*, abs/2409.00750, 2024. 17

- [215] Yueqian Wang, Xiaojun Meng, Yuxuan Wang, Jianxin Liang, Jiansheng Wei, Huishuai Zhang, and Dongyan Zhao. Videollm knows when to speak: Enhancing time-sensitive video comprehension with video-text duet interaction format, 2024. URL <https://arxiv.org/abs/2411.17991>. 48
- [216] Zhecan Wang, Garrett Bingham, Adams Wei Yu, Quoc V Le, Thang Luong, and Golnaz Ghiasi. Haloquest: A visual hallucination dataset for advancing multimodal reasoning. In *European Conference on Computer Vision*, pages 288–304. Springer, 2024. 45, 47
- [217] Maurice Weber, Carlo Siebenschuh, Rory Butler, Anton Alexandrov, Valdemar Thanner, Georgios Tsolakis, Haris Jabbar, Ian Foster, Bo Li, Rick Stevens, et al. Wordscape: a pipeline to extract multilingual, visually rich documents with layout annotations from web crawl data. *Advances in Neural Information Processing Systems*, 36:26048–26068, 2023. 10, 39
- [218] Yuxiang Wei, Zhe Wang, Jiawei Liu, Yifeng Ding, and Lingming Zhang. Magicoder: Empowering code generation with OSS-instruct. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 52632–52657. PMLR, 21–27 Jul 2024. 46
- [219] Bo Wu, Shoubin Yu, Zhenfang Chen, Joshua B Tenenbaum, and Chuang Gan. Star: A benchmark for situated reasoning in real-world videos, 2024. URL <https://arxiv.org/abs/2405.09711>. 49
- [220] Chengyue Wu, Xiaokang Chen, Zhiyu Wu, Yiyang Ma, Xingchao Liu, Zizheng Pan, Wen Liu, Zhenda Xie, Xingkai Yu, Chong Ruan, and Ping Luo. Janus: Decoupling visual encoding for unified multimodal understanding and generation. *CoRR*, abs/2410.13848, 2024. 4
- [221] Chengyue Wu, Xiaokang Chen, Zhiyu Wu, Yiyang Ma, Xingchao Liu, Zizheng Pan, Wen Liu, Zhenda Xie, Xingkai Yu, Chong Ruan, and Ping Luo. Janus: Decoupling visual encoding for unified multimodal understanding and generation, 2024. URL <https://arxiv.org/abs/2410.13848>. 2
- [222] Haoning Wu, Zicheng Zhang, Erli Zhang, Chaofeng Chen, Liang Liao, Annan Wang, Kaixin Xu, Chunyi Li, Jingwen Hou, Guangtao Zhai, Geng Xue, Wenxiu Sun, Qiong Yan, and Weisi Lin. Q-instruct: Improving low-level visual abilities for multi-modality foundation models, 2023. 44
- [223] Haoning Wu, Hanwei Zhu, Zicheng Zhang, Erli Zhang, Chaofeng Chen, Liang Liao, Chunyi Li, Annan Wang, Wenxiu Sun, Qiong Yan, Xiaohong Liu, Guangtao Zhai, Shiqi Wang, and Weisi Lin. Towards open-ended visual quality comparison, 2024. 45, 48
- [224] Weijia Wu, Yuzhong Zhao, Zhuang Li, Jiahong Li, Hong Zhou, Mike Zheng Shou, and Xiang Bai. A large cross-modal video retrieval dataset with reading comprehension, 2023. URL <https://arxiv.org/abs/2305.03347>. 49, 50
- [225] Zhiyu Wu, Xiaokang Chen, Zizheng Pan, and et al. Deepseek-vl2: Mixture-of-experts vision-language models for advanced multimodal understanding, 2024. URL <https://arxiv.org/abs/2412.10302>. 14
- [226] Junbin Xiao, Xindi Shang, Angela Yao, and Tat-Seng Chua. Next-qa: Next phase of question-answering to explaining temporal actions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 9777–9786, June 2021. 49, 50
- [227] Binzhu Xie, Sicheng Zhang, Zitang Zhou, Bo Li, Yuanhan Zhang, Jack Hessel, Jingkang Yang, and Ziwei Liu. Funqa: Towards surprising video comprehension, 2024. URL <https://arxiv.org/abs/2306.14899>. 49
- [228] Chunyu Xie, Jincheng Li, and Baochang Zhang. Zero: A large-scale chinese cross-modal benchmark with a new vision-language framework. *N/A*, 2022. 10, 39
- [229] Rongchang Xie, Chen Du, Ping Song, and Chang Liu. Muse-vl: Modeling unified vlm through semantic discrete encoding, 2024. URL <https://arxiv.org/abs/2411.17762>. 2
- [230] Zhifei Xie and Changqiao Wu. Mini-omni: Language models can hear, talk while thinking in streaming. *CoRR*, abs/2408.16725, 2024. 2
- [231] Zhifei Xie and Changqiao Wu. Mini-omni2: Towards open-source gpt-4o with vision, speech and duplex capabilities. *CoRR*, abs/2410.11190, 2024. 2, 4, 16
- [232] Can Xu, Qingfeng Sun, Kai Zheng, Xiubo Geng, Pu Zhao, Jiazhan Feng, Chongyang Tao, Qingwei Lin, and Daxin Jiang. WizardLM: Empowering large pre-trained language models to follow complex instructions. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=CfXh93NDgH>. 46

- [233] Dejing Xu, Zhou Zhao, Jun Xiao, Fei Wu, Hanwang Zhang, Xiangnan He, and Yueting Zhuang. Video question answering via gradually refined attention over appearance and motion. In *ACM Multimedia*, 2017. 18
- [234] Haiyang Xu, Qinghao Ye, Xuan Wu, Ming Yan, Yuan Miao, Jiabo Ye, Guohai Xu, Anwen Hu, Yaya Shi, Guangwei Xu, et al. Youku-implug: A 10 million large-scale chinese video-language dataset for pre-training and benchmarks. *arXiv preprint arXiv:2306.04362*, 2023. 11, 39
- [235] Zhangchen Xu, Fengqing Jiang, Luyao Niu, Yuntian Deng, Radha Poovendran, Yejin Choi, and Bill Yuchen Lin. Magpie: Alignment data synthesis from scratch by prompting aligned llms with nothing. *ArXiv*, abs/2406.08464, 2024. URL <https://api.semanticscholar.org/CorpusID:270391432>. 46
- [236] Zhengzhuo Xu, Sinan Du, Yiyang Qi, Chengjin Xu, Chun Yuan, and Jian Guo. Chartbench: A benchmark for complex visual reasoning in charts. *ArXiv*, abs/2312.15915, 2023. URL <https://api.semanticscholar.org/CorpusID:266550948>. 44, 47
- [237] Charig Yang, Weidi Xie, and Andrew Zisserman. It’s about time: analog clock reading in the wild. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 2508–2517, 2022. 45, 48
- [238] Dongjie Yang, Suyuan Huang, Chengqiang Lu, Xiaodong Han, Haoxin Zhang, Yan Gao, Yao Hu, and Hai Zhao. Vript: A video is worth thousands of words. *arXiv preprint arXiv:2406.06040*, 2024. 49
- [239] Zehui Yang, Yifan Chen, Lei Luo, Runyan Yang, Lingxuan Ye, Gaofeng Cheng, Ji Xu, Yaohui Jin, Qingqing Zhang, Pengyuan Zhang, Lei Xie, and Yonghong Yan. Open source magicdata-ramc: A rich annotated mandarin conversational(ramc) speech dataset. In Hanseok Ko and John H. L. Hansen, editors, *Annual Conference of the International Speech Communication Association, Interspeech*, pages 1736–1740. ISCA, 2022. 10, 39, 50
- [240] Zhen Yang, Ming Ding, Qingsong Lv, Zhihuan Jiang, Zehai He, Yuyi Guo, Jinfeng Bai, and Jie Tang. Gpt can solve mathematical problems without a calculator. *arXiv preprint arXiv:2309.03241*, 2023. 46
- [241] Bangpeng Yao, Xiaoye Jiang, Aditya Khosla, Andy Lai Lin, Leonidas Guibas, and Li Fei-Fei. Human action recognition by learning bases of action attributes and parts. In *2011 International conference on computer vision*, pages 1331–1338. IEEE, 2011. 44
- [242] Yuan Yao, Tianyu Yu, Ao Zhang, Chongyi Wang, Junbo Cui, Hongji Zhu, Tianchi Cai, Haoyu Li, Weilin Zhao, Zhihui He, et al. Minicpm-v: A gpt-4v level mllm on your phone. *arXiv preprint arXiv:2408.01800*, 2024. 1, 2, 14, 15, 16, 17
- [243] Kexin Yi, Chuang Gan, Yunzhu Li, Pushmeet Kohli, Jiajun Wu, Antonio Torralba, and Joshua B Tenenbaum. Clevrer: Collision events for video representation and reasoning. *arXiv preprint arXiv:1910.01442*, 2019. 49, 50
- [244] Peter Young, Alice Lai, Micah Hodosh, and Julia Hockenmaier. From image descriptions to visual denotations: New similarity metrics for semantic inference over event descriptions. *Transactions of the Association for Computational Linguistics*, 2:67–78, 2014. 18
- [245] Fan Yu, Shiliang Zhang, Yihui Fu, Lei Xie, Siqi Zheng, Zhihao Du, Weilong Huang, Pengcheng Guo, Zhijie Yan, Bin Ma, Xin Xu, and Hui Bu. M2met: The icassp 2022 multi-channel multi-party meeting transcription challenge. In *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP*, pages 6167–6171. IEEE, 2022. 10, 39, 50
- [246] Longhui Yu, Weisen Jiang, Han Shi, Jincheng Yu, Zhengying Liu, Yu Zhang, James T Kwok, Zhenguo Li, Adrian Weller, and Weiyang Liu. Metamath: Bootstrap your own mathematical questions for large language models. *arXiv preprint arXiv:2309.12284*, 2023. 46
- [247] Qifan Yu, Juncheng Li, Longhui Wei, Liang Pang, Wentao Ye, Bosheng Qin, Siliang Tang, Qi Tian, and Yueting Zhuang. Hallucidoctor: Mitigating hallucinatory toxicity in visual instruction data, 2023. 45, 47
- [248] Tianyu Yu, Haoye Zhang, Yuan Yao, Yunkai Dang, Da Chen, Xiaoman Lu, Ganqu Cui, Taiwan He, Zhiyuan Liu, Tat-Seng Chua, and Maosong Sun. Rlaif-v: Aligning mllms through open-source ai feedback for super gpt-4v trustworthiness. *arXiv preprint arXiv:2405.17220*, 2024. 44, 47
- [249] Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang, and Lijuan Wang. Mm-vet: Evaluating large multimodal models for integrated capabilities. In *International conference on machine learning*. PMLR, 2024. 13

- [250] Lifan Yuan, Ganqu Cui, Hanbin Wang, Ning Ding, Xingyao Wang, Jia Deng, Boji Shan, Huimin Chen, Ruobing Xie, Yankai Lin, Zhenghao Liu, Bowen Zhou, Hao Peng, Zhiyuan Liu, and Maosong Sun. Advancing llm reasoning generalists with preference trees, 2024. 46
- [251] Sha Yuan, Hanyu Zhao, Zhengxiao Du, Ming Ding, Xiao Liu, Yukuo Cen, Xu Zou, Zhilin Yang, and Jie Tang. Wudaocorpora: A super large-scale chinese corpora for pre-training language models. *AI Open*, 2: 65–68, 2021. 11, 39
- [252] Tai-Ling Yuan, Zhe Zhu, Kun Xu, Cheng-Jun Li, Tai-Jiang Mu, and Shi-Min Hu. A large chinese text dataset in the wild. *Journal of Computer Science and Technology*, 34(3):509–521, 2019. 45, 48
- [253] Ye Yuan, Xiao Liu, Wondimu Dikubab, Hui Liu, Zhilong Ji, Zhongqin Wu, and Xiang Bai. Syntax-aware network for handwritten mathematical expression recognition. *arXiv preprint arXiv:2203.01601*, 2022. 45, 48
- [254] Xiang Yue, Xingwei Qu, Ge Zhang, Yao Fu, Wenhao Huang, Huan Sun, Yu Su, and Wenhua Chen. Mammoth: Building math generalist models through hybrid instruction tuning. *arXiv preprint arXiv:2309.05653*, 2023. 46
- [255] Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, Cong Wei, Botao Yu, Ruibin Yuan, Renliang Sun, Ming Yin, Boyuan Zheng, Zhenzhu Yang, Yibo Liu, Wenhao Huang, Huan Sun, Yu Su, and Wenhua Chen. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi. In *Proceedings of CVPR*, 2024. 13, 16
- [256] Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. Hellaswag: Can a machine really finish your sentence?, 2019. URL <https://arxiv.org/abs/1905.07830>. 15
- [257] Albert Zeyer, André Merboldt, Wilfried Michel, Ralf Schlüter, and Hermann Ney. Librispeech transducer model with internal language model prior correction. In Hynek Hermansky, Honza Cernocký, Lukás Burget, Lori Lamel, Odette Scharenborg, and Petr Motlíček, editors, *Annual Conference of the International Speech Communication Association, Interspeech*, pages 2052–2056. ISCA, 2021. 1, 10, 14, 39, 50
- [258] Binbin Zhang, Hang Lv, Pengcheng Guo, Qijie Shao, Chao Yang, Lei Xie, Xin Xu, Hui Bu, Xiaoyu Chen, Chenchen Zeng, Di Wu, and Zhendong Peng. WENETSPEECH: A 10000+ hours multi-domain mandarin corpus for speech recognition. In *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP*, pages 6182–6186. IEEE, 2022. 10, 39, 50
- [259] Chi Zhang, Feng Gao, Baoxiong Jia, Yixin Zhu, and Song-Chun Zhu. Raven: A dataset for relational and analogical visual reasoning. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019. 44, 47
- [260] Rui Zhang, Yongsheng Zhou, Qianyi Jiang, Qi Song, Nan Li, Kai Zhou, Lei Wang, Dong Wang, Minghui Liao, Mingkun Yang, et al. Icdar 2019 robust reading challenge on reading chinese text on signboard. In *2019 international conference on document analysis and recognition (ICDAR)*, pages 1577–1581. IEEE, 2019. 45, 48
- [261] Shuo Zhang, Biao Yang, Zhang Li, Zhiyin Ma, Yuliang Liu, and Xiang Bai. Exploring the capabilities of large multimodal models on dense text, 2024. 45, 48
- [262] Xiaoman Zhang, Chaoyi Wu, Ziheng Zhao, Weixiong Lin, Ya Zhang, Yanfeng Wang, and Weidi Xie. Pmcvqa: Visual instruction tuning for medical visual question answering. *arXiv preprint arXiv:2305.10415*, 2023. 45, 48
- [263] Yanzhe Zhang, Ruiyi Zhang, Jiuxiang Gu, Yufan Zhou, Nedim Lipka, Diyi Yang, and Tong Sun. Llavav: Enhanced visual instruction tuning for text-rich image understanding, 2023. 45
- [264] Ying Zhang, Lionel Gueguen, Ilya Zharkov, Peter Zhang, Keith Seifert, and Ben Kadlec. Uber-text: A large-scale dataset for optical character recognition from street-level imagery. In *SUNw: Scene Understanding Workshop - CVPR 2017*, 2017. 45, 48
- [265] Yuanhan Zhang, Jinming Wu, Wei Li, Bo Li, Zejun Ma, Ziwei Liu, and Chunyuan Li. Video instruction tuning with synthetic data, 2024. URL <https://arxiv.org/abs/2410.02713>. 49
- [266] Bo Zhao, Boya Wu, Muyang He, and Tiejun Huang. Svit: Scaling up visual instruction tuning. *arXiv preprint arXiv:2307.04087*, 2023. 44, 47, 50

- [267] Wanjun Zhong, Ruixiang Cui, Yiduo Guo, Yaobo Liang, Shuai Lu, Yanlin Wang, Amin Saied, Weizhu Chen, and Nan Duan. Agieval: A human-centric benchmark for evaluating foundation models, 2023. URL <https://arxiv.org/abs/2304.06364>. 15
- [268] Xu Zhong, Elaheh ShafieiBavani, and Antonio Jimeno Yepes. Image-based table recognition: data, model, and evaluation. *arXiv preprint arXiv:1911.10683*, 2019. 44
- [269] Fengbin Zhu, Wenqiang Lei, Youcheng Huang, Chao Wang, Shuo Zhang, Jiancheng Lv, Fuli Feng, and Tat-Seng Chua. TAT-QA: A question answering benchmark on a hybrid of tabular and textual content in finance. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 3277–3287, 2021. 44, 47
- [270] Wanrong Zhu, Jack Hessel, Anas Awadalla, Samir Yitzhak Gadre, Jesse Dodge, Alex Fang, Youngjae Yu, Ludwig Schmidt, William Yang Wang, and Yejin Choi. Multimodal c4: An open, billion-scale corpus of images interleaved with text. *Advances in Neural Information Processing Systems*, 36, 2024. 11, 39
- [271] Yongshuo Zong, Ondrej Bohdal, Tingyang Yu, Yongxin Yang, and Hospedales Timothy. Safety fine-tuning at (almost) no cost: A baseline for vision large language models. *arXiv preprint arXiv:2402.02207*, 2024. 45, 47

Appendix

A More Qualitative Results

In this section, we show examples of different modality tasks to demonstrate the capabilities of our M2-omni model.

Image Understanding. As shown in Fig. S1, our M2-omni model demonstrates an adeptness in complex OCR and reasoning. And Fig. S2, the model displays its ability in flow chart understanding, and mathematical problem solving. These cases demonstrate the model’s ability to handle various complex image-text understanding tasks.

Receipt OCR Example:

提取图中的所有文字内容。

结账单 桌台号: 二楼包间-凤凰山 流水号: 27
订单号: 101221102142217279000001 人数: 6
商品 单价 数量 价格 (元) antmmf_20241203

商品	单价	数量	价格 (元)
养生海参煲	58.00	6/份	348.00
荷香小肚	36.00	1/份	36.00
苦菊拌馓子	22.00	1/份	22.00
葱烧海参	68.00	1/份	68.00
爆三样	58.00	1/份	58.00
炸五香肉	48.00	1/份	48.00
油爆螺片	68.00	1/份	68.00
爆炒金钱肚	58.00	1/份	58.00
胶东巧媳妇	38.00	1/份	38.00
鲜粉皮炒肉	26.00	2/份	52.00
山芹肉丝	22.00	1/份	22.00
酱焖中黄花	88.00	1/份	88.00
馒头	3.00	6/份	18.00
纸巾	3.00	1/包	3.00
筷子	1.00	6/双	6.00
合计		31	933.00
商品原价合计			933.00
应付金额 (元)			933.00

Olympic Sports Chart Example:

Team GB's most successful Olympic sports
Gold medals won by Team GB at the Summer Olympics (1996-2020)

What is the Team GB's most successful Olympic sports in 2008?

In the 2008 Beijing Olympics, Team GB's most successful Olympic sport was cycling, with 8 gold medals won.

Department Salary Table Example:

Department	Name	Salary
Administration	Emily	\$2,000
Finance	Nick	\$1,800
Marketing	John	\$2,600
Marketing	Gloria	\$1,800
Administration	Jane	\$2,500
Finance	Miles	\$2,000
Administration	Tyler	\$3,000
Finance	Wilkins	\$2,500
Marketing	Miles	\$2,800
Administration	Sabine	\$1,900

If you want to make more money, which department should you go to?

To determine this, we can calculate the average salary for each department based on the salary information provided in the image:

- Administration: $(2,000 + 2,500 + 3,000 + 1,900) / 4 = \$2,350$
- Finance: $(1,800 + 2,000 + 2,500) / 3 = \$2,100$
- Marketing: $(2,600 + 1,800 + 2,800) / 3 = \$2,400$

Based on these calculations, the Marketing department has the highest average salary at \$2,400. Therefore, if you want to make more money, you should consider going to the Marketing department.

Figure S1: Cases for complex OCR.

Interleave Image-Text Understanding. As shown in Fig. S3, the model shows its excellent ability in processing interleaved images-text. The model has the ability to synthesize and understand the content of multiple images.

Video Understanding. Fig. S4 displays several cases for video understanding. We can see that our model can accurately capture the details in the video and understand the events in videos.

Audio QA. As shown in Fig. S5, the model can accurately understand the content of the audio and answer questions combined with the image/video content, which demonstrates the model’s multimodal understanding ability.

B Training Data Details


In this section, we list the training data in detail, including data sources, sampling ratios, data volumes, and language information.

Table S1: Details of open source data in pre-training stage.


Dataset	Size	Ratio (%)	Class	Language
Laion 5B [172]	1555342102	67.10	Image-Text	English
Zero [228]	151766788	6.55	Image-Text	Chinese
COYO [13]	61915700	2.67	Image-Text	English
SBU [157]	777671	0.03	Image-Text	English
CC3M [179]	3105571	0.13	Image-Text	English
CC12M [17]	10337890	0.45	Image-Text	English
Object365 [177]	1062993	0.05	Image-Text	English
Datacomp [61]	187843384	8.10	Image-Text	Chinese
Clotho [47]	14465	0.00	Audio-Text	English
AudioCaps [97]	50939	0.00	Audio-Text	English
Libriheavy [91]	10454844	0.45	Audio-Text	English
MACS [141]	17275	0.00	Audio-Text	English
AudioSet [66]	1909428	0.08	Audio-Text	English
VGGSound [20]	95495	0.00	Audio-Text	English
AISHELL1 [12]	134424	0.01	Audio-Text	Chinese
WenetSpeech [258]	14625245	0.63	Audio-Text	Chinese
GigaSpeech [19]	8282988	0.36	Audio-Text	English
Librispeech [257]	286652	0.01	Audio-Text	English
CoVoST2_en_en [203]	304937	0.01	Audio-Text	English
CoVoST2_en_zh-CN [203]	304937	0.01	Audio-Text	Chinese
CoVoST2_zh-CN_en [203]	11928	0.00	Audio-Text	English
CoVoST2_zh-CN_zh-CN [203]	11928	0.00	Audio-Text	Chinese
WavCaps [147]	275282	0.01	Audio-Text	English
SPGISpeech [154]	1966109	0.08	Audio-Text	English
KeSpeech [195]	973583	0.04	Audio-Text	Chinese
AliMeeting [245]	372886	0.02	Audio-Text	Chinese
magicdata_755h [239]	584976	0.03	Audio-Text	Chinese
MagicData_RAMC [239]	164972	0.01	Audio-Text	Chinese
Primewords_100h [163]	50383	0.00	Audio-Text	Chinese
FreeST [193]	102600	0.00	Audio-Text	Chinese
tal_zh100h [9]	93963	0.00	Audio-Text	Chinese
tal_zhen587h [9]	354680	0.02	Audio-Text	Chinese
aidatatang_200zh [101]	189121	0.01	Audio-Text	Chinese
TED_LIUM_v2 [171]	93437	0.00	Audio-Text	English
SlideSpeech [204]	483731	0.02	Audio-Text	English
MMC4 [270]	36870000	1.59	Interleaved Image-Text	English
WuDao [251]	49896202	2.15	Text	Chinese
Pile [63]	136514954	5.89	Text	English
WebVid [8]	1032719	0.04	Video-Text	English
Youku-mPLUG [234]	1098244	0.05	Video-Text	Chinese
CDIP-OCR [187]	9715288	0.42	OCR	English
OCR-IDL [11]	26473994	1.14	OCR	English
Webvicob [99]	27179852	1.17	OCR	English
WordScape [217]	8492083	0.37	OCR	English
MARIO-OCR [22]	6172608	0.27	OCR	English




What should we add in the third step?


 In the third step, we should add milk to the mixture. This is indicated by the illustration of a milk carton and a whisk, suggesting that milk is to be incorporated into the batter at this stage, ensuring a creamy consistency.


(a) Flow chart understanding



$$\sqrt{2x+6} + 4 = x + 3$$
 Help me solve this problem and give an explanation.

What is the solution set of the equation above?

A) $\{-1\}$
 B) $\{5\}$
 C) $\{-1, 5\}$
 D) $\{0, -1, 5\}$


SOLUTION:
 To find the solution set of the given equation:

$$\sqrt{2x+6} + 4 = x + 3$$
 we'll first isolate the square root term.
 Step 1: Subtract 4 from both sides of the equation.

$$\sqrt{2x+6} = x - 1$$

 Step 2: Square both sides to eliminate the square root.

$$(\sqrt{2x+6})^2 = (x-1)^2$$

$$2x+6 = x^2 - 2x + 1$$

 Step 3: Move all terms to one side to set the equation to zero.

$$x^2 - 2x + 1 - 2x - 6 = 0$$

$$x^2 - 4x - 5 = 0$$

 Step 4: Factor the quadratic equation.

$$(x-5)(x+1) = 0$$

 Step 5: Solve for x.

$$x - 5 = 0 \text{ or } x + 1 = 0$$

$$x = 5 \text{ or } x = -1$$

 Step 6: Check for extraneous solutions by substituting the values back into the original equation.
 For $x = 5$:

$$\sqrt{2(5)+6} + 4 = 5 + 3$$

$$4 + 4 = 8$$

 This is true.
 For $x = -1$:



$$\sqrt{2(-1)+6} + 4 = -1 + 3$$

$$2 + 4 = 8$$



 This is not true, so $x = -1$ is an extraneous solution and is not included in the solution set.
 Therefore, the solution set of the equation is $x = 5$.
 The correct answer is:
 ● B) $\{5\}$


(b) Mathematical problem solving

Figure S2: Cases for information extraction and visual reasoning.


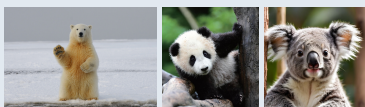


 In which row and column is the peach located?



 The peaches are located in the third row, first column.



 In which row and column is the fruit in this picture located in the previous picture?


 The fruit in this picture, the apple, is located in the second row, second column of the previous picture.

(a) Multi-turn dialogue



 Where do these animals mainly live? Let's introduce their living habits respectively.


 The animals shown in the images are the polar bear, the panda bear, and the koala. Each of these species has distinct habitats and living habits.

1. Polar Bear:

- Habitat: Polar bears live in the Arctic region. They are found in five countries: Norway, Denmark (Greenland), Russia, the United States (Alaska), and Canada.
- Living Habits: Polar bears are excellent swimmers and often hunt seals, their primary food source, from the sea ice. They are solitary animals and have large home ranges. Due to the melting of sea ice, polar bears are increasingly spending more time on land, which can lead to food shortages.

2. Panda Bear:

- Habitat: Pandas inhabit bamboo forests in the mountainous regions of central China, particularly in the Sichuan, Shaanxi, and Gansu provinces.
- Living Habits: Pandas are almost entirely dependent on bamboo for food, although they may occasionally eat other plants or small animals. They are mostly solitary but will come together to mate. Pandas have a very low reproductive rate, which, along with habitat loss, threatens their survival.

3. Koala:

- Habitat: Koalas are native to Australia and are found in the eastern and southern regions, particularly in Queensland, New South Wales, Victoria, and South Australia.
- Living Habits: Koalas live in eucalyptus forests, as their diet consists almost exclusively of eucalyptus leaves. They have a very specialized digestive system that allows them to detoxify the chemicals in these leaves, which are toxic to most animals. Koalas are not very active and sleep for up to 20 hours a day, conserving energy because their diet is low in nutritional value. These unique animals are all considered vulnerable or endangered due to habitat loss, climate change, and other human activities. Conservation efforts are in place to protect these species and their habitats.

(b) Multi-image understanding

Figure S3: Cases for interleaved image-text understanding.



The video begins with a title card reading "Afterwork Routine" and shows a series of clips depicting various activities. The first scene shows an individual arriving home and placing their shoes in a shoe rack. Subsequent scenes include using a vacuum cleaner to clean the floor, ironing clothes, and storing items in a drawer with compartmentalized organization. Other clips show the use of a water dispenser, a portable washing machine, a mopping robot, and a cooking sequence where eggs are fried and a dish is prepared using a multi-cooker. There's also a scene of organizing a kitchen cabinet, using a knife to prepare food, disposing of waste into a trash bin, sealing a food container with a vacuum sealer, and using a steamer to make food. Additionally, there are shots of a person folding a laundry basket, placing clothes in a drawer, and relaxing on a sofa with a pet. Throughout the video, the color scheme is primarily white with accents of pastel colors, and the overall atmosphere is clean and modern.

What fruit was the person in the video handling?

The person in the video was handling a watermelon. They were seen cutting it into slices and serving it on a plate.

What color is the cutting board used to cut watermelon?

The cutting board used to cut the watermelon is teal-colored.

Figure S4: Case for detailed video understanding.

(Audio content: 右转走什么路?)

根据图片，右转可以走金水路。金水路的箭头指向了“英协路”的右侧，表明这是一个合适的选择。

(Audio content: 直行呢?)

直行前往：凤台路

(a) Image audio QA

(Audio content: What are the two people doing in the video?)

The two people in the video are engaging in physical combat. They are shown fighting, throwing punches, and grappling with each other.

(b) Video audio QA

Figure S5: Cases for audio QA.

Table S2: Details of open source image-text data in IT-Stage-1-Data (Part-1).

Dataset	Size	Ratio (%)	Data Class	Language
TextCaps [184]	21942	0.08	Captioning	English
LRV-Caption [122]	254897	0.98	Captioning	English/Chinese
ShareGPT4V [24]	101178	0.39	Captioning	English
Stanford40 Action [241]	9397	0.04	Captioning	English
PixMo-CapQA [46]	229781	0.88	Captioning	English
ChartQA [142]	7548	0.03	Chart	English
ChartBench [236]	599616	2.29	Chart	English
MMC-Inst [123]	371027	1.42	Chart	English
PlotQA [149]	157045	0.60	Chart	English
FigureQA [90]	100000	0.38	Chart	English
DVQA [89]	199364	0.76	Chart	English
CRPE [208]	12896	0.05	Chart	English
ChartGemma [143]	163240	0.62	Chart	English
TabMWP [135]	22662	0.09	Chart	English
Chart2Text [92]	27794	0.11	Chart	English
LRV-Instruction-Chart [122]	21103	0.08	Chart	English
ALLaVA [18]	977493	3.73	Conversation	English/Chinese
ComVint [48]	23586	0.11	Conversation	English/Chinese
TallyQA [1]	249274	0.95	Counting	English
Locount [15]	12660	0.05	Counting	English
DocVQA [144]	46191	0.17	Document	English
DeepForm-VQA [3]	5367	0.02	Document	English
Open-WikiTable [102]	2033	0.01	Document	English
TabFact [29]	12890	0.05	Document	English
OCR-IDL [11]	84183	0.32	Document	English
kleister-charity [188]	5175	0.02	Document	English
DocReason25K [81]	22568	0.09	Document	English
HierText [130]	8250	0.03	Document	English
VisualMRC [194]	4794	0.02	Document	English
DocStruct4M [81]	299214	1.14	Document	English
PubTabNet [268]	387665	1.48	Document	English
arxiv_qa [113]	99992	0.38	Document	English
PixMo-Docs [46]	255261	0.98	Document	English
TAT-QA [269]	6630	0.02	Document	English
Table-VQA [100]	84317	0.32	Document	English
PixMo-AskModelAnything [46]	157540	0.60	General QA	English
COCO-VQA [169]	28054	0.11	General QA	English
VG-VQA [166]	14136	0.03	General QA	English/Chinese
SVIT [266]	19818	0.08	General QA	English
LVIS-Instruct4v [205]	111169	0.42	General QA	Chinese
RLAIF-V [248]	22911	0.09	General QA	English
RAVEN [259]	41995	0.16	General QA	English
OK-VQA [140]	26994	0.10	General QA	English
VQAv2 [70]	249274	0.95	General QA	English
GQA [83]	72148	0.28	General QA	English
Q-Instruct [222]	200534	0.77	General QA	English
VSR [121]	9516	0.04	General QA	English
VisCoT [176]	97490	0.37	General QA	English
CogVLM-SFT-311K [207]	296629	0.29	General QA	English/Chinese
ShareGPT4o [35]	96825	0.37	General QA	English
image-textualization [159]	99573	0.38	General QA	English
MapQA [16]	242501	0.93	General QA	English
VizWiz [76]	20523	0.08	General QA	English
PathVQA [77]	32632	0.12	General QA	English
ALFWorld [183]	44968	0.17	General QA	English

Table S3: Details of open source image-text data in IT-Stage-1-Data (Part-2).

Dataset	Size	Ratio (%)	Data Class	Language
Inqa [160]	207821	0.79	General QA	English
OODVQA [182]	16532	0.06	General QA	English
Cambrian-10M [198]	1863834	7.12	General QA	English
Align-Anything-TI2T-Instruction [85]	39216	0.15	General QA	English
LRV-Instruction [122]	180722	0.69	General QA	English
VLGuard [271]	10000	0.04	General QA	English
HalluciDoctor [247]	104518	0.39	General QA	English
M-HalDetect [73]	28268	0.10	General QA	English
illusionVQA [175]	4362	0.02	General QA	English
HaloQuest [216]	7686	0.03	General QA	English
Infinity-MM [71]	78284	2.92	General QA	English
RefCOCO [93]	200537	0.54	Grounding	English
Objects365 [178]	1038990	3.96	Grounding	English/Chinese
GPT4Gen-RD-BoxCoT [23]	11268	0.04	Grounding	English
AOKVQA [173]	34112	0.13	Knowledge	English
KVQA [174]	20806	0.08	Knowledge	English
CLEVR [88]	70000	0.27	Knowledge	English
Super-CLEVR [117]	56913	0.22	Knowledge	English
ViQuAE [105]	3153	0.01	Knowledge	English
Co-Instruct [223]	9699	0.04	Knowledge	English
CLEVR-Math [119]	675284	2.58	Mathematics	English
MathV360K [181]	328339	1.25	Mathematics	English
GeoGPT4V [14]	18174	0.07	Mathematics	English
GeoQA [21]	72318	0.28	Mathematics	English
TextVQA [185]	21953	0.08	OCR	English
OCR-VQA [150]	207572	0.79	OCR	English
LLaVAR [263]	19800	0.08	OCR	English
ICDAR19_LSVT [192]	30000	0.11	OCR	Chinese
ICDAR19_ReCTS [260]	19825	0.08	OCR	Chinese
ICDAR19_ArT [37]	9344	0.03	OCR	Chinese
Docmatix [104]	101806	0.39	OCR	English
DT-VQA [261]	20780	0.08	OCR	English
Clock [237]	3678	0.01	OCR	English
COCO-Text V2.0 [202]	13049	0.05	OCR	Chinese
infographicsVQA [145]	12078	0.05	OCR	English
WebSRC [30]	9098	0.03	OCR	English
CTW [252]	25871	0.10	OCR	Chinese
RCTW-17 [180]	9262	0.03	OCR	Chinese
ST-VQA [10]	17731	0.07	OCR	English
TextOCR [186]	21750	0.08	OCR	Chinese
SynthText [75]	857773	3.28	OCR	Chinese
DTNutrCap [261]	4498	0.02	OCR	English
DTScene [261]	15534	0.06	OCR	English
ScreenQA [5]	161522	0.60	OCR	English
Uber-Text [264]	13941	0.05	OCR	Chinese
MathWriting [67]	62726	0.24	OCR	English
HME [253]	74502	0.28	OCR	English
ScienceQA [134]	10332	0.04	Science	English
AI2D [94]	9930	0.04	Science	English
TQA [95]	19161	0.07	Science	English
IconQA [133]	21393	0.08	Science	English
PMC-VQA [262]	152603	0.58	Science	English
VQA-RAD [103]	5379	0.02	Science	English

Table S4: Details of open source text data in IT-Stage-1-Data.

Dataset	Size	Ratio (%)	Language	Data Class
Evol-Instruct-Code [138]	66862	0.52	English	Code
UltraInteract_sft [250]	288579	2.27	English	Code
glaive-code-assistant-v1 [68]	136109	1.07	English	Code
glaive-code-assistant-v2 [68]	215166	1.69	English	Code
glaive-code-assistant-v3 [68]	475192	3.78	English	Code
Magocoder [218]	108063	0.85	English	Code
ALLaVA [18]	143000	1.12	English	Conversation
alpaca-gpt4 [158]	103998	0.83	English	Conversation
alpaca-gpt4_zh [158]	47347	0.37	Chinese	Conversation
UltraFeedback [43]	121832	0.97	English	Conversation
Cambrian-10M [198]	1713307	13.45	English	General QA
SlimOrca [118]	517982	4.07	English	General QA
Align-Anything-Instruction-100K [85]	105333	0.83	English	General QA
Align-Anything-Instruction-100K-zh [85]	104550	0.82	Chinese	General QA
WizardLM_evol_instruct-v2 [232]	142999	1.12	English	knowledge
databricks_dolly_15k [40]	15011	0.12	English	knowledge
Magpie-Qwen2 [235]	1000000	7.85	English	knowledge
Infinity-Instruct [153]	2116735	16.62	English	knowledge
MathInstruct [254]	261629	2.05	English	Mathematics
NuminaMath-Cot [109]	859296	6.74	English	Mathematics
DART-Math-Hard [199]	551000	4.32	English	Mathematics
orca-math-word-problems-200k [151]	200035	1.57	English	Mathematics
MetaMathQA [246]	395000	3.10	English	Mathematics
OpenMathInstruct-v2 [200]	1000000	7.85	English	Mathematics
MathGLM [240]	200488	1.57	Chinese	Mathematics
arxiv-physics-instruct [96]	276286	2.17	English	Science

Table S5: Details of open source image-text data in IT-Stage-2-Data (Part-1).

Dataset	Size	Ratio (%)	Data Class	Language
LRV-Caption [122]	106239	0.62	Captioning	English
ShareGPT4V [24]	64917	0.38	Captioning	Chinese
CogVLM-SFT-311K-caption [207]	67389	0.39	Captioning	Chinese
textocr_gpt4o_train [53]	100324	0.58	Captioning	English
PixMo-CapQA [46]	229781	1.33	Captioning	English
ChartQA [142]	20128	0.12	Chart	English
CRPE [208]	51584	0.3	Chart	English
ChartBench [236]	599616	3.48	Chart	English
FigureQA [90]	100000	0.58	Chart	English
PlotQA [149]	157045	0.91	Chart	English
MMC-Inst [123]	371027	2.15	Chart	English
DVQA [89]	199364	1.16	Chart	English
ChartGemma [143]	163240	0.95	Chart	English
TabMWP [135]	226620	1.31	Chart	English
Chart2Text [92]	277940	1.61	Chart	English
LRV-Instruction-Chart [122]	21103	0.12	Chart	English
ALLaVA [18]	165387	0.96	Conversation	English/Chinese
ComVint [48]	23586	0.14	Conversation	English/Chinese
TallyQA [1]	49854	0.29	Counting	English
Locount [15]	12660	0.07	Counting	English
DocVQA [144]	123176	0.72	Document	English
DeepForm-VQA [3]	7156	0.04	Document	English
TabFact [29]	12890	0.07	Document	English
HierText [130]	8250	0.05	Document	English
TAT-QA [269]	4420	0.03	Document	English
VisualMRC [194]	4794	0.03	Document	English
OCR-IDL [11]	168366	0.98	Document	English
DocReason25K [81]	22568	0.13	Document	English
DocStruct4M [81]	89764	0.52	Document	English
arxiv_qa [113]	99992	0.58	Document	English
PixMo-Docs [46]	255261	1.48	Document	English
SVIT [266]	39636	0.23	General QA	English
GQA [83]	72148	0.42	General QA	English
MapQA [16]	242501	1.41	General QA	English
ShareGPT4o [35]	193650	1.12	General QA	English
CogVLM-SFT-311K-caption [207]	935553	3.69	General QA	English/Chinese
image-textualization [159]	298719	1.73	General QA	English
lnqa [160]	207821	1.21	General QA	English
OODVQA [182]	8266	0.05	General QA	English
VizWiz [76]	20523	0.12	General QA	English
VQAv2 [70]	249274	1.45	General QA	English
RAVEN [259]	83990	0.49	General QA	English
RLAIF-V [248]	45822	0.27	General QA	English
VSR [121]	4758	0.03	General QA	English
Cambrian-10M [198]	28054	0.16	General QA	English
Align-Anything-TI2T-Instruction [85]	78432	0.46	General QA	English
LRV-Instruction [122]	361444	2.1	General QA	English/Chinese
VLGuard [271]	10000	0.06	General QA	English
HalluciDoctor [247]	104528	0.61	General QA	English
M-HalDetect [73]	28268	0.17	General QA	English
illusionVQA [175]	7270	0.04	General QA	English
HaloQuest [216]	23058	0.13	General QA	English
Infinity-MM [71]	782884	4.55	General QA	English
PixMo-AskModelAnything [46]	157540	0.91	General QA	English
VisCoT [176]	175022	1.02	General QA	English
DocStruct-Grounding [81]	99983	0.58	Grounding	English
AOKVQA [173]	17056	0.1	Knowledge	English

Table S6: **Details of open source image-text data in IT-Stage-2-Data (Part-2).**

Dataset	Size	Ratio (%)	Data Class	Language
ViQuAE [105]	2102	0.01	Knowledge	English
KVQA [174]	41612	0.24	Knowledge	English
Co-Instruct [223]	12932	0.08	Knowledge	English
CLEVR [88]	70000	0.41	Knowledge	English
Super-CLEVR [117]	56913	0.33	Knowledge	English
GeoGPT4V [14]	36348	0.21	Mathematics	English
MathV360K [181]	328339	1.91	Mathematics	English
CLEVR-Math [119]	675284	3.92	Mathematics	English
Geo170k [62]	176602	1.02	Mathematics	English
GeoQA [21]	144636	0.84	Mathematics	English
TextVQA [185]	21953	0.13	OCR	English
OCR-VQA [150]	207572	1.2	OCR	English
ICDAR19_LSVT [192]	30000	0.17	OCR	Chinese
ICDAR19_ReCTS [260]	19825	0.12	OCR	Chinese
ICDAR19_ArT [37]	4672	0.03	OCR	Chinese
Clock [237]	4904	0.03	OCR	English
DT-VQA [261]	83120	0.48	OCR	English
Docmatix [104]	306376	1.78	OCR	English
DTNutrCap [261]	4498	0.03	OCR	English
DTScene [261]	15534	0.09	OCR	English
infographicsVQA [145]	16104	0.09	OCR	English
WebSRC [30]	18196	0.11	OCR	English
TextOCR [186]	87000	0.5	OCR	Chinese
ST-VQA [10]	35462	0.21	OCR	English
CTW [252]	51742	0.3	OCR	Chinese
RCTW-17 [180]	9262	0.05	OCR	Chinese
COCO-Text V2.0 [202]	13049	0.08	OCR	Chinese
SynthText [75]	85777	0.5	OCR	Chinese
ScreenQA [5]	80761	0.47	OCR	English
Uber-Text [264]	27882	0.16	OCR	Chinese
HME [253]	148984	0.86	OCR	English
MathWriting [67]	31363	0.18	OCR	English
IconQA [133]	7131	0.04	Science	English
TQA [95]	76644	0.44	Science	English
AI2D [94]	39720	0.23	Science	English
ScienceQA [134]	123984	0.72	Science	English
VQA-RAD [103]	10758	0.06	Science	English
PMC-VQA [262]	152603	0.89	Science	English

Table S7: **Details of Interleaved image-text data in IT-Stage-2-Data.**

Dataset	Size	Ratio (%)	Class	Language
InternVL-SA-1B-Caption-EN [32]	77704	2.0	Caption	English
InternVL-SA-1B-Caption-CN [32]	77704	1.0	Caption	Chinese
MMDU-EN [215]	74998	4.0	General QA	English
MMDU-CN [215]	33882	2.0	General QA	Chinese
M4-Instruct [107]	615814	1.0	General QA	English
Synthetic GEO-mv	241060	1.0	General QA	English
Synthetic ScienceQA-mv	45916	2.0	General QA	English
MP-DocVQA (en) [197]	-	-	Document	English
MP-Docmatix [104]	-	-	Document	English

Table S8: Details of Video-text data in IT-Stage-2-Data.

Dataset	Size	Ratio (%)	Class	Language
Vript [238]	-	-	Caption	English
OpenVid [152]	-	-	Caption	English
Mementos [213]	-	-	Caption	English
ShareGPT4o-Video [34]	2111	4.0	Caption	English & Chinese
ShareGPT4Video [26]	255000	1.0	Caption	English
VideoGPT+ [139]	-	-	Caption	English
TextVR [224]	39648	1.0	Caption	English
Synthetic VideoDetailCaption	56748	4.0	Caption	English
EgoTaskQA [87]	61710	1.0	General QA	English
CLEVRER [243]	82620	1.0	General QA	English
NExT-QA [226]	34132	1.0	General QA	English
LLaVA-Video [265]	1367388	1.0	General QA	English
FineVideo [56]	87502	1.0	General QA	English
VideoBlink (en) [189]	2590	4.0	General QA	English
TGIF-QA [84]	52696	1.0	General QA	English

Table S9: Details of video-text data in IT-Stage-3-Data.

Dataset	Size	Ratio (%)	Class	Language
TextVR [224]	39648	1.0	Caption	English
ShareGPT4o-Video [34]	2111	4.0	Caption	English & Chinese
Synthetic VideoAction	7182	4.0	Caption	English
Synthetic VideoDetailCaption	56748	4.0	Caption	English
EgoTaskQA [87]	61710	2.0	General QA	English
CLEVRER [243]	82620	1.0	General QA	English
NExT-QA [226]	34132	1.0	General QA	English
LLaVA-Video [265]	1367388	0.5	General QA	English
FineVideo [56]	87502	1.0	General QA	English
VideoBlink (en) [189]	2590	2.0	General QA	English
MoVid [27]	24699	2.0	General QA	English
FunQA [227]	21012	1.0	General QA	English
TGIF-QA [84]	52696	1.0	General QA	English
AlignAnythingVideo [86]	9501	6	General QA	English
STAR [219]	45731	2.0	General QA	English
MMWorld [78]	1976	4.0	General QA	English
IntentQA [110]	40320	2.0	General QA	English

Table S10: **Details of open source audio-text data in IT-Stage-3-Data.**

Dataset	Size	Ratio (%)	Data Class	Language
Libriheavy [91]	10454844	24.77	ASR	English
GigaSpeech [19]	8282988	19.62	ASR	English
Librispeech [257]	286652	0.68	ASR	English
CoVoST2_en_en [203]	304937	0.72	ASR	English
SPGISpeech [154]	1966109	4.66	ASR	English
TEDLIUM_v2 [171]	93437	0.22	ASR	English
SlideSpeech [204]	483731	1.15	ASR	English
CoVoST2_cn_cn [203]	11928	0.03	ASR	Chinese
AISHELL1 [12]	134424	0.32	ASR	Chinese
WenetSpeech [258]	14625245	34.65	ASR	Chinese
KeSpeech [195]	973583	2.31	ASR	Chinese
AliMeeting [245]	372886	0.88	ASR	Chinese
MagicData_755h [239]	584976	1.39	ASR	Chinese
MagicData_RAMC [239]	164972	0.39	ASR	Chinese
Primewords_100h [163]	50383	0.12	ASR	Chinese
FreeST [193]	102600	0.24	ASR	Chinese
Tal_zh100h [9]	93963	0.22	ASR	Chinese
Tal_zhen587h [9]	354680	0.84	ASR	Chinese
Aidatatang_200zh [101]	189121	0.45	ASR	Chinese
CoVoST2_en_cn [203]	304937	0.72	AST	Chinese
CoVoST2_cn_en [203]	11928	0.03	AST	English
WavCaps [147]	275282	0.65	AAC	English
Clotho [47]	14465	0.03	AAC	English
AudioCaps [97]	50939	0.12	AAC	English
MACS [141]	17275	0.04	AAC	English
AudioSet [66]	1909428	4.52	AAT	English
VGGSound [20]	95495	0.23	AAT	English

Table S11: **Details of audio-QA data in IT-Stage-3-Data.**

Dataset	Size	Ratio (%)	Data Class	Language
COCO-VQA [169]	879598	11.81	Image-Audio-QA	English/Chinese
VG-VQA [166]	300000	4.03	Image-Audio-QA	English/Chinese
SVIT [266]	40000	0.54	Image-Audio-QA	English/Chinese
OK_VQA [140]	18018	0.24	Image-Audio-QA	English/Chinese
VQAv2 [70]	887514	11.91	Image-Audio-QA	English/Chinese
GQA [83]	1886000	25.31	Image-Audio-QA	English/Chinese
TextVQA [185]	69204	0.93	Image-Audio-QA	English/Chinese
TextCaps [184]	219530	2.95	Image-Audio-QA	English/Chinese
OCR-VQA [150]	2004292	26.90	Image-Audio-QA	English/Chinese
TextVR [224]	79296	1.06	Video-Audio-QA	English/Chinese
VideoChat [111]	13778	0.18	Video-Audio-QA	English/Chinese
WebVid [7]	800000	10.74	Video-Audio-QA	English/Chinese
NExT-QA [226]	68264	0.92	Video-Audio-QA	English/Chinese
CLEVRER [243]	80000	1.07	Video-Audio-QA	English/Chinese
TGIF-QA [84]	105392	1.41	Video-Audio-QA	English/Chinese