

It's Not All Black and White: Degree of Truthfulness for Risk-Avoiding Agents

EDEN HARTMAN, Bar-Ilan University, Israel

EREL SEGAL-HALEVI, Ariel University, Israel

BIAOSHUAI TAO, Shanghai Jiao Tong University, China

The classic notion of *truthfulness* requires that no agent has a profitable manipulation – an untruthful report that, for *some* combination of reports of the other agents, increases her utility. This strong notion implicitly assumes that the manipulating agent either knows what all other agents are going to report, or is willing to take the risk and act as-if she knows their reports.

Without knowledge of the others' reports, most manipulations are *risky* – they might decrease the manipulator's utility for some other combinations of reports by the other agents. Accordingly, a recent paper (Bu, Song and Tao, "On the existence of truthful fair cake cutting mechanisms", *Artificial Intelligence* 319 (2023), 103904) suggests a relaxed notion, which we refer to as *risk-avoiding truthfulness (RAT)*, which requires only that no agent can gain from a *safe* manipulation – one that is sometimes beneficial and never harmful.

Truthfulness and RAT are two extremes: the former considers manipulators with complete knowledge of others, whereas the latter considers manipulators with no knowledge at all. In reality, agents often know about some – but not all – of the other agents. This paper introduces the *RAT-degree* of a mechanism, defined as the smallest number of agents whose reports, if known, may allow another agent to safely manipulate, or n if there is no such number. This notion interpolates between classic truthfulness (degree n) and RAT (degree at least 1): a mechanism with a higher RAT-degree is harder to manipulate safely.

To illustrate the generality and applicability of this concept, we analyze the RAT-degree of prominent mechanisms across various social choice settings, including auctions, indivisible goods allocations, cake-cutting, voting, and stable matchings.

CONTENTS

Abstract	0
Contents	0
1 Introduction	1
2 Preliminaries	3
3 The RAT-Degree	3
4 Auction for a Single Good	5
5 Indivisible Goods Allocations	7
6 Cake Cutting	12
7 Single-Winner Ranked Voting	16
8 Stable Matchings	19
9 Discussion and Future Work	20
References	22
A Related Work: Extended Discussion	24
B Proofs for Section 3 (The RAT-Degree)	26
C Proofs for Section 4 (Auction for a Single Good)	26
D Proofs for Section 5 (Indivisible Goods Allocations)	28
E Proofs for Section 6 (Cake Cutting)	34
F Proofs for Section 7 (Single-Winner Ranked Voting)	39
G Proofs for Section 8 (Stable Matchings)	45

1 Introduction

The Holy Grail of mechanism design is the *truthful mechanism* – a mechanism in which the (weakly) dominant strategy of each agent is truthfully reporting her type. But in most settings, there is provably no truthful mechanism that satisfies other desirable properties such as budget-balance, efficiency or fairness. Practical mechanisms are thus *manipulable* in the sense that some agent a_i has a *profitable* manipulation – for *some* combination of reports by the other agents, agent a_i can induce the mechanism to yield an outcome (strictly) better for her by reporting non-truthfully.

This notion of manipulability implicitly assumes that the manipulating agent either knows the reports made by all other agents, or is willing to take the risk and act *as-if* she knows their reports. Without knowledge of the others’ reports, most manipulations are *risky* – they might decrease the manipulator’s utility for some other combinations of reports by the other agents. In practice, many agents are *risk-avoiding* and will not manipulate in such cases. This highlights a gap between the standard definition and the nature of such agents.

To illustrate, consider a simple example in the context of voting. Under the Plurality rule, agents vote for their favorite candidate, and the candidate with the most votes wins. If an agent knows that her preferred candidate has no chance of winning, she may find it beneficial to vote for her second-choice candidate to prevent an even less preferred candidate from winning. However, if the agent lacks precise knowledge of the other votes and decides to vote for her second choice, it may backfire – she might inadvertently cause an outcome worse than if she had voted truthfully. For instance, if the other agents vote in a way that makes the agent the tie-breaker.

Indeed, various papers on cake-cutting (e.g. [Brams et al., 2006, Bu et al., 2023]), voting (e.g. [Hazon and Elkind, 2010, Slinko and White, 2008, 2014]) stable matching (e.g. Chen and Möller [2024], Fernandez [2018]) and coalition formation [Waxman et al., 2021] studies truthfulness among such agents. In particular, Bu et al. [2023] introduced a weaker notion of truthfulness, suitable for risk-avoiding agents, for cake-cutting. Their definition can be adapted to any problem as follows.

Let us first define a *safe manipulation* as a non-truthful report that may never harm the agent’s utility. Based on that, a mechanism is *safely manipulable* if some agent a_i has a manipulation that is both profitable and safe; otherwise, the mechanism is Risk-Avoiding Truthful (RAT).

Standard truthfulness and RAT can be seen as two extremes with respect to safe-and-profitable manipulations: the former considers manipulators with complete knowledge of others, whereas the latter considers manipulators with no knowledge at all. In reality, agents often know about some – but not all – of the other agents.

This paper introduces the *RAT-Degree* – a new measurement that quantifies how robust a mechanism is to such safe-and-profitable manipulations. The RAT-Degree of a mechanism is an integer $d \in \{0, \dots, n\}$, which represents – roughly – the smallest number of agents whose reports, if known, may allow another agent to safely manipulate; or n if there is no such number. (See Section 3 for formal definition).

This measure allows us to position mechanisms along a spectrum. A higher degree implies that an agent has to work harder in order to collect the information required for a successful manipulation; therefore it is less likely that mechanism will be manipulated. On one end of the spectrum are truthful mechanisms – where no agent can safely manipulate even with complete knowledge of all the other agents. The RAT-degree of such mechanisms is n . While on the other end are mechanisms that are safely manipulable – no knowledge about other agents is required to safely manipulate. The RAT-degree of such mechanisms is 0.

Importantly, the RAT-degree is determined by the worst-case scenario for the mechanism designer, which corresponds to the best-case scenario for the manipulating agents. The way we measure the amount of knowledge is based on a general objective applicable to all social choice settings.

Contributions. Our main contribution is the definition of the RAT-degree.

To illustrate the generality and usefulness of this concept, we selected several different social choice domains, and analyzed the RAT-degree of some prominent mechanisms in each domain. As our goal is mainly to illustrate the new concepts, we did not attempt to analyze all mechanisms and all special case of each mechanism, but rather focused on some cases that allowed for a more simple analysis. To prove an upper bound on the RAT-degree, we need to show a profitable manipulation. However, in contrast to usual proofs of manipulability, we also have to analyze more carefully, how much knowledge on other agents is sufficient in order to guarantee the safety of the manipulation. This analysis gives more insight on the kind of manipulations possible in each mechanism, and on potential ways to avoid them.

Organization. Section 2 introduces the model and required definitions. Section 3 presents the definition of RAT-degree. Section 4 explores auctions for a single good. Section 5 examines indivisible goods allocations. Section 5 focuses on cake cutting. Section 7 addresses single-winner ranked voting. Section 8 considers stable matchings. Section 9 concludes with some future work directions.

Due to space constraints, most proofs are delegated to appendices, but we have attempted to provide intuitive proof sketches in the paper body.

1.1 Related Word

There is a vast body of work on truthfulness relaxations and alternative measurements of manipulability. Due to space constraints, we provide only a brief overview here; a more in-depth discussion of these works and their relation to RAT-degree can be found in Appendix A.

Truthfulness Relaxations. Various truthfulness relaxations focus on a certain subset of all possible manipulations, which are considered more “likely”. It requires that none of the manipulations from this subset is profitable. Different relaxations consider different subsets of “likely” manipulations.

Brams et al. [2006] propose *maximin strategy-proofness*, where an agent manipulates only if it is always beneficial. Waxman et al. [2021] were the first (as far as we know) to use the term *safe manipulation*.¹ They examined the possible manipulations of agents with three different levels of knowledge on the social networks.

Bu et al. [2023] called a mechanism for cake-cutting, in which no agent has a safe-and-profitable manipulation, *risk-averse truthful (RAT)*; we prefer to call such a mechanism *risk-avoiding truthful*, as the definition assumes that agents completely avoid any risk. We extend their work by generalizing RAT to any social choice problem, and by suggesting a quantitative measure of the robustness of a mechanism to such manipulations.

Troyan and Morrill [2020] introduce *not-obvious manipulability (NOM)*, which assumes agents consider only extreme best or worst cases. RAT and NOM are independent notions. Fernandez [2018] define *regret-free truth-telling (RFTT)*, where agents never regret truth-telling after observing the outcome. RAT and RFTT do not imply each other. Additionally, Hazon and Elkind [2010], Slinko and White [2008, 2014] study “safe manipulations” in voting, but they consider coalition of voters and a different type of risk - that too many or too few participants will perform the exact safe manipulation.

Alternative Measurements. There are many approaches for quantifying manipulability from different perspectives. One approach considers the computational complexity of finding a profitable manipulation – e.g., [Bartholdi et al., 1989, Bartholdi III and Orlin, 1991] (see [Faliszewski and Procaccia, 2010, Veselova, 2016] for surveys). Another measurement is the number of bits an agent needs to know in order to have a safe manipulation, in the spirit of communication complexity, e.g.,

¹They use “safe manipulation” for a manipulation that is both safe and profitable.

[Babichenko et al., 2019, Brânzei and Nisan, 2019, Grigorieva et al., 2006, Nisan and Segal, 2002] and compilation complexity - e.g., [Chevaleyre et al., 2009, Karia and Lang, 2021, Xia and Conitzer, 2010]. A third approach evaluates the probability that a profitable manipulation exists—e.g., [Barrot et al., 2017, Lackner et al., 2023, Lackner and Skowron, 2018]. The *incentive ratio*, which measures how much an agent can improve their utility by manipulating, is also widely studied—e.g., [Chen et al., 2022, 2011, Cheng et al., 2022, Cheng and Zhou, 2019, Li et al., 2024]. Other metrics include assessing the average and maximum gain per manipulation [Aleskerov and Kurbanov, 1999] and counting the number of agents who benefit from manipulating [Andersson et al., 2014a,b].

Please refer to Appendix A for a more thorough discussion of these alternative notions, and their relation to our notion of RAT-degree.

2 Preliminaries

We consider a generic social choice setting, with a set of n agents $N = \{a_1, \dots, a_n\}$, and a set of potential *outcomes* X . Each agent, $a_i \in N$, has preferences over the set of outcomes X , that can be described in one of two ways: (1) a linear ordering of the outcomes, or (2) a utility function from X to \mathbb{R} . The set of all possible preferences for agent a_i is denoted by \mathcal{D}_i , and is referred to as the agent's *domain*. We denote the agent's *true* preferences by $T_i \in \mathcal{D}_i$. Unless otherwise stated, when agent a_i weakly prefers the outcome x_1 over x_2 , it is denoted by $x_1 \succeq_i x_2$; and when she strictly prefers x_1 over x_2 , it is denoted by $x_1 \succ_i x_2$.

A *mechanism* or *rule* is a function $f : \mathcal{D}_1 \times \dots \times \mathcal{D}_n \rightarrow X$, which takes as input a list of reported preferences P_1, \dots, P_n (which may differ from the true preferences), and returns the chosen outcome. In this paper, we focus on deterministic and single-valued mechanisms.

For any agent $a_i \in N$, we denote by (P_i, \mathbf{P}_{-i}) the preference profile in which agent a_i reports P_i , and the other agents report \mathbf{P}_{-i} .

Truthfulness. A *manipulation* for a mechanism f and agent $a_i \in N$ is an untruthful report $P_i \in \mathcal{D}_i \setminus \{T_i\}$. A manipulation is *profitable* if there exists a set of preferences of the other agents for which it increases the manipulator's utility:

$$\exists \mathbf{P}_{-i} \in \mathcal{D}_{-i} : f(P_i, \mathbf{P}_{-i}) \succ_i f(T_i, \mathbf{P}_{-i}) \quad (1)$$

A mechanism f is called *manipulable* if some agent a_i has a profitable manipulation; otherwise f is called *truthful*.

RAT. A manipulation is *safe* if it never harms the manipulator's utility – it is weakly preferred over telling the truth for any possible preferences of the other agents:

$$\forall \mathbf{P}_{-i} \in \mathcal{D}_{-i} : f(P_i, \mathbf{P}_{-i}) \succeq_i f(T_i, \mathbf{P}_{-i}) \quad (2)$$

A mechanism f is called *safely-manipulable* if some agent a_i has a manipulations that is profitable and safe; otherwise f is called *risk-avoiding truthful (RAT)*.

3 The RAT-Degree

Let $k \in \{0, \dots, n-1\}$, $K \subseteq N \setminus \{a_i\}$ with $|K| = k$ and $\bar{K} := N \setminus (\{a_i\} \cup K)$. We denote by $(P_i, \mathbf{P}_K, \mathbf{P}_{\bar{K}})$ the preference profile in which the preferences of agent a_i are P_i , the preferences of the agents in K are \mathbf{P}_K , and the preferences of the agents in \bar{K} are $\mathbf{P}_{\bar{K}}$.

Definition 3.1. Given an agent a_i and a subset $K \subseteq N \setminus \{a_i\}$:

A manipulation P_i is called *profitable for i given K* if

$$\exists \mathbf{P}_{\bar{K}} \in \mathcal{D}_{\bar{K}} : f(P_i, \mathbf{P}_K, \mathbf{P}_{\bar{K}}) \succ_i f(T_i, \mathbf{P}_K, \mathbf{P}_{\bar{K}}) \quad (3)$$

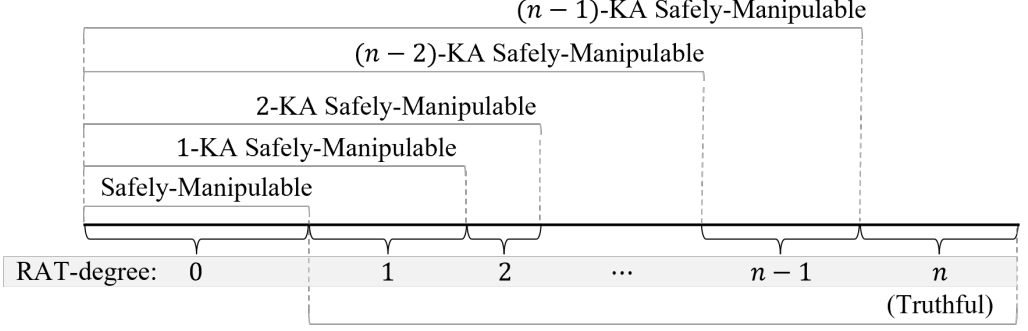


Fig. 1. Hierarchy of the Manipulability and RAT-Degree Classes. KA stands for Known-Agents.

A manipulation P_i is called *safe for i given K* if

$$\forall \mathbf{P}_{\bar{K}} \in \mathcal{D}_{\bar{K}} : f(P_i, \mathbf{P}_K, \mathbf{P}_{\bar{K}}) \succeq_i f(T_i, \mathbf{P}_K, \mathbf{P}_{\bar{K}}) \quad (4)$$

In words: The agents in K are those whose preferences are *Known* to a_i ; the agents in \bar{K} are those whose preferences are unknown to a_i . Given that the preferences of the known agents are \mathbf{P}_K , (3) says that there exist a preference profile of the unknown agents that makes the manipulation profitable for agent a_i ; while (4) says that the manipulation is safe – it is weakly preferred over telling the truth for any preference profile of the unknown-agents.

The previous two definitions are special cases of Definition 3.1: (1) is equivalent to P_i being profitable given \emptyset , and (2) is equivalent to P_i being safe given \emptyset .

Definition 3.2. A mechanism f is called *k -known-agents safely-manipulable* if for some agent a_i and some subset $K \subseteq N \setminus \{a_i\}$ with $|K| = k$, there exists a manipulation P_i that is both profitable and safe given K .

PROPOSITION 3.3. *Let $k \in \{0, \dots, n-2\}$. If a mechanism is k -known-agents safely-manipulable, then it is also $(k+1)$ -known-agents safely-manipulable.*

Proposition 3.3 justifies the following definition:

Definition 3.4. The *RAT-degree* of a mechanism f is the minimum k for which the mechanism is k -known-agent safely manipulable, or n if there is no such k .

Intuitively, a mechanism with a higher RAT-degree is harder to manipulate, as a risk-avoiding agent would need to collect more information in order to find a safe manipulation.

OBSERVATION 3.5. (a) *A mechanism is truthful if-and-only-if its RAT-degree is n .*
 (b) *A mechanism is RAT if-and-only-if its RAT-degree is at least 1.*

Figure 1 illustrates the relation between classes of different RAT-degree.

3.1 An Intuitive Point of View

Consider Table 1. When the risk-avoiding agent has no information (0-known-agents), a profitable-and-safe manipulation is a row in the table that represents an alternative report $P_i \neq T_i$, that dominates T_i – this means that for *each* one of the columns, the outcome in the corresponding row is *at least*

	\mathbf{P}_{-i}^1	\mathbf{P}_{-i}^2	\mathbf{P}_{-i}^3	...
T_i				
$P_i \neq T_i$				

Table 1. A Safe-And-Profitable Manipulation from an Agent Perspective.

as good as the outcome of the first row, and for one column, it is strictly larger. When the risk-avoiding agent has more information (k -known-agents, when $k > 0$), it is equivalent to considering a strict subset of the columns. Lastly, when the risk-avoiding agent has a full information ($(n - 1)$ -known-agents), it is equivalent to considering only one column.

4 Auction for a Single Good

We consider a seller owning a single good, and n potential buyers (the agents). The true preferences T_i are given by real values $v_i \geq 0$, representing the happiness of agent i from receiving the good. The reported preferences P_i are the “bids” $b_i \geq 0$. A mechanism in this context has to determine the *winner* – the agent who will receive the good, and the *price* – how much the winner will pay.

We assume that agents are quasi-linear – meaning their valuations can be interpreted in monetary units. Accordingly, the utility of the winning agent is the valuation minus the price; while the utility of the other agents is zero.

Results. The two most well-known mechanisms in this context are first-price auction and second-price auctions. First-price auction is known to be manipulable; moreover, it is easy to show that it is safely-manipulable, so its RAT-degree is 0. We show that a first-price auction with a positive discount has RAT-degree 1. Second-price auction is known to be truthful, so its RAT-degree is n . However, it has some important practical disadvantages [Ausubel and Milgrom, 2006]. In particular, when buyers are risk-averse, the expected revenue of a second-price auction is lower than that of a first-price auction [Nisan et al., 2007]; even when the buyers are risk-neutral, a risk-averse *seller* would prefer the revenue distribution of a first-price auction [Krishna, 2009].

This raises the question of whether it is possible to combine the advantages of both auction types. Indeed, we prove that any auction that applies a weighted average between the first-price and the second-price achieves a RAT-degree of $n - 1$, which is very close to being fully truthful (RAT-degree n). This implies that a manipulator agent would need to obtain information about all $n - 1$ other agents to safely manipulate – which is a very challenging task. The seller’s revenue from such an auction is higher compared to the second-price auction, giving this mechanism a significant advantage in this context. This result opens the door to exploring new mechanisms that are not truthful but come very close to it. Such mechanisms may enable desirable properties that are unattainable with truthful mechanisms.

4.1 First-Price Auction

In first-price auction, the agent who bids the highest price wins the good and pays her bid; the other agents get and pay nothing.

It is well-known that the first-price auction is not truthful. We start by proving that the situation is even worse: first-price auction is safely-manipulable, meaning that its RAT-degree is 0.

THEOREM 4.1. *First-price auction is safely manipulable (RAT-degree = 0).*

PROOF SKETCH. A truthful agent always gets a utility of 0, whether he wins or loses. On the other hand, an agent who manipulates by bidding slightly less than v_i gets a utility of at least 0 when he loses and a strictly positive utility when he wins. Thus, this manipulation is safe and profitable. \square

4.2 First-Price Auction with Discount

In first-price auction with discount, the agent i with the highest bid b_i wins the item and pays $(1 - t)b_i$, where $t \in (0, 1)$ is a constant. As before, the other agents get and pay nothing.

We prove that, although this minor change does not make the mechanism truthful, it increases the degree of trustfulness for risk-avoiding agents. However, it is still quite vulnerable to manipulation as knowing the strategy of one other agent might be sufficient to safely-manipulate it.

THEOREM 4.2. *The RAT-degree of the First-Price Auction with Discount is 1.*

To prove that the RAT-degree is 1, we need to show that the mechanism is (a) *not* safely-manipulable, and (b) 1-known-agents safely-manipulable. We prove each of these in a lemma.

LEMMA 4.3. *First-Price Auction with Discount is not safely-manipulable.*

PROOF SKETCH. Here, unlike in the first-price auction, whenever the agent wins the good, she gains positive utility. This implies that no manipulation can be safe. If she under-bids her value, she risks losing the item, which strictly decreases her utility. If she over-bids, she might end up paying more than necessary, reducing her utility without increasing her chances of winning. \square

LEMMA 4.4. *First-Price Auction with Discount is 1-known-agents safely-manipulable.*

PROOF SKETCH. Consider the case where the manipulator a_i knows there is another agent a_j bidding $b_j \in (v_i, v_i/(1-t))$. When bidding truthfully, she loses and gets zero utility. However, by bidding any value $b_i \in (b_j, v_i/(1-t))$, she either wins and gains positive utility or loses and remains with zero utility. Thus it is safe and profitable. \square

4.3 Average-First-Second-Price Auction

In the Average-First-Second-Price (AFSP) Auction, the agent i with the highest bid b_i wins the item and pays $wb_i + (1-w)b_{-i}^{\max}$, where $b_{-i}^{\max} := \max_{j \neq i} b_j$ is the second-highest bid, and $w \in (0, 1)$ is a fixed constant. That is, the price is a weighted average between the first price and the second price.

We show that this simple change makes a significant difference – the RAT-degree increases to $n-1$. This means that a manipulator agent would need to obtain information about all other agents to safely manipulate the mechanism – a very challenging task in practice.

THEOREM 4.5. *The RAT-degree of the Average-Price Auction is $(n-1)$.*

The theorem is proved using the following two lemmas.

LEMMA 4.6. *The AFSP mechanism is not $(n-2)$ -known-agents safely-manipulable.*

PROOF SKETCH. Let a_i be a potential manipulator, b_i a potential manipulation, K be a set of known agents, with $|K| = n-2$, and \mathbf{b}_K be a vector that represents their bids. We prove that the only unknown-agent a_j can make any manipulation either not profitable or not safe. We denote by b_K^{\max} the maximum bid among the agents in K and consider each of the six possible orderings of v_i , b_i and b_K^{\max} . In two cases ($v_i < b_i < b_K^{\max}$ or $b_i < v_i < b_K^{\max}$) the manipulation is not profitable; in the other four cases, the manipulation is not safe. \square

LEMMA 4.7. *The AFSP mechanism is $(n-1)$ -known-agents safely-manipulable.*

PROOF SKETCH. Consider any combination of bids of the other agents in which all the bids are strictly smaller than v_i . Let b_{-i}^{\max} be the highest bid among the other agents. Then any alternative bid $b_i \in (b_{-i}^{\max}, v_i)$ is a safe manipulation. \square

Conclusion. By choosing a high value for the parameter w , the Average-Price Auction becomes similar to the first-price auction, and therefore may attain a similar revenue in practice, but with better strategic properties. The average-price auction is sufficiently simple to test in practice; we find it very interesting to check how it fares in comparison to the more standard auction types.

5 Indivisible Goods Allocations

In this section, we consider several mechanisms to allocate m indivisible goods $G = \{g_1, \dots, g_m\}$ among the n agents. Here, the true preferences T_i are given by m real values: $v_{i,\ell} \geq 0$ for any $g_\ell \in G$, representing the happiness of agent a_i from receiving the good g_ℓ . The reported preferences P_i are real values $r_{i,\ell} \geq 0$. We assume the agents have *additive* valuations over the goods. Given a bundle $S \subseteq G$, let $v_i(S) = \sum_{g_\ell \in S} v_{i,\ell}$ be agent a_i 's utility upon receiving the bundle S . A mechanism in this context gets n (potentially untruthful) reports from all the agents and determines the *allocation* – a partition (A_1, \dots, A_n) of G , where A_i is the bundle received by agent a_i .

Results. We start by considering a simple mechanism, the utilitarian goods allocation – which assigns each good to the agent who reports the highest value for it. We prove that this mechanism is safely manipulable (RAT-degree = 0). We then show that the RAT-degree can be increased to 1 by requiring normalization – the values reported by each agent are scaled such that the set of all items has the same value for all agents. The RAT-degree of the famous round-robin mechanism is also at most 1. In contrast, we design a new mechanism that satisfies the common fairness notion called EF1 (envy-freeness up to one good), that attains a RAT-degree of $n - 1$.

5.1 Utilitarian Goods Allocation

The *utilitarian* rule aims to maximize the sum of agents' utilities. When agents have additive utilities, this goal can be achieved by assigning each good to an agent who reports the highest value for it. This section analyzes this mechanism.

We make the practical assumption that agents' reports are bounded from above by some maximum possible value $r_{max} > 0$.

we assume that in cases where multiple agents report the same highest value for some good, the mechanism employs some tie-breaking rule to allocate the good to one of them. However, the tie-breaking rule must operate independently for each good, meaning that the allocation for one good cannot depend on the tie-breaking outcomes of other goods.

THEOREM 5.1. *The Utilitarian allocation rule is safely manipulable (RAT-degree = 0).*

PROOF SKETCH. Manipulating by reporting the highest possible value, r_{max} , for all goods is both profitable and safe. It is profitable because if the maximum report among the other agents for a given good lies between the manipulator's true value and their alternative bid, r_{max} , the manipulator's utility strictly increases. It is safe because, in all other cases, the utility remains at least as high. \square

5.2 Normalized Utilitarian Goods Allocation

In the *normalized* utilitarian allocation rule, the agents' reports are first normalized such that each agent's values sum to a given constant $V > 0$. Then, each good is given to the agent with the highest *normalized* value. We focus on the case of at least three goods.

THEOREM 5.2. *For $m \geq 3$ goods, the RAT-degree of the Normalized Utilitarian allocation rule is 1.*

We prove Theorem 5.2 using several lemmas that analyze different cases.

The first two lemmas prove that the rule is not safely-manipulable, so its RAT-degree is at least 1. Lemma 5.3 addresses agents who value only one good positively, while Lemma 5.4 covers agents who value at least two goods positively.

LEMMA 5.3. *An agent who values only one good positively cannot safely manipulate the Normalized Utilitarian allocation rule.*

PROOF SKETCH. Due to the normalization requirement, any manipulation by such an agent involves reporting a lower value for the only good she values positively, while reporting a higher

values for some goods she values at 0. This reduces her chances of winning her desired good and raises her chances of winning goods she values at zero, ultimately decreasing her utility. Thus, the manipulation is neither profitable nor safe. \square

LEMMA 5.4. *An agent who values positively at least two goods cannot safely manipulate the Normalized Utilitarian allocation rule.*

PROOF SKETCH. Since values are normalized, any manipulation by such an agent must involve increasing the reported value of at least one good g_{inc} while decreasing the value of at least one other good g_{dec} . We show that such a manipulation is not safe, by considering the case where all other agents report as follows: they assign a value of 0 to g_{inc} , a value between the manipulator's true and reported value for g_{dec} , and a value slightly higher than the manipulator's report for all other goods (it is possible to construct such reports that are non-negative and normalized).

With these reports, the manipulation causes the manipulator to lose the good g_{dec} which has a positive value for her, whereas she wins the good g_{inc} with or without the manipulation, and does not win any other good. Hence, the manipulation strictly decreases her total value. \square

The last lemma shows that the RAT-degree is at most 1, thus completing the proof of the theorem.

LEMMA 5.5. *With $m \geq 3$ goods, Normalized Utilitarian is 1-known-agent safely-manipulable.*

PROOF SKETCH. Consider a scenario where there is a known agent who reports 0 for some good g that the manipulator wants and slightly more than the manipulator's true values for all other goods. In this case, by telling the truth, the manipulator has no chance to win any good except g . Therefore, reporting a value of V for g and a value of 0 for all other goods is a safe manipulation.

The same manipulation is also profitable, since it is possible that the reports of all $n - 2$ unknown agents for g are larger than the manipulator's true value and smaller than V . In such a case, the manipulation causes the manipulator to win g , which strictly increases her utility. \square

5.3 Round-Robin Item Allocation

In round-robin item allocation, the agents are arranged according to some predetermined order π . There are m rounds, corresponding to the number of items. In each round, the agent whose turn it is (based on π) takes their most preferred item from the set of items that remain unallocated at that point. When there are multiple items that are equally most preferred, the agent breaks the tie according to a fixed item-priority ordering. Note that normalization is not important for Round-Robin, as it is not affected by scaling the valuations.

If there are at most n items, then the rule is clearly truthful. Thus, we assume that there are $m \geq n + 1$ items. Even the slight increment to $m = n + 1$ makes a significant difference:

LEMMA 5.6. *With $m \geq n + 1$ items, round-robin is 1-known-agent safely-manipulable.*

PROOF. Let π be the order according to agents' indices: a_1, a_2, \dots, a_n . Let agent a_1 's valuation be such that $v_{1,1} = v_{1,2} = 1$ and $v_{1,3} = \dots = v_{1,m} = 0$. Suppose agent a_1 knows that agent a_2 will report the valuation with $v_{2,1} = 0, v_{2,2} = 1$, and $v_{2,3} = \dots = v_{2,m} = 0.5$. We show that agent a_1 has a safe and profitable manipulation by reporting $v'_{1,1} = 0.5, v'_{1,2} = 1$, and $v'_{1,3} = \dots = v'_{1,m} = 0$.

Firstly, we note that agent a_1 's utility is always 1 when reporting her valuation truthfully, regardless of the valuations of agents a_3, \dots, a_n . This is because agent a_1 will receive item g_1 (by the item-index tie-breaking rule) and agent a_2 will receive item g_2 in the first two rounds. The allocation of the remaining items does not affect agent a_1 's utility.

Secondly, after misreporting, agent a_1 will receive item g_2 in the first round, which already secures agent a_1 a utility of at least 1. Therefore, agent a_1 's manipulation is safe.

Lastly, if the remaining $n - 2$ agents report the same valuations as agent a_2 does, it is easy to verify that agent a_1 will receive item g_1 in the $(n + 1)$ -th round. In this case, agent a_1 's utility is 2. Thus, the manipulation is profitable. \square

We show a partial converse.

LEMMA 5.7. *With $m \leq 2n$ items, round-robin is not safely-manipulable.*

PROOF. If $m \leq n$ then Round-Robin is clearly truthful, so we assume $m \geq n + 1$.

We first consider manipulations by a_1 (the agent who picks an item first). We order the items by descending order of a_1 's true values ($v_{1,1} \geq v_{1,2} \geq \dots \geq v_{1,m}$), and subject to that, by the fixed item-priority ordering.

If $v_{1,1} = \dots = v_{1,n+1}$, then a_1 always gets the maximum possible value (two highest-valued items) by being truthful, so no manipulation is profitable. Therefore we assume that $v_{1,1} > v_{1,n+1}$.

When a_1 is truthful, he gets g_1 first. Then the other $n - 1$ agents pick items, and then a_1 gets the best of the remaining $m - n$ items. If the manipulation is such that a_1 still gets g_1 first, then the first round proceeds in exactly the same way with or without the manipulation, so in the second round, a_1 still has the same set of $m - n$ items available. Therefore, the manipulation is not profitable. Hence, we assume that a_1 manipulates such that he picks some other item, say $g_z \neq g_1$, at the first round.

If $z \geq n + 1$, then the manipulation is not profitable, as when a_1 is truthful his value is at least $g_{1,1} + g_{1,n+1}$, and when he manipulates his value cannot be higher. Hence, we assume that $z \leq n$. We prove that this manipulation is not safe.

Suppose the $n - 1$ unknown agents all have same valuation: they rank the goods the same as a_1 , except that g_z is moved to be lower than g_n .

When a_1 is truthful, he gets g_1 first. When the other $n - 1$ agents take their items, there are at least $n - 1$ items better for them than g_z . At the start of the second round g_z is available, so a_1 gets an item at least as good, and his value is at least $v_{1,1} + v_{1,z}$.

When a_1 manipulates, he gets g_z first. Then the other $n - 1$ agents take all items $\{g_1, \dots, g_n\}$ except g_z . Then at the start of the second round the best available item for a_1 is g_{n+1} , so his total value is at most $v_{1,z} + v_{1,n+1}$. This is strictly smaller than $v_{1,1} + v_{1,z}$ by the assumption $v_{1,1} > v_{1,n+1}$, so the manipulation is harmful for a_1 .

We now consider any other agent a_j . Any manipulation by a_j has no effect on the $j - 1$ items picked first. Therefore, from the point of view of a_j , the situation is as if he picks first from a set of $m - j + 1$ items. Therefore, a similar proof applies, and a_j has no safe manipulation either. \square

As a corollary, we get:

THEOREM 5.8. *The RAT-degree of round-robin is n when $m \leq n$, exactly 1 when $n + 1 \leq m \leq 2n$, and at most 1 when $m > 2n$.*

The proof of Lemma 5.6 uses weak preferences (preferences with ties). In particular, if a_1 's valuations for the top two items are different, then picking g_2 first is risky. With strict preferences, we could only prove a much weaker upper bound of $n - 2$. This raises the following question.

OPEN QUESTION 5.9. *What is the RAT-degree of round-robin when agents report strict preferences?*

5.4 An EF1 Mechanism with RAT-degree $n - 1$

In this section, we focus on mechanisms that always output fair allocations (with respect to the reported valuation profile). We consider the widely used fairness criterion *envy-freeness up to one item* (EF1), which intuitively means that no agent envies another agent if one item is (hypothetically) removed from that agent's bundle.

Definition 5.10. Given a valuation profile (v_1, \dots, v_n) , an allocation (A_1, \dots, A_n) is *envy-free up to one item* (EF1) if for every pair of $i, j \in [n]$ there exists a good g such that $v_i(A_i) \geq v_i(A_j \setminus \{g\})$.

It is well-known and easy to see that the round-robin mechanism always outputs an EF1 allocation. However, as we have seen in the previous section, the round-robin mechanism has a very low RAT-degree. In this section, we propose a new EF1 mechanism that has RAT-degree $n - 1$.

5.4.1 Description of Mechanism. The mechanism has two components: an agent selection rule Γ and an allocation rule Ψ . The agent selection rule Γ takes the valuation profile (v_1, \dots, v_n) as an input and outputs the indices i^+, i^- of two agents, where agent a_{i^+} is called *the mechanism-favored agent* and agent a_{i^-} is called *the mechanism-unfavored agent* (the reason of both names will be clear soon). The allocation rule Ψ takes the valuation profile (v_1, \dots, v_n) and the indices of the two agents i^+, i^- output by Γ as inputs and then outputs an EF1 allocation (A_1, \dots, A_n) . We will complete the description of our mechanism by defining Γ and Ψ .

We first define Ψ . Given the input valuation profile (v_1, \dots, v_n) , let $\mathcal{X}_i^{\text{EF1}}$ be the set of all EF1 allocations (A_1, \dots, A_n) in which agent a_{i^-} is not envied by anyone else, i.e., for any agent a_i , we have $v_i(A_i) \geq v_i(A_{i^-})$. Notice that $\mathcal{X}_i^{\text{EF1}}$ is nonempty: the allocation output by the round-robin mechanism with i^- being the last agent under π satisfies both (1) and (2) above.

The rule Ψ then outputs an allocation (A_1, \dots, A_n) in $\mathcal{X}_i^{\text{EF1}}$ that maximizes $v_{i^+}(A_{i^+})$. When there are multiple maximizers, the rule breaks the tie in an arbitrary consistent way. This finishes the description of Ψ .

To describe Γ , we first state a key property called *volatility* that we want from Γ , and then show that a volatile rule can be constructed. Informally, volatility says the following. If an arbitrary agent a_i changes the reported valuation profile from v_i to v'_i , we can construct a valuation profile v_j for another agent a_j such that v_j has a positive value on only one pre-specified good and the two agents output by Γ switch from some pre-specified i^+, i^- to some pre-specified $i^{+'}, i^{-'}$.

Definition 5.11. A selection rule Γ is called *volatile* if for any six indices of agents $i, j, i^+, i^-, i^{+'}, i^{-'}$ with $i \neq j$, $i^+ \neq i^-$, and $i^{+'} \neq i^{-'}$, any good $g_{\ell^*} \in G$, any set of $n - 2$ valuation profiles $\{v_k\}_{k \notin \{i, j\}}$, and any two reported valuation profiles v_i, v'_i of agent a_i with $v_i \neq v'_i$ (i.e., $v_{i, \ell} \neq v'_{i, \ell}$ for at least one good g_ℓ), there exists a valuation function v_j of agent a_j such that

- $v_{j, \ell^*} > 0$, and $v_{j, \ell} = 0$ for any $\ell \neq \ell^*$, and
- Γ outputs i^+ and i^- for the valuation profile $\{v_k\}_{k \notin \{i, j\}} \cup \{v_i\} \cup \{v_j\}$;
- Γ outputs $i^{+'}$ and $i^{-'}$ for the valuation profile $\{v_k\}_{k \notin \{i, j\}} \cup \{v'_i\} \cup \{v_j\}$.

In other words, a manipulation of agent i from v_i to v'_i can affect the output of Γ in any possible way (from any pair i^+, i^- to any other pair $i^{+'}, i^{-'}$), depending on the report of agent j .

We will use an arbitrary volatile rule Γ for our mechanism. We conclude the description of Γ by proving (in the appendix) that such a rule exists.

PROPOSITION 5.12. *There exists a volatile agent selection rule Γ .*

PROOF. The rule Γ first finds the maximum value among all agents and all goods: $v^* := \max_{i \in [n], \ell \in [m]} v_{i, \ell}$.

It then views the value v^* as a binary string that encodes the following information:

- the index i of an agent a_i ;
- a non-negative integer t ,
- two non-negative integers a, b , between 0 and $\binom{n}{2}$.

We append 0's as most significant bits to v^* if the length of the binary string is not long enough to support the format of the encoding. If the encoding of v^* is longer than the length enough for

encoding the above-mentioned information, we take only the least significant bits in the amount required for the encoding.

The mechanism-favored agent a_{i^+} and the mechanism-unfavored agent a_{i^-} are then decided in the following way. Let $s \in \{0, 1\}$ be the bit at the t -th position of the binary encoding of the value $v_i(g_t)$.

Let $p := (a \cdot s + b) \bmod \binom{n}{2}$. Each value of p corresponds to a pair of different agents (i^+, i^-) .

To see that Γ is volatile, suppose v_i and v'_i are different in the t -th bits of their binary encoding. We construct a value v^* that encodes the integers i, t, a, b where

- (1) the t -th bit of v_i is s and the t -th bit of v'_i is s' for $s \neq s'$;
- (2) The pair (i^+, i^-) corresponds to the integer $(a \cdot s + b) \bmod \binom{n}{2}$.
- (3) The pair (i^+, i^-) corresponds to the integer $(a \cdot s' + b) \bmod \binom{n}{2}$.

(1) can always be achieved by some encoding rule. To see (2) and (3) can always be achieved, assume $s = 1$ and $s' = 0$ without loss of generality. We can then take $b :=$ the integer corresponding to the pair (i^+, i^-) , and $a := -b +$ the integer corresponding to the pair (i^+, i^-) , modulo $\binom{n}{2}$.

We then construct a valuation v_j such that v_{j, ℓ^*} is the largest and is equal to v^* . In case v^* is not large enough, we increase it as needed by adding most significant digits. \square

Remark 5.13. The proof of Proposition 5.12 requires that the mechanism does *not* normalize the valuations, nor place any upper bound on the reported values. Suppose there were an upper bound V on the value. V encodes some agent i , bit number t , and integers a, b . It is possible that these numbers give the highest priority to agent i . In that case, agent i could manipulate by reporting the value V .

5.4.2 Proving RAT-degree of $n - 1$. Before we proceed to the proof, we first define some additional notions. We say that (A_1, \dots, A_n) is a *partial allocation* if $A_i \cap A_j = \emptyset$ for any pair of $i, j \in [n]$ and $\bigcup_{i=1}^n A_i \subseteq G$. The definition of EF1 can be straightforwardly extended to partial allocations. Given a possibly partial allocation (A_1, \dots, A_n) , we say that agent a_i *strongly envies* agent a_j if $v_i(A_i) < v_i(A_j \setminus \{g\})$ for any $g \in A_j$, i.e., the EF1 criterion from a_i to a_j fails. Given $t \in [n]$, we say that a (possibly partial) allocation (A_1, \dots, A_n) is *EF1 except for t* if for any pair $i, j \in [n]$ with $i \neq t$ we have $v_i(A_i) \geq v_i(A_j \setminus \{g\})$ for some $g \in G$. In words, the allocation is EF1 except that agent a_t is allowed to strongly-envy others.

We first prove some lemmas which will be used later.

LEMMA 5.14. *Fix a valuation profile. Let (A_1, \dots, A_n) be a partial EF1 allocation. There exists a complete EF1 allocation (A_1^+, \dots, A_n^+) such that $v_i(A_i^+) \geq v_i(A_i)$ for each $i \in [n]$.*

PROOF. Construct the envy-graph for the partial allocation (A_1, \dots, A_n) and then perform the *envy-graph procedure* proposed by Lipton et al. [2004] to obtain a complete allocation (A_1^+, \dots, A_n^+) . The monotonic property of the procedure directly implies this proposition. \square

LEMMA 5.15. *Fix a valuation profile and an arbitrary agent a_t . Let \mathcal{X}^{EF1} be the set of all complete EF1 allocations. Let $\mathcal{X}^{\text{EF1}-t}$ be the set of all possibly partial allocations that are EF1 except for possibly a_t . The allocation in \mathcal{X}^{EF1} that maximizes agent a_t 's utility is also the one in $\mathcal{X}^{\text{EF1}-t}$ that maximizes a_t 's utility.*

In other words, if a_t gets the maximum possible value subject to EF1, he cannot get a higher value by agreeing to give up the EF1 guarantee for himself. This claim is trivially true for share-based fairness notions such as proportionality, but quite challenging to prove for EF1; see appendix.

THEOREM 5.16. *The Γ - Ψ mechanism in Sect. 5.4.1 has a RAT-degree of $n - 1$.*

PROOF SKETCH. For every profitable manipulation by a_i , and for every unknown agent a_j , the volatility of Γ implies that, for some possible valuation v_j , a truthful report by a_i leads to a_i being the favored agent and a_j being the unfavored agent, whereas the manipulation leads to a_i being the unfavored agent and a_j being the favored agent. We use this fact, combined with Lemma 5.14 and Lemma 5.15, to prove that the manipulation may be harmful for a_i . \square

Remark 5.17. Our Γ - Ψ algorithm does not run in polynomial time, as it requires to maximize the utility of a certain agent subject to EF1, which is an NP-hard problem (e.g., the proof in Appendix A.2 of Barman et al. [2019] can easily imply this). We do not know if a polynomial-time EF1 algorithm with a high RAT-degree exists.

6 Cake Cutting

In this section, we study the *cake cutting* problem: the allocation of divisible heterogeneous resources to n agents. The cake cutting problem was proposed by Steinhaus [1948, 1949], and it is a widely studied subject in mathematics, computer science, economics, and political science.

In the cake cutting problem, the resource/cake is modeled as an interval $[0, 1]$, and it is to be allocated among a set of n agents $N = \{a_1, \dots, a_n\}$. An allocation is denoted by (A_1, \dots, A_n) where $A_i \subseteq [0, 1]$ is the share allocated to agent a_i . We require that each A_i is a union of finitely many closed non-intersecting intervals, and, for each pair of $i, j \in [n]$, A_i and A_j can only intersect at interval endpoints, i.e., the measure of $A_i \cap A_j$ is 0. We say an allocation is *complete* if $\bigcup_{i=1}^n A_i = [0, 1]$. Otherwise, it is *partial*.

The true preferences T_i of agent a_i are given by a *value density function* $v_i : [0, 1] \rightarrow \mathbb{R}_{\geq 0}$ that describes agent a_i 's preference over the cake. To enable succinct encoding of the value density function, we adopt the widely considered assumption that each v_i is *piecewise constant*: there exist finitely many points $x_{i0}, x_{i1}, x_{i2}, \dots, x_{ik_i}$ with $0 = x_{i0} < x_{i1} < x_{i2} < \dots < x_{ik_i} = 1$ such that v_i is a constant on every interval $(x_{i\ell}, x_{i(\ell+1)})$, $\ell = 0, 1, \dots, k_i - 1$. Given a subset $S \subseteq [0, 1]$ that is a union of finitely many closed non-intersecting intervals, agent a_i 's value for receiving S is then given by $V_i(S) = \int_S v_i(x) dx$.

Fairness and efficiency are two natural goals for allocating the cake. For efficiency, we consider two commonly used criteria: *social welfare* and *Pareto-optimality*. Given an allocation (A_1, \dots, A_n) , its *social welfare* is given by $\sum_{i=1}^n V_i(A_i)$. This is a natural measurement of efficiency that represents the overall happiness of all agents. Pareto-optimality is a yes-or-no criterion for efficiency. An allocation (A_1, \dots, A_n) is *Pareto-optimal* if there does not exist another allocation (A'_1, \dots, A'_n) such that $V_i(A'_i) \geq V_i(A_i)$ for each agent a_i and at least one of these n inequalities is strict.

For fairness, we study two arguably most important notions: *envy-freeness* and *proportionality*. An allocation (A_1, \dots, A_n) is *proportional* if each agent receives her average share, i.e., for each $i \in [n]$, $V_i(A_i) \geq \frac{1}{n} V_i([0, 1])$. An allocation (A_1, \dots, A_n) is *envy-free* if every agent weakly prefers her own allocated share, i.e., for every pair $i, j \in [n]$, $V_i(A_i) \geq V_i(A_j)$. A complete envy-free allocation is always proportional, but this implication does not hold for partial allocations.

Before we discuss our results, we define an additional notion, *uniform segment*, which will be used throughout this section. Given n value density functions v_1, \dots, v_n (that are piecewise constant by our assumptions), we identify the set of points of discontinuity for each v_i and take the union of the n sets. Sorting these points by ascending order, we let x_1, \dots, x_{m-1} be all points of discontinuity for all the n value density functions. Let $x_0 = 0$ and $x_m = 1$. These points define k intervals, $(x_0, x_1), (x_1, x_2), \dots, (x_{m-1}, x_m)$, such that each v_i is a constant on each of these intervals. We will call each of these intervals a *uniform segment*, and we will denote $X_t = (x_{t-1}, x_t)$ for each $t = 1, \dots, m$. For each agent a_i , we will slightly abuse the notation by using $v_i(X_t)$ to denote $v_i(x)$ with $x \in X_t$.

Since all agents' valuations on each uniform segment are uniform, it is tempting to think about the cake cutting problem as the problem of allocating m divisible homogeneous goods. However, this interpretation is inaccurate when concerning agents' strategic behaviors, as, in the cake cutting setting, an agent can manipulate her value density function with a different set of points of discontinuity, which affects how the divisible goods are defined. To see a significant difference between these two models, in the divisible goods setting, the *equal division rule* that allocates each divisible good evenly to the n agents is truthful (with RAT-degree n), envy-free and proportional, while, in the cake cutting setting, it is proved in Tao [2022] that truthfulness and proportionality are incompatible even for two agents.

Results. In Sect. 6.1, we start by considering the simple mechanism that outputs allocation with the maximum social welfare. We show that the RAT-degree of this mechanism is 0. Similar as it is in the case of indivisible goods, we also consider the normalized variant of this mechanism, and we show that the RAT-degree is 1. In Sect. 6.2, we consider mechanisms that output fair allocations. We review the mechanisms studied in Bu et al. [2023] by studying their RAT-degrees. We will see that one of those mechanisms, which always outputs envy-free allocation, has a RAT-degree of $n - 1$. However, this mechanism has a very poor performance on efficiency. Finally, in Sect. 6.3, we propose a new mechanism with RAT-degree $n - 1$ that always outputs proportional and Pareto-optimal allocations.

6.1 Maximum Social Welfare Mechanisms

It is easy to find an allocation that maximizes the social welfare: for each uniform segment X_t , allocate it to an agent a_i with the maximum $v_i(X_t)$. When multiple agents have equally largest value of $v_i(X_t)$ on the segment X_t , we need to specify a tie-breaking rule. However, as we will see later, the choice of the tie-breaking rule does not affect the RAT-degree of the mechanism.

It is easy to see that, whatever the tie-breaking rule is, the maximum social welfare mechanism is safely manipulable. It is safe for an agent to report higher values on every uniform segment. For example, doubling the values on all uniform segments is clearly a safe manipulation.

OBSERVATION 6.1. *Utilitarian Cake-Cutting with any tie-breaking rule has RAT-degree 0.*

We next consider the following variant of the maximum social welfare mechanism: first rescale each v_i such that $V_i([0, 1]) = \int_0^1 v_i(x) dx = 1$, and then output the allocation with the maximum social welfare. We will show that the RAT-degree is 1. The proof is similar to the one for indivisible items (Theorem 5.2) and is given in the appendix.

THEOREM 6.2. *When there are at least three agents, Normalized Utilitarian Cake-Cutting with any tie-breaking rule has RAT-degree 1.*

6.2 Fair Mechanisms

In this section, we focus on mechanisms that always output fair (envy-free or proportional) allocations. As we have mentioned earlier, it is proved in Tao [2022] that truthfulness and proportionality are incompatible even for two agents and even if partial allocations are allowed. This motivates the search for fair cake-cutting algorithms with a high RAT-degree.

The mechanisms discussed in this section have been considered in Bu et al. [2023]. However, they are only studied by whether or not they are risk-averse truthful (in our language, whether the RAT-degree is positive). With our new notion of RAT-degree, we are now able to provide a more fine-grained view of their performances on strategy-proofness.

One natural envy-free mechanism is to evenly allocate each uniform segment X_t to all agents. Specifically, each X_t is partitioned into n intervals of equal length, and each agent receives exactly

one of them. It is easy to see that $V_i(A_j) = \frac{1}{n}V_i([0, 1])$ for any $i, j \in [n]$ under this allocation, so the allocation is envy-free and proportional.

To completely define the mechanism, we need to specify the order of evenly allocating each $X_t = (x_{t-1}, x_t)$ to the n agents. A natural tie-breaking rule is to let agent a_1 get the left-most interval and agent a_n get the right-most interval. Specifically, agent a_i receives the i -th interval of X_t , which is $[x_{t-1} + \frac{i-1}{n}(x_t - x_{t-1}), x_{t-1} + \frac{i}{n}(x_t - x_{t-1})]$. However, it was proved in Bu et al. [2023] that the equal division mechanism under this ordering rule is safely-manipulable, i.e., its RAT-degree is 0. In particular, agent a_1 , knowing that she will always receive the left-most interval in each X_t , can safely manipulate by deleting a point of discontinuity in her value density function if her value on the left-hand side of this point is higher.

To avoid this type of manipulation, a different ordering rule was considered by Bu et al. [2023] (See Mechanism 3 in their paper): at the t -th segment, the n equal-length subintervals of X_t are allocated to the n agents with the left-to-right order $a_t, a_{t+1}, \dots, a_n, a_1, a_2, \dots, a_{t-1}$. By using this ordering rule, an agent does not know her position in the left-to-right order of X_t without knowing others' value density functions. Indeed, even if only one agent's value density function is unknown, an agent cannot know the index t of any segment X_t . This suggests that the mechanism has a RAT-degree of $n - 1$.

THEOREM 6.3. *Consider the mechanism that evenly partitions each uniform segment X_t into n equal-length subintervals and allocates these n subintervals to the n agents with the left-to-right order $a_t, a_{t+1}, \dots, a_n, a_1, a_2, \dots, a_{t-1}$. It has RAT-degree $n - 1$ and always outputs envy-free allocations.*

PROOF SKETCH. Envy-freeness is trivial: for any $i, j \in [n]$, we have $V_i(A_j) = \frac{1}{n}V_i([0, 1])$. The general impossibility result in Tao [2022] shows that no mechanism with the envy-freeness guarantee can be truthful, so the RAT-degree is at most $n - 1$.

To show that the RAT-degree is exactly $n - 1$, we show that, if even a single agent is not known to the manipulator, it is possible that this agent's valuation adds discontinuity points in a way that the ordering in each uniform segment is unfavorable for the manipulator. \square

Although the equal division mechanism with the above-mentioned carefully designed ordering rule is envy-free and has a high RAT-degree of $n - 1$, it is undesirable in at least two aspects:

- (1) it requires quite many cuts on the cake by making $n - 1$ cuts on each uniform segment; this is particularly undesirable if piecewise constant functions are used to approximate more general value density functions.
- (2) it is highly inefficient: each agent a_i 's utility is never more than her minimum proportionality requirement $\frac{1}{n}V_i([0, 1])$;

Regarding point (1), researchers have been looking at allocations with *connected pieces*, i.e., allocations with only $n - 1$ cuts on the cake. A well-known mechanism in this category is *the moving-knife procedure*, which always outputs proportional allocations. This mechanism was first proposed by Dubins and Spanier [1961]. It always returns a proportional connected allocation. Unfortunately, it was shown by Bu et al. [2023] that Dubins and Spanier's moving-knife procedure is safely-manipulable for some very subtle reasons.

Bu et al. [2023] proposed a variant of the moving-knife procedure that is RAT. In addition, they showed that another variant of moving-knife procedure proposed by Ortega and Segal-Halevi [2022] is also RAT.² In the appendix, we describe both mechanisms and show that both of them have RAT-degree 1. These results invoke the following question.

²It should be noticed that, when v_i is allowed to take 0 value, tie-breaking needs to be handled very properly to ensure RAT. See Bu et al. [2023] for more details. Here, for simplicity, we assume $v_i(x) > 0$ for each $i \in [n]$ and $x \in [0, 1]$.

OPEN QUESTION 6.4. *Is there a proportional connected cake-cutting rule with RAT-degree at least 2?*

We handle point (2) from above in the following subsection.

6.3 A Proportional and Pareto-Optimal Mechanism with RAT-degree $n - 1$

In this section, we provide a mechanism with RAT-degree $n - 1$ that always outputs proportional and Pareto-optimal allocations. In addition, we show that the mechanism can be implemented in polynomial time. The mechanism uses some similar ideas as the one in Section 5.4.

6.3.1 Description of Mechanism. The mechanism has two components: an order selection rule Γ and an allocation rule Ψ . The order selection rule Γ takes the valuation profile (v_1, \dots, v_n) as an input and outputs an order π of the n agents. We use π_i to denote the i -th agent in the order. The allocation rule Ψ then outputs an allocation based on π .

We first define the allocation rule Ψ . Let $\mathcal{X}^{\text{PROP}}$ be the set of all proportional allocations. Then Ψ outputs an allocation in $\mathcal{X}^{\text{PROP}}$ in the following “leximax” way:

- (1) the allocation maximizes agent π_1 's utility;
- (2) subject to (1), the allocation maximizes agent π_2 's utility;
- (3) subject to (1) and (2), the allocation maximizes agent π_3 's utility;
- (4) \dots

We next define Γ . We first adapt the volatility property of Γ (defined in Sect. 5.4) to the cake-cutting setting.

Definition 6.5. A function Γ (from the set of valuation profiles to the set of orders on agents) is called *volatile* if for any two agents $a_i \neq a_j$ and any two orders π and π' , any set of $n - 2$ value density functions $\{v_k\}_{k \notin \{i,j\}}$, any value density function \bar{v}_j , and any two reported valuation profiles v_i, v'_i of agent a_i with $v_i \neq v'_i$, there exists a valuation function v_j of agent a_j such that

- v_j is a rescaled version of \bar{v}_j , i.e., there exists α such that $v_j(x) = \alpha \bar{v}_j(x)$ for all $x \in [0, 1]$;
- Γ outputs π for the valuation profile $\{v_k\}_{k \notin \{i,j\}} \cup \{v_i\} \cup \{v_j\}$, and Γ outputs π' for the valuation profile $\{v_k\}_{k \notin \{i,j\}} \cup \{v'_i\} \cup \{v_j\}$.

In other words, a manipulation of agent i from v_i to v'_i can affect the output of Γ in any possible way (from any order π to any order π'), depending on the report of agent j .

PROPOSITION 6.6. *There exists a volatile function Γ .*

6.3.2 Properties of the Mechanism. The mechanism always outputs a proportional allocation by definition. It is straightforward to check that it outputs a Pareto-efficient allocation.

PROPOSITION 6.7. *The Γ - Ψ mechanism for cake-cutting always returns a Pareto-efficient allocation.*

It then remains to show that the mechanism has RAT-degree $n - 1$. We need the following proposition; it follows from known results on super-proportional cake-cutting [Dubins and Spanier, 1961, Woodall, 1986]; for completeness we provide a proof in the appendix.

PROPOSITION 6.8. *Let $\mathcal{X}^{\text{PROP}}$ be the set of all proportional allocations for the valuation profile (v_1, \dots, v_n) . Let (A_1, \dots, A_n) be the allocation in $\mathcal{X}^{\text{PROP}}$ that maximizes agent a_i 's utility. If there exists $j \in [n] \setminus \{i\}$ such that v_i and v_j are not identical up to scaling, then $V_i(A_i) > \frac{1}{n} V_i([0, 1])$.*

The proof of the following theorem is similar to the one for indivisible goods (Theorem 5.16).

THEOREM 6.9. *The Γ - Ψ mechanism for cake-cutting has RAT-degree $n - 1$.*

Finally, we analyze the run-time of our mechanism.

PROPOSITION 6.10. *The Γ - Ψ mechanism for cake-cutting can be computed in polynomial time.*

6.4 Towards An Envy-Free and Pareto-Optimal Mechanism with RAT-degree $n - 1$

Given the result in the previous section, it is natural to ask if the fairness guarantee can be strengthened to envy-freeness. A compelling candidate is the mechanism that always outputs allocations with maximum *Nash welfare*. The Nash welfare of an allocation (A_1, \dots, A_n) is defined

by the product of agents utilities: $\prod_{i=1}^n V_i(A_i)$.

It is well-known that such an allocation is envy-free and Pareto-optimal. However, computing its RAT-degree turns out to be very challenging for us. We conjecture the answer is $n - 1$.

OPEN QUESTION 6.11. *What is the RAT-degree of the maximum Nash welfare mechanism?*

7 Single-Winner Ranked Voting

We consider n voters (the agents) who need to elect one winner from a set C of m candidates. The agents' preferences are given by strict linear orderings $>_i$ over the candidates.

When there are only two candidates, the majority rules and its variants (weighted majority rules) are truthful. With three or more candidates, the Gibbard–Satterthwaite Theorem [Gibbard, 1973, Satterthwaite, 1975] implies that the only truthful rules are dictatorships. Our goal is to find non-dictatorial rules with a high RAT-degree.

Throughout the analysis, we consider a specific agent Alice, who looks for a safe profitable manipulation. Her true ranking is $c_m >_A \dots >_A c_1$. We assume that, for any $j > i$, Alice strictly prefers a victory of c_j to a tie between c_j and c_i , and strictly prefers this tie to a victory of c_i .³

7.1 Positional voting rules: general bounds

A *positional voting rule* is parameterized by a vector of scores, $\mathbf{s} = (s_1, \dots, s_m)$, where $s_1 \leq \dots \leq s_m$ and $s_1 < s_m$. Each voter reports his entire ranking of the m candidates. Each such ranking is translated to an assignment of a score to each candidate: the lowest-ranked candidate is given a score of s_1 , the second-lowest candidate is given s_2 , etc., and the highest-ranked candidate is given a score of s_m . The total score of each candidate is the sum of scores he received from the rankings of all n voters. The winner is the candidate with the highest total score.

Formally, for any subset $N' \subseteq N$ and any candidate $c \in C$, we denote by $\text{score}_{N'}(c)$ the total score that c receives from the votes of the agents in N' . Then the winner is $\arg \max_{c \in C} \text{score}_N(c)$. If there are several agents with the same maximum score, then the outcome is considered a tie.

Common special cases of positional voting are *plurality voting*, in which $\mathbf{s} = (0, 0, 0, \dots, 0, 1)$, and *anti-plurality voting*, in which $\mathbf{s} = (0, 1, 1, \dots, 1, 1)$. By the Gibbard–Satterthwaite theorem, all positional voting rules are manipulable, so their RAT-degree is smaller than n . But, as we will show next, some positional rules have a higher RAT-degree than others.

Results. We will show that all positional voting rules have an RAT-degree between $\approx n/m$ and $\approx n/2$. These bounds are almost tight: the upper bound is attained by plurality and the lower bound is attained by anti-plurality (up to small additive constants).

In the upcoming lemmas, we identify the manipulations that are safe and profitable for Alice under various conditions on the score vector \mathbf{s} . We assume throughout that there are $m \geq 3$ candidates, and that n is sufficiently large. We allow an agent to abstain, which means that his vote gives the same score to all candidates.⁴

³We could also assume that ties are broken at random, but this would require us to define preferences on lotteries, which we prefer to avoid in this paper.

⁴We need the option to abstain in order to avoid having different constructions for even n and odd n ; see the proofs for details.

The first lemma implies a lower bound of $\approx n/m$ on the RAT-degree of positional voting rules.

LEMMA 7.1. *In any positional voting rule for $m \geq 3$ candidates, if the number of known agents is at most $(n+1)/m - 2$, then Alice has no safe profitable manipulation.*

PROOF SKETCH. For any combination of rankings of the known agents, it is possible that the unknown agents vote in a way that balances out the votes of the known agents, such that all agents have almost the same score; if Alice is truthful, there is a tie between two candidates, and if she manipulates, the worse of these candidates win. \square

We now prove an upper bound of $\approx n/2$ on the RAT-degree. We need several lemmas.

LEMMA 7.2. *Let $m \geq 3$ and $n \geq 2m$. If $s_2 > s_1$ and there are $k \geq \lceil n/2 \rceil + 1$ known agents, then switching the bottom two candidates (c_2 and c_1) may be a safe profitable manipulation for Alice.*

PROOF SKETCH. For some votes by the known agents, c_1 has no chance to win, so the worst candidate for Alice that could win is c_2 . Therefore, switching c_1 and c_2 cannot harm, but may help a better candidate win over c_2 . \square

Lemma 7.2 can be generalized as follows.

LEMMA 7.3. *Let $m \geq 3$ and $n \geq 2m$. For every integer $t \in \{1, \dots, m-2\}$, if $s_{t+1} > s_t = \dots = s_1$, and there are $k \geq \lceil n/2 \rceil + 1$ known agents, then switching c_{t+1} and c_t may be a safe profitable manipulation.*

PROOF SKETCH. For some votes by the known agents, all candidates c_1, \dots, c_t have no chance to win, so the worst candidate for Alice that could win is c_{t+1} . Therefore, switching c_t and c_{t+1} cannot harm, but can help better candidates win over c_{t+1} . \square

LEMMA 7.4. *Let $m \geq 3$ and $n \geq 4$. If $s_m > s_{m-1}$ and there are $k \geq \lceil n/2 \rceil + 1$ known agents, then switching the top two candidates (c_m and c_{m-1}) may be a safe profitable manipulation for Alice.*

PROOF SKETCH. For some votes by the known agents, the manipulation is safe since c_m has no chance to win, and it is profitable as it may help c_{m-1} win over worse candidates. \square

Combining the lemmas leads to the following bounds on the RAT-degree:

THEOREM 7.5. *For any positional voting rule with $m \geq 3$ candidates:*

- (a) *The RAT-degree is at least $\lfloor (n+1)/m \rfloor - 1$;*
- (b) *When $n \geq 2m$, the RAT-degree is at most $\lceil n/2 \rceil + 1$.*

PROOF. The lower bound follows immediately from Lemma 7.1.

For the upper bound, consider a positional voting rule with score-vector s . Let $t \in \{1, \dots, m-1\}$ be the smallest index for which $s_{t+1} > s_t$ (there must be such an index by definition of a score-vector).

If $t \leq m-2$, then Lemma 7.3 implies that, for some votes by the $\lceil n/2 \rceil + 1$ known agents, switching c_{t+1} and c_t may be a safe and profitable manipulation for Alice.

Otherwise, $t = m-1$, and Lemma 7.4 implies the same.

In all cases, Alice has a safe profitable manipulation. \square

7.2 Plurality and anti-plurality

We now show that the bounds of Theorem 7.5 are tight up to small additive constants.

We first show that the upper bound of $\approx n/2$ is attained by the *plurality voting rule*, which is the positional voting rule with score-vector $(0, 0, 0, \dots, 0, 1)$.

LEMMA 7.6. *In the plurality voting rule with $n \geq 5$ agents, if the number of known agents is at most $n/2$, then Alice has no safe profitable manipulation.*

PROOF SKETCH. When there are at most $n/2$ known agents, there are at least $n/2 - 1$ unknown agents. For some votes of these unknown agents, the outcome when Alice votes truthfully is a tie between Alice’s top candidate and another candidate. But when Alice manipulates, the other candidate wins. \square

Combining Lemma 7.4 and Lemma 7.6 gives an almost exact RAT-degree of plurality voting.

THEOREM 7.7. *With $m \geq 3$ candidates and $n \geq 5$ agents, the RAT-degree of plurality voting is $n/2 + 1$ when n is even; it is between $\lfloor n/2 \rfloor + 1$ and $\lceil n/2 \rceil + 1$ when n is odd.*

Next, we show that the lower bound of $\approx n/m$ is attained by the *anti-plurality voting rule*. To this end, we prove several upper bounds on the RAT-degree for more general score-vectors.

The following lemma strengthens Lemma 7.2.

LEMMA 7.8. *Let $\ell \in \{2, \dots, m - 1\}$ be an integer. Consider a positional voting setting with $m \geq 3$ candidates and $n \geq (\ell + 1)m$ agents. Denote $s_{\text{top}:\ell} := \sum_{j=m-\ell+1}^m s_j$ = the sum of the ℓ highest scores and $s_{\text{bot}:\ell} := \sum_{j=1}^{\ell} s_j$ = the sum of the ℓ lowest scores.*

If $s_2 > s_1$ and there are k known agents, where

$$k > \frac{\ell s_m - s_{\text{bot}:\ell}}{\ell s_m + s_{\text{top}:\ell} - s_{\text{bot}:\ell} - \ell s_1} n,$$

then switching the bottom two candidates (c_2 and c_1) may be a safe profitable manipulation for Alice.

PROOF SKETCH. The proof has a similar structure to that of Lemma 7.2. Note that the expression at the right-hand side can be as small as $\frac{1}{\ell + 1}n$ (for the anti-plurality rule), which is much smaller than the $\lceil n/2 \rceil + 1$ known agents required in Lemma 7.2. Still, we can prove that, for some reports of the known agents, the score of c_1 is necessarily lower than the *arithmetic mean* of the scores of the ℓ candidates $\{c_m, c_2, \dots, c_\ell\}$. Hence, it is lower than at least one of these scores. Therefore, c_1 still cannot win, so switching c_1 and c_2 is safe. \square

In particular, for the anti-plurality rule the condition in Lemma 7.8 for $\ell = m - 1$ is $k > n/m$, which implies a lower bound of $\lfloor n/m \rfloor + 1$. Combined with the general upper bound of Theorem 7.5, we get:

THEOREM 7.9. *With $m \geq 3$ candidates and $n \geq m^2$ agents, The RAT-degree of anti-plurality voting is at least $\lfloor (n + 1)/m \rfloor - 1$ and at most $\lfloor n/m \rfloor + 1$.*

Intuitively, the reason that anti-plurality fares worse than plurality is that, even with a small number of known agents, it is possible to deduce that some candidate has no chance to win, and therefore there is a safe manipulation.

While we do not yet have a complete characterization of the RAT-degree of positional voting rules, our current results already show the strategic importance of the choice of scores.

7.3 Higher RAT-degree?

Theorem 7.5 raises the question of whether some other, non-positional voting rules have RAT-degrees substantially higher than $n/2$. Using ideas similar to those in Section 5.4, we could use a selection rule Γ to choose a “dictator”, and implement the dictator’s first choice. This deterministic mechanism has RAT-degree $n - 1$, as without knowledge of all other agents’ inputs, every manipulation might cause the manipulator to lose the chance of being a dictator. However, besides the fact that this is an unnatural mechanism, it suffers from other problems such as the *no-show paradox* (a participating voter might affect the selection rule in a way that will make another agent a dictator, which might be worse than not participating at all).

Our main open problem is therefore to devise natural voting rules with a high RAT-degree.

OPEN QUESTION 7.10. *Does there exist a non-dictatorial voting rule that satisfies the participation criterion (i.e. does not suffer from the no-show paradox), with RAT-degree larger than $\lceil n/2 \rceil + 1$?*

8 Stable Matchings

In this section, we consider mechanisms for stable matchings. Here, the n agents are divided into two disjoint subsets, M and W , that need to be matched to each other. The most common examples are men and women or students and universities. Each agent has a strict preference order over the agents in the other set and being unmatched – for each $m \in M$, an order \succ_m over $W \cup \{\phi\}$; and for each $w \in W$ an order, \succ_w , over $M \cup \{\phi\}$.

A *matching* between M to W is a mapping μ from $M \cup W$ to $M \cup W \cup \{\phi\}$ such that (1) $\mu(m) \in W \cup \{\phi\}$ for each $m \in M$, (2) and $\mu(w) \in M \cup \{\phi\}$ for each $w \in W$, and (3) $\mu(m) = w$ if and only if $\mu(w) = m$ for any $(m, w) \in M \times W$. When $\mu(a) = \phi$ it means that agent a is unmatched under μ . A matching is said to be *stable* if (1) *no* agent prefers being unmatched over their assigned match, and (2) there is *no* pair $(m, w) \in M \times W$ such that m prefers w over his assigned match while w prefers m over her assigned match – $w \succ_m \mu(m)$ and $m \succ_w \mu(w)$.

A mechanism in this context gets the preference orders of all agents and returns a stable matching. See Gonczarowski and Thomas [2024] for a recent description of the structure of matching mechanisms.

Results. Our results for this problem are preliminary, so we provide only a brief overview here, with full descriptions and proofs in the appendix. We believe, however, that this is an important problem and that our new definition opens the door to many interesting questions.

We first analyze the deferred acceptance mechanism and prove that its RAT-degree is at least 1 and at most 3. The proof of the upper bound relies on *truncation*, where an agent in W falsely reports preferring to remain unmatched over certain options. We further show that even without truncation, the RAT-degree is at most 5.

Finally, we examine the Boston mechanism and establish an upper bound of 2 on its RAT-degree.

8.1 Deferred Acceptance (Gale-Shapley)

The *deferred acceptance* algorithm [Gale and Shapley, 1962] is one of the most well-known mechanisms for computing a stable matching. In this algorithm, one side of the market – here, M – proposes, while the other side – W – accepts or rejects offers iteratively.

It is well known that the mechanism is truthful for the proposing side (M) but untruthful for the other side (W). That is, the agents in W may have an incentive to misreport their preferences to obtain a better match. Moreover, there is provably no mechanism for two-sided matching that is truthful for both sides.

This section provides a more nuanced analysis of the amount of knowledge required by W agents to manipulate safely. We focus on a specific agent $w_1 \in W$, with ranking $m_1 \succ_{w_1} m_2 \succ_{w_1} \dots$. There are three kinds of potential manipulations for any $w_1 \in W$:

- (1) Demoting some $m_j \in M$ from above ϕ to below ϕ (i.e., claiming that an acceptable partner is unacceptable for her). This is equivalent to reporting only a prefix of the ranking, sometimes called *truncation* [Coles and Shorrer, 2014, Ehlers, 2008, Roth and Rothblum, 1999].
- (2) Promoting some $m_j \in M$ from below ϕ to above ϕ (i.e., claiming that an unacceptable partner is acceptable for her).
- (3) Reordering some $m_i, m_j \in M$ (i.e., claiming that she prefers m_i to m_j where in fact she prefers m_j to m_i).

LEMMA 8.1. *In Deferred Acceptance with $k \geq 3$ known agents, there may be a safe and profitable truncation manipulation for w_1 .*

In some settings, it is reasonable to assume that agents always prefer being matched if possible. In such cases, the mechanism is designed to accept only preferences over agents from the opposite set (or equivalently, orders where being unmatched is always the least preferred option). Clearly, under this restriction, truncation is not a possible manipulation. We prove that even when truncation is not possible, the RAT-degree is bounded.

LEMMA 8.2. *In Deferred Acceptance without truncation, with $k \geq 5$ known agents, there may be a safe and profitable reorder manipulation for w_1 .*

We conjecture that the numbers 3 and 5 are tight, but currently have only a weaker lower bound of 1, which follows from the following lemma:

LEMMA 8.3. *In Deferred Acceptance, no agent has a safe manipulation.*

Combining the above lemmas gives:

THEOREM 8.4. *The RAT-degree of Deferred Acceptance is at least 1.*

It is at most 3 when truncation is allowed, and at most 5 when truncation is not allowed.

8.2 Boston Mechanism

The *Boston* mechanism [Abdulkadiroğlu and Sönmez, 2003] is a widely used mechanism for assigning students or schools. It is not truthful for both sides. Moreover, we show that it can be safely manipulated with little information.

LEMMA 8.5. *In the Boston Mechanism with $k \geq 2$ known agents, there may be a safe and profitable reorder manipulation for some $m_1 \in M$.*

The lemma implies:

THEOREM 8.6. *The RAT-degree of the Boston mechanism is at most 2.*

We have seen two matching mechanisms with a low RAT-degree – at most a small constant independent of n . This raises an open question:

OPEN QUESTION 8.7. *Is there a stable matching mechanism with RAT-degree in $\Omega(n)$?*

9 Discussion and Future Work

Our main goal in this paper is to encourage a more quantitative approach to truthfulness that can be applied to various problems. When truthfulness is incompatible with other desirable properties, we aim to find mechanisms that are “as hard to manipulate as possible”, where hardness is measured by the amount of knowledge required for a safe manipulation. We have considered several alternatives towards the same goal.

Using Randomization. If we used randomness, we could eliminate all safe manipulations. Consider for example the following voting rule:

- With some small probability $p > 0$, run random dictatorship, that is, choose a random voter and elect his top candidate;
- Otherwise, run plurality voting (or any other voting rule with desirable properties).

Due to the small probability of being a dictator, each voter might lose from manipulation, so no manipulation is safe. This rule is not entirely far-fetched: governments do sometimes use randomization to encourage truth-telling in tax reports (see e.g. [Haan et al., 2012]). However, randomization is very unlikely to be acceptable in high-stakes voting scenarios.

Beyond Worst-Case. We defined the RAT-degree as a “worst case” concept: to prove an upper bound, we find a single example of a safe manipulation. This is similar to the situation with the classic truthfulness notion, where to prove non-truthfulness, it is sufficient to find a single example of a manipulation. To go beyond the worst case, one could follow relaxations of truthfulness, such as truthful-in-expectation [Lavi and Swamy, 2011] or strategyproofness-in-the-large [Azevedo and Budish, 2019], and define similarly “RAT-degree in expectation” or “RAT-degree in the large”.

Alternative Information Measurements. Another avenue for future work is to study other ways to quantify truthfulness. For example, instead of counting the number of known *agents*, one could count the number of *bits* that an agent should know about other agents’ preferences in order to have a safe manipulation. The disadvantage of this approach is that different domains have different input formats, and therefore it would be hard to compare numbers of bits in different domains (see Appendix A for more details).

Changing Quantifiers. One could argue for a stronger definition requiring that a safe manipulation exists for every possible set of k known-agents, rather than for some set, or similarly for every possible preference profile for the known agents rather than just in some profile. However, we believe such definitions would be less informative, as in many cases, a manipulation that is possible for some set of k known-agents, is not possible for *any* such set. For example, in the first-price auction with discount (see Section 4.2), the RAT-degree is 1 under our definition. But if we required the the knowledge on any agent’s bid would allow manipulation rather than just one, the degree would automatically jump to $n - 1$, making the measure far less meaningful.

Combining the “known agents” concept with other notions. We believe that the “known agents” approach can be used to quantify the degree to which a mechanism is robust to other types of manipulations (besides safe manipulations), such as “always-profitable” manipulations or “obvious” manipulation. Accordingly, one can define the “max-min-strategyproofness degree” or the “NOM degree” (see Appendix A).

Other applications. The RAT-degree can potentially be useful in any social-choice setting in which truthful mechanisms are not known, or lack other desirable properties. Examples include combinatorial auctions, multiwinner voting, budget aggregation and facility location.

References

- Atila Abdulkadirođlu and Tayfun Sönmez. 2003. School choice: A mechanism design approach. *American economic review* 93, 3 (2003), 729–747.
- Fuad Aleskerov and Eldeniz Kurbanov. 1999. Degree of manipulability of social choice procedures. *Current trends in Economics: theory and applications* (1999), 13–27.
- Tommy Andersson, Lars Ehlers, and Lars-Gunnar Svensson. 2014a. Budget balance, fairness, and minimal manipulability. *Theoretical Economics* 9, 3 (2014), 753–777.
- Tommy Andersson, Lars Ehlers, and Lars-Gunnar Svensson. 2014b. Least manipulable envy-free rules in economies with indivisibilities. *Mathematical Social Sciences* 69 (2014), 43–49.
- Lawrence M Ausubel and Paul Milgrom. 2006. The lovely but lonely Vickrey auction. *Combinatorial auctions* 17, 3 (2006), 22–26.
- Eduardo M Azevedo and Eric Budish. 2019. Strategy-proofness in the large. *The Review of Economic Studies* 86, 1 (2019), 81–116.
- Yakov Babichenko, Shahar Dobzinski, and Noam Nisan. 2019. The communication complexity of local search. In *Proceedings of the 51st Annual ACM SIGACT Symposium on Theory of Computing* (Phoenix, AZ, USA) (STOC 2019). Association for Computing Machinery, New York, NY, USA, 650–661. <https://doi.org/10.1145/3313276.3316354>
- Siddharth Barman, Ganesh Ghalme, Shweta Jain, Pooja Kulkarni, and Shivika Narang. 2019. Fair division of indivisible goods among strategic agents. *arXiv preprint arXiv:1901.09427* (2019).
- Nathanaël Barrot, Jérôme Lang, and Makoto Yokoo. 2017. Manipulation of Hamming-based approval voting for multiple referenda and committee elections. In *Proceedings of the 16th Conference on Autonomous Agents and MultiAgent Systems (AAMAS-2017)*. 597–605.
- John J Bartholdi, Craig A Tovey, and Michael A Trick. 1989. The computational difficulty of manipulating an election. *Social choice and welfare* 6 (1989), 227–241.
- John J Bartholdi III and James B Orlin. 1991. Single transferable vote resists strategic voting. *Social Choice and Welfare* 8, 4 (1991), 341–354.
- Steven J Brams, Michael A Jones, Christian Klamler, et al. 2006. Better ways to cut a cake. *Notices of the AMS* 53, 11 (2006), 1314–1321.
- Simina Brânzei and Noam Nisan. 2019. Communication Complexity of Cake Cutting. In *Proceedings of the 2019 ACM Conference on Economics and Computation* (Phoenix, AZ, USA) (EC '19). Association for Computing Machinery, New York, NY, USA, 525. <https://doi.org/10.1145/3328526.3329644>
- Xiaolin Bu, Jiaxin Song, and Biaoshuai Tao. 2023. On existence of truthful fair cake cutting mechanisms. *Artificial Intelligence* 319 (2023), 103904. <https://doi.org/10.1016/j.artint.2023.103904>
- Ning Chen, Xiaotie Deng, Bo Tang, Hongyang Zhang, and Jie Zhang. 2022. Incentive ratio: A game theoretical analysis of market equilibria. *Information and Computation* 285 (2022), 104875.
- Ning Chen, Xiaotie Deng, and Jie Zhang. 2011. How profitable are strategic behaviors in a market?. In *Algorithms–ESA 2011: 19th Annual European Symposium, Saarbrücken, Germany, September 5-9, 2011. Proceedings* 19. Springer, 106–118.
- Yiqiu Chen and Markus Möller. 2024. Regret-free truth-telling in school choice with consent. *Theoretical Economics* 19, 2 (2024), 635–666.
- Yukun Cheng, Xiaotie Deng, Yuhao Li, and Xiang Yan. 2022. Tight incentive analysis on sybil attacks to market equilibrium of resource exchange over general networks. In *Proceedings of the 23rd ACM Conference on Economics and Computation*. 792–793.
- Yu-Kun Cheng and Zi-Xin Zhou. 2019. An improved incentive ratio of the resource sharing on cycles. *Journal of the Operations Research Society of China* 7 (2019), 409–427.
- Yann Chevaleyre, Jérôme Lang, Nicolas Maudet, and Guillaume Ravilly-Abadie. 2009. Compiling the votes of a subelectorate. In *Proceedings of the 21st International Joint Conference on Artificial Intelligence (IJCAI-2009)*. 97–102.
- Peter Coles and Ran Shorrer. 2014. Optimal truncation in matching markets. *Games and Economic Behavior* 87 (2014), 591–615.
- Lester E Dubins and Edwin H Spanier. 1961. How to cut a cake fairly. *The American Mathematical Monthly* 68, 1P1 (1961), 1–17.
- Lars Ehlers. 2008. Truncation strategies in matching markets. *Mathematics of Operations Research* 33, 2 (2008), 327–335.
- Piotr Faliszewski and Ariel D Procaccia. 2010. AI’s war on manipulation: Are we winning? *AI Magazine* 31, 4 (2010), 53–64.
- Marcelo Ariel Fernandez. 2018. *Deferred acceptance and regret-free truth-telling*. Economics Working Paper Archive 65832. The Johns Hopkins University, Department of Economics. <https://ideas.repec.org/p/jhu/papers/65832.html>
- David Gale and Lloyd S Shapley. 1962. College admissions and the stability of marriage. *The American Mathematical Monthly* 69, 1 (1962), 9–15.
- Allan Gibbard. 1973. Manipulation of voting schemes: a general result. *Econometrica: journal of the Econometric Society* (1973), 587–601.

- Yannai A Gonczarowski and Clayton Thomas. 2024. Structural Complexities of Matching Mechanisms. In *Proceedings of the 56th Annual ACM Symposium on Theory of Computing*. 455–466.
- Elena Grigorieva, P Jean-Jacques Herings, Rudolf Müller, and Dries Vermeulen. 2006. The communication complexity of private value single-item auctions. *Operations Research Letters* 34, 5 (2006), 491–498.
- Marco A Haan, Pim Heijnen, Lambert Schoonbeek, and Linda A Toolsema. 2012. Sound taxation? On the use of self-declared value. *European Economic Review* 56, 2 (2012), 205–215.
- Noam Hazon and Edith Elkind. 2010. Complexity of safe strategic voting. In *Algorithmic Game Theory: Third International Symposium, SAGT 2010, Athens, Greece, October 18-20, 2010. Proceedings 3*. Springer, 210–221.
- Neel Karia and Jérôme Lang. 2021. Compilation Complexity of Multi-Winner Voting Rules (Student Abstract). In *Proceedings of the 35th AAAI Conference on Artificial Intelligence (AAAI-2021)*. 15809–15810.
- Vijay Krishna. 2009. *Auction theory*. Academic press.
- Martin Lackner, Jan Maly, and Oliviero Nardi. 2023. Free-Riding in Multi-Issue Decisions. In *Proceedings of the 22nd International Conference on Autonomous Agents and Multiagent Systems (AAMAS-2023)*. 2040–2048.
- Martin Lackner and Piotr Skowron. 2018. Approval-based multi-winner rules and strategic voting. In *Proceedings of the 27th International Joint Conference on Artificial Intelligence (IJCAI-2018)*. 340–346.
- Ron Lavi and Chaitanya Swamy. 2011. Truthful and near-optimal mechanism design via linear programming. *Journal of the ACM (JACM)* 58, 6 (2011), 1–24.
- Bo Li, Ankang Sun, and Shiji Xing. 2024. Bounding the Incentive Ratio of the Probabilistic Serial Rule. In *Proceedings of the 23rd International Conference on Autonomous Agents and Multiagent Systems*. 1128–1136.
- Richard J Lipton, Evangelos Markakis, Elchanan Mossel, and Amin Saberi. 2004. On approximately fair allocations of indivisible goods. In *Proceedings of the 5th ACM Conference on Electronic Commerce*. 125–131.
- Noam Nisan, Tim Roughgarden, Eva Tardos, and Vijay Vazirani. 2007. *Algorithmic Game Theory*. Cambridge University Press. 238 pages.
- Noam Nisan and Ilya Segal. 2002. The communication complexity of efficient allocation problems. *Draft. Second version March 5th* (2002), 173–182.
- Josué Ortega and Erel Segal-Halevi. 2022. Obvious manipulations in cake-cutting. *Social Choice and Welfare* 59, 4 (2022), 969–988.
- Alvin E Roth and Uriel G Rothblum. 1999. Truncation strategies in matching markets—in search of advice for participants. *Econometrica* 67, 1 (1999), 21–43.
- Mark Allen Satterthwaite. 1975. Strategy-proofness and Arrow’s conditions: Existence and correspondence theorems for voting procedures and social welfare functions. *Journal of economic theory* 10, 2 (1975), 187–217.
- Arkadii Slinko and Shaun White. 2008. Nondictatorial social choice rules are safely manipulable. In *Proceedings of the Second International Workshop on Computational Social Choice (COMSOC-2008)*. 403–414.
- Arkadii Slinko and Shaun White. 2014. Is it ever safe to vote strategically? *Social Choice and Welfare* 43 (2014), 403–427.
- Hugo Steinhaus. 1948. The Problem of Fair Division. *Econometrica* 16, 1 (1948), 101–104.
- Hugo Steinhaus. 1949. Sur La Division Pragmatique. *Econometrica* 17 (1949), 315–319.
- Biaoshuai Tao. 2022. On existence of truthful fair cake cutting mechanisms. In *Proceedings of the 23rd ACM Conference on Economics and Computation*. 404–434.
- Peter Troyan and Thayer Morrill. 2020. Obvious manipulations. *Journal of Economic Theory* 185 (2020), 104970.
- Yu A Veselova. 2016. Computational complexity of manipulation: a survey. *Automation and Remote Control* 77 (2016), 369–388.
- Toby Walsh. 2011. Where are the hard manipulation problems? *Journal of Artificial Intelligence Research* 42 (2011), 1–29.
- Naftali Waxman, Noam Hazon, and Sarit Kraus. 2021. Manipulation of k-coalitional games on social networks. *arXiv preprint arXiv:2105.09852* (2021).
- Douglas R Woodall. 1986. A note on the cake-division problem. *J. Comb. Theory, Ser. A* 42, 2 (1986), 300–301.
- Lirong Xia and Vincent Conitzer. 2010. Compilation complexity of common voting rules. In *Proceedings of the 24th AAAI Conference on Artificial Intelligence (AAAI-2010)*. 915–920.

A Related Work: Extended Discussion

A.1 Truthfulness Relaxations

The large number of impossibility results have lead to extensive research into relaxations of truthfulness. A relaxed truthfulness notion usually focuses on a certain subset of all possible manipulations, which are considered more “likely”. It requires that none of the manipulations from this subset is profitable. Different relaxations consider different subsets of “likely” manipulations.

RAT. Closest to our work is the recent paper by [Bu et al., 2023], which introduces the definition on which this paper is build upon - *risk-avoiding truthfulness (RAT)*. The definition assumes that agents avoid risk - they will manipulate only when it is sometimes beneficial but never harmful. We first note that their original term for this concept is *risk-averse truthfulness*. However, since the definition assumes that agents completely avoid any element of risk, we adopt this new name, aiming to more accurately reflect this assumption.

We extend their work in two key directions. First, we generalize the definition from cake-cutting to any social choice problem. Second, we move beyond a binary classification of whether a mechanism is RAT, to a quantitative measure of its robustness to manipulation by such agents. Our new definition provides deeper insight of the mechanism’ robustness. In Section 6, we also analyze the mechanisms proposed in their paper alongside additional mechanisms for cake-cutting.

Their paper (in Section 5) provides an extensive comparison between RAT of related relaxation of truthfulness. For completeness, we include some of these comparisons here as well.

Maximin Strategy-Proofness. Another related relaxation of truthfulness, introduced by Brams et al. [2006], assumes the opposite extreme to the standard definition regarding the agents’ willingness to manipulate. In the standard definition, an agent is assumed to manipulate if for *some* combination of the other agents’ reports, it is beneficial. In contrast, this relaxation assumes that an agent will manipulate only if the manipulation is *always* beneficial — i.e., for *any* combination of the other agents’ reports.

This definition is not only weaker than the standard one but also weaker than RAT, as it assumes that agents manipulate in only a subset of the cases where RAT predicts manipulation. We believe that, in this sense, RAT provides a more realistic and balanced assumption. However, we note that a similar approach can be applied to this definition as well — the degree to which a mechanism is robust to always-profitable manipulations (rather than to safe manipulations).

NOM. Troyan and Morrill [2020] introduce the notion of *not-obvious manipulability (NOM)*, which focuses on *obvious manipulation* — informally, a manipulation that benefits the agent either in the worst case or in the best case. It presumes that agents are boundedly rational, and only consider extreme situations — best or worst cases. A mechanism is NOM if there are no obvious manipulations.

This notion is a relaxation of truthfulness since the existence of an obvious manipulation imposes a stronger requirement than merely having a profitable one.

However, an obvious manipulation is not necessarily a *safe* manipulation, nor is a safe manipulation necessarily an obvious one (see Appendix D in [Bu et al., 2023] for more details). Therefore, NOM and RAT are independent notions.

Regret-Free Truth-telling (RFTT). Fernandez [2018] proposes another relaxation of truthfulness, called *regret-free truth-telling*. This concept also considers the agent’s knowledge about other agents but does so in a different way. Specifically, a mechanism satisfies RFTT if no agent ever regrets telling the truth after observing the outcome – meaning that she could not have safely manipulated given that only the reports that are consistent with the observed outcome are possible. Note that

the agent does not observe the actual reports of others but only the final outcome (the agents are assumed to know how the mechanism works).

An ex-post-profitable manipulation is always profitable, but the opposite is not true, as it is possible that the profiles in which a manipulation could be profitable are not consistent with the outcome. This means that RFTT does not imply RAT. A safe manipulation is always ex-post-safe, but the opposite is not true, as it is possible that the manipulation is harmful for some profiles that are inconsistent with the outcome. This means that RAT does not imply RFTT.

Different Types of Risk. Slinko and White [2008, 2014] and Hazon and Elkind [2010] study “safe manipulations” in voting. Their concept of safety is similar to ours, but allows a simultaneous manipulation by a coalition of voters. They focus on a different type of risk for the manipulators: the risk that too many or too few of them will perform the exact safe manipulation.

A.2 Alternative Measurements

Various measures can be used to quantify the manipulability of a mechanism. Below, we compare some existing approaches with our RAT-degree measure.

Computational Complexity. Even when an agent knows the reports of all other agents, it might be hard to compute a profitable manipulation. Mechanisms can be ranked according to the run-time complexity of this computation: mechanisms in which a profitable manipulation can be computed in polynomial time are arguably more manipulable than mechanisms in which this problem is NP-hard. This approach was pioneered by Bartholdi et al. [1989], Bartholdi III and Orlin [1991] for voting, and applied in diverse social choice settings, e.g. coalitional games in social networks [Waxman et al., 2021]. See Faliszewski and Procaccia [2010], Veselova [2016] for surveys.

Nowadays, with the advent of efficient SAT and CSP solvers, NP-hardness does not seem a very good defense against manipulation. Moreover, some empirical studies show that voting rules that are hard to manipulate in theory, may be easy to manipulate in practice [Walsh, 2011]. We claim that the main difficulty in manipulation is not the computational hardness, but rather the informational hardness — learning the other agents’ preferences.

Queries and Bits. Instead of counting the number of agents, we could count the number of *bits* that an agent needs to know in order to have a safe manipulation (this is similar in spirit to the concepts of communication complexity - e.g., [Babichenko et al., 2019, Brânzei and Nisan, 2019, Grigorieva et al., 2006, Nisan and Segal, 2002] and compilation complexity - e.g., [Chevalyre et al., 2009, Karia and Lang, 2021, Xia and Conitzer, 2010]). But this definition may be incomparable between different domains, as the bit length of the input is different. We could also measure the number of basic queries, rather than the number of agents. But then we have to define what “basic query” means, which may require a different definition for each setting. The number of agents is an objective measure that is relevant for all settings.

Probability of Having Profitable Manipulation. Truthfulness requires that not even a *single* preference-profile allows a profitable manipulation. Mechanisms can be ranked according to the probability that such a profile exists – e.g., [Barrot et al., 2017, Lackner et al., 2023, Lackner and Skowron, 2018]. The probability of truthful mechanism is zero, and the lower the probability is, the more resistant the mechanism is to profitable manipulations.

A disadvantage of this approach is that it requires knowledge of the distribution over preference profiles; our RAT-degree does not require it.

Incentive Ratio. Another common measure is the *incentive ratio* of a mechanism Chen et al. [2011], which describes the extent to which an agent can increase her utility by manipulating. For each

agent, it considers the maximum ratio between the utility obtained by manipulating and the utility received by being truthful, given the same profile of the others. The incentive ratio is then defined as the maximum of these values across all agents.

This measure is widely used - e.g., [Chen et al., 2022, Cheng et al., 2022, Cheng and Zhou, 2019, Li et al., 2024]. However, it is meaningful only when utility values have a clear numerical interpretation, such as in monetary settings. In contrast, our RAT-degree measure applies to any social choice setting, regardless of how utilities are represented.

Degree of Manipulability. Aleskerov and Kurbanov [1999] define four different indices of "manipulability" of ranked voting rules, based on the fraction of profiles in which a profitable manipulation exists; the fraction of manipulations that are profitable; and the average and maximum gain per manipulation. As the indices are very hard to compute, they estimate them on 26 voting rules using computer experiments. These indices are useful under an assumption that all profiles are equally probable ("impartial culture"), or assuming a certain mapping between ranks of candidates and their values for the agent.

Andersson et al. [2014a,b] measure the degree of manipulability by counting the number of agents who have a profitable manipulation. They define a rule as *minimally manipulable* with respect to a set of acceptable mechanisms if for each preference profile, the number of agents with a profitable manipulation is minimal across all acceptable mechanisms.

B Proofs for Section 3 (The RAT-Degree)

PROPOSITION 3.3. *Let $k \in \{0, \dots, n - 2\}$. If a mechanism is k -known-agents safely-manipulable, then it is also $(k + 1)$ -known-agents safely-manipulable.*

PROOF. By definition, some agent a_i has a profitable-and-safe-manipulation-given- k -known-agents. That is, there exists a subset $K \subseteq N \setminus \{a_i\}$ with $|K| = k$ and some preference profile for them $\mathbf{P}_K \in \mathbf{D}_K$, such that (3) and (4) hold. Let $a_j \in \bar{K}$. Consider the preferences P_j that a_j has in some profile satisfying (3) (profitable). Define $K^+ := K \cup \{a_j\}$ and construct a preference profile where the preferences of the agents in K remain \mathbf{P}_K , and a_j 's preferences are set to P_j . Since (3) holds for P_j , the same manipulation remains profitable given the new set of known-agents. Moreover, (4) continues to hold, as the set of unknown agents has only shrunk. Thus, the mechanism is also $(k + 1)$ -known-agents safely manipulable. \square

C Proofs for Section 4 (Auction for a Single Good)

THEOREM 4.1. *First-price auction is safely manipulable (RAT-degree = 0).*

PROOF. To prove the mechanism is safely manipulable, we need to show an agent and an alternative bid, such that the agent always *weakly* prefers the outcome that results from reporting the alternative bid over reporting her true valuation, and *strictly* prefers it in at least one scenario. We prove that the mechanism is safely-manipulable by all agents with positive valuations.

Let $i \in N$ be an agent with valuation $v_i > 0$, we shall now prove that bidding $b_i < v_i$ is a safe manipulation.

We need to show that for any combination of bids of the other agents, bidding b_i does not harm agent i , and that there exists a combination where bidding b_i strictly increases her utility. To do so, we consider the following cases according to the maximum bid of the other agents:

- The maximum bid is smaller than b_i : if agent i bids her valuation v_i , she wins the good and pays v_i , results in utility 0. However, by bidding $b_i < v_i$, she still wins but pays only b_i , yielding a positive utility.

Thus, in this case, agent i strictly increases her utility by lying.

- The maximum bid is between b_i and v_i : if agent i bids her valuation v_i , she wins the good and pays v_i , resulting in utility 0. By bidding $b_i < v_i$, she loses the good but pays nothing, also resulting in utility 0.

Thus, in this case, bidding b_i does not harm agent i .

- The maximum bid is higher than v_i : Regardless of whether agent i bids her valuation v_i or $b_i < v_i$, she does not win the good, resulting in utility 0.

Thus, in this case, bidding b_i does not harm agent i .

□

LEMMA 4.3. *First-Price Auction with Discount is not safely-manipulable.*

PROOF. We need to show that, for each agent i and any bid $b_i \neq v_i$, at least one of the following is true: either (1) for any combination of bids of the other agents, agent i weakly prefers the outcome from bidding v_i ; or (2) there exists such a combination for which i strictly prefers the outcome from bidding v_i . We consider two cases.

Case 1: $v_i = 0$. In this case condition (1) clearly holds, as bidding v_i guarantees the agent a utility of 0, and no potential outcome of the auction can give i a positive utility.

Case 2: $v_i > 0$. In this case we prove that condition (2) holds. We consider two sub-cases:

- Under-bidding ($b_i < v_i$): whenever $\max_{j \neq i} b_j \in (b_i, v_i)$, when agent i bids truthfully she wins the good and pays $(1-t)v_i$, resulting in utility $tv_i > 0$; but when she bids b_i she does not win, resulting in utility 0.
- Over-bidding ($v_i < b_i$): whenever $\max_{j \neq i} b_j < v_i$, when agent i bids truthfully her utility is tv_i as before; when she bids b_i she wins and pays $(1-t)b_i > (1-t)v_i$, so her utility is less than tv_i .

In both cases lying may harm agent i . Thus, she has no safe manipulation. □

LEMMA 4.4. *First-Price Auction with Discount is 1-known-agents safely-manipulable.*

PROOF. we need to identify an agent i , for whom there exists another agent $j \neq i$ and a bid b_j , such that if j bids b_j , then agent i has a safe manipulation.

Indeed, let $i \in N$ be an agent with valuation $v_i > 0$ and let $j \neq i$ be another agent who bids some value $b_j \in (v_i, v_i/(1-t))$. We prove that bidding any value $b_i \in (b_j, v_i/(1-t))$ is a safe manipulation for i .

If i truthfully bids v_i , she loses the good (as $b_j > v_i$), and gets a utility of 0.

If i manipulates by bidding some $b_i \in (b_j, v_i/(1-t))$, then she gets either the same or a higher utility, depending on the maximum bid among the unknown agents ($b^{\max} := \max_{\ell \neq i, \ell \neq j} b_\ell$):

- If $b^{\max} < b_i$, then i wins and pays $(1-t)b_i$, resulting in a utility of $v_i - (1-t)b_i > 0$, as $(1-t)b_i < v_i$. Thus, i strictly gains by lying.
- If $b^{\max} > b_i$, then i does not win the good, resulting in utility 0. Thus, in this case, bidding b_i does not harm i .
- If $b^{\max} = b_i$, then one of the above two cases happens (depending on the tie-breaking rule).

In all cases b_i is a safe manipulation, as claimed. □

LEMMA 4.6. *The AFSP mechanism is not $(n-2)$ -known-agents safely-manipulable.*

PROOF. Let $i \in N$ be an agent with true value $v_i > 0$, and a manipulation $b_i \neq v_i$. We show that this manipulation is unsafe even when knowing the bids of $n-2$ of the other agents.

Let K be a subset of $(n-2)$ of the remaining agents (the agents in K are the “known agents”), and let \mathbf{b}_K be a vector that represents their bids. Lastly, let j be the only agent in $N \setminus (K \cup \{i\})$. We need to prove that at least one of the following is true: either (1) the manipulation is not profitable

– for any possible bid of agent j , agent i weakly prefers the outcome from bidding v_i over the outcome from bidding b_i ; or (2) the manipulation is not safe — there exists a bid for agent j , such that agent i strictly prefers the outcome from bidding v_i .

Let $b_K^{\max} := \max_{\ell \in K} b_\ell$. We consider each of the six possible orderings of v_i , b_i and b_K^{\max} (cases with equalities are contained in cases with inequalities, according to the tie-breaking rule):

- $v_i < b_i < b_K^{\max}$ or $b_i < v_i < b_K^{\max}$: In these cases (1) holds, as for any bid of agent j , agent i never wins. Therefore the manipulation is not profitable.
- $v_i < b_K^{\max} < b_i$: We show that (2) holds. Assume that j bids any value $b_j \in (v_i, b_i)$. When i bids truthfully, she does not win the good so her utility is 0. But when i bids b_i , she wins and pays a weighted average between b_i and $\max(b_j, b_K^{\max})$. As both these numbers are strictly greater than v_i , the payment is larger than v_i as well, resulting in a negative utility. Hence, the manipulation is not safe.
- $b_K^{\max} < v_i < b_i$: We show that (2) holds. Assume that j bids any value $b_j < b_K^{\max}$. When i tells the truth, she wins and pays $wv_i + (1-w)b_K^{\max}$; but when i bids b_i , she still wins but pays a higher price, $wb_i + (1-w)b_K^{\max}$, so her utility decreases. Hence, the manipulation is not safe.
- $b_i < b_K^{\max} < v_i$: We show that (2) holds. Assume that agent j bids any value $b_j < b_i$. When i tells the truth, she wins and pays $wv_i + (1-w)b_K^{\max} < v_i$, resulting in a positive utility. But when i bids b_i , she does not win and her utility is 0. Hence, the manipulation is not safe.
- $b_K^{\max} < b_i < v_i$: We show that (2) holds. Assume that j bids any value $b_j \in (b_i, v_i)$. When i tells the truth, she wins and pays $wv_i + (1-w)b_j < v_i$, resulting in a positive utility. But when i bids b_i , she does not win and her utility is 0. Hence, the manipulation is not safe.
- $b_i < b_K^{\max} < v_i$ or $b_K^{\max} < b_i < v_i$: We show that (2) holds. Assume that j bids any value $b_j \in (b_i, v_i)$. When i tells the truth, she wins and pays $wv_i + (1-w)\max(b_j, b_K^{\max})$, which is smaller than v_i as both b_j and b_K^{\max} are smaller than v_i . Therefore, i 's utility is positive. But when i bids b_i , she does not win and her utility is 0. Hence, the manipulation is not safe.

□

LEMMA 4.7. *The AFSP mechanism is $(n-1)$ -known-agents safely-manipulable.*

PROOF. given an agent $i \in N$, we need to show an alternative bid $b_i \neq v_i$ and a combination of $(n-1)$ bids of the other agents, such that the agent strictly prefers the outcome resulting from its untruthful bid over her true valuation.

Consider any combination of bids of the other agents in which all the bids are strictly smaller than v_i . Let b_{-i}^{\max} be the highest bid among the other agents. We prove that any alternative bid $b_i \in (b_{-i}^{\max}, v_i)$ is a safe manipulation.

When agent i bids her valuation v_i , she wins the good and pays $wv_i + (1-w)b_{-i}^{\max}$, yielding a (positive) utility of

$$v_i - wv_i - (1-w)b_{-i}^{\max} = (1-w)(v_i - b_{-i}^{\max}).$$

But when i bids b_i , as $b_i > b_{-i}^{\max}$, she still wins the good but pays $wb_i + (1-w)b_{-i}^{\max}$, which is smaller as $b_i < v_i$; therefore her utility is higher. □

D Proofs for Section 5 (Indivisible Goods Allocations)

THEOREM 5.1. *The Utilitarian allocation rule is safely manipulable (RAT-degree = 0).*

PROOF. To prove the mechanism is safely manipulable, we need to show one agent that has an alternative report, such that the agent always *weakly* prefers the outcome that results from reporting the alternative report over reporting her true valuations, and *strictly* prefers it in at least one scenario.

Let $a_1 \in N$ be an agent who has a value different than 0 and r_{max} for at least one of the goods. Let g_1 be such good – that is, $0 < v_{1,1} < r_{max}$. We prove that reporting the highest possible value, r_{max} , for all goods is a safe manipulation. Notice that this report is indeed a manipulation as it is different than the true report in at least one place.

We need to show that for any combination of reports of the other agents, this report does not harm agent a_i , and that there exists a combination where it strictly increases her utility.

Since the utilities are additive and tie-breaking is performed separately for each good, we can analyze each good independently. The following proves that for all goods, agent a_1 always weakly prefers to manipulate. Case 4 (marked by *) proves that for the good g_1 , there exists a combination of reports of the others, for which agent a_1 strictly prefers the outcome from manipulating. Which proves that it is indeed a safe profitable manipulation.

Let $g_\ell \in G$ be a good. We consider the following cases according to the value of agent a_1 for the good g_ℓ , $v_{1,\ell}$; and the maximum report among the other agents for this good:

- $v_{1,\ell} = r_{max}$: In this case, both the truthful and the untruthful reports are the same.
- $v_{1,\ell} = 0$: Agent a_1 does not care about this good, so regardless of the reports which determines whether or not agent a_1 wins the good, her utility from it is 0.

Thus, in this case, agent a_1 is indifferent between telling the truth and manipulating.

- $0 < v_{1,\ell} < r_{max}$ and the maximum report of the others is strictly smaller than $v_{1,\ell}$: Agent a_1 wins the good in both cases – whether she reports her true value or reports r_{max} .

Thus, in this case, agent a_1 is indifferent between telling the truth and manipulating.

- (*) $0 < v_{1,\ell} < r_{max}$ and the maximum report of the others is greater than $v_{i,j}$ and smaller than r_{max} : when agent a_1 reports her true value for the good g_ℓ , then she does not win it. However, by bidding r_{max} , she does.

Thus, in this case, agent a_1 strictly increases her utility by lying (as her value for this good is positive).

- $0 < v_{1,\ell} < r_{max}$ and the maximum report of the others equals r_{max} : when agent a_1 reports her true value for the good, she does not win it. But by bidding r_{max} , she may win the good (depending on the tie-breaking rule).

Thus, in this case, agent a_1 either strictly gain or does not lose from manipulating.

□

LEMMA 5.3. *An agent who values only one good positively cannot safely manipulate the Normalized Utilitarian allocation rule.*

PROOF. Let a_1 be an agent who values only one good and let g_1 be the only good she likes. That is, her true valuation is $v_{1,1} = V$ and $v_{1,\ell} = 0$ for any $\ell \neq 1$ (any good g_ℓ different than g_1).

To prove that agent a_1 does *not* have a safe manipulation, we need to show that for any report for her either (1) for any reports of the other agents, agent a_1 weakly prefers the outcome from telling the truth; or (2) there exists a reports of the other agents, for which agent a_1 strictly prefers the outcome from telling the truth.

Let $(r_{1,1}, \dots, r_{1,m})$ be an alternative report for the m goods. We assume that the values are already normalized. We shall now prove that the second condition holds (lying may harm the agent).

First, as the alternative report is different, we can conclude that $r_{1,1} < V$. We denote the difference by $\epsilon = V - r_{1,1}$. Next, consider the following reports of the other agents (all agents except a_1): $V - \frac{1}{2}\epsilon$ for item g_1 and $\frac{1}{2}\epsilon$ for some other good.

When agent a_1 reports her true value she wins her desired good g_1 , which gives her utility $V > 0$. However, when she lies, she loses good g_1 and her utility decreases to 0 (winning goods different than g_1 does not increases her utility).

That is, lying may harm the agent. \square

LEMMA 5.4. *An agent who values positively at least two goods cannot safely manipulate the Normalized Utilitarian allocation rule.*

PROOF. Let a_1 be an agent who values at least two good, $v_{1,1}, \dots, v_{1,m}$ her true values for the m goods, and $r_{1,1}, \dots, r_{1,m}$ a manipulation for a_1 . We need to show that the manipulation is either not *safe* – there exists a combination of the other agents’ reports for which agent a_1 strictly prefers the outcome from telling the truth; or not *profitable* – for any combination of reports of the other agents, agent a_1 weakly prefers the outcome from telling the truth. We will show that the manipulation is not safe by providing an explicit combination of other agents’ reports.

First, notice that since the true values and untruthful report of agent a_1 are different and they sum to the same constant V , there must be a good g_{inc} whose value was increased (i.e., $v_{1,\text{inc}} < r_{1,\text{inc}}$), and a good g_{dec} whose value was decreased (i.e., $v_{1,\text{dec}} > r_{1,\text{dec}}$).

Next, let $\epsilon := \min\left\{\frac{1}{m-1}r_{1,\text{inc}}, \frac{1}{2}(v_{1,\text{dec}} - r_{1,\text{dec}})\right\}$, notice that $\epsilon > 0$. Also, let $c := r_{1,\text{inc}} - \epsilon$, notice that $c > 0$ as well (here we use the condition $m \geq 3$).

We consider the combination of reports in which all agents except a_1 report the following values, denoted by $r(1), \dots, r(m)$:

- For good g_{inc} they report $r(\text{inc}) := 0$.
- For good g_{dec} they report $r(\text{dec}) := r_{1,\text{dec}} + \epsilon$.
- For the rest of the goods, $g_\ell \in G \setminus \{g_{\text{inc}}, g_{\text{dec}}\}$, they report $r(\ell) := r_{1,\ell} + \frac{1}{m-2}c$.

We prove that the above values constitute a legal report – they are non-negative and normalized to V .

First, we show that the sum of values in this report is V :

$$\begin{aligned} \sum_{\ell=1}^m r(\ell) &= r(\text{inc}) + r(\text{dec}) + \sum_{g_\ell \in G \setminus \{g_{\text{inc}}, g_{\text{dec}}\}} r(\ell) \\ &= 0 + (r_{1,\text{dec}} + \epsilon) + \sum_{g_\ell \in G \setminus \{g_{\text{inc}}, g_{\text{dec}}\}} \left(r_{1,\ell} + \frac{1}{m-2}c \right) \\ &= (r_{1,\text{dec}} + \epsilon) + \sum_{g_\ell \in G \setminus \{g_{\text{inc}}, g_{\text{dec}}\}} r_{1,\ell} + (m-2) \frac{1}{m-2}c \\ &= (r_{1,\text{dec}} + \epsilon) + \sum_{g_\ell \in G \setminus \{g_{\text{inc}}, g_{\text{dec}}\}} r_{1,\ell} + (r_{1,\text{inc}} - \epsilon) = \sum_{\ell=1}^m r_{1,\ell} = V. \end{aligned}$$

Second, we show that all the values are non-negative:

- Good g_{inc} : it is clear as $r(\text{inc}) = 0$.
- Good g_{dec} : since $r(\text{dec})$ is strictly higher than the (non-negative) report of agent a_1 by $\epsilon > 0$, it is clearly non-negative.
- Rest of the goods, $g_\ell \in G \setminus \{g_{\text{inc}}, g_{\text{dec}}\}$: since $\epsilon = \min\left\{\frac{1}{m-1}r_{1,\text{inc}}, \frac{1}{2}(v_{1,\text{dec}} - r_{1,\text{dec}})\right\}$, it is clear that $\epsilon \leq \frac{1}{m-1}r_{1,\text{inc}}$. As $m \geq 3$ and $r_{1,\text{inc}} > 0$, we get that $c = r_{1,\text{inc}} - \epsilon = \frac{m-2}{m-1}r_{1,\text{inc}}$ is higher than 0. As $r(\ell)$ is strictly higher than the (non-negative) report of agent a_1 by $c > 0$, it is clearly non-negative.

Now, we prove that, given these reports for the $n - 1$ unknown agents, agent a_1 strictly prefers the outcome from reporting truthfully to the outcome from manipulating.

We look at the two possible outcomes for each good – the one from telling and truth and the other from lying, and show that the outcome of telling the truth is always either the same or better, and that for at least one of the goods that agent a_1 wants (specifically, g_{dec}) it is strictly better.

- For good g_{inc} we consider two cases.
 - (1) If $v_{1,\text{inc}} = 0$: when agent a_1 is truthful we have a tie for this good as $r(\text{inc}) = 0$. When agent a_1 manipulates, she wins the good (as $r_{1,\text{inc}} > v_{1,\text{inc}} = 0 = r(\text{inc})$). However, as $v_{1,\text{inc}} = 0$, in both cases, her utility from this good is 0.
 - (2) If $v_{1,\text{inc}} > 0$: Whether agent a_1 says is truthful or not, she wins the good as $r_{1,\text{inc}} > v_{1,\text{inc}} > 0 = r(\text{inc})$. Thus, for this good, the agent receives the same utility (of $v_{1,\text{inc}}$) when telling the truth or lying.
- For good g_{dec} : when agent a_1 is truthful, she wins the good since $r(\text{dec}) < v_{1,\text{dec}}$:

$$\begin{aligned}
 r(\text{dec}) &= r_{1,\text{dec}} + \epsilon \\
 &= r_{1,\text{dec}} + \min\left\{\frac{1}{m-1}r_{1,\text{inc}}, \frac{1}{2}(v_{1,\text{dec}} - r_{1,\text{dec}})\right\} \\
 &\leq r_{1,\text{dec}} + \frac{1}{2}(v_{1,\text{dec}} - r_{1,\text{dec}}) \\
 &= \frac{1}{2}(v_{1,\text{dec}} + r_{1,\text{dec}}) < \frac{1}{2}(v_{1,\text{dec}} + v_{1,\text{dec}}) = v_{1,\text{dec}} \quad (\text{as } r_{1,\text{dec}} < v_{1,\text{dec}})
 \end{aligned}$$

But when agent a_1 manipulates, she loses the good since $r(\text{dec}) > r_{1,\text{dec}}$ (as $r(\text{dec}) = r_{1,\text{dec}} + \epsilon$ and $\epsilon > 0$).

As the real value of agent a_1 for this good is positive, the agent strictly prefers telling the truth for this good.

- Rest of the goods, $g_\ell \in G \setminus \{g_{\text{inc}}, g_{\text{dec}}\}$: When agent a_1 is truthful, all the outcomes are possible – the agent either wins or loses or that there is a tie.

However, as for this set of goods the reports of the other agents are $r(\ell) = r_{1,q} + \frac{1}{n-2}c > r_{1,\ell}$, when agent a_1 manipulates, she always loses the good. Thus, her utility from lying is either the same or smaller (since losing the good is the worst outcome).

Thus, the manipulation may harm the agent. \square

LEMMA 5.5. *With $m \geq 3$ goods, Normalized Utilitarian is 1-known-agent safely-manipulable.*

PROOF. Let a_1 be an agent and let $v_{1,1}, \dots, v_{1,m}$ be her values for the m goods. We need to show (1) an alternative report for agent a_1 , (2) another agent a_2 , and (3) a report agent a_2 ; such that for any combination of reports of the remaining $n - 2$ (unknown) agents, agent a_1 weakly prefers the outcome from lying, and that there exists a combination for which agent a_1 strictly prefers the outcome from lying.

Let g_{ℓ^+} be a good that agent a_1 values (i.e., $v_{1,\ell^+} > 0$).

Let a_2 be an agent different than a_1 . We consider the following report for agent a_2 : first, $r_{2,\ell^+} := 0$, and $r_{2,\ell} := r_{1,\ell} + \epsilon$ for any good g_ℓ different than g_{ℓ^+} , where $\epsilon := \frac{1}{m-1}v_{1,\ell^+}$. Notice that $\epsilon > 0$.

We shall now prove that reporting V for the good g_{ℓ^+} (and 0 for the rest of the goods) is a safe manipulation for a_1 given that a_2 reports the described above.

When agent a_1 reports her true values, then she does not win the goods different than g_{ℓ^+} – this is true regardless of the reports of the remaining $n - 2$ agents, as agent a_2 reports a higher value $r_{1,\ell} < r_{1,\ell} + \epsilon = r_{2,\ell}$. For the good g_{ℓ^+} , we only know that $r_{2,\ell^+} = 0 > v_{1,\ell^+} > r_{1,\ell^+} = V$, meaning that it depends on the reports of the $(n - 2)$ remaining agents. We consider the following cases, according to the maximum report for g_{ℓ^+} among the remaining agents:

- If the maximum is smaller than v_{1,ℓ^+} : agent a_1 wins the good v_{1,ℓ^+} in both cases (when telling the truth or lies).
(the same)
- If the maximum is greater than v_{1,ℓ^+} but smaller than $r_{1,\ell^+} = V$: when agent a_1 tells the truth, she does not win the good. However, when she lies, she does.
(lying is strictly better).
- If the maximum equals $r_{1,\ell^+} = V$: when agent a_1 tells the truth, she does not win the good. However, when she lies, we have tie for this good. Although agent a_1 is risk-averse, having a chance to win the good is strictly better than no chance at all.
(lying is strictly better).

□

LEMMA 5.15. *Fix a valuation profile and an arbitrary agent a_t . Let \mathcal{X}^{EF1} be the set of all complete EF1 allocations. Let $\mathcal{X}^{\text{EF1}^{-t}}$ be the set of all possibly partial allocations that are EF1 except for possibly a_t . The allocation in \mathcal{X}^{EF1} that maximizes agent a_t 's utility is also the one in $\mathcal{X}^{\text{EF1}^{-t}}$ that maximizes a_t 's utility.*

PROOF. Assume $t = 1$ without loss of generality. The allocation space \mathcal{X}^{EF1} is clearly a subset of $\mathcal{X}^{\text{EF1}^{-1}}$. Assume for the sake of contradiction that, for all possibly partial allocations in $\mathcal{X}^{\text{EF1}^{-1}}$, agent a_1 strongly envies someone else. Let (A_1, \dots, A_n) be an allocation that minimizes $|\bigcup_{i=1}^n A_i|$ (minimizes the total number of goods allocated) among all allocations in $\mathcal{X}^{\text{EF1}^{-1}}$.

For each $i \neq 1$, agent a_i will strongly envy some other agent if an arbitrary good is removed from A_i , for otherwise, the minimality is violated. We say that an agent a_i *champions* agent a_j if the following holds.

- a_i strongly envies a_j for $i = 1$;
- for $i \neq 1$, let agent a_i remove the most valuable good from each A_k (for $k \neq i$) and let A_k^- be the resultant bundle; then the championed agent, agent a_j , is defined by the index k with the maximum $v_i(A_k^-)$.

We then construct a *champion graph* which is a directed graph with n vertices where the vertices represent the n agents and an edge from a_i to a_j represents that agent a_i champions agent a_j . By our definition, each vertex in the graph has at least one outgoing edge, so the graph must contain a directed cycle C .

Consider a new allocation (A'_1, \dots, A'_n) defined as follows. For every edge (a_i, a_j) in C , let agent a_i remove the most valuable good from A_j and then take the bundle. We will show that $v_1(A'_1) \geq v_1(A_1)$ and $(A'_1, \dots, A'_n) \in \mathcal{X}^{\text{EF1}^{-1}}$, which will contradict the minimality of (A_1, \dots, A_n) .

It is easy to see $v_1(A'_1) \geq v_1(A_1)$. If agent a_1 is not in the cycle C , then her utility is unchanged. Otherwise, she receives a bundle that she previously strongly envies, and one good is then removed from the bundle. The property of strong envy guarantees that $v_1(A'_1) > v_1(A_1)$.

To show that $(A'_1, \dots, A'_n) \in \mathcal{X}^{\text{EF1}^{-1}}$, first consider any agent a_i with $i \neq 1$ that is not in C . Agent a_i 's bundle is unchanged, and she will not strongly envy anyone else as before (as only item-removals happen during the update).

Next consider any agent a_i with $i \neq 1$ that is in C . Let a_j be the agent such that (a_i, a_j) is an edge in C . Let A_j^- be the bundle with the most valuable good (according to v_i) removed from A_j . By our definition, agent a_i receives A_j^- in the new allocation. We will prove that agent a_i , by receiving A_j^- , does not strongly-envy any of the original bundles A_k , for any $k \in [n]$.

Our definition of championship ensures that this is true for any $k \neq i$, as the new bundle of a_i is at least as valuable for a_i than every other bundle with an item removed.

It remains to show that this holds for $k = i$. As we have argued at the beginning, in the original allocation (A_1, \dots, A_n) , removing any item from A_i would make agent a_i strongly envy some other agent. By our definition of championship, when one good g' is removed from A_i , agent a_i strongly envies a_j , which implies a_i thinks A_j^- is more valuable than $A_i \setminus \{g'\}$. Therefore, in the new allocation, by receiving A_j^- , agent a_i does not strongly envy A_i .

We have proved that agent a_i , by receiving the bundle A_j^- , does not strongly envy any of the n original bundles A_1, \dots, A_n . Since the new allocation only involves item removals, agent a_i does not strongly envy anyone else in the new allocation.

Hence, the new allocation is in $\mathcal{X}_1^{\text{EF1}}$, which contradicts the minimality of (A_1, \dots, A_n) . \square

THEOREM 5.16. *The Γ - Ψ mechanism in Sect. 5.4.1 has a RAT-degree of $n - 1$.*

PROOF. Let i, j be two arbitrary agents. Fix $n - 2$ arbitrary valuations $\{v_k\}_{k \notin \{i, j\}}$ for the remaining $n - 2$ agents. Consider two arbitrary valuations for agent a_i , v_i and v'_i , with $v_i \neq v'_i$, where v_i is a_i 's true valuation. We will show that switching from v_i to v'_i is not a safe manipulation.

Let ℓ^* be some good that a_i values positively, that is, $v_{i, \ell^*} > 0$. By the volatility of Γ , we can construct the valuation of agent a_j such that

- $v_{j, \ell^*} > 0$, and $v_{j, \ell} = 0$ for any $\ell \neq \ell^*$;
- if agent a_i truthfully reports v_i , then agent a_i is mechanism-favored and agent a_j is mechanism-unfavored; if agent a_i reports v'_i instead, then agent a_j is mechanism-favored and agent a_i is mechanism-unfavored.

Let (A_1, \dots, A_n) be the allocation output by Ψ when agent a_i reports v_i truthfully, and (A'_1, \dots, A'_n) be the allocation output by Ψ when agent a_i reports v'_i . Our objective is to show that $v_i(A_i) > v_i(A'_i)$.

Let us consider (A'_1, \dots, A'_n) first. We know that $g_{\ell^*} \in A'_j$. To see this, notice that A'_j maximizes agent a_j 's utility as long as $g_{\ell^*} \in A'_j$. In addition, there exists a valid allocation (A''_1, \dots, A''_n) output by Ψ with $g_{\ell^*} \in A'_j$: consider the round-robin mechanism with agent a_j be the first and agent a_i be the last under the order π .

Consider a new allocation (A''_1, \dots, A''_n) in which g_{ℓ^*} is moved from a_j to a_i , that is,

- $A''_i = A'_i \cup \{g_{\ell^*}\}$,
- $A''_j = A'_j \setminus \{g_{\ell^*}\}$,
- $A''_k = A'_k$ for $k \notin \{i, j\}$.

Notice that (A''_1, \dots, A''_n) is EF1 except for i :

- agent a_j will not envy any agent a_k with $k \neq i$ (as each bundle A''_k has a zero value for j), and agent a_j will not envy agent a_i upon removing the item g_{ℓ^*} from A''_i ;
- no other agent k strongly envies agent i : given that no one envies agent i in (A'_1, \dots, A'_n) (as agent i is mechanism-unfavored), no one strongly envies agent i in (A''_1, \dots, A''_n) ;
- no agent strongly envies agent a_j , as $A''_j \subseteq A'_j$;
- any two agents in $N \setminus \{a_i, a_j\}$ do not strongly envy each other, as their allocations are not changed.

Now, consider (A_1, \dots, A_n) , which is the allocation that favors agent a_i when agent a_i truthfully reports v_i . We can assume $A_j = \emptyset$ without loss of generality. If not, we can reallocate goods in A_j to the remaining $n - 1$ agents while keeping the EF1 property among the remaining $n - 1$ agents (Lemma 5.14). Agent a_j will not strongly envy anyone, as removing the good g_{ℓ^*} kills the envy. Thus, the resultant allocation is still EF1 and no one envies the empty bundle A_j . In addition, by Lemma 5.14, the utility of each agent a_k with $k \neq j$ does not decrease after the reallocation of A_j .

Let \mathcal{Y}^{EF1} be the set of all EF1 allocations of the item-set G to the agent-set $N \setminus \{a_j\}$. Let $\mathcal{Y}^{\text{EF1}-i}$ be the set of all possibly partial allocations of the item-set G to the agent-set $N \setminus \{a_j\}$ that are EF1 except

for agent i . The above argument shows that $(A_1, \dots, A_{j-1}, A_{j+1}, \dots, A_n)$ is an allocation in \mathcal{Y}^{EF1} that maximizes agent a_i 's utility. We have also proved that $(A'_1, \dots, A'_{j-1}, A'_{j+1}, \dots, A'_n) \in \mathcal{Y}^{\text{EF1}-i}$. By Lemma 5.15, we have $v_i(A_i) \geq v_i(A'_i)$. In addition, we have $A'_i = A_i \cup \{g_{\ell^*}\}$, $g_{\ell^*} \notin A'_i$, and $v_{i, \ell^*} > 0$ (by our assumption), which imply $v_i(A'_i) > v_i(A_i)$. Therefore, $v_i(A_i) > v_i(A'_i)$. \square

E Proofs for Section 6 (Cake Cutting)

THEOREM 6.2. *When there are at least three agents, Normalized Utilitarian Cake-Cutting with any tie-breaking rule has RAT-degree 1.*

PROOF. We assume without loss of generality that the value density function reported by each agent is normalized (as, otherwise, the mechanism will normalize the function for the agent).

We first show that the mechanism is not 0-known-agents safely-manipulable. Consider an arbitrary agent a_i and let v_i be her true value density function. Consider an arbitrary misreport v'_i of agent a_i with $v'_i \neq v_i$. Since the value density functions are normalized, there must exist an interval (a, b) where v'_i and v_i are constant and $v'_i(x) < v_i(x)$ for $x \in (a, b)$. Choose $\varepsilon > 0$ such that $v_i(x) > v'_i(x) + \varepsilon$. Consider the following two value density functions (note that both are normalized):

$$v^{(1)}(x) = \begin{cases} v'_i(x) + \varepsilon & \text{if } x \in (a, b) \\ v'_i(x) - \varepsilon \cdot \frac{b-a}{1+a-b} & \text{otherwise} \end{cases} \quad \text{and} \quad v^{(2)}(x) = \begin{cases} v'_i(x) - \varepsilon & \text{if } x \in (a, b) \\ v'_i(x) + \varepsilon \cdot \frac{b-a}{1+a-b} & \text{otherwise} \end{cases}.$$

Suppose the remaining $n - 1$ agents' reported value density functions are either $v^{(1)}$ or $v^{(2)}$ and each of $v^{(1)}$ and $v^{(2)}$ is reported by at least one agent (here we use the assumption $n \geq 3$). In this case, agent a_i will receive the empty set by reporting v'_i . On the other hand, when reporting v_i , agent a_i will receive an allocation that at least contains (a, b) as a subset. Since v_i has a positive value on (a, b) , reporting v'_i is not a safe manipulation.

We next show that the mechanism is 1-known-agent safely-manipulable. Suppose agent a_1 's true value density function is

$$v_1(x) = \begin{cases} 1.5 & \text{if } x \in [0, 0.5] \\ 0.5 & \text{otherwise} \end{cases},$$

and agent a_1 knows that agent a_2 reports the uniform value density function $v_2(x) = 1$ for $x \in [0, 1]$. We will show that the following manipulation of agent a_1 is safe and profitable.

$$v'_1(x) = \begin{cases} 2 & \text{if } x \in [0, 0.5] \\ 0 & \text{otherwise} \end{cases}$$

Firstly, regardless of the reports of the remaining $n - 2$ agents, the final allocation received by agent a_1 must be a subset of $[0, 0.5]$, as agent a_2 's value is higher on the other half $(0.5, 1]$. Since v'_1 is larger than v_1 on $[0, 0.5]$, any interval received by agent a_1 when reporting v_1 will also be received if v'_1 were reported. Thus, the manipulation is safe.

Secondly, if the remaining $n - 2$ agents' value density functions are

$$v_3(x) = v_4(x) = \dots = v_n(x) = \begin{cases} 1.75 & \text{if } x \in [0, 0.5] \\ 0.25 & \text{otherwise} \end{cases},$$

it is easy to verify that agent a_1 receives the empty set when reporting truthfully and she receives $[0, 0.5]$ by reporting v'_1 . Therefore, the manipulation is profitable. \square

THEOREM 6.3. *Consider the mechanism that evenly partitions each uniform segment X_t into n equal-length subintervals and allocates these n subintervals to the n agents with the left-to-right order $a_t, a_{t+1}, \dots, a_n, a_1, a_2, \dots, a_{t-1}$. It has RAT-degree $n - 1$ and always outputs envy-free allocations.*

PROOF. Envy-freeness is trivial: for any $i, j \in [n]$, we have $V_i(A_j) = \frac{1}{n}V_i([0, 1])$. The general impossibility result in Tao [2022] shows that no mechanism with the envy-freeness guarantee can be truthful, so the RAT-degree is at most $n - 1$.

To show that the RAT-degree is exactly $n - 1$, consider an arbitrary agent a_i with true value density function v_i and an arbitrary agent a_j whose report is unknown to agent a_i . Fix $n - 2$ arbitrary value density functions $\{v_k\}_{k \notin \{i, j\}}$ that are known by agent a_i to be the reports of the remaining $n - 2$ agents. For any v'_i , we will show that agent a_i 's reporting v'_i is either not safe or not profitable.

Let T be the set of points of discontinuity for $v_1, v_2, \dots, v_{j-1}, v_{j+1}, \dots, v_n$, and T' be the set of points of discontinuity with v_i replaced by v'_i . If $T \subseteq T'$ (i.e., the uniform segment partition defined by T' is "finer" than the partition defined by T), the manipulation is not profitable, as agent a_i will receive her proportional share $\frac{1}{n}V_i([0, 1])$ in both cases.

It remains to consider the case where there exists a point of discontinuity y of v_i such that $y \in T$ and $y \notin T'$. This implies that y is a point of discontinuity in v_i , but not in v'_i nor in the valuation of any other agent. We will show that the manipulation is not safe in this case.

Choose a sufficiently small $\varepsilon > 0$ such that $(y - \varepsilon, y + \varepsilon)$ is contained in a uniform segment defined by T' . We consider two cases, depending on whether the "jump" of v_i in its discontinuity point y is upwards or downwards.

Case 1: $\lim_{x \rightarrow y^-} v_i(x) < \lim_{x \rightarrow y^+} v_i(x)$. We can construct v_j such that: 1) $y - \varepsilon$ and $y + \varepsilon$ are points of discontinuity of v_j , and 2) the uniform segment $(y - \varepsilon, y + \varepsilon)$ under the profile $(v_1, \dots, v_{i-1}, v'_i, v_{i+1}, \dots, v_n)$ is the t -th segment where n divides $t - i$ (i.e., agent a_i receives the left-most subinterval of this uniform segment). Notice that 2) is always achievable by inserting a suitable number of points of discontinuity for v_j before $y - \varepsilon$. Given that $\lim_{x \rightarrow y^-} v_i(x) < \lim_{x \rightarrow y^+} v_i(x)$, agent a_i 's allocated subinterval on the segment $(y - \varepsilon, y + \varepsilon)$ has value strictly less than $\frac{1}{n}V_i([y - \varepsilon, y + \varepsilon])$.

Case 2: $\lim_{x \rightarrow y^-} v_i(x) > \lim_{x \rightarrow y^+} v_i(x)$. We can construct v_j such that 1) $(y - \varepsilon, y + \varepsilon)$ is a uniform segment under the profile $(v_1, \dots, v_{i-1}, v'_i, v_{i+1}, \dots, v_n)$, and 2) agent a_i receives the right-most subinterval on this segment. In this case, agent a_i again receives a value of strictly less than $\frac{1}{n}V_i([y - \varepsilon, y + \varepsilon])$ on the segment $(y - \varepsilon, y + \varepsilon)$.

We can do this for every point y of discontinuity of v_i that is in $T \setminus T'$. By a suitable choice of v_j (with a suitable number of points of discontinuity of v_j inserted in between), we can make sure agent a_i receives a less-than-average value on every such segment $(y - \varepsilon, y + \varepsilon)$. Moreover, agent a_i receives exactly the average value on each of the remaining segments, because the remaining discontinuity points of T are contained in T' . Therefore, the overall utility of a_i by reporting v'_i is strictly less than $\frac{1}{n}V_i([0, 1])$. Given that a_i receives value exactly $\frac{1}{n}V_i([0, 1])$ for truthfully reporting v_i , reporting v'_i is not safe. \square

E.1 Moving-knife mechanisms: descriptions and proofs

Hereafter, we assume $v_i(x) > 0$ for each $i \in [n]$ and $x \in [0, 1]$.

Dubins and Spanier's moving-knife procedure. Let $u_i = \frac{1}{n}V_i([0, 1])$ be the value of agent a_i 's proportional share. In the first iteration, each agent a_i marks a point $x_i^{(1)}$ on $[0, 1]$ such that the interval $[0, x_i^{(1)}]$ has value exactly u_i to agent a_i . Take $x^{(1)} = \min_{i \in [n]} x_i^{(1)}$, and the agent a_{i_1} with $x_{i_1}^{(1)} = x^{(1)}$ takes the piece $[0, x^{(1)}]$ and leaves the game. In the second iteration, let each of the remaining $n - 1$ agents a_i marks a point $x_i^{(2)}$ on the cake such that $[x^{(1)}, x_i^{(2)}]$ has value exactly u_i . Take $x^{(2)} = \min_{i \in [n] \setminus \{i_1\}} x_i^{(2)}$, and the agent a_{i_2} with $x_{i_2}^{(2)} = x^{(2)}$ takes the piece $[x^{(1)}, x^{(2)}]$ and leave the game. This is done iteratively until $n - 1$ agents have left the game with their allocated pieces. Finally, the only remaining agent takes the remaining part of the cake. It is easy to see that

each of the first $n - 1$ agents receives exactly her proportional share, while the last agent receives weakly more than her proportional share; hence the procedure always returns a proportional allocation.

Notice that, although the mechanism is described in an iterative interactive way that resembles an extensive-form game, we will consider the *direct-revelation* mechanisms in this paper, where the n value density functions are reported to the mechanism at the beginning. In the above description of Dubins and Spanier’s moving-knife procedure, as well as its two variants mentioned later, by saying “asking an agent to mark a point”, we refer to that the mechanism computes such a point based on the reported value density function. In particular, we do not consider the scenario where agents can adaptively choose the next marks based on the allocations in the previous iterations.

Unfortunately, it was shown by Bu et al. [2023] that Dubins and Spanier’s moving-knife procedure is safely-manipulable for some very subtle reasons.

Bu et al. [2023] proposed a variant of the moving-knife procedure that is risk-averse truthful. In addition, Bu et al. [2023] shows that another variant of moving-knife procedure proposed by Ortega and Segal-Halevi [2022] is also risk-averse truthful.⁵ Below, we will first describe both mechanisms and then show that both of them have RAT-degree 1.

Ortega and Segal-Halevi’s moving knife procedure. The first iteration of Ortega and Segal-Halevi’s moving knife procedure is the same as it is in Dubins and Spanier’s. After that, the interval $[x^{(1)}, 1]$ is then allocated *recursively* among the $n - 1$ agents $[n] \setminus \{a_i\}$. That is, in the second iteration, each agent a_i marks a point $x_i^{(2)}$ such that the interval $[x^{(1)}, x_i^{(2)}]$ has value exactly $\frac{1}{n-1}V_i([x^{(1)}, 1])$ (instead of $\frac{1}{n}V_i([0, 1])$ as it is in Dubins and Spanier’s moving-knife procedure). The remaining part is the same: the agent with the left-most mark takes the corresponding piece and leaves the game. After the second iteration, the remaining part of the cake is again recursively allocated to the remaining $n - 2$ agents. This is continued until the entire cake is allocated.

Bu, Song, and Tao’s moving knife procedure. Each agent a_i is asked to mark all the $n - 1$ “equal-division-points” $x_i^{(1)}, \dots, x_i^{(n-1)}$ at the beginning such that $V_i([x_i^{(t-1)}, x_i^{(t)}]) = \frac{1}{n}V_i([0, 1])$ for each $t = 1, \dots, n$, where we set $x_i^{(0)} = 0$ and $x_i^{(n)} = 1$. The remaining part is similar to Dubins and Spanier’s moving-knife procedure: in the first iteration, agent i_1 with the minimum $x_{i_1}^{(1)}$ takes $[0, x_{i_1}^{(1)}]$ and leave the game; in the second iteration, agent i_2 with the minimum $x_{i_2}^{(2)}$ among the remaining $n - 1$ agents takes $[x_{i_1}^{(1)}, x_{i_2}^{(2)}]$ and leave the game; and so on. The difference to Dubins and Spanier’s moving-knife procedure is that each $x_i^{(t)}$ is computed at the beginning, instead of depending on the position of the previous cut.

THEOREM E.1. *The RAT-degree of Ortega and Segal-Halevi’s moving knife procedure is 1.*

PROOF. It was proved in Bu et al. [2023] that the mechanism is not 0-known-agent safely-manipulable. It remains to show that it is 1-known-agents safely-manipulable. Suppose agent a_1 ’s value density function is uniform, $v_1(x) = 1$ for $x \in [0, 1]$, and agent a_1 knows that agent a_2 will report v_2 such that $v_2(x) = 1$ for $x \in [1 - \varepsilon, 1]$ and $v_2(x) = 0$ for $x \in [0, 1 - \varepsilon]$ for some very small $\varepsilon > 0$ with $\varepsilon \ll \frac{1}{n}$. We show that the following v_1' is a safe manipulation.

$$v_1'(x) = \begin{cases} 1 & x \in [0, \frac{n-2}{n}] \\ \frac{2}{n\varepsilon} & x \in [1 - 2\varepsilon, 1 - \varepsilon] \\ 0 & \text{otherwise} \end{cases}$$

⁵It should be noticed that, when v_i is allowed to take 0 value, tie-breaking needs to be handled very properly to ensure risk-averse truthfulness. See Bu et al. [2023] for more details.

Before we move on, note an important property of v'_1 : for any $t \leq \frac{n-2}{n}$, we have $V_1([t, 1]) = V'_1([t, 1])$.

Let $[a, b]$ be the piece received by agent a_1 when she reports v_1 truthfully. If $b \leq \frac{n-2}{n}$, the above-mentioned property implies that she will also receive exactly $[a, b]$ for reporting v'_1 . If $b > \frac{n-2}{n}$, then we know that agent a_1 is the $(n-1)$ -th agent in the procedure. To see this, we have $V_1([a, b]) \geq \frac{1}{n}([0, 1]) = \frac{1}{n}$ by the property of Ortega and Segal-Halevi's moving knife procedure, and we also have $V_1([b, 1]) = 1 - b < \frac{2}{n}$. This implies b cannot be the $1/k$ cut point of $[a, 1]$ for $k \geq 3$. On the other hand, it is obvious that agent a_2 takes a piece after agent a_1 . Thus, by the time agent a_1 takes $[a, b]$, the only remaining agent is agent a_2 .

Since there are exactly two remaining agents in the game before agent a_1 takes $[a, b]$, we have $V_1([a, 1]) \geq \frac{2}{n}V_1([0, 1]) = \frac{2}{n}$. This implies $a \leq \frac{n-2}{n}$ and $b = \frac{a+1}{2} \leq \frac{n-1}{n}$. On the other hand, by reporting v'_1 , agent a_1 can then get the piece $[a, b']$ with $b' \in [1 - 2\varepsilon, 1 - \varepsilon]$. We see that $b' > b$. Thus, the manipulation is safe and profitable. \square

THEOREM E.2. *The RAT-degree of Bu, Song, and Tao's moving knife procedure is 1.*

PROOF. It was proved in Bu et al. [2023] that the mechanism is not 0-known-agent safely-manipulable. The proof that it is 1-known-agents safely-manipulable is similar to the proof for Ortega and Segal-Halevi's moving knife procedure, with the same v_1, v'_1 and v_2 . It suffices to notice that the first $n-2$ equal-division-points are the same for v_1 and v'_1 , where the last equal-division-point of v'_1 is to the right of v_1 's. Given that agent a_2 will always receive a piece after agent a_1 , the same analysis in the previous proof can show that the manipulation is safe and profitable. \square

E.2 Additional proofs

PROPOSITION 6.6. *There exists a volatile function Γ .*

PROOF. The function does the following. It first finds the maximum value among all the value density functions (overall all uniform segments): $v^* = \max_{i \in [n], \ell \in [m]} v_i(X_\ell)$. It then views v^* as a binary string that encodes the following information:

- the index i of an agent a_i ,
- a non-negative integer t ,
- two non-negative integers a and b that are at most $n! - 1$.

We append 0's as most significant bits to v^* if the length of the binary string is not long enough to support the format of the encoding. If the encoding of v^* is longer than the length enough for encoding the above-mentioned information, we take only the least significant bits in the amount required for the encoding.

The order π is chosen in the following way. Firstly, we use an integer between 0 and $n! - 1$ to encode an order. Then, let s be the t -th bit that encodes agent a_i 's value density function. The order is defined to be $as + b \bmod (n!)$.

We now prove that Γ is volatile. Suppose v_i and v'_i differ at their t -th bits, so that that the t -th bit of v_i is s and the t -th bit of v'_i is $s' \neq s$. We construct a number v^* that encodes the index i , the integer t , and two integers a, b such that $as + b \bmod (n!)$ encodes π and $as' + b \bmod (n!)$ encodes π' .

Then, we construct v_j by rescaling \bar{v}_j such that the maximum value among all density functions is attained by v_j , and this number is exactly v^* , that is, $v^* = v_j(X_\ell)$ for some uniform segment X_ℓ . If the encoded v^* is not large enough to be a maximum value, we enlarge it as needed by adding most significant bits.

By definition, Γ returns π when a_i reports v_i and returns π' when a_i reports v'_i . \square

PROPOSITION 6.7. *The Γ - Ψ mechanism for cake-cutting always returns a Pareto-efficient allocation.*

PROOF. Suppose for the sake of contradiction that (A_1, \dots, A_n) output by the mechanism is Pareto-dominated by (A'_1, \dots, A'_n) , i.e., we have

- (1) $V_i(A'_i) \geq V_i(A_i)$ for each agent a_i , and
- (2) for at least one agent a_i , $V_i(A'_i) > V_i(A_i)$.

Property (1) above ensures (A'_1, \dots, A'_n) is proportional and thus is also in $\mathcal{X}^{\text{PROP}}$: for each $i \in [n]$, $V_i(A'_i) \geq V_i(A_i) \geq \frac{1}{n}V_i([0, 1])$ (as the allocation (A_1, \dots, A_n) is proportional). Based on the property (2), find the smallest index i such that $V_{\pi_i}(A'_i) > V_{\pi_i}(A_i)$. We see that (A_1, \dots, A_n) does not maximize the i -th agent in the order π , which contradicts the definition of the mechanism. \square

PROPOSITION 6.8. *Let $\mathcal{X}^{\text{PROP}}$ be the set of all proportional allocations for the valuation profile (v_1, \dots, v_n) . Let (A_1, \dots, A_n) be the allocation in $\mathcal{X}^{\text{PROP}}$ that maximizes agent a_i 's utility. If there exists $j \in [n] \setminus \{i\}$ such that v_i and v_j are not identical up to scaling, then $V_i(A_i) > \frac{1}{n}V_i([0, 1])$.*

PROOF. We will explicitly construct a proportional allocation (B_1, \dots, B_n) where $V_i(B_i) > \frac{1}{n}V_i([0, 1])$ if the pre-condition in the statement is satisfied. Notice that this will imply the proposition, as we are finding the allocation maximizing a_i 's utility. To construct such an allocation, we assume v_i and v_j are normalized without loss of generality (then $v_i \neq v_j$), and consider the equal division allocation where each uniform segment X_t is evenly divided. This already guarantees that agent a_i receives a value of $\frac{1}{n}V_i([0, 1])$. Since v_i and v_j are normalized and $v_i \neq v_j$, there exist two uniform segments X_{t_1} and X_{t_2} such that $v_i(X_{t_1}) > v_j(X_{t_1})$ and $v_i(X_{t_2}) < v_j(X_{t_2})$. Agent a_i and a_j can then exchange parts of their allocations on X_{t_1} and X_{t_2} to improve the utility for both of them, which guarantees the resultant allocation is still proportional. For example, set $\varepsilon > 0$ be a very small number. Agent a_i can give a length of $\frac{\varepsilon}{v_i(X_{t_2}) + v_j(X_{t_2})}$ from X_{t_2} to agent a_j , in exchange of a length of $\frac{\varepsilon}{v_i(X_{t_1}) + v_j(X_{t_1})}$ from X_{t_1} . This describes the allocation (B_1, \dots, B_n) . \square

THEOREM 6.9. *The Γ - Ψ mechanism for cake-cutting has RAT-degree $n - 1$.*

PROOF. Consider an arbitrary agent a_i with the true value density function v_i , and an arbitrary agent a_j whose reported value density function is unknown to a_i . Fix $n - 2$ arbitrary value density function $\{v_k\}_{k \notin \{i, j\}}$ for the remaining $n - 2$ agents. Consider an arbitrary manipulation $v'_i \neq v_i$.

Choose a uniform segment X_t with respect to $(v_1, \dots, v_{j-1}, v_{j+1}, \dots, v_n)$, satisfying $v_i(X_t) > 0$. Choose a very small interval $E \subseteq X_t$, such that the value density function

$$\bar{v}_j = \begin{cases} 0 & \text{if } x \in E \\ v_j(x) & \text{otherwise} \end{cases}$$

is not a scaled version of some v_k with $k \in [n] \setminus \{i, j\}$. Apply the volatility of Γ to find a value density function v_j for agent a_j that rescales \bar{v}_j such that

- (1) when agent a_i reports v_i , agent a_i is the first in the order output by Γ ;
- (2) when agent a_i reports v'_i , agent a_j is the first in the order output by Γ .

Let (A_1, \dots, A_n) and (A'_1, \dots, A'_n) be the output allocation for the profiles $\{v_k\}_{k \notin \{i, j\}} \cup \{v_i\} \cup \{v_j\}$ and $\{v_k\}_{k \notin \{i, j\}} \cup \{v'_i\} \cup \{v_j\}$ respectively. Since \bar{v}_j is not a scaled version of some v_k , its rescaled version v_j is also different. By Proposition 6.8, $V_j(A'_j) > \frac{1}{n}V_j([0, 1])$, as a_j is the highest-priority agent when a_i reports v'_i . Let D be some subset of A'_j with $V_j(D) > 0$ and $V_j(A'_j \setminus D) \geq \frac{1}{n}V_j([0, 1])$, and consider the allocation (A_1^+, \dots, A_n^+) in which D is moved from a_j to a_i , that is,

- for $k \notin \{i, j\}$, $A_k^+ = A'_k$;
- $A_i^+ = A'_i \cup D$;
- $A_j^+ = A'_j \setminus D$.

It is clear by our construction that the new allocation is still proportional with respect to $\{v_k\}_{k \notin \{i,j\}} \cup \{v'_i\} \cup \{v_j\}$. In addition, by the relation between \bar{v}_j and v_i (and thus the relation between v_j and v_i), we have $V_i(D) > 0$ based on agent a_i 's true value density function v_i . Therefore, under agent a_i 's true valuation, $V_i(A_i^+) > V_i(A_i')$.

If the allocation (A_1^+, \dots, A_n^+) is not proportional under the profile $\{v_k\}_{k \notin \{i,j\}} \cup \{v_i\} \cup \{v_j\}$ (where v'_i is changed to v_i), then the only agent for whom proportionality is violated must be agent i , that is, $V_i(A_i^+) < \frac{1}{n} V_i([0, 1])$. It then implies $V_i(A_i') < \frac{1}{n} V_i([0, 1])$. On the other hand, agent a_i receives at least her proportional share when reporting truthfully her value density function v_i . This already implies the manipulation is not safe.

If the allocation (A_1^+, \dots, A_n^+) is proportional under the profile $\{v_k\}_{k \notin \{i,j\}} \cup \{v_i\} \cup \{v_j\}$, then it is in $\mathcal{X}^{\text{PROP}}$. Since agent a_i is the first agent in the order when reporting v_i truthfully, we have $V_i(A_i) \geq V_i(A_i^+)$, which further implies $V_i(A_i) > V_i(A_i')$. Again, the manipulation is not safe. \square

PROPOSITION 6.10. *The Γ - Ψ mechanism for cake-cutting can be computed in polynomial time.*

PROOF. We first note that Γ can be computed in polynomial time. Finding v^* and reading the information of i, t, a , and b can be performed in linear time, as it mostly only requires reading the input of the instance. In particular, the lengths of a and b are both less than the input length, so $as + b$ is of at most linear length and can also be computed in linear time. Finally, the length of $n!$ is $\Theta(n \log n)$, so $as + b \bmod (n!)$ can be computed in polynomial time. We conclude that Γ can be computed in polynomial time.

We next show that Ψ can be computed by solving linear programs. Let x_{it} be the length of the t -th uniform segment allocated to agent a_i . Then an agent a_i 's utility is a linear expression $\sum_{t=1}^m v_i(X_t) x_{it}$, and requiring an agent's utility is at least some value (e.g., her proportional share) is a linear constraint. We can use a linear program to find the maximum possible utility $u_{\pi_1}^*$ for agent π_1 among all proportional allocations. In the second iteration, we write the constraint $\sum_{t=1}^m v_{\pi_1}(X_t) x_{it} \geq u_{\pi_1}^*$ for agent π_1 , the proportionality constraints for the $n - 2$ agents $[n] \setminus \{\pi_1, \pi_2\}$, and maximize agent π_2 's utility. This can be done by another linear program and gives us the maximum possible utility $u_{\pi_2}^*$ for agent π_2 . We can iteratively do this to figure out all of $u_{\pi_1}^*, u_{\pi_2}^*, \dots, u_{\pi_n}^*$ by linear programs. \square

F Proofs for Section 7 (Single-Winner Ranked Voting)

LEMMA 7.1. *In any positional voting rule for $m \geq 3$ candidates, if the number of known agents is at most $(n + 1)/m - 2$, then Alice has no safe profitable manipulation.*

PROOF. If a manipulation does not change any score, then it is clearly not profitable. So suppose the manipulation changes the score of some candidates. Let c_i be a candidate whose score increases by the largest amount by the manipulation (note that it cannot be Alice's top candidate). If there are several such candidates, choose the one that is ranked highest by Alice. Let c_j be some candidate that Alice prefers to c_i .

To show that the manipulation is not safe, suppose the unknown agents vote as follows.

- For every known agent a_i , some $m - 1$ unknown agents vote with "rotated" variants of a_i 's ranking (e.g. if a_i ranks $c_1 > c_2 > c_3 > c_4$, then three unknown agents rank $c_2 > c_3 > c_4 > c_1$, $c_3 > c_4 > c_1 > c_2$ and $c_4 > c_1 > c_2 > c_3$).
- Additional $m - 1$ unknown agents vote with rotated variants of Alice's true ranking.
- Additional $\lceil m/2 - 1 \rceil$ unknown agents rank c_i first and c_j second, and additional $\lceil m/2 - 1 \rceil$ unknown agents rank c_j first and c_i second. These $2 \lceil m/2 - 1 \rceil$ unknown agents rank the remaining $m - 2$ candidates such that each candidate appears last at least once (note that $2 \lceil m/2 - 1 \rceil \geq m - 2$ so this is possible).

- The other unknown agents, if any, abstain.

When Alice is truthful, the scores are as follows:

$$\begin{aligned} \text{score}_N(c_i) = \text{score}_N(c_j) &= (k+1) \cdot \sum_{j=1}^m s_j + (\lceil m/2 - 1 \rceil)(s_m + s_{m-1}) \\ \text{score}(c_\ell) &= (k+1) \cdot \sum_{j=1}^n s_j + S_\ell \quad \forall \ell \neq i, j \end{aligned}$$

where S_ℓ is the sum of some $2 \lceil m/2 - 1 \rceil$ scores; all these scores are at most s_{m-1} , and some of them are equal to s_1 . As $s_1 < s_m$ for any score vector, $S_\ell < (\lceil m/2 - 1 \rceil)(s_m + s_{m-1})$ for all $\ell \neq i, j$. Hence, the two candidates c_i and c_j both have a score strictly higher than every other candidate.

When Alice manipulates, the score of c_i increases by the largest amount, so c_i wins. Since $c_j \succ_A c_i$, this outcome is worse for Alice than the tie.

The number of agents required is

$$k + (m-1)k + (m-1) + 1 + 2 \lceil m/2 - 1 \rceil \leq m(k+2) - 1.$$

The condition on k in the lemma ensures that n is at least as large. \square

LEMMA 7.2. *Let $m \geq 3$ and $n \geq 2m$. If $s_2 > s_1$ and there are $k \geq \lfloor n/2 \rfloor + 1$ known agents, then switching the bottom two candidates (c_2 and c_1) may be a safe profitable manipulation for Alice.*

PROOF. Suppose there is a subset K of $\lfloor n/2 \rfloor + 1$ known agents, who vote as follows:

- $\lfloor n/2 \rfloor - 1$ known agents rank $c_2 > c_m > \dots > c_1$.
- Two known agents rank $c_m > c_2 > \dots > c_1$.
- In case n is odd, the remaining known agent abstains.

We first show that c_1 cannot win. To this end, we show that the difference in scores between c_2 and c_1 is always strictly positive.

- The difference in scores given by the known agents is

$$\text{score}_K(c_2) - \text{score}_K(c_1) = (\lfloor n/2 \rfloor - 1)(s_m - s_1) + 2(s_{m-1} - s_1).$$

- There are $\lfloor n/2 \rfloor - 1$ agents not in K (including Alice). These agents can reduce the score-difference by at most $(\lfloor n/2 \rfloor - 1)(s_m - s_1)$. Therefore,

$$\text{score}_N(c_2) - \text{score}_N(c_1) \geq 2(s_{m-1} - s_1),$$

which is positive by the assumption $s_2 > s_1$. So c_1 has no chance to win or even tie.

Therefore, switching c_2 and c_1 can never harm Alice – the manipulation is safe.

Next, we show that the manipulation can help c_m win, when the agents not in K vote as follows:

- $\lfloor n/2 \rfloor - 3$ unknown agents rank $c_m > c_2 > \dots$, where each candidate except c_1, c_2, c_m is ranked last by at least one voter (here we use the assumption $n \geq 2m$).
- One unknown agent ranks $c_2 > \dots > c_m > c_1$;
- Alice votes truthfully $c_m > \dots > c_2 > c_1$.

Then,

$$\begin{aligned} \text{score}_N(c_2) - \text{score}_N(c_m) &= (\lfloor n/2 \rfloor - 1)(s_m - s_{m-1}) + 2(s_{m-1} - s_m) \\ &\quad + (\lfloor n/2 \rfloor - 3)(s_{m-1} - s_m) + (s_m - s_2) + (s_2 - s_m) \\ &= 0. \end{aligned}$$

Moreover, for any $j \notin \{1, 2, m\}$, the score of c_j is even lower (here we use the assumption that c_j is ranked last by at least one unknown agent):

$$\begin{aligned} \text{score}_N(c_2) - \text{score}_N(c_j) &\geq (\lfloor n/2 \rfloor - 1)(s_m - s_{m-2}) + 2(s_{m-1} - s_{m-2}) \\ &\quad + (\lfloor n/2 \rfloor - 4)(s_{m-1} - s_{m-2}) + (s_{m-1} - s_1) + (s_m - s_{m-1}) + (s_2 - s_{m-1}) \\ &\geq (s_{m-1} - s_1) + (s_2 - s_{m-1}) \\ &= s_2 - s_1, \end{aligned}$$

which is positive by the lemma assumption. Therefore, when Alice is truthful, the outcome is a tie between c_m and c_2 .

If Alice switches c_1 and c_2 , then the score of c_2 decreases by $s_2 - s_1$, which is positive by the lemma assumption, and the scores of all other candidates except c_1 do not change. So c_m wins, which is better for Alice than a tie. Therefore, the manipulation is profitable. \square

LEMMA 7.3. *Let $m \geq 3$ and $n \geq 2m$. For every integer $t \in \{1, \dots, m-2\}$, if $s_{t+1} > s_t = \dots = s_1$, and there are $k \geq \lfloor n/2 \rfloor + 1$ known agents, then switching c_{t+1} and c_t may be a safe profitable manipulation.*

PROOF. Suppose there is a subset K of $\lfloor n/2 \rfloor + 1$ known agents, who vote as follows:

- $\lfloor n/2 \rfloor - 1$ known agents rank $c_{t+1} > c_m$ first and rank $c_t > \dots > c_1$ last.
- Two known agents rank $c_m > c_{t+1}$ first and rank $c_t > \dots > c_1$ last.
- In case n is odd, the remaining known agent abstains.

We first show that the t worst candidates for Alice (c_1, \dots, c_t) cannot win. Note that, by the lemma assumption $s_t = \dots = s_1$, all these candidates receive exactly the same score by all known agents. We show that the difference in scores between c_{t+1} and c_t (and hence all t worst candidates) is always strictly positive.

- The difference in scores given by the known agents is

$$\text{score}_K(c_{t+1}) - \text{score}_K(c_t) = (\lfloor n/2 \rfloor - 1)(s_m - s_1) + (s_{m-1} - s_1).$$

- There are $\lfloor n/2 \rfloor - 1$ agents not in K (including Alice). These agents can reduce the score-difference by at most $(\lfloor n/2 \rfloor - 1)(s_m - s_1)$. Therefore,

$$\text{score}_N(c_{t+1}) - \text{score}_N(c_t) \geq (s_{m-1} - s_1),$$

which is positive by the assumption $m - 2 \geq t$ and $s_{t+1} > s_t$. So no candidate in c_1, \dots, c_t has a chance to win or even tie.

Therefore, switching c_{t+1} and c_t can never harm Alice — the manipulation is safe.

Next, we show that the manipulation can help c_m win. We compute the score-difference between c_m and the other candidates with and without the manipulation.

Suppose that the agents not in K vote as follows:

- $\lfloor n/2 \rfloor - 3$ unknown agents rank $c_m > c_{t+1} > \dots$, where each candidate in c_{t+2}, \dots, c_{m-1} is ranked last by at least one voter (here we use the assumption $n \geq 2m$).
- One unknown agent ranks $c_{t+1} > \dots > c_m > c_t > \dots > c_1$;
- Alice votes truthfully $c_m > \dots > c_{t+1} > c_t > \dots > c_1$.

Then,

$$\begin{aligned} \text{score}_N(c_{t+1}) - \text{score}_N(c_m) &= (\lfloor n/2 \rfloor - 1)(s_m - s_{m-1}) + 2(s_{m-1} - s_m) \\ &\quad + (\lfloor n/2 \rfloor - 3)(s_{m-1} - s_m) + (s_m - s_{t+1}) + (s_{t+1} - s_m) \\ &= 0. \end{aligned}$$

Moreover, for any $j \in \{t+2, \dots, m-1\}$, the score of c_j is even lower (here we use the assumption that c_j is ranked last by at least one unknown agent):

$$\begin{aligned} \text{score}_N(c_{t+1}) - \text{score}_N(c_j) &\geq (\lfloor n/2 \rfloor - 1)(s_m - s_{m-2}) + 2(s_{m-1} - s_{m-2}) \\ &\quad + (\lfloor n/2 \rfloor - 4)(s_{m-1} - s_{m-2}) + (s_{m-1} - s_1) + (s_m - s_{m-1}) + (s_{t+1} - s_{m-1}) \\ &\geq (s_{m-1} - s_1) + (s_{t+1} - s_{m-1}) \\ &= s_{t+1} - s_1, \end{aligned}$$

which is positive by the lemma assumption. Therefore, when Alice is truthful, the outcome is a tie between c_m and c_{t+1} .

If Alice switches c_t and c_{t+1} , then the score of c_{t+1} decreases by $s_{t+1} - s_t$, which is positive by the lemma assumption, and the scores of all other candidates except c_t do not change. As c_t cannot win, c_m wins, which is better for Alice than a tie. Therefore, the manipulation is profitable. \square

LEMMA 7.4. *Let $m \geq 3$ and $n \geq 4$. If $s_m > s_{m-1}$ and there are $k \geq \lfloor n/2 \rfloor + 1$ known agents, then switching the top two candidates (c_m and c_{m-1}) may be a safe profitable manipulation for Alice.*

PROOF. Suppose there is a subset K of $\lfloor n/2 \rfloor + 1$ known agents, who vote as follows:

- $\lfloor n/2 \rfloor - 1$ known agents rank $c_{m-2} > c_{m-1} > \dots > c_m$.
- One known agent ranks $c_{m-2} > c_m > c_{m-1} > \dots$.
- One known agent ranks $c_{m-1} > c_{m-2} > \dots > c_m$.
- In case n is odd, the remaining known agent abstains.

We first show that c_m cannot win. To this end, we show that the difference in scores between c_{m-2} and c_m is always strictly positive.

- The difference in scores given by the known agents is

$$\begin{aligned} \text{score}_K(c_{m-2}) - \text{score}_K(c_m) &= (\lfloor n/2 \rfloor - 1)(s_m - s_1) + (s_m - s_{m-1}) + (s_{m-1} - s_1) \\ &= (\lfloor n/2 \rfloor)(s_m - s_1) \end{aligned}$$

- There are $\lfloor n/2 \rfloor - 1$ agents not in K (including Alice). These agents can reduce the score-difference by at most $(\lfloor n/2 \rfloor - 1)(s_m - s_1)$. Therefore,

$$\text{score}_N(c_{m-2}) - \text{score}_N(c_m) \geq (s_m - s_1),$$

which is positive for any score vector. So c_m has no chance to win or even tie.

Therefore, switching c_m and c_{m-1} can never harm Alice — the manipulation is safe.

Next, we show that the manipulation can help c_{m-1} win. We compute the score-difference between c_{m-1} and the other candidates with and without the manipulation.

Suppose that the agents not in K vote as follows:

- the $\lfloor n/2 \rfloor - 2$ unknown agents⁶ rank $c_{m-1} > c_{m-2} > \dots$.
- Alice votes truthfully $c_m > c_{m-1} > c_{m-2} \dots > c_1$.

Then,

$$\begin{aligned} \text{score}_N(c_{m-2}) - \text{score}_N(c_{m-1}) &= (\lfloor n/2 \rfloor - 1)(s_m - s_{m-1}) + (s_m - s_{m-2}) + (s_{m-1} - s_m) \\ &\quad + (\lfloor n/2 \rfloor - 2)(s_{m-1} - s_m) + (s_{m-2} - s_{m-1}) \\ &= (s_m - s_{m-1}), \end{aligned}$$

which is positive by the assumption $s_m > s_{m-1}$. The candidates $c_{j < m-2}$ are ranked even lower than c_{m-1} by all agents. Therefore the winner is c_{m-2} .

⁶Here we use the assumption $n \geq 4$.

If Alice switches c_{m-1} and c_m , then the score of c_{m-1} increases by $s_m - s_{m-1}$ and the scores of all other candidates except c_m do not change. Therefore, $\text{score}_N(c_{m-2}) - \text{score}_N(c_{m-1})$ becomes 0, and there is a tie between c_{m-2} and c_{m-1} , which is better for Alice by assumption. Therefore, the manipulation is profitable. \square

LEMMA 7.6. *In the plurality voting rule with $n \geq 5$ agents, if the number of known agents is at most $n/2$, then Alice has no safe profitable manipulation.*

PROOF. If a manipulation does not involve Alice's top candidate c_m , then it does not affect the outcome and cannot be profitable. So let us consider a manipulation in which Alice ranks another candidate $c_{alt}^A \neq c_m$ at the top. We show that the manipulation is not safe.

Note that there are $n - k - 1$ unknown agents; the lemma condition implies $n - k - 1 \geq n - n/2 - 1 = n/2 - 1 \geq k - 1$.

Let $c_{alt}^K = \arg \max_{j \in [m-1]} \text{score}_K(c_j)$ denote the candidate with the highest number of votes among the known agents, except Alice's top candidate (c_m). Consider the following two cases.

Case 1: $\text{score}_K(c_{alt}^K) = 0$. Since c_{alt}^K is a candidate who got the maximum number of votes from K except c_m , this implies that all k known agents either vote for c_m or abstain.

Suppose that some $k - 1$ unknown agents vote for c_{alt}^A or abstain, such that the score-difference $\text{score}(c_m) - \text{score}(c_{alt}^A) = 1$ (if there are additional agents, they abstain). Then, when Alice is truthful, her favorite candidate, c_m wins, as $\text{score}_N(c_m) - \text{score}_N(c_{alt}^A) = 2$ and the scores of all other candidates are 0. But when Alice manipulates and votes for c_{alt}^A , the outcome is a tie between c_m and c_{alt}^A , which is worse for Alice.

Case 2: $\text{score}_K(c_{alt}^K) \geq 1$. Then again the manipulations not safe, as it is possible that the unknown agents vote as follows:

- Some $\text{score}_K(c_m)$ agents vote for c_{alt}^K ;
 - Some $\text{score}_K(c_{alt}^K) - 1$ agents vote for c_m .
- This is possible as both values are non-negative and $\text{score}_K(c_m) + \text{score}_K(c_{alt}^K) \leq \sum_{j=1}^m \text{score}_K(c_j) \leq k$, so $\text{score}_K(c_m) + (\text{score}_K(c_{alt}^K) - 1) \leq k - 1 \leq$ the number of unknown agents.
- The remaining unknown agents (if any) are split evenly between c_m and c_{alt}^K ; if the number of remaining unknown agents is odd, then the extra agent abstains.

We now prove that the manipulation is harmful for Alice.

Denote $N' := N \setminus \{Alice\}$ = all agents except Alice. Then

$$\begin{aligned} \text{score}_{N'}(c_{alt}^K) &= \text{score}_K(c_m) + \text{score}_K(c_{alt}^K); \\ \text{score}_{N'}(c_m) &= \text{score}_K(c_m) + \text{score}_K(c_{alt}^K) - 1. \end{aligned}$$

so the score-difference is exactly 1.

Also, as c_{alt}^K has the largest score among the known agents, this still holds with the unknown agents, as all of them vote for either c_{alt}^K or c_m .

We claim that $\text{score}_{N'}(c_{alt}^K)$ is strictly higher than that of all other candidates. Indeed:

- If $|R| \geq 2$, then c_{alt}^K receives at least one vote from an unknown agent, whereas all other candidates except c_m receive none.
- Otherwise, $|R| \leq 1$, which means that $\text{score}_K(c_m) + \text{score}_K(c_{alt}^K) - 1 \geq n - k - 2$, so $\text{score}_{N'}(c_{alt}^K) \geq n - k - 1 \geq n/2 - 1$, which is larger than 1 since $n \geq 5$. On the other

hand, $\text{score}_K(c_m) + \text{score}_K(c_{alt}^K) - 1 \geq k - 1$, which implies that all other candidates together received at most one vote from all known agents.

Now, if Alice is truthful, the outcome is a tie between c_{alt}^K and c_m , but when she manipulates and removes her vote from c_m , the outcome is a victory for c_{alt}^K , which is worse for her.

Thus, in all cases, Alice does not have a safe profitable manipulation. \square

LEMMA 7.8. *Let $\ell \in \{2, \dots, m-1\}$ be an integer. Consider a positional voting setting with $m \geq 3$ candidates and $n \geq (\ell+1)m$ agents. Denote $s_{\text{top}:\ell} := \sum_{j=m-\ell+1}^m s_j$ = the sum of the ℓ highest scores and $s_{\text{bot}:\ell} := \sum_{j=1}^{\ell} s_j$ = the sum of the ℓ lowest scores.*

If $s_2 > s_1$ and there are k known agents, where

$$k > \frac{\ell s_m - s_{\text{bot}:\ell}}{\ell s_m + s_{\text{top}:\ell} - s_{\text{bot}:\ell} - \ell s_1} n,$$

then switching the bottom two candidates (c_2 and c_1) may be a safe profitable manipulation for Alice.

PROOF. Suppose there is a subset K of k known agents, who vote as follows:

- $k-2$ known agents rank $c_2 > c_m$, then all candidates $\{c_3, \dots, c_\ell\}$ in an arbitrary order, then the rest of the candidates in an arbitrary order, and lastly c_1 .
- Two known agents rank $c_m > c_2$, then all candidates $\{c_3, \dots, c_\ell\}$ in an arbitrary order, then the rest of the candidates in an arbitrary order, and lastly c_1 .

We first show that c_1 cannot win. Denote $L := \{c_m, c_2, c_3, \dots, c_\ell\}$. We show that the difference in scores between some of the ℓ candidates in L and c_1 is always strictly positive.

- The known agents rank all candidates in L at the top ℓ positions. Therefore, each agent gives all of them together a total score of $s_{\text{top}:\ell}$. So

$$\sum_{c \in L} (\text{score}_K(c) - \text{score}_K(c_1)) = k(s_{\text{top}:\ell} - \ell s_1).$$

- There are $n-k$ agents not in K (including Alice). Each of these agents gives all candidates in L together at least $s_{\text{bot}:\ell}$, and gives c_1 at most s_m points. Therefore, we can bound the sum of score differences as follows:

$$\begin{aligned} \sum_{c \in L} (\text{score}_N(c) - \text{score}_N(c_1)) &\geq k(s_{\text{top}:\ell} - \ell s_1) + (n-k)(s_{\text{bot}:\ell} - \ell s_m) \\ &= k(\ell s_m + s_{\text{top}:\ell} - s_{\text{bot}:\ell} - \ell s_1) + n(s_{\text{bot}:\ell} - \ell s_m). \end{aligned}$$

The assumption on k implies that this expression is positive. Therefore, for at least one $c \in L$, $\text{score}_N(c) - \text{score}_N(c_1) > 0$. So c_1 has no chance to win or even tie. Therefore, switching c_2 and c_1 is a safe manipulation.

Next, we show that the manipulation can help c_m win, when the agents not in K vote as follows:

- $k-4$ unknown agents rank $c_m > c_2 > \dots$, where each candidate except c_1, c_2, c_m is ranked last by at least one voter (here we use the assumption $n \geq (\ell+1)m$: the condition on k implies $k > n/(\ell+1) \geq m$, so $k \geq m+1$ and $k-4 \geq m-3$).
- One unknown agent ranks $c_2 > \dots > c_m > c_1$;
- Alice votes truthfully $c_m > \dots > c_2 > c_1$.
- If there are remaining unknown agents, then they are split evenly between $c_m > c_2 > \dots$ and $c_2 > c_m > \dots$ (if the number of remaining agents is odd, then the last one abstains).

Then,

$$\begin{aligned} \text{score}_N(c_2) - \text{score}_N(c_m) &= (k-2)(s_m - s_{m-1}) + 2(s_{m-1} - s_m) \\ &\quad + (k-4)(s_{m-1} - s_m) + (s_m - s_2) + (s_2 - s_m) \\ &= 0. \end{aligned}$$

Moreover, for any $j \notin \{1, 2, m\}$, the score of c_j is even lower (here we use the assumption that c_j is ranked last by at least one unknown agent):

$$\begin{aligned} \text{score}_N(c_2) - \text{score}_N(c_j) &\geq (k-2)(s_m - s_{m-2}) + 2(s_{m-1} - s_{m-2}) \\ &\quad + (k-5)(s_{m-1} - s_{m-2}) + (s_{m-1} - s_1) + (s_m - s_{m-1}) + (s_2 - s_{m-1}) \\ &\geq (s_{m-1} - s_1) + (s_2 - s_{m-1}) \\ &= s_2 - s_1, \end{aligned}$$

which is positive by the lemma assumption. Therefore, when Alice is truthful, the outcome is a tie between c_m and c_2 .

If Alice switches c_1 and c_2 , then the score of c_2 decreases by $s_2 - s_1$, which is positive by the lemma assumption, and the scores of all other candidates except c_1 do not change. So c_m wins, which is better for Alice than a tie. Therefore, the manipulation is profitable. \square

G Proofs for Section 8 (Stable Matchings)

G.1 Deferred Acceptance (Gale-Shapley): descriptions and proofs

The algorithm proceeds as follows:

- (1) Each $m \in M$ proposes to his most preferred alternative according to \succ_m that has not reject him yet and that he prefers over being matched.
- (2) Each $w \in W$ tentatively accepts her most preferred proposal according to \succ_w that she prefers over being matched, and rejects the rest.
- (3) The rejected agents propose to their next most preferred choice as in step 1.
- (4) The process repeats until no one of the rejected agents wishes to make a new proposal.
- (5) The final matching is determined by the last set of accepted proposal.

LEMMA 8.1. *In Deferred Acceptance with $k \geq 3$ known agents, there may be a safe and profitable truncation manipulation for w_1 .*

PROOF. Suppose the 3 known agents are as follows:

- Let $w_2 \in W$ be an agent whose preferences are $m_2 \succ_{w_2} m_1 \succ_{w_2} \dots$.
- The preferences of m_1 are $w_2 \succ_{m_1} w_1 \succ_{m_1} \dots$.
- The preferences of m_2 are $w_1 \succ_{m_2} w_2 \succ_{m_2} \dots$.

When w_1 is truthful, the resulting matching includes the pairs (m_1, w_2) and (m_2, w_1) , since in this case it proceeds as follows:

- In the first step, all the agents in M propose to their most preferred option: m_1 proposes to w_2 and m_2 proposes to w_1 .
Then, the agents in W tentatively accept their most preferred proposal among those received, as long as she prefers it to remaining unmatched: w_1 tentatively accepts m_2 since she prefers him over being unmatched, and since m_2 must be her most preferred option among the proposers as m_1 (her top choice) did not propose to her. Similarly, w_2 tentatively accepts m_1 .
- In the following steps, more rejected agents in M might propose to w_1 and w_2 , but they will not switch their choices, as they prefer m_2 and m_1 , respectively.

Thus, when the algorithm terminates m_1 is matched to w_2 and m_2 is matched to w_1 , which means that w_1 is matched to her second-best option.

We shall now see that w_1 can increase her utility by truncating her preference order to $m_1 \succ'_{w_1} \phi \succ'_{w_1} m_2 \succ'_{w_1} \dots$. The following shows that in this case, the resulting matching includes the pairs (m_1, w_1) and (m_2, w_2) , meaning that w_1 is matched to her most preferred option (instead of her second-best).

- In the first step, as before, m_1 proposes to w_2 and m_2 proposes to w_1 . However, here, w_1 rejects m_2 because, according to her false report, she prefers being unmatched over being matched to m_2 . As before, w_2 tentatively accepts m_1 .
- In the second step, m_2 , having been rejected by w_1 , proposes to his second-best choice w_2 . Since w_2 prefers m_2 over m_1 , she rejects m_1 and tentatively accepts m_2 .
- In the third step, m_1 , having been rejected by w_2 , proposes to his second-best choice w_1 . w_1 now tentatively accepts m_1 since according to her false report, she prefers him over being unmatched.
- In the following steps, more rejected agents in M might propose to w_1 and w_2 , but they will not switch their choices, as they prefer m_2 and m_1 , respectively. Thus, when the algorithm terminates m_1 will be matched to w_1 and m_2 will be matched to w_2 .

Thus, regardless of the reports of the remaining $(n - 4)$ remaining (unknown) agents, w_1 strictly prefers to manipulate her preferences. \square

LEMMA 8.2. *In Deferred Acceptance without truncation, with $k \geq 5$ known agents, there may be a safe and profitable reorder manipulation for w_1 .*

PROOF. Suppose the 5 known agents are as follows:

- Let $w_2 \in W$ be an agent whose preferences are $m_1 \succ_{w_2} m_2 \succ_{w_2} m_3 \succ_{w_2} \dots$.
- Let $w_3 \in W$ be an agent whose preferences are $m_2 \succ_{w_3} m_1 \succ_{w_3} m_3 \succ_{w_3} \dots$.
- The preferences of m_1 are $w_3 \succ_{m_1} w_1 \succ_{m_1} w_2 \succ_{m_1} \dots$.
- The preferences of m_2 are $w_1 \succ_{m_2} w_3 \succ_{m_2} w_2 \succ_{m_2} \dots$.
- The preferences of m_3 are $w_1 \succ_{m_3} w_3 \succ_{m_3} w_2 \succ_{m_3} \dots$.

When w_1 is truthful, the resulting matching includes the pairs (m_1, w_3) , (m_2, w_1) and (m_3, w_2) , since in this case it proceeds as follows:

- In the first step, all the agents in M propose to their most preferred option: m_1 proposes to w_3 , while m_2 and m_3 proposes to w_1 . Then, the agents in W tentatively accept their most preferred proposal among those received. w_1 tentatively accepts m_2 since he must be her most preferred option among the proposers – as he is her second-best and her top choice, m_1 , did not propose to her; and rejects m_3 . Similarly, w_3 tentatively accepts m_1 . w_2 did not get any proposes.
- In the second step, m_3 , having been rejected by w_1 , proposes to his second-best choice w_3 . Since w_3 prefers her current match m_1 over m_3 , she rejects m_3 .
- In the third step, m_3 , having been rejected by w_3 , proposes to his third-best choice w_2 . Since w_2 does not have a match, she tentatively accepts m_3 .
- In the following steps, more rejected agents in M – that are not m_1, m_2 and m_3 , might propose to w_1, w_2 and w_3 , but they will not switch their choices, as they can only be least preferred than their current match. Thus, when the algorithm terminates m_1 is matched to w_3 , m_2 is matched to w_1 , and m_3 is matched to w_2 , which means that w_1 is matched to her second-best option.

But if w_1 swaps m_2 and m_3 and reports $m_1 \succ'_{w_1} m_3 \succ'_{w_1} m_2 \succ'_{w_1} \dots$, then the resulting matching includes the pairs (m_1, w_1) , (m_2, w_3) and (m_3, w_2) , meaning that w_1 is matched to her most preferred option (instead of her second-best).

- In the first step, as before, m_1 proposes to w_3 , while m_2 and m_3 proposes to w_1 . However, here, w_1 tentatively accepts m_3 and rejects m_2 . As before, w_3 tentatively accepts m_1 and w_2 did not get any proposes.
- In the second step, m_2 , having been rejected by w_1 , proposes to his second-best choice w_3 . Since w_3 prefers m_2 over m_1 , she rejects m_1 and tentatively accepts m_2 .
- In the third step, m_1 , having been rejected by w_3 , proposes to his second-best choice w_1 . w_1 tentatively accepts m_1 since according to her false report, she prefers him over m_3 .
- In the fourth step, m_3 , having been rejected by w_1 , proposes to his second-best choice w_3 . w_3 prefers her current match m_2 , and thus rejects m_3 .
- In the fifth step, m_3 , having been rejected by w_3 , proposes to his third-best choice w_2 . As w_2 does not have a match, she tentatively accepts m_3 .
- In the following steps, more rejected agents in M - that are not m_1, m_2 and m_3 , might propose to w_1, w_2 and w_3 , but they will not switch their choices, as they can only be least preferred than their current match.

Thus, when the algorithm terminates m_1 is matched to w_1 , m_2 is matched to w_3 , and m_3 is matched to w_2 .

Thus, regardless of the reports of the remaining $(n - 6)$ remaining (unknown) agents report, w_1 strictly prefers to manipulate her preferences. \square

LEMMA 8.3. *In Deferred Acceptance, no agent has a safe manipulation.*

PROOF. We consider each of the three possible kinds of manipulations, and show that each of them is not safe for w_1 .

Demoting some $m_j \in M$ to below ϕ . For some unknown agents' rankings, m_j is the only one who proposes to w_1 . Therefore, when w_1 demotes m_j she rejects him and remains unmatched, but when she is truthful she is matched to him, which is better for her.

Promoting some $m_j \in M$ to above ϕ . An analogous argument works in this case too.

Reordering some $m_i, m_j \in M$. For some unknown agents' rankings, m_i and m_j are the only ones who propose to w_1 , and they do so simultaneously. Therefore, when w_1 is truthful she is matched to the one she prefers, but when she manipulates she rejects him in favor of the less-preferred one.

In all three cases, the manipulation is not safe. \square

G.2 Boston Mechanism: descriptions and proofs

The mechanism proceeds in rounds as follows:

- (1) Each $m \in M$ proposes to his most preferred alternative according \succ_m that has not yet rejected him and is still available.
- (2) Each $w \in W$ (permanently) accepts her most preferred proposal according to \succ_w and rejects the rest. Those who accept a proposal become unavailable.
- (3) The rejected agents propose to their next most preferred choice as in step 1.
- (4) The process repeats until all agents are either assigned or have exhausted their preference lists.

LEMMA 8.5. *In the Boston Mechanism with $k \geq 2$ known agents, there may be a safe and profitable reorder manipulation for some $m_1 \in M$.*

PROOF. Let $m_1 \in M$ be an agent with preferences $w_1 \succ_{m_1} w_2 \succ_{m_1} \dots$. Suppose the two known agents are as follows:

- Let $m_2 \in M$ be an agent whose preferences are similar to m_1 , $w_1 \succ_{m_2} w_2 \succ_{m_2} \dots$.
- The preferences of w_1 are $m_2 \succ_{w_1} m_1 \succ_{w_1} \dots$.

When m_1 reports truthfully, the mechanism proceeds as follows: In the first round, both m_1 and m_2 proposes to w_1 . Since w_1 prefers m_2 , she rejects m_1 and becomes unavailable. Thus, in the second round, m_1 proposes to w_2 .

We prove that m_1 has a safe-and-profitable manipulation: $w_2 \succ'_{m_1} w_3 \succ'_{m_1} \dots \succ'_{m_1} w_1$. The manipulation is safe since m_1 never had a chance to be matched with w_1 (regardless of his report). The manipulation is profitable as there exists a case where the manipulation improves m_1 's outcome. Consider the case where the top choice of w_2 is m_1 and there is another agent, m_3 , whose top choice is w_2 . Notice that w_2 prefers m_1 over m_3 . When m_1 reports truthfully, then in the first round, m_3 proposes to w_2 and gets accepted, making her unavailable by the time m_1 reaches her in the second round. However, if m_1 manipulates, he proposes to w_2 in the first round, and she will accept him (as she prefers him over m_3). This guarantees that m_1 is matched to w_2 , improving his outcome compared to truthful reporting. \square

THEOREM 8.6. *The RAT-degree of the Boston mechanism is at most 2.*