

Note on the 2-component Analogue of 2-dimensional Long Wave-Short Wave Resonance Interaction System

Ken-ichi Maruno

Department of Mathematics, The University of Texas-Pan American, Edinburg, TX 78541

Yasuhiro Ohta

Department of Mathematics, Kobe University, Rokko, Kobe 657-8501, Japan

Masayuki Oikawa

Research Institute for Applied Mechanics, Kyushu University, Kasuga, Fukuoka, 816-8580, Japan

November 17, 2018

Abstract

An integrable two-component analogue of the two-dimensional long wave-short wave resonance interaction (2c-2d-LSRI) system is studied. Wronskian solutions of 2c-2d-LSRI system are presented. A reduced case, which describes resonant interaction between an interfacial wave and two surface wave packets in a two layer fluid, is also discussed.

2000 Mathematics Subject Classification. 35Q51, 35Q55, 37K40

1 Introduction

In these past decades, vector soliton equations have received so much attention in mathematical physics and nonlinear physics [1, 2, 3, 4]. Recently, we derived the following system in a two-layer fluid using reductive perturbation method, which was motivated by a paper by Onorato et. al. [5, 6]:

$$\begin{aligned} i(S_t^{(1)} + S_y^{(1)}) - S_{xx}^{(1)} + LS^{(1)} &= 0, & i(S_t^{(2)} - S_y^{(2)}) - S_{xx}^{(2)} + LS^{(2)} &= 0, \\ L_t &= 2(|S^{(1)}|^2 + |S^{(2)}|^2)_x. \end{aligned} \quad (1)$$

This system is an extension of the two-dimensional long wave-short wave resonance interaction system[7, 8] and describes the two-dimensional resonant interaction between an interfacial gravity wave and two surface gravity packets propagating in directions symmetric about the propagation direction of the interfacial wave in a two-layer fluid.

In this paper, we will study this system and its integrable modification,

$$\begin{aligned} i(S_t^{(1)} + S_y^{(1)}) - S_{xx}^{(1)} + LS^{(1)} &= 2iS^{(2)*} Q, \\ i(S_t^{(2)} - S_y^{(2)}) - S_{xx}^{(2)} + LS^{(2)} &= 2iS^{(1)*} Q, \\ L_t &= 2(|S^{(1)}|^2 + |S^{(2)}|^2)_x, \quad Q_x = S^{(1)}S^{(2)}. \end{aligned} \quad (2)$$

where $*$ means complex conjugate. In our recent paper [9], we studied

$$\begin{aligned} i(S_t^{(1)} + S_y^{(1)}) - S_{xx}^{(1)} + LS^{(1)} &= 0, \quad i(S_t^{(2)} + S_y^{(2)}) - S_{xx}^{(2)} + LS^{(2)} = 0, \\ L_t &= 2(|S^{(1)}|^2 + |S^{(2)}|^2)_x. \end{aligned} \quad (3)$$

Note that this system is different from the system (1) only in the sign of y -derivative term $S_y^{(2)}$.

2 Bilinear Forms and Wronskian Solutions

Consider a two-component analogue of two-dimensional long wave-short wave resonance interaction (2c-2d-LSRI) system (2). Using the dependent variable transformation $L = -(2 \log F)_{xx}$, $S^{(1)} = G/F$, $S^{(2)} = H/F$, $Q = -K^*/F$, we obtain

$$\begin{aligned} (D_x^2 - i(D_t + D_y))G \cdot F &= 2iH^*K^*, & D_x D_t F \cdot F &= -2(GG^* + HH^*), \\ (D_x^2 - i(D_t - D_y))H \cdot F &= 2iG^*K^*, & D_x K \cdot F &= -G^*H^*. \end{aligned} \quad (4)$$

These bilinear forms have the three-component Wronskian solution [10, 11, 12].

Consider the following three-component Wronskian:

$$\tau_{NML} = \begin{vmatrix} \varphi & \psi & \chi \end{vmatrix},$$

where φ , ψ and χ are $(N + M + L) \times N$, $(N + M + L) \times M$ and $(N + M + L) \times L$ matrices, respectively: $\varphi = (\partial_{x_1}^{j-1} \phi_i)_{\substack{1 \leq j \leq N \\ 1 \leq i \leq N+M+L}}$, $\psi = (\partial_{x_1}^{j-1} \psi_i)_{\substack{1 \leq j \leq M \\ 1 \leq i \leq N+M+L}}$ and $\chi = (\partial_{x_1}^{j-1} \chi_i)_{\substack{1 \leq j \leq L \\ 1 \leq i \leq N+M+L}}$, and ϕ_i is an arbitrary function of x_1 and x_2 satisfying $\partial_{x_2} \phi_i = \partial_{x_1}^2 \phi_i$, and ψ_i and χ_i are arbitrary functions of y_1 and z_1 , respectively. The above Wronskian satisfies

$$\begin{aligned} (D_{x_1}^2 - D_{x_2})\tau_{N+1,M-1,L} \cdot \tau_{NML} &= 0, & (D_{x_1}^2 - D_{x_2})\tau_{N+1,M,L-1} \cdot \tau_{NML} &= 0, \\ D_{x_1} D_{y_1} \tau_{NML} \cdot \tau_{NML} &= 2\tau_{N+1,M-1,L} \tau_{N-1,M+1,L}, \\ D_{x_1} D_{z_1} \tau_{NML} \cdot \tau_{NML} &= 2\tau_{N+1,M,L-1} \tau_{N-1,M,L+1}, \\ D_{x_1} \tau_{N,M+1,L-1} \cdot \tau_{NML} &= -\tau_{N-1,M+1,L} \tau_{N+1,M,L-1}, \\ D_{y_1} \tau_{N-1,M,L+1} \cdot \tau_{NML} &= -\tau_{N,M-1,L+1} \tau_{N-1,M+1,L}, \\ D_{z_1} \tau_{N+1,M-1,L} \cdot \tau_{NML} &= -\tau_{N+1,M,L-1} \tau_{N,M-1,L+1}. \end{aligned}$$

Setting

$$\begin{aligned} f &= \tau_{NML}, & g &= \tau_{N+1,M-1,L}, & h &= \tau_{N-1,M,L+1}, & k &= \tau_{N,M+1,L-1}, \\ \bar{g} &= \tau_{N-1,M+1,L}, & \bar{h} &= \tau_{N+1,M,L-1}, & \bar{k} &= \tau_{N,M-1,L+1}, \end{aligned}$$

we have the following bilinear forms:

$$\begin{aligned}
(D_{x_1}^2 - D_{x_2})g \cdot f &= 0, & (D_{x_1}^2 + D_{x_2})\bar{g} \cdot f &= 0, & D_{x_1}D_{y_1}f \cdot f &= 2g\bar{g}, \\
(D_{x_1}^2 + D_{x_2})h \cdot f &= 0, & (D_{x_1}^2 - D_{x_2})\bar{h} \cdot f &= 0, & D_{x_1}D_{z_1}f \cdot f &= 2h\bar{h}, \\
D_{x_1}k \cdot f &= -\bar{g}\bar{h}, & D_{y_1}h \cdot f &= -\bar{g}\bar{k}, & D_{z_1}g \cdot f &= -\bar{h}\bar{k}, \\
D_{x_1}\bar{k} \cdot f &= gh, & D_{y_1}\bar{h} \cdot f &= gk, & D_{z_1}\bar{g} \cdot f &= hk.
\end{aligned}$$

By the change of independent variables $x_1 = x$, $x_2 = -iy$, $y_1 = y - t$, $z_1 = -y - t$ (x, y, t : real), we have $\partial_x = \partial_{x_1}$, $\partial_y = -i\partial_{x_2} + \partial_{y_1} - \partial_{z_1}$, $\partial_t = -\partial_{y_1} - \partial_{z_1}$. Thus we obtain

$$\begin{aligned}
(D_x^2 - i(D_t + D_y))g \cdot f &= -2i\bar{h}\bar{k}, & (D_x^2 + i(D_t + D_y))\bar{g} \cdot f &= -2ihk, \\
(D_x^2 - i(D_t - D_y))h \cdot f &= -2i\bar{g}\bar{k}, & (D_x^2 + i(D_t - D_y))\bar{h} \cdot f &= -2igk, \\
D_x D_t f \cdot f &= -2(g\bar{g} + h\bar{h}), & D_x k \cdot f &= -\bar{g}\bar{h}, & D_x \bar{k} \cdot f &= gh.
\end{aligned}$$

Consider solutions satisfying the following condition

$$\bar{g}\mathcal{G} = (g\mathcal{G})^*, \quad \bar{h}\mathcal{G} = (h\mathcal{G})^*, \quad \bar{k}\mathcal{G} = -(k\mathcal{G})^*, \quad f\mathcal{G} : \text{real}, \quad (5)$$

where \mathcal{G} is a gauge factor. Then, for $F = f\mathcal{G}$, $G = g\mathcal{G}$, $H = h\mathcal{G}$, $K = k\mathcal{G}$, we will obtain the bilinear equations of the 2c-2d-LSRI system (4). Thus the 2c-2d-LSRI system has a three-component Wronskian solution.

To satisfy the condition (5), we consider the following constrained case: $N = M + L$, $\psi_i = 0$ for $2M + 1 \leq i \leq 2M + 2L$, $\chi_i = 0$ for $1 \leq i \leq 2M$ and

$$\begin{aligned}
\varphi_i &= e^{\xi_i}, & \varphi_{M+i} &= e^{-\xi_i^*}, & \xi_i &= p_i x_1 + p_i^2 x_2, \\
\psi_i &= a_i e^{\eta_i}, & \psi_{M+i} &= a_{M+i} e^{-\eta_i^*}, & \eta_i &= q_i y_1 + \eta_{i0},
\end{aligned}$$

for $i = 1, 2, \dots, M$, and

$$\begin{aligned}
\varphi_{2M+i} &= e^{\theta_i}, & \varphi_{2M+L+i} &= e^{-\theta_i^*}, & \theta_i &= s_i x_1 + s_i^2 x_2, \\
\chi_{2M+i} &= b_i e^{\zeta_i}, & \chi_{2M+L+i} &= b_{L+i} e^{-\zeta_i^*}, & \zeta_i &= r_i z_1 + \zeta_{i0},
\end{aligned}$$

for $i = 1, 2, \dots, L$, where p_i , s_i , q_i , r_i are wave numbers and η_{i0} , ζ_{i0} are phase constants. The parameters a_i and b_i must be determined from the condition of complex conjugacy. By using the standard technique [13], a_i and b_i are determined as

$$\begin{aligned}
a_i &= \prod_{\substack{k=1 \\ k \neq i}}^M \frac{p_k - p_i}{q_k - q_i} \prod_{k=1}^M \frac{p_k^* + p_i}{q_k^* + q_i}, & a_{M+i} &= \prod_{k=1}^L (s_k + p_i^*)(s_k^* - p_i^*), \quad 1 \leq i \leq M, \\
b_i &= \prod_{\substack{k=1 \\ k \neq i}}^L \frac{s_k - s_i}{r_k - r_i} \prod_{k=1}^L \frac{s_k^* + s_i}{r_k^* + r_i}, & b_{L+i} &= \prod_{k=1}^M (p_k + s_i^*)(p_k^* - s_i^*), \quad 1 \leq i \leq L,
\end{aligned}$$

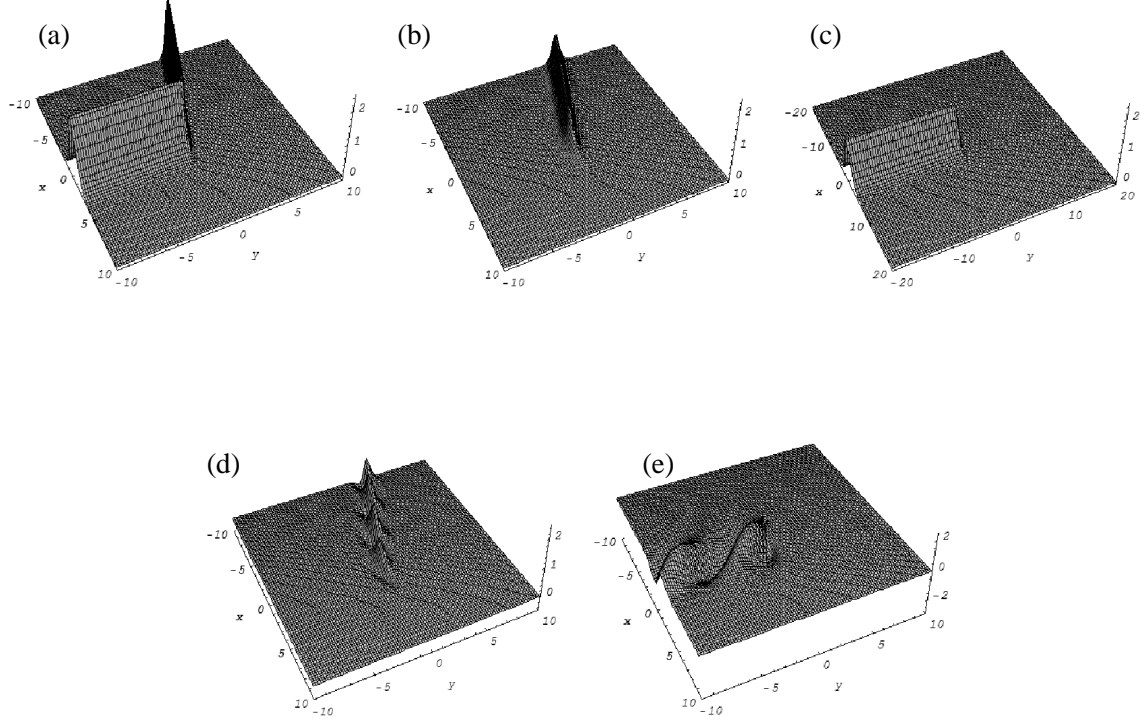


Figure 1: Single line soliton of eqs.(2), which is obtained by tau-functions of (6). (a) $-L$, (b) $|S^{(1)}|$, (c) $|S^{(2)}|$, (d) $\text{Re}[S^{(1)}]$, (e) $\text{Re}[S^{(2)}]$. The parameters are $p = 1 + i, q = -1 + 2i, r = -2 + i$.

and the condition (5) is satisfied for the gauge factor,

$$\mathcal{G} = \prod_{1 \leq i < j \leq M} (p_j^* - p_i^*)(q_i - q_j) \prod_{1 \leq i < j \leq L} (s_j^* - s_i^*)(r_i - r_j) \prod_{i=1}^M \prod_{j=1}^L (p_i - s_j) \\ \times e^{\sum_{i=1}^M (\xi_i^* - \eta_i) + \sum_{j=1}^L (\theta_j^* - \zeta_j)}.$$

This solution represents the $(M + L)$ -soliton, i.e., M solitons propagate on the first component of short wave $S^{(1)}$ whose complex wave numbers are given by p_i, q_i and complex phase constants are η_{i0} , and L solitons propagate on the second one $S^{(2)}$ whose complex wave numbers and phase constants are s_i, r_i and ζ_{i0} .

For instance by taking $M = L = 1$, (1+1)-soliton solution is given as

$$\mathcal{G}f = c \left(\frac{p + p^*}{q + q^*} \frac{s + s^*}{r + r^*} \frac{1}{|p + s^*|^2} - \frac{s + s^*}{r + r^*} e^{\xi + \xi^* - \eta - \eta^*} - \frac{p + p^*}{q + q^*} e^{\theta + \theta^* - \zeta - \zeta^*} \right. \\ \left. + |p - s|^2 e^{\xi + \xi^* - \eta - \eta^* + \theta + \theta^* - \zeta - \zeta^*} \right),$$

$$\begin{aligned}
Gg &= c(p+p^*)e^{\xi-\eta} \left(\frac{s+s^*}{r+r^*} \frac{1}{p^*+s} - (p-s)e^{\theta+\theta^*-\zeta-\zeta^*} \right), \\
Gh &= -c(s+s^*)e^{\theta^*-\zeta^*} \left(\frac{p+p^*}{q+q^*} \frac{1}{p^*+s} + (p^*-s^*)e^{\xi+\xi^*-\eta-\eta^*} \right), \\
Gk &= c \frac{(p+p^*)(s+s^*)}{p+s^*} e^{\xi^*-\eta^*+\theta-\zeta},
\end{aligned}$$

where $c = -|(p-s)(p+s^*)|^2$ and we dropped the index 1 for simplicity. In order to satisfy the regularity condition $f \neq 0$, we can take $\text{Re } p > 0$, $\text{Re } s > 0$, $\text{Re } q < 0$ and $\text{Re } r < 0$. After removing the gauge and constant factors, by choosing the same wave number in x direction for the above two solitons, i.e., $s = p$, we obtain the single soliton solution,

$$\begin{aligned}
f &= \frac{1}{p+p^*} - e^{\xi+\xi^*} ((q+q^*)e^{-\eta-\eta^*} + (r+r^*)e^{-\zeta-\zeta^*}), \\
g &= (q+q^*)e^{\xi-\eta}, \quad h = -(r+r^*)e^{\xi^*-\zeta^*}, \quad k = (q+q^*)(r+r^*)e^{\xi+\xi^*-\eta^*-\zeta}, \quad (6)
\end{aligned}$$

where $\xi = px - ip^2y$, $\eta = q(y-t) + \eta_0$ and $\zeta = -r(y+t) + \zeta_0$. Figure 1 shows the plots of this single soliton solution. L shows V-shape soliton, $|S^{(1)}|$ and $|S^{(2)}|$ shows solitoff behaviour [14].

3 Solutions in the case without Q

We consider the 2c-2d-LSRI system (1) without the fourth field Q in (2). This system (1) describes waves in the two-layer fluid. Setting $L = -(2 \log F)_{xx}$, $S^{(1)} = G/F$, $S^{(2)} = H/F$, we have

$$\begin{aligned}
[i(D_t + D_y) - D_x^2]G \cdot F &= 0, & [i(D_t - D_y) - D_x^2]H \cdot F &= 0, \\
-(D_t D_x - 2c)F \cdot F &= 2GG^* + 2HH^*.
\end{aligned}$$

Here we consider the case of $c = 0$.

Using the procedure of the Hirota bilinear method, we obtain the single soliton solution

$$\begin{aligned}
F &= 1 + A_{11} \exp(\eta_1 + \eta_1^*), \quad G = a_1 \exp(\eta_1), \quad H = b_1 \exp(\xi_1), \\
\eta_j &= p_j x + iq_j y + \lambda_j t + \eta_j^{(0)}, \quad \xi_j = p_j x - iq_j y + \lambda_j t + \eta_j^{(0)}, \\
A_{11} &= -\frac{a_1 a_1^* + b_1 b_1^*}{(p_1 + p_1^*)(\lambda_1 + \lambda_1^*)}, \quad \lambda_1 = -ip_1^2 - iq_1.
\end{aligned}$$

Here q_j is a real number. We can rewrite A_{11} as

$$A_{11} = -\frac{a_1 a_1^* + b_1 b_1^*}{(p_1 + p_1^*)^2 (ip_1^* - ip_1)}.$$

Thus we have

$$S^{(1)} = \frac{a_1 \exp(\eta_1)}{1 + A_{11} \exp(\eta_1 + \eta_1^*)}, \quad S^{(2)} = \frac{b_1 \exp(\xi_1)}{1 + A_{11} \exp(\eta_1 + \eta_1^*)},$$

$$L = -2 \frac{\partial^2}{\partial x^2} \log(1 + A_{11} \exp(\eta_1 + \eta_1^*)).$$

Since $|S^{(1)}|^2 = GG^*/F^2$, $|S^{(2)}|^2 = HH^*/F^2$, $L = -2 \frac{\partial^2}{\partial x^2} \log F$ do not include y , all solitons propagate in the x direction.

There is an exact solution depending on y -variable,

$$S^{(1)} = \frac{A_1 \exp(px + qy + rt)}{1 + \exp(2(px + qy + rt))} \exp(i(k_1 x + l_1 y + m_1 t)),$$

$$S^{(2)} = \frac{A_2 \exp(px + qy + rt)}{1 + \exp(2(px + qy + rt))} \exp(i(k_2 x + l_2 y + m_2 t)),$$

$$L = \frac{A \exp(2(px + qy + rt))}{(1 + \exp(2(px + qy + rt)))^2},$$

where $p, q, r, k_1, l_1, m_1, k_2, l_2, m_2, A_1, A_2, A$ satisfy the relations $r = (k_1 + k_2)p$, $q = (k_1 - k_2)p$, $m_1 = k_1^2 - l_1 - p^2$, $m_2 = k_2^2 + l_2 - p^2$, $A = -8p^2$, $A_1^2 + A_2^2 = -4(k_1 + k_2)p^2$, and p, q, k_1, l_1, l_2 are arbitrary parameters. In figure 2, we see that waves in $S^{(1)}$ and $S^{(2)}$ have different modulation property, i.e., carrier waves in $S^{(1)}$ and $S^{(2)}$ has different directions of propagation. Note that the solutions of equations (2) also have this property.

It seems that eqs.(1) are nonintegrable and do not admit general N -soliton solution. Similar system (2) has an N -soliton solution, but its physical derivation has not been done yet.

4 Concluding Remarks

We have studied solutions of a new integrable two-component two-dimensional long wave-short wave resonant interaction (2c-2d LSRI) system (2). We presented a Wronskian formula for 2c-2d LSRI system (2) with complex conjugacy condition. We have also presented solutions of the system (1) in the case of two-layer fluid, i.e. the 2c-2d LSRI system without Q . In this case, the system (1) seems to be non-integrable, i.e. the system (1) does not have multi-soliton solutions. We have found that waves in $S^{(1)}$ and $S^{(2)}$ in both systems have different modulation property, i.e., carrier waves in $S^{(1)}$ and $S^{(2)}$ has different directions of propagation. But the system (2) has much more interesting solutions such as the V-shape soliton and solitoff because of integrability.

One of authors (K. M.) wishes to acknowledge organizers for providing the financial support for the ISLAND 3 (Integrable Systems: Linear And Nonlinear Dynamics 3) conference.

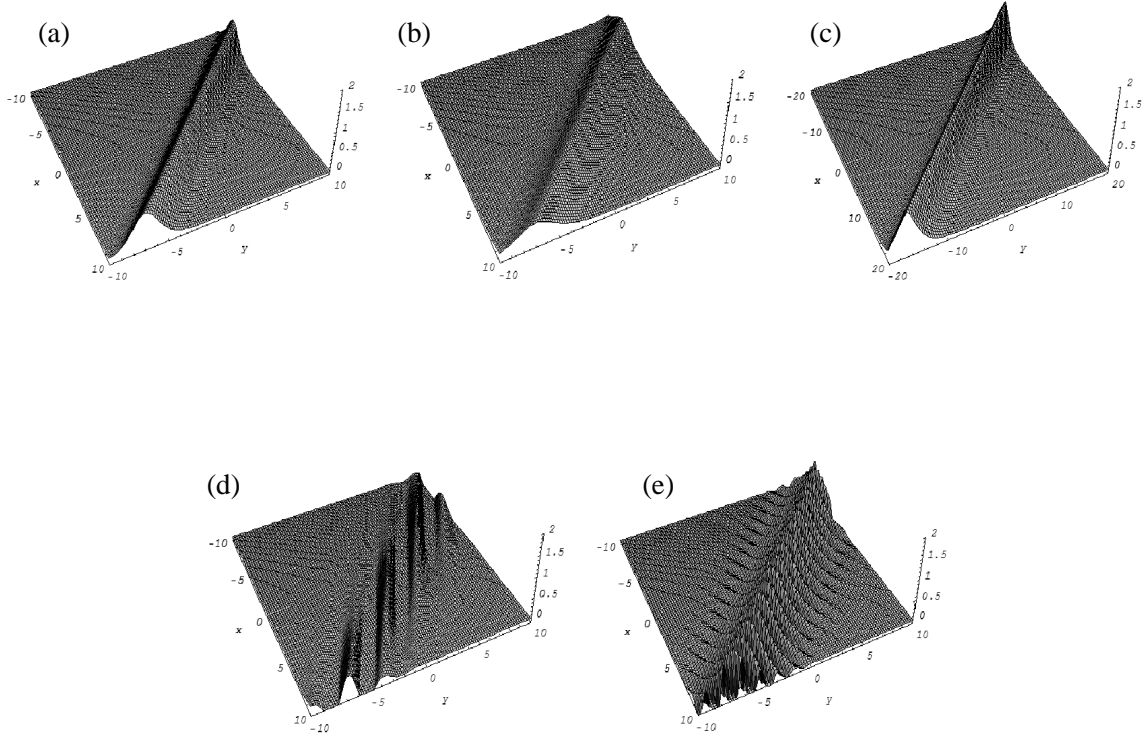


Figure 2: Line soliton of eqs.(1). (a) $-L$, (b) $|S^{(1)}|$, (c) $|S^{(2)}|$, (d) $\text{Re}[S^{(1)}]$, (e) $\text{Re}[S^{(2)}]$. The parameters are $k_1 = -1, k_2 = -2, A_1 = 1, A_2 = 2, l_1 = 3, l_2 = 4$.

References

- [1] M. J. Ablowitz, B. Prinari and A. D. Trubatch, *Discrete and Continuous Nonlinear Schrödinger Systems*, (Cambridge University Press, 2004).
- [2] S. V. Manakov, *On the theory of two-dimensional stationary self-focusing of electromagnetic waves*, Sov. Phys. JETP **38** (1974), 248–253.
- [3] R. Radhakrishnan, M. Lakshmanan, and J. Hietarinta, *Inelastic collision and switching of coupled bright solitons in optical fibers*, Phys. Rev. E **56** (1997), 2213–2216.
- [4] M. J. Ablowitz, B. Prinari and A. D. Trubatch, *Soliton interactions in the vector NLS equation*, Inv. Probl. **20** (2004), 1217–1237.

- [5] M. Oikawa, Y. Ohta, K. Maruno, In preparation : Talk at the RIAM conference 2006, Kyushu University.
- [6] M. Onorato, A. R. Osborne and M. Serio, *Modulational Instability in Crossing Sea States: A Possible Mechanism for the Formation of Freak Waves*, Phys. Rev. Lett. **96** (2006), 014503-1–014503-4.
- [7] N. Yajima and M. Oikawa, *Formation and interaction of sonic-Langmuir solitons –inverse scattering method*, Prog. Theor. Phys. **56** (1976), 1719–1739.
- [8] M. Oikawa, M. Okamura and M. Funakoshi, *Two-Dimensional Resonant Interaction between Long and Short Waves*, J. Phys. Soc. Jpn. **58** (1989), 4416–4430.
- [9] Y. Ohta, K. Maruno and M. Oikawa, *Two-component analogue of two-dimensional long wave-short wave resonance interaction equations: a derivation and solutions*, J. Phys.A: Math. Theor. **40** (2007), 7659–7672.
- [10] E. Date, M. Jimbo, M. Kashiwara and T. Miwa, *Transformation groups for soliton equations. III. Operator approach to the Kadomtsev-Petviashvili equation*, J. Phys. Soc. Jpn. **50** (1981), 3806–3812.
- [11] E. Date, M. Jimbo, M. Kashiwara and T. Miwa, *Transformation group for soliton equations: Euclidean Lie algebras and reduction of the KP hierarchy*, Publ. Res. Inst. Math. Sci. **18** (1982), 1077–1111.
- [12] R. Hirota, *The Direct Method in Soliton Theory*, (Cambridge University Press, 2004).
- [13] J. Hietarinta and R. Hirota, *Multidromion solutions to the Davey-Stewartson equation*, Phys. Lett. A **145** (1990), 237–244.
- [14] C.R. Gilson, *Resonant behaviour in the Davey-Stewartson equation*, Phys. Lett. A **161** (1992), 423–428.