

Computing all minimal Markov bases in Macaulay2

Oliver Clarke, Alexander Milner

February 2025

Abstract

We introduce the package *allMarkovBases* for *Macaulay2*, which is used to compute all minimal Markov bases of a given toric ideal. The package builds on functionality of *4ti2* by producing the *fiber graph* of the toric ideal. The package uses this graph to compute other properties of the toric ideal such as its indispensable set of binomials as well as its universal Markov basis.

1 Introduction

Let k be a field and fix a matrix $A \in \mathbb{Z}^{d \times n}$ such that $\ker(A) \cap \mathbb{N}^n = \{0\}$, which we call a configuration matrix. The toric ideal $I_A \subseteq k[x_1, \dots, x_n]$ is the ideal generated by the binomials $x^u - x^v$ where $u, v \in \mathbb{N}^n$ such that $u - v \in \ker(A)$. Note that here we use multi-index notation, so x^u denotes the monomial $x_1^{u_1} x_2^{u_2} \cdots x_n^{u_n}$. For an introduction to toric ideals, see [Stu96]. A (*minimal*) *Markov basis* of A is an (inclusion-minimal) set of generators M of I_A and we identify M with its set of binomial exponents $\{u - v : x^u - x^v \in M\}$. The seminal paper of Diaconis and Sturmfels [DS98] provides a connection between Markov bases of toric ideals and sampling from conditional distributions. The research landscape of Algebraic Statistics has since seen a great deal of development, particularly in the study of Markov bases. For an introduction to Markov bases in Statistics we refer to [Kos20] and [FAHP24], and for a general introduction to Algebraic Statistics we refer to [Sul23].

The current version of *Macaulay2* [GS] is shipped with *4ti2* [HHK⁺], which is a powerful library for performing computations with toric ideals, polyhedra, and lattices. Users of *Macaulay2* may be familiar with its interfacing package *FourTiTwo*, which provides the function `toricMarkov` that computes a single Markov basis from a given matrix. However, this package does not provide a way to study all possible minimal Markov bases of a given matrix A . So we introduce the package *allMarkovBases*, which comes with a function `markovBases` that returns all minimal Markov bases. We do this by computing the *fiber graphs* of A , which is a sequence of graphs whose connectivity can be used to determine the Markov bases of A . See Section 2.1. Our package exploits the fiber graph to compute important families of binomials of the toric ideal, which cannot be computed directly with *FourTiTwo*. This includes the *indispensable set* $S(A)$ and *universal Markov basis* $U(A)$, which are, respectively, the intersection and union of all minimal Markov bases. These families of elements have alternative combinatorial descriptions and prominently feature in the study of Markov bases. See, for example, [CTV14, KTV23, CK24, CTV17]. If the number of Markov bases is very large, then our package allows for the uniform sampling from the set of Markov bases.

1.1 Outline with examples

The matrix $A = \begin{pmatrix} 7 & 8 & 9 & 10 \end{pmatrix}$ has four minimal Markov bases, which are computed as follows.

```
i1 : needsPackage "allMarkovBases";  
  
i2 : A = matrix "7,8,9,10";
```

```
i3 : countMarkov A
o3 = 4
```

```
i4 : markovBases A
o4 = { | -1 2 -1 0 |, | -1 2 -1 0 |, | -1 2 -1 0 |, | -1 2 -1 0 | }
      | -1 1 1 -1 | | -1 1 1 -1 | | -1 1 1 -1 | | -1 1 1 -1 |
      | 0 -1 2 -1 | | 0 -1 2 -1 | | 0 -1 2 -1 | | 0 -1 2 -1 |
      | 4 0 -2 -1 | | 4 0 -2 -1 | | 4 -1 0 -2 | | 4 -1 0 -2 |
      | 3 1 -1 -2 | | 3 1 -1 -2 | | 3 1 -1 -2 | | 3 1 -1 -2 |
      | 3 0 1 -3 | | 2 2 0 -3 | | 3 0 1 -3 | | 2 2 0 -3 |
```

On the other hand, the matrix $A' = (51 \ 52 \ 53 \ 54 \ 55 \ 56)$ has 24300 minimal Markov bases. It may not be feasible to work with all of them so we can produce random samples as follows.

```
i5 : A' = matrix "51,52,53,54,55,56";
```

```
i6 : countMarkov A'
o6 = 24300
```

```
i7 : randomMarkov A'
o7 = | 8 4 0 0 0 -11 |
      | -1 2 -1 0 0 0 |
      | -1 1 1 -1 0 0 |
      | -1 0 2 0 -1 0 |
      | -1 1 0 1 -1 0 |
      | 0 -1 1 1 -1 0 |
      | -1 1 0 0 1 -1 |
      | 0 0 -1 2 -1 0 |
      | 0 -1 0 2 0 -1 |
      | 0 0 -1 1 1 -1 |
      | 0 0 0 -1 2 -1 |
      | 12 0 -1 0 -1 -9 |
      | 11 1 0 -1 -1 -9 |
      | 11 0 1 -1 0 -10 |
      | 9 3 0 0 -1 -10 |
```

The *indispensable set* $S(A')$ and the *universal Markov basis* $U(A')$ are computed as follows. We have abridged the output of `toricUniversalMarkov A'` to save space. We note that the indispensable set and universal Markov bases are read from the fiber graph, so the methods do not require the computation of all 24300 minimal Markov bases.

```
i8 : toricIndispensableSet A'
o8 = | -1 2 -1 0 0 0 |
      | -1 1 1 -1 0 0 |
      | 0 0 -1 1 1 -1 |
      | 0 0 0 -1 2 -1 |
```

```
i9 : toricUniversalMarkov A'
o9 = | 10 0 2 0 0 -11 |
      | 8 4 0 0 0 -11 |
      ...
      | 9 3 0 0 -1 -10 |
      | 11 0 0 1 -1 -10 |
      33      6
o9 : Matrix ZZ <-- ZZ
```

An example from Algebraic Statistics is the Segre embedding of a product of projective spaces:

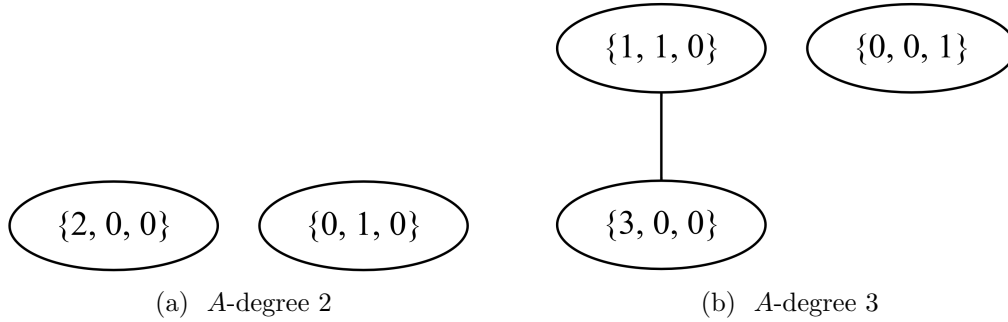


Figure 1: Fiber graphs of A for the generating fibers

and their A -degrees are 2 and 3 respectively. We say that $t \in \mathbb{N}A$ is a *generating fiber* for A if there exists an element $x^u - x^v$ of a minimal Markov basis with A -degree $\deg_A(x^u - x^v) = t$. The aforementioned results provide a natural procedure to generate all minimal Markov bases using the fiber graph of A .

2.1 Fiber graphs

Let $t \in \mathbb{N}^d$. The *fiber graph* G_t has vertex set \mathcal{F}_t and edge set

$$E(G_t) = \{uv : \text{there exists } i \in \{1, \dots, n\} \text{ such that } u_i > 0 \text{ and } v_i > 0\}.$$

Using our package, the list of fiber graphs of the generating fibers of A are computed as follows.

```
i4 : fiberGraph A
o4 = {Graph{{0, 1, 0} => {}}, Graph{{0, 0, 1} => {}
      {2, 0, 0} => {}          {1, 1, 0} => {{3, 0, 0}}
      {3, 0, 0} => {{1, 1, 0}}}
```

A visualisation of these fibers, produced by the package *Graphs*, is shown in Figure 1. Each element $z \in \ker(A)$ is thought of as a *move* that connects pairs of points $u, v \in \mathbb{N}^n$ whenever $u = v + z$. In our example, the move $(2, -1, 0)$ connects $(2, 0, 0)$ and $(0, 1, 0)$ and connects $(1, 1, 0)$ and $(3, 0, 0)$. The *fundamental theorem of Markov bases* [DS98, Theorem 3.1] tells us that the set of Markov bases are in one-to-one correspondence with collections of elements of $\ker(A)$ that *connect* each fiber of A . Here, a subset $M \subseteq \ker(A)$ is said to *connect* the t -fiber, for some $t \in \mathbb{N}A$, if the graph $G_{M,t}$ on \mathcal{F}_t with edges $\{uv : u - v \in M\}$ is connected. Similarly, by [CKT07, Theorems 2.6 and 2.7], the minimal Markov bases are in one-to-one correspondence with sets of moves that *minimally connect* G_t for each generating fiber t of A .

Remark 2.1. In the literature, the graphs $G_{M,t}$ are often called fiber graphs [HM09]. To avoid confusion, for us the term fiber graph will always refer to the graph G_t for some t .

In our example, we observe that the 2-fiber in Figure 1a is connected only by the element $(2, -1, 0)$, up to sign. It follows that the corresponding binomial $x^2 - y$ is indispensable as there is no other way to connect the 2-fiber, thus every Markov basis must contain it. On the other hand, the 3-fiber in Figure 1b is minimally connected with either the move $(1, 1, -1)$ or $(3, 0, -1)$. These form the two minimal Markov bases of A . This process is carried out by the function `markovBases`:

```
i5 : markovBases A
o5 = { | 2 -1 0 |, | 2 -1 0 | }
      | 3 0 -1 | | 1 1 -1 | }
```

2.2 The all-Markov algorithm

Our package computes all Markov bases with an implementation of Algorithm 1. By [CKT07, Theorems 2.6 and 2.7], this algorithm is correct and returns all minimal Markov bases of A .

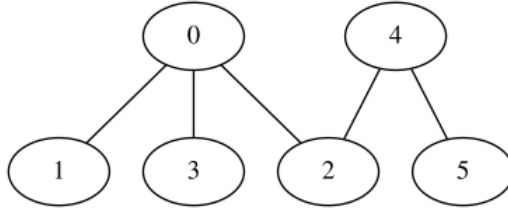


Figure 2: Spanning tree on $\{0, 1, \dots, 5\}$ associated to the Prüfer sequence $\{0, 0, 2, 4\}$

Algorithm 1: All minimal Markov bases of a matrix

Input : $A \in \mathbb{Z}^{d \times n}$ a configuration matrix

Output: \mathcal{M} the set of minimal Markov bases of A

```

1: Initialise  $\mathcal{M} = \emptyset$  ;
2: for  $t \in \mathbb{N}A$  a generating fiber of  $A$  do
3:   | Compute  $C_t :=$  the set of connected components of the fiber graph  $G_t$  ;
4: end
5:  $\mathcal{T} := \prod_t \{T : \text{spanning tree on vertex set } C_t\}$ , where the product is taken over all
   generating fibers  $t \in \mathbb{N}A$  of  $A$ 
6: for  $\{T_t : \text{spanning tree on } C_t\} \in \mathcal{T}$  do
7:   | for each collection  $\{f_{T,e} : T \in \mathcal{T}, e \in E(T)\}$  where  $f_{T,e}$  is a choice function on  $e$  do
8:     |   |  $M := \{f_{T,e}(u) - f_{T,e}(v) : T \in \mathcal{T}, uv \in E(T)\}$  Markov basis of  $A$ ;
9:     |   |  $\mathcal{M} \leftarrow \mathcal{M} \cup \{M\}$ ;
10:  | end
11: end

```

Let us give some notes on how the algorithm works. For each fiber graph G_t , with $t \in \mathbb{N}A$ a generating fiber of A , we treat its connected components as the vertices of a new graph \widehat{G}_t for which we choose a spanning tree T . Then the union over all generating fibers of the binomials $x^u - x^v$, where u, v are in distinct connected components of G_t which are connected by an edge of T , forms a minimal Markov basis. Concretely, on line 7, the edge $e \in E(T)$ is a pair of connected components of C_t , hence e is set of sets of elements of \mathbb{N}^n . Suppose that $uv \in E(T)$ is an edge of some $T \in \mathcal{T}$, then the choice function $f_{T,e}$ produces the binomial $x^u - x^v$, which appears in the Markov basis.

The spanning trees are enumerated using the well-known bijection of Prüfer [Prü18]. This bijection between labelled spanning trees on n vertices and *Prüfer sequences* (sequences in $\{0, \dots, n-1\}$ of length $n-2$) is completely constructive. We have implemented a helpful function `pruferSequence` that takes a Prüfer sequence and returns the edge set of the corresponding spanning tree. For example, the spanning tree associated to the sequence $\{0, 1, 2, 3\}$ is given computed as follows, see Figure 2.

```

i6 : pruferSequence {0,0,2,4}
o6 = {set {0, 1}, set {0, 3}, set {0, 2}, set {4, 2}, set {4, 5}}

```

By knowing only the sizes of connected components of each fiber graph, it is possible to calculate the number of minimal Markov bases. Let $t \in \mathbb{N}A$ be a generating fiber of A . Let us assume G_t has n_t connected components of size $m_{t,1}, m_{t,2}, \dots, m_{t,n_t}$ for some positive integers $m_{t,i}$ with $i \in \{1, 2, \dots, n_t\}$. Then, by a slight modification of Prüfer's bijection, see [CKT07, Theorem 2.9], the number of minimal Markov bases of A is given by

$$\prod_t m_{t,1} \cdot m_{t,2} \cdots m_{t,n_t} \cdot (m_{t,1} + m_{t,2} + \cdots + m_{t,n_t})^{n_t-2}.$$

In our package, we have implemented this as the function `countMarkov`, which computes the number of minimal Markov bases without enumerating all of them.

2.3 Variations on the algorithm

Our package includes variations of Algorithm 1, which allows us to sample from the set of Markov bases and compute the indispensable set and universal Markov basis.

Random sampling. The function `randomMarkov` produces a random Markov basis as follows. In lines 6 and 7 of Algorithm 1, we sample uniformly an element of \mathcal{T} and a random collection of choice functions respectively. This produces a single uniformly distributed minimal Markov basis of A . The optional argument `NumberOfBases` specifies how many samples to produce.

```
i7 : randomMarkov(A, NumberOfBases => 1)
o7 = | 2 -1 0 |
      | 3 0 -1 |
```

Indispensable set and universal Markov basis. The universal Markov basis $U(A)$ of the matrix A is the union of its minimal Markov bases. Every minimal Markov basis arises from Algorithm 1, so we may compute $U(A)$ with a slight modification. Specifically, our package provides the function `toricUniversalMarkov`, which implements the following modification to the algorithm.

Algorithm 2: Universal Markov basis of a matrix

Input : $A \in \mathbb{Z}^{d \times n}$ a configuration matrix

Output: $U(A)$ the universal Markov basis of A

```
1: Initialise  $U(A) = \emptyset$  ;
2: for  $t \in \mathbb{N}A$  a generating fiber of  $A$  do
3:   | Compute  $C_t :=$  the set of connected components of the fiber graph  $G_t$  ;
4:   |  $K_t :=$  complete graph on vertex set  $C_t$  ;
5: end
6:  $K := \bigsqcup_t K_t$ , where the union is taken over all generating fibers  $t \in \mathbb{N}A$  of  $A$ 
7: for  $\{u, v\} \in E(K)$  do
8:   | for each choice function  $f_{uv}$  on  $\{u, v\}$  do
9:     |  $U(A) \leftarrow U(A) \cup \{f_{uv}(u) - f_{uv}(v)\}$  ;
10:  | end
11: end
```

By [CKT07, Corollary 2.10], the indispensable elements can be detected directly from the fiber graphs. The function `toricIndispensableSet` determines the indispensable elements by finding each fiber graph G_t with exactly two vertices that are each singletons. In our running example, the universal Markov basis and indispensable set are computed as follows.

```
i8 : toricUniversalMarkov A
o8 = | 2 -1 0 |
      | 3 0 -1 |
      | 1 1 -1 |
```

```
i9 : toricIndispensableSet A
o9 = | 2 -1 0 |
```

Polynomial output. For each method: `markovBases`, `randomMarkov`, `toricUniversalMarkov`, `toricIndispensableSet`, we may specify a polynomial ring. The function returns an ideal whose generating set, accessible with `gens`, is the corresponding set of binomials.

```
i10 : R = QQ[x, y, z];
i11 : markovBases(A, R)
o11 = {ideal (x2 - y, x3 - z), ideal (x2 - y, x*y - z)}
i12 : toricIndispensableSet(A, R)
```

```

o12 = ideal(x2 - y)

i13 : gens toricUniversalMarkov(A, R)
o13 = | x2-y x3-z xy-z |

```

References

- [CK24] Oliver Clarke and Dimitra Kosta. Distance reducing markov bases. *arXiv preprint arXiv:2406.17730*, 2024.
- [CKT07] Hara Charalambous, Anargyros Katsabekis, and Apostolos Thoma. Minimal systems of binomial generators and the indispensable complex of a toric ideal. *Proceedings of the American Mathematical Society*, pages 3443–3451, 2007.
- [CTV14] Hara Charalambous, Apostolos Thoma, and Marius Vladioiu. Markov complexity of monomial curves. *Journal of Algebra*, pages 391–411, 2014.
- [CTV17] Hara Charalambous, Apostolos Thoma, and Marius Vladioiu. Minimal generating sets of lattice ideals. *Collectanea Mathematica*, page 377–400, 2017.
- [DS98] Persi Diaconis and Bernd Sturmfels. Algebraic algorithms for sampling from conditional distributions. *The Annals of Statistics*, pages 363–397, 1998.
- [FAHP24] Jesús A. De Loera Félix Almendra-Hernández and Sonja Petrović. Markov bases: A 25 year update. *Journal of the American Statistical Association*, pages 1671–1686, 2024.
- [GS] Daniel R. Grayson and Michael E. Stillman. Macaulay2, a software system for research in algebraic geometry. Available at <http://www2.macaulay2.com>.
- [HHK⁺] Raymond Hemmecke, Ralf Hemmecke, Matthias Köppe, Peter Malkin, and Matthias Walter. 4ti2—a software package for algebraic, geometric and combinatorial problems on linear spaces.
- [HM09] Raymond Hemmecke and Peter N. Malkin. Computing generating sets of lattice ideals and markov bases of lattices. *Journal of Symbolic Computation*, pages 1463–1476, 2009.
- [Kos20] Dimitra Kosta. Markov bases of toric ideals: Connecting commutative algebra and statistics. *London Mathematical Society Newsletter*, 486:34–37, 2020.
- [KTV23] Dimitra Kosta, Apostolos Thoma, and Marius Vladioiu. On the strongly robust property of toric ideals. *Journal of Algebra*, pages 1–25, 2023.
- [Prü18] Heinz Prüfer. Neuer beweis eines satzes über permutationen. *Archiv der Mathematischen Physik*, 27:742–744, 1918.
- [Stu96] Bernd Sturmfels. *Gröbner bases and convex polytopes*. American Mathematical Society, 1996.
- [Sul23] S. Sullivant. *Algebraic Statistics*. Graduate Studies in Mathematics. American Mathematical Society, 2023.