General Reasoning Requires Learning to Reason from the Get-go

Seungwook Han *1 Jyothish Pari *1 Samuel J. Gershman 2 Pulkit Agrawal 1

Abstract

Large Language Models (LLMs) have demonstrated impressive real-world utility, exemplifying artificial useful intelligence (AUI). However, their ability to reason adaptively and robustly – the hallmarks of artificial general intelligence (AGI) – remains fragile. While LLMs seemingly succeed in commonsense reasoning, programming, and mathematics, they struggle to generalize algorithmic understanding across novel contexts. Our experiments with algorithmic tasks in esoteric programming languages reveal that LLM's reasoning overfits to the training data and is limited in its transferability. We hypothesize that the core issue underlying such limited transferability is the coupling of reasoning and knowledge in LLMs.

To transition from AUI to AGI, we propose disentangling knowledge and reasoning through three key directions: (1) pretaining to reason using RL from scratch as an alternative to the widely used next-token prediction pretraining, (2) using a curriculum of synthetic tasks to ease the learning of a reasoning prior for RL that can then be transferred to natural language tasks, and (3) learning more generalizable reasoning functions using a small context window to reduce exploiting spurious correlations between tokens. Such a reasoning system coupled with a trained retrieval system and a large external memory bank as a knowledge store can overcome several limitations of existing architectures at learning to reason in novel scenarios.

1. Introduction

Large Language Models (LLMs) have demonstrated impressive capabilities across diverse tasks, such as commonsense reasoning, math, and programming (Ho et al., 2022; Wei

et al., 2023; 2022; Lampinen et al., 2022; DeepSeek-AI, 2024; OpenAI, 2024; Meta, 2024). Their practical impact makes them a compelling instance of *artificial useful intelligence* (AUI) – systems that assist humans in real-world tasks. Nevertheless, a significant gap remains between AUI and artificial general intelligence (AGI), systems capable of robust, adaptive reasoning across diverse domains and contexts like humans.

To illustrate this gap, we designed algorithmic tasks in esoteric programming languages that isolate reasoning from memorization. These tasks involve simple algorithmic problems (e.g., printing, sorting) seen during pretraining and easily solved in Python and Java, but presented in unfamiliar programming languages with different syntaxes. Our results in Section 3 show that state-of-the-art LLMs struggle to transfer their algorithmic understanding to coding in new programming syntaxes. Notably, o1 (Jaech et al., 2024), post-trained for reasoning with a combination reinforcement learning (RL) and search, e.g., Chain-of-Thought (Wei et al., 2023), performed the best. However, even o1's performance suffers, illustrating the limitation of current models in flexibly transferring their reasoning to novel contexts.

We hypothesize that going beyond the reasoning ability of current models requires a fundamental overhaul of the pretraining paradigm. The dominant approach – supervised pretraining with next-token prediction loss on passively collected Internet data, followed by RL-based posttraining (DeepSeek-AI, 2025; Lightman et al., 2023; Luong et al., 2024; Zelikman et al., 2024; 2022) - closely mirrors AlphaGo's methodology in the game of Go (Silver et al., 2016). In AlphaGo, supervised pretraining on human demonstrations and post-RL optimization were used to surpass human playing abilities. However, this paradigm was overturned by AlphaZero (Silver et al., 2017), which demonstrated that RL from scratch – without supervised pretraining – achieved superior performance. By relying solely on self-play and starting from random initialization, AlphaZero surpassed AlphaGo, uncovering more efficient and creative strategies through purely RL.

This paradigm shift from AlphaGo to AlphaZero motivates our hypothesis that, even in current LLMs, reliance on supervised pretraining constrains models to a "local minimum" of reasoning capabilities. Supervised pretraining on demon-

^{*}Equal contribution ¹Improbable AI Lab, MIT ²Department of Psychology and Center for Brain Science, Harvard University. Correspondence to: Seungwook Han <swhan@mit.edu>, Jyothish Pari <jyopari@mit.edu>.

stration data can be a double-edged sword: while it provides a helpful exploration bias for reasoning finetuning via RL, it also serves as a bias that may hinder subsequent exploration. Consequently, we hypothesize that next-token prediction training on Internet-scale data may constrain models to a local minimum of reasoning abilities that cannot easily be escaped through post-training RL, similar to how RL fine-tuning in AlphaGo remained inferior to Go gameplay learned with RL from scratch in AlphaZero.

Our intuition behind why next-token prediction might lead to a local minimum in reasoning is as follows: when the training objective is merely to predict the next token, the model can exploit correlations between tokens in the context window to reduce prediction error instead of learning the underlying reasoning algorithm that explains the data. For instance, if the model is trained on examples such as 5+3=8;2+1=3;...;4+7=11, it might learn that the next character after the character + and a *number* is the character +. In other words, the model can learn superficial statistical patterns (like which words commonly occur together) rather than developing genuine understanding (e.g., of addition) that will generalize across different situations.

As another example, consider instructing a model to write Python code with 1-based indexing instead of the usual 0based indexing. To solve the task with the simple change, the model must override its memorized Python knowledge and flexibly apply the 1-based indexing rules learned from other languages like R or MATLAB. However, many models pretrained with next-token prediction produce 0-indexing based solutions, leaning on surface-level pattern matching that ignores the instruction (Wu et al., 2024). This illustrates how passive pretraining fails to incentivize the learning of generalizable reasoning skills and, instead, reinforces memorization and pattern matching that have limited generalization beyond the training scenarios. When a model learns to reason in a way that is tied to specific ways of expressing things rather than underlying principles - the model struggles to apply its reasoning to new scenarios.

In this position paper, we argue that to advance from AUI to AGI, it is critical to deliberately disentangle knowledge from reasoning, allowing models to develop robust reasoning independent of memorized patterns. Additionally, we propose architectural modifications that enable the reasoning system to flexibly adapt to newly added knowledge, ensuring that models can generalize their reasoning strategies to novel domains. To this end, we outline three key directions to achieve this paradigm shift, which we discuss in detail in Section 4.

1. Pretraining for reasoning via reward-based learning (Section 4.1): The choice of training data can significantly influence whether the model exploits cor-

relations to learn fragile reasoning or discovers the more general underlying reasoning algorithm. As an illustration, consider training a model to multiply numbers with data of the form $[2 \times 5 = 10; 3 \times 4 =$ 12; ... $5 \times 7 = 35$], where the answers are directly provided. We refer to such data as passive data that is the outcome of human knowledge and reasoning (i.e., most of the Internet data) but doesn't encompass the reasoning process. Continuing with the analogy of AlphaGo, human gameplay data used for supervised training is passive in the sense that it contains what moves humans played but not why those moves were played. While one hopes that a model can implicitly learn the true reasoning process if trained with the nexttoken prediction objective, the model could memorize the answers or exploit correlations in the data to learn reasoning that works for in-distribution data, but fails beyond the training data distribution.

Consider the alternative of training model on data that spells out the reasoning algorithm (i.e., reasoning trace) – $[2 \times 5 = 5 + 5 = 10; 3 \times 4 = 4 + (4 + 4) =$ $12; \dots 5 \times 7 = (7+7) + (7+7) + 7 = 35$]. We hypothesize that the model has a better chance of learning the underlying algorithm with such data. However, obtaining large amounts of reasoning trace data is challenging. One way is to use RL to generate data that maximizes the task reward (i.e., correct multiplication or winning the game as in AlphaZero). In other words, by structuring training as an iterative (Carreira et al., 2016) and step-wise problem-solving process rather than next-token prediction on passive data, models can develop more robust and generalizable reasoning abilities not limited to the spurious patterns observed in pretraining data.

2. Enabling Efficient Exploration via Synthetic Tasks (Section 4.2): Building on the insight that data containing reasoning traces may better enable the model to learn the underlying reasoning process compared to passive data, the natural question is how to obtain such data. We propose that this data can be obtained via a more active process where an agent optimizes task rewards through a sequence of actions and generates reasoning traces in the process. However, as natural language comprises of ~40K tokens, doing RL from scratch is infeasible. To address the exploration challenge, we propose using synthetic tasks with a reduced token space while preserving key structural properties to learn a reasoning prior (e.g., commutativity, associativity, in-context learning, etc.). The token space and complexity can gradually be increased via a task curriculum that increases difficulty. Once the reasoning prior is learned, it can leveraged to bootstrap reasoning in natural language.

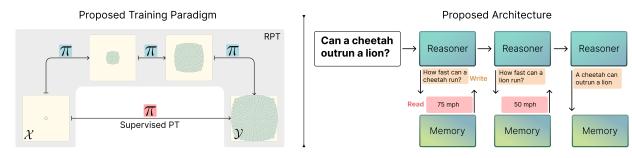


Figure 1. (Left) Comparing reward-based pretraining (RPT) and traditional supervised pertaining (SPT). Supervised pretraining requires the model to directly predict answers, limiting its ability to refine intermediate solutions. In contrast, RPT enables step-by-step reasoning from the outset, allowing the model to iteratively approximate complex functions through simpler transitions that are easier to learn and more robust to errors (Carreira et al., 2016). (Right) Illustration of our proposed decoupled memory-reasoning architecture. This design allows the reasoning module to operate on shorter context windows that reduce the chances of learning spurious correlations and, thereby, more transferrable reasoning. The use of a shorter context window also encourages the model to learn how to dynamically read and write to memory, which facilitates the use of reasoning model on new problems and knowledge domains.

3. Architectural bias to decouple knowledge and reasoning (Section 4.3): Training models using long context windows provide more chances for the model to learn spurious correlations between past and future tokens when minimizing the next-token prediction loss. Previous work highlighted issues such as lost-in-themiddle phenomenon (Liu et al., 2024), where models become overly sensitive to token positions within a long context rather than learning a robust, transferable reasoning process. Drawing on insights from cognitive science - which emphasize the efficacy of a limited "working memory" (Miller, 1956; Elman, 1993) - we hypothesize that restricting the model to reason over only a limited set of tokens reduces the chances of exploiting spurious correlations between tokens and thereby promote more robust reasoning that can transfer to new knowledge domains.

To this end, we propose three architectural changes. We first disentangle knowledge and reasoning into distinct modules - an external memory bank and a reasoning network. Such decomposition provides an inductive bias for re-using the reasoning model on new knowledge domains. Second, we propose that the reasoning model should operate over a small context window, an inductive bias that reduces the chances of relying on spurious correlations for making accurate predictions. Thirdly, because the reasoning model operates on a short context window, it needs to retrieve and write information from the external memory bank. We propose to learn the strategies for reading from and writing to an external memory bank. We hypothesize that this structured approach enables dynamic retrieval and reasoning, reduces reliance on spurious correlations, and therefore improves generalization.

2. Background and Notation

Current LLMs are pretrained for next-token prediction over a large text corpus. Let \mathcal{D} denote a large unlabeled text corpus collected from the Internet, which we refer to as **passive data**. This passive data includes books, articles, and online content and generally does not describe intermediate reasoning steps that can guide problem-solving. For example, while a text passage might contain the statement of a math problem and its final answer, it often omits the step-by-step derivation leading to the solution (e.g., intermediate algebraic manipulations or deductions). Each element in \mathcal{D} is a sequence of tokens $\mathbf{x} = (x_1, x_2, \dots, x_T)$, typically formed using a vocabulary of size |V|. A language model ϕ_{θ} with parameters θ (often a Transformer (Vaswani et al., 2023)) is trained to learn the conditional distribution

$$P(x_t \mid x_1, x_2, \dots, x_{t-1}; \theta).$$

In practice, we maximize the log-likelihood of each token given its preceding tokens:

$$\max_{\theta} \sum_{\mathbf{x} \in \mathcal{D}} \sum_{t=1}^{T} \log P(x_t \mid x_{< t}; \theta).$$

We refer to this task-agnostic pretraining using next-token prediction loss as **supervised pretraining** (SPT). Any subsequent training that continues to optimize this objective for a target task is referred to as **supervised finetuning** (SFT).

Training for tasks can also be performed using a reward-based formulation grounded in RL. At each step t, the model ϕ_{θ} receives a scalar reward r_t , which can depend on partial or complete outputs. Here, the data is not the passively collected corpus \mathcal{D} , but rather is gathered **online** from the model's own interactions. The goal is to maximize the

expected cumulative reward:

$$\max_{\theta} \, \mathbb{E}_{\mathbf{x} \sim \pi_{\theta}} \Big[\sum_{t=1}^{T} r_{t}(\mathbf{x}) \Big],$$

where π_{θ} is the model's policy distribution over sequences \mathbf{x} . We refer to the pretraining done with this reward-based objective as **reward-based pretraining** (RPT), and subsequent training that continues to optimize this reward as **reward-based finetuning** (RFT).

3. Evaluation of Reasoning Separate From Knowledge

To evaluate the ability of current models to transfer their reasoning across domains, we constructed an evaluation benchmark containing simple algorithmic tasks, such as printing and sorting, in esoteric programming languages. Unlike conventional evaluation using programming languages with familiar syntax, such as Python or Java, this benchmark is designed to minimize the influence of pre-existing knowledge by using languages with unconventional rules and minimal semantic connections to common programming languages. This allows us to measure a model's ability to generalize its logical reasoning to solve problems in domains different from the ones encountered during pretraining.

3.1. Esoteric Programming Languages

We used two esoteric programming languages, Brainf**k (Wikipedia, 2025) and Befunge (Cat's Eye Technologies, 1993). Both languages are rare – infrequently seen during pretraining – and radically different from common languages like Python. However, they are Turing-complete, meaning they can express any algorithm that a conventional programming language like Python can, given enough time and memory. Brainf**k operates on a simple, tape-based memory model with only eight commands. Befunge is a two-dimensional stack-based language where code execution follows paths on a grid, allowing for unconventional control flows like loops and branches in any direction. While both languages differ significantly from Python, they are based on simple programming rules. Examples below.

Listing 1. Brainf**k program to print the character 'K.'

Listing 2. Befunge program to calculate the factorial.

Tasks. We designed two sets of tasks for Brainf**k and Befunge, which are easy to do in Python and Java. We select

the tasks based on what is more suitable to implement in each esoteric language while maintaining some overlap. For Brainf**k, we have the three tasks of printing two-letter words, sorting a list of five elements, and copying an input string of five characters. For Befunge, we have the three tasks of printing two-letter words, generating a program to calculate the factorial of the input number, and generating a program to output the first k Fibonacci numbers.

Evaluation Details. We evaluate the state-of-the-art LLMs of different families and scales: Llama 3.1 8B and 70B, Qwen2.5 Coder 7B and 32B, GPT-40 and o1. For each task, we construct a set of problems by changing the inputs. For example, in the printing task, we vary the characters to print (e.g., 'hi' and 'so'). The models are prompted using the standardized format reported in Listing 4 and Listing 5 of Appendix A.2 and A.3 respectively. Like the information available to a human while learning a new programming language, the prompt includes the full syntax and rules of the programming language and example code blocks with explanations. We further detail the evaluation protocol in Appendix A.1.

Results. Despite the simplicity of the tasks, all models generally perform poorly, averaging $\sim 12\%$ accuracy in Brainf**k (see Table 1) and $\sim 29\%$ in Befunge (see Table 2). In Brainf**k, performance only marginally improves (about 4% on average) with the increase in the number of in-context examples from 1 to 10 suggesting that current models struggle to infer the correct structure and principles underlying Brainf**k, even with all the rules, syntax, and contextual guidance. On the other hand, in Befunge, in-context examples allow the models to achieve $\sim 70-90\%$ accuracy at printing two-letter words. But, the models fail to solve the Fibonacci and factorial tasks.

A notable outlier is the o1 model, which vastly outperforms other models. Unlike the other models, o1 has undergone extensive post-training with RL for solving reasoning tasks (Jaech et al., 2024), which likely contributes to its stronger performance. This result highlights the potential benefits of RL-based post-training in adapting models to specialized or unconventional tasks. However, it is important to note that even o1's performance leaves considerable room for improvement. It scores 1% accuracy on sorting five elements even with 10 in-context examples and 65.5% accuracy on printing two-letter words.

Models	Print (# ICL = 1)	Print (4)	Print (10)	Sort	Copy
Llama 3.1 8B	1	4	7	0	0
Llama 3.1 70B	2	7	10	0	0
Qwen2.5 Coder 7B	2	2	1	0	0
Qwen2.5 Coder 32B	3	2	2	0	9
GPT-40	2	9	13	0	0
o1	71	64	65	1	95

Table 1. Brainf**k evaluation results. We report the percent accuracy over the test set for each task. The number of examples used for each task evaluation is listed in Appendix A.1. The numbers within parentheses are the number of in-context examples during evaluation.

Models	Print (# ICL = 1)	Print (4)	Print (10)	Fibonacci	Factorial
Llama 3.1 8B	19	68	72	0	0
Llama 3.1 70B	92	92	93	2	0
Qwen2.5 Coder 7B	15	66	74	0	0
Qwen2.5 Coder 32B	8	83	94	0	0
GPT-40	72	98	100	0	0
o1	70	83	93	0	0

Table 2. Befunge evaluation results. We report the percent accuracy over the test set for each of the tasks. The number of examples used for each task evaluation is listed in Appendix A.1. The numbers within parentheses are the number of in-context examples during evaluation.

4. Proposed Directions

4.1. Pretraining for Reasoning with Reinforcement Learning

Proposal: Instead of pretraining on passive data (defined in Section 2) and finetuning with RL, we propose integrating RL directly into the pretraining phase to enable better iterative reasoning.

Recent works have continued the SPT-then-RFT paradigm to enhance task adaptability and reasoning capabilities in LLMs. In particular, RFT has shown to be essential in improving generalization across reasoning-intensive domains, such as mathematical problem-solving and program synthesis (Zelikman et al., 2024; Hosseini et al., 2024). By enabling and refining intermediate reasoning traces (e.g., "Let's solve this step by step: First, we need to factor the quadratic equation...") to arrive at a final answer, these methods decompose complex problems into easier sub-problems, allowing models to iteratively construct solutions through systematic exploration of possible solution paths.

The current approach of training LLMs with the SPT-then-RFT paradigm mirrors AlphaGo (Silver et al., 2016), which initially leveraged pretraining on human demonstrations, followed by RL finetuning, achieving superhuman performance in Go. However, AlphaZero (Silver et al., 2017), which trained purely with RL from scratch, surpassed AlphaGo, suggesting that imitation-based pretraining may

limit exploration. A similar risk arises in LLMs: an initial phase of supervised pretraining on passive data (as defined in Section 2) often lacks the supervision of intermediate reasoning steps and may confine subsequent RL finetuning to a restricted solution space, hindering its ability to escape the local minimum. Moreover, it is common to constrain RL finetuning to stay close to the base language model to reduce the risk of generating unnatural sequence of language tokens and thereby hacking the reward function (Gao et al., 2023; Paulus, 2017; Alami et al., 2024). However, such a constraint also hinders the exploration of RL finetuning and its ability to discover the underlying reasoning process.

Hypothesis: Pretraining on passive data can constrain the subsequent reward-based finetuning by placing models in local minima, limiting their ability to discover reasoning strategies that generalize (e.g., finding novel ways to solve math problems beyond the specific solution approaches seen in training data).

Does reward-based pretraining (RPT) outperform supervised pretraining followed RL finetuning (SPT-then-RFT) in Go?

We trained two agents using the **SPT-then-RFT** paradigm (as used in AlphaGo) and the **RPT** paradigm (as used in AlphaZero) in a simplified Go environment using a 9×9 board. This setup allows rigorous evaluation of whether pretraining on expert human demonstrations collected from the




Figure 2. Comparing the different training paradigms of RPT vs. SPT-then-RFT in Go 9×9 . These results affirm the hypothesis that the SPT can restrict the model's subsequent exploration with RL. The KL regularization is added to replicate common training paradigms in language models (Gao et al., 2023; Paulus, 2017; Alami et al., 2024).

top 100 players impairs RL's ability to escape the local minima found by supervised learning and thereby restricts its exploration and ability to learn superior gameplay strategies. The AlphaZero paper introduced multiple changes from AlphaGo (e.g., different network architecture, pretraining strategies, etc.), making it challenging to pinpoint the most critical change responsible for the performance difference. We ran controlled experiments to isolate whether the RL training from scratch was the major factor contributing to performance gain. To mimic the common training setup in LLMs, we adopt a Kullback-Leibler (KL) penalty (Kullback & Leibler, 1951) as a regularization for the SPT-then-RFT paradigm.

Go 9×9 results, reported in Figure 2, show that supervised pretraining on passive data constrains the RL finetuning performed similarly to RLHF in LLMs by limiting exploration. As expected, the RPT model achieves a 100% win rate against the SPT, demonstrating that exploration via reward-based training can easily outperform training on the top 100 expert data. Against the SPT-then-RFT paradigm, the performance of the RPT model varies with the KL constraint that keeps the generations close to the pre-trained model. The RPT model achieves a 66% win rate compared to SPT + RFT with a KL coefficient of 0.1, and a greater win rate of 92% against SPT + RFT with a stricter KL coefficient of 0.5. These findings highlight that tighter reliance on pre-trained knowledge hinders exploration while loosening these constraints enables RL to discover better strategies.

Without the KL constraint and given an infinite training bud-

get, RPT and SPT + RFT models can eventually converge to the same optimal policy. Such recovery in performance using RFT after SPT may be possible in simpler tasks such as Go9x9 where reward hacking is not possible. However, running unconstrained RL post-SPT with LLMs is generally infeasible as the LLM degrades and starts producing gibberish (i.e., meaningless sequence of tokens) that still increases the reward function (i.e., reward hacking (Skalse et al., 2022)). To verify if this is ndeed the case we repeat the comparison between SPT and SPT + RFT with LLMs as detailed below.

Does reward-based finetuning (RFT) outperform supervised pretraining followed by reward-based finetuning (SPT-then-RFT)?

We test the hypothesis that, also in LLMs, RL training for reasoning (RFT) after supervised pertaining (SPT) may be insufficient to push the model beyond its local minimum to discover more general reasoning abilities that could have been learned if the model was trained from scratch to reason via RL.

As the training of a language model from scratch using RL remains very challenging (see Section 4.2 for more discussion), we use a pretrained LLM and test if supervised fine-tuning (SFT) on a passive dataset (i.e., examples of questions and answers) limits generalization compared to finetuning for reasoning using RL (RFT).

To make a fair comparison, we fix all variables constant except the training paradigms of: (1) **SFT-then-RFT** paradigm, where a base model is finetuned on supervised demonstrations before applying RL (Ziegler et al., 2019); (2) **pure RFT** paradigm, where the base model is only finetuned with a reward-based objective via RL. While this setup does not involve full SPT vs. RPT comparisons, it provides a computationally efficient proxy for understanding how SFT on passively collected data influences the exploration and generalization of downstream RFT.

For this investigation, we design a synthetic mathematical reasoning task wherein the model must identify vectors orthogonal to a given vector (more details in Appendix A.4). As show in Listing 3, the problem is presented as a multiple-choice question, where the model must choose the correct option. We used Qwen 1.5B (Yang et al., 2024) as the base pre-trained model and evaluated different fine-tuning strategies using the prompt detailed in Appendix A.5.

Listing 3. Example of synthetic orthogonality task

```
{
   "instruction": "Which of the vectors
        are orthogonal to [-2, -1, 0]?
        (a) [3, 4, -5]
        (b) [0, 0, 2]
        (c) [-1, 3, 4]
```

Model Configuration	Train (%)	Test (%)	
Base Model	88	89	
Base Model + SFT-then-RFT	100	80	
Base Model + RFT	94	93	

Table 3. Comparing the effect of direct finetuning with RL (RFT) against supervised finetuning followed by RL finetuning (SFT-then-RFT) on the reasoning task of determining orthoganlity between vectors. We used Qwen 1.5B as the Base model. for these experiments. Pure RFT training achieves the highest accuracy, while SFT-based models show signs of overfitting.

```
(d) [-1, 1, 5]
output the answer as solution:",
  "output": "solution: (b)"
}
```

Results in Table 3 support our hypothesis: models trained with only RFT outperform those finetuned with SFT-then-RFT. The SFT-then-RFT models overfit to the training distribution, achieving near-perfect accuracy on the training set but inferior generalization to the test set reflected in a performance drop from 100% to 80%. This result suggests that the model is more prone to memorizing patterns in the training data instead of figuring out the underlying reasoning algorithm. These results are aligned with those of Chu et al. (2025) that show SFT memorizes while RL generalizes. Furthermore, SFT-trained models struggle to leverage RL post-training effectively. We observe that SFT models learn to predict the answer directly, avoiding step-by-step reasoning. As a result, during the RL post-training phase, the model does not generate the intermediate reasoning steps to solve the task. This reinforces the idea that passive pretraining (i.e., next-token prediction on data without explicit intermediate reasoning traces) overfits and constrains later exploration that prevents models from discovering more general reasoning patterns.

Towards RL-Driven Pretraining Building on these insights, we advocate for a new pretraining approach that emphasizes learning step-by-step reasoning patterns. Since we lack large-scale training data with explicit intermediate reasoning steps (e.g., Chain-of-Thought style demonstrations), we propose using RL to generate such reasoning traces through interaction with an environment and guided by appropriate reward functions. We posit that achieving truly general reasoning abilities requires training a model from scratch (i.e., RPT) to reason using reward supervision instead of the currently popular paradigm of supervised pretraining on passive data followed by finetuning for reasoning with rewards. However, this approach presents a significant exploration challenge because searching in the space of language tokens from scratch is difficult. To realize this vision of RL-driven pretraining, we must efficiently

explore and generate high-quality, coherent reasoning steps that are missing in current pretraining datasets. We provide ideas on addressing this challenge in Section 4.2.

4.2. Pretraining for Reasoning from Scratch (RPT) using Synthetic Tasks

Proposal: We propose pretraining models using simplified synthetic tasks with reduced token spaces to address the challenge of efficient exploration in reasoning tasks. Searching for reasoning traces in large token spaces is inherently difficult, as the vast combinatorial possibilities make it challenging to identify coherent and meaningful patterns. In contrast, reducing the token space in controlled environments and training agents to iteratively solve synthetic tasks or games can enable models to efficiently learn the core reasoning mechanisms. Once these reasoning skills are acquired, they can be scaled to more complex tasks with larger token spaces, gradually transferring them to natural language settings.

An important challenge when training a model from scratch with RL is efficiently exploring the space of reasoning traces to find the high-reward ones. The search space of natural language is nearly unconstrained, and therefore, the likelihood of finding a solution by generating a random combination of words is extremely small. The central question is: How can we make this search process more tractable?

To this end, we propose training a "reasoning prior" on synthetic tasks that incentivize the learning of reasoning primitives within a smaller token space where exploration is much easier. By training on simplified tasks where the agent must iteratively interact with the environment to solve for a reward, the agent can develop key reasoning skills, such as hierarchical abstraction, causal reasoning, and compositional generalization, bypassing the complexities of natural language. Recent studies (Chan et al., 2022; 2024) suggest that capabilities such as in-context learning emerge from structural properties of natural language syntax (e.g., burstiness, where items cluster temporally or thematically, and Zipfian distributions with heavy long tails) rather than specific semantics of the language tokens. This suggests that we can choose problems with drastically smaller token spaces that preserve key task properties necessary for the emergence of reasoning prior. Once such reasoning prior has been acquired, models can then be adapted to broader token spaces and ultimately to language, integrating search and feedback mechanisms into large-scale language pretraining.

The two open questions are: (i) Which tasks should be used for reasoning pretraining and (ii) How do we transfer reasoning prior to natural language? Some possibilities for (i) are generating logic games using a small set of randomly generated rules or using data sources with similar distributions to natural language but smaller token spaces. We can start with tasks with smaller token spaces and gradually increase the complexity with larger token spaces requiring more challenging reasoning. We see a parallel here between the state of self-supervised learning in computer vision a decade ago (Gui et al., 2024; Baradad et al., 2022; Walker et al., 2015; Jayaraman & Grauman, 2016; Agrawal et al., 2015; Doersch et al., 2015), where many attempts were made to develop a good proxy task for self-supervision. It took considerable research by the community to eventually find self-supervision objectives and tasks that eventually superseded the performance of supervised learning. We expect something similar here.

For (ii), we can draw to the common practice of adapting a neural network for a new computer vision task by preserving the early layers and potentially finetuning or re-initializing the last layers (Donahue et al., 2013; Agrawal et al., 2014). When it comes to reasoning prior, we expect it to be embedded in the intermediate layers of the neural network (not too close to inputs or outputs). To transfer the reasoning prior, we can preserve the intermediate layers but adapt the input/output layers to enable the reasoning to work in a new token space (Lu et al., 2021). Careful selection and design of the artificial environments (i) are essential to learning features and circuits that are useful and transferrable (ii) to natural language.

Evidence from existing literature hinting at the plausibility of the proposed approach We argue that the reasoning priors learned with synthetic tasks can plausibly transfer to natural language, supported by two key pieces of evidence. First, code is an example of an artificial environment that closely parallels language. Although code and language have different token distributions, pretraining on code before training on natural language has been widely used (Petty et al., 2024; Aryabumi et al., 2024; Kim et al., 2024). The structured nature of code - precise syntax, deterministic semantics, and modularity – enables models to develop strong priors for logic and problem-solving. Cognitive studies further support this approach: children who learn programming exhibit enhanced creativity, mathematical skills, and reasoning on other non-coding tasks (Scherer et al., 2019; Montuori et al., 2024). This suggests that structured environments, whether learned by humans or machines, facilitate the development of transferable reasoning skills.

Second, Zhong & Andreas (2024) demonstrated that even a random transformer, with only embedding layers optimized, can surprisingly solve various algorithmic tasks, such as modular arithmetic and parentheses balancing. This suggests that some meaningful circuits or computational pathways already exist within the architecture of random mod-

els. Based on this observation, we hypothesize that when a model is explicitly trained to learn to maximize rewards on synthetic tasks, it will develop more meaningful and transferrable circuits that can be transferred and used when interacting with the model in natural language.

Further, unlike real-world corpora, which conflate reasoning and knowledge – for example, in natural language, logical inference is often entangled with background knowledge and contextual semantics – synthetic tasks enable explicit disentanglement of the two. In these tasks, knowledge may consist of predefined rules and primitives that govern system dynamics, and we have full control over them. Because these synthetic tasks remove the ambiguities and semantic dependencies inherent in language, models trained to solve such tasks focus solely on applying known rules to reason, solving for certain rewards by iteratively stepping through the environment. Thus, artificial environments serve as ideal testbeds for reasoning mechanisms that do not confound an agent's extent of a priori factual knowledge with its reasoning abilities.

4.3. Decoupling Knowledge and Reasoning to Generalize Across Domains

Proposal: To enable robust generalization across knowledge domains, we propose **decoupling knowledge and reasoning** using an external memory bank to store knowledge and a **small context window**, allowing models to retrieve and process information selectively rather than the currently dominant paradigm of learning to reason using large context windows that can be more prone to overfitting.

The quest for disentangling knowledge and reasoning leads to the following questions: (i) Are there model architectural priors that encourage the emergence of more robust reasoning? (ii) How can we help the model generalize its reasoning to new problems and knowledge domains?

Current models discover reasoning by training a transformer model on a long context window. It is widely believed that larger models with longer context windows and more extensive data learn superior reasoning abilities as evidenced by their superior in-context learning (ICL; Dong et al. (2022)) abilities. However, our experiments in Section 3 illustrate that simply scaling models with larger data may not suffice for achieving general reasoning due to the intertwining of knowledge and reasoning. We hypothesize that training with longer context windows has more chances of learning spurious correlations among past tokens to predict future tokens. This is evident in the *lost-in-the-middle* phenomenon, where models become sensitive to the position of information rather than the content (Liu et al., 2024).

One way to encourage the emergence of more general reasoning is to train with *shorter context windows*. As the model need to predict using fewer tokens, it will have lesser chances to learn spurious correlations between tokens in the context window to predict future tokens. Crucially, cognitive science studies in humans provide the empirical grounding for this approach, suggesting that limiting context can foster more accurate and systematic reasoning (Miller, 1956; Newport, 1988; Elman, 1993; Cowan, 2001). In fact, as a result of the limited context, we develop strategies such as *chunking* (Thalmann et al., 2019), where we form abstractions that group related pieces of knowledge, enabling more complex concepts to be retained within working memory.

However, reducing the context window can prevent the model from having the long-range information necessary to make predictions. To mitigate this issue, we **propose to have an explicit** semantic memory where data is stored and a learned retrieval mechanism to fetch a small amount of data in the model's working memory (i.e., context window) on which the reasoning function operates.

We hypothesize that this combination of semantic memory for data storage, a learned data retrieval mechanism, and a small working memory on top of which reasoning operates will lead to a more scalable and generalizable reasoning system. The proposed architecture should allow for effective generalization to new problems or new knowledge sources by inserting the new knowledge in the semantic memory.

At a surface level, our proposal may seem akin to retrievalaugmented generation (RAG) (Lewis et al., 2021), which also integrates external knowledge. However, RAG systems typically rely on in-context learning (ICL) (Dong et al., 2022)—the retrieved text is appended into a single context that can become quite large. This approach presents two key challenges: (i) it relies on a static, heuristic-based retrieval mechanism, such as nearest neighbors on a fixed embedding space, that does not allow the model to actively query, and (ii) it assumes the model has strong long-context reasoning abilities, which is often not the case. As context size grows, retrieval quality degrades, and models struggle to effectively utilize all retrieved information, leading to errors (Zhang et al., 2024).

Moreover, prior memory-based approaches, such as Guu et al. (2020) typically do not support the aforementioned dynamic, multi-round interactions with external memory. Yet, when tackling a challenging math problem, for instance, we often need to retrieve different relevant past problems or theorems at various stages of reasoning. As we progress, we may continue to refine our retrieval and also record the approach we use to solve the problem. This iterative retrieval and updating of knowledge is essential for more efficient learning when we encounter similar problems in the future.

In contrast, we propose to interact with the memory (read/write) during *training* and *inference*, thereby learning to explicitly decouple memory from reasoning. Rather than appending all retrieved text into a long context window, we maintain a relatively *small* working memory to which the model can repeatedly query and update an external semantic memory. Using a small context forces both the retrieval mechanism to retrieve more relevant information and for the reasoning module to operate on a smaller number of tokens and thereby have lesser chances of learning spurious correlations between tokens.

Conceptually, our proposed design is reminiscent of early neural memory architectures like Neural Turing Machines (Graves, 2014) and Differentiable Neural Computers (Graves et al., 2016), where a separate memory module is maintained. These approaches, however, often suffer from significant optimization instabilities (Aleš, 2016; Paaßen & Schulz, 2020) due to end-to-end differentiability across numerous memory-access steps, which often lead to volatile gradients. To circumvent such optimization bottlenecks, we propose discrete memory-access decisions trained via RL, thereby avoiding the vanishing gradients typical in longhorizon differentiable memory access. In addition, since long-horizon RL optimization can be unstable, we propose leveraging a *curriculum* strategy to stabilize training by starting with simple memory interactions (read and write) and gradually progressing towards more complex, multi-step interactions.

5. Discussion and Alternative Views

An alternative perspective to our proposal of disentangling knowledge and reasoning contends that knowledge and reasoning are so deeply intertwined that they are practically inseparable. For example, consider completing the sentence, "The coffee was unbearably hot, so he poured it into a ..." Although "metal cup" and "porcelain cup" may both be probable completions, most people would select "porcelain cup" based on the context that the coffee was hot. Yet, it is unclear whether such a choice arises from memorized associations (knowledge of common behavior) or inference (reasoning about likely scenarios). This fundamental ambiguity raises questions about whether knowledge and reasoning can or should even be disentangled in intelligent systems.

One perspective is that if an agent has to perform a task repeatedly, then it may not want to explicitly reason every time, but store the result of its reasoning as "knowledge". In such a scenario, knowledge and reasoning can be coupled for efficiency. Our argument is not that reasoning and knowledge cannot be coupled but that the agent should have a mechanism to separate them and not only reason based on correlations between its experiences so that it can truly apply the reasoning in a general way.

Furthermore, integrating RL into the pretraining of LLMs presents several significant challenges that question its feasibility and scalability. One major issue is the inefficiency of RL-driven training, which requires collecting data on the fly through interactions rather than leveraging static, largescale corpora. This process is computationally expensive and risks becoming infeasible as model sizes and training demands grow. Finally, while we argue that supervised pretraining on passive data can limit exploration, training on synthetic tasks can suffer from a similar problem if they are poorly designed or constrained to narrow task distributions that ultimately do not transfer well to natural language. Particularly if real-world tasks in natural language include reasoning skills beyond the scope of synthetic pretraining tasks, then mechanisms to compensate for such differences in the pretraining and the needed capabilities will be required. Therefore, the choice of specific pretraining tasks is an important subject of future research.

6. Related Works

Evaluating Reasoning in Large Language Models. LLMs like GPT-4 (OpenAI, 2024), Llama 3 (Meta, 2024), and Qwen (DeepSeek-AI, 2024) have demonstrated impressive reasoning capabilities. However, as demonstrated with our esoteric programming language experiment, their reasoning remains fragile, often overfitting to training data patterns. These results are coherent with the findings of Mirzadeh et al. (2024); Wu et al. (2024), which evaluate LLMs' reasoning under counterfactual tasks and modified math problems. Xie et al. (2024) explored the interplay between memorization and reasoning, revealing that fine-tuning enhances both memorization and reasoning generalization.

Inference-time Scaling for Reasoning. Recent research on inference-time scaling methods falls into two broad categories. The first category encompasses search-based approaches that do not require additional training. Methods, such as Chain-of-Thought (Wei et al., 2023), Tree-of-Thought (Yao et al., 2024), Self-Consistency (Wang et al., 2023a), break down reasoning into sub-problems or explore multiple reasoning paths during inference and select the optimal solution based on the consistency criteria. The second category comprises of RL-based methods, which integrate search with learning mechanisms guided by reward models. Techniques like Reinforcement Learning with Human Feedback (Ouyang et al., 2022), ReST (Singh et al., 2024), and STaR (Zelikman et al., 2022; 2024) use search to generate diverse outputs with intermediate reasoning steps and provide feedback or reward signals (Lightman et al., 2023; Wang et al., 2024a; Uesato et al., 2022) to improve the model's reasoning policies. These methods adaptively refine reasoning by iteratively training the model on successful outcomes.

Memory Architectures. Current memory approaches like

Retrieval-Augmented Generation (RAG) (Berges et al., 2024) provide static memory augmentation but lack dynamism. Neural Turing Machines (NTMs) (Aleš, 2016) explored differentiable memory architectures but face optimization challenges due to the backpropagation through time. Recent innovations (Berges et al., 2024) embed memory as a persistent KV-cache into the model's weights, but because the memory is intricately tied to the models' representations, it becomes difficult to add new knowledge without retraining. Jin et al. (2024) proposed a novel framework using trainable (memory) and (reason) tokens to separate knowledge retrieval from reasoning, addressing key challenges in LLMs such as hallucinations and logical inconsistencies. However, this method still ties knowledge with reasoning in a single model.

Synthetic Data. Most current efforts (Chen et al., 2024; HuggingFace, 2024; Microsoft, 2024) focus on generating synthetic data directly in natural language using pretrained models. In contrast, there is a less explored avenue that involves using simple, symbolic synthetic datasets for pretraining (Wu et al., 2022; 2021; Krishna et al., 2021). These approaches typically depend on manually crafted rules (e.g., Set, Identity) to generate data. On top of this lack of scalability, they often lack the complexity required for emergent behavior, limiting their ability to support more complex structures or patterns. The simplicity of these rules can restrict the diversity and depth of the learned priors.

In other various domains, synthetic data has also shown promise. Studies in vision tasks (Wang et al., 2023b; Baradad et al., 2022) and RL (Baradad et al., 2023; Wang et al., 2024b) demonstrate the effectiveness of synthetic data derived from random Markov chains and noise-based images.

7. Acknowledgment

We want to express our gratitude to Idan Shenfeld, Zhang-Wei Hong, Akarsh Kumar, and members of the Improbable AI lab for the helpful discussion on the paper. We are grateful to MIT Supercloud and the Lincoln Laboratory Supercomputing Center for providing HPC resources. The research was supported in part by NSF CSGrad4US Fellowship, Google, and Amazon. The research was sponsored by the Army Research Office and was accomplished under Grant Number W911NF-21-1-0328. The research was also sponsored by the Office of Naval Research and was accomplished under Grant Number N00014-22-1-2740. This research was also sponsored by the United States Air Force Research Laboratory and the United States Air Force Artificial Intelligence Accelerator and was accomplished under Cooperative Agreement Number FA8750-19-2-1000. This research was supported also by the National Institute of Health under the Grant Number MH133066. The views and conclusions contained in this document are those of the authors and should not be interpreted as representing the official policies, either expressed or implied, of the Army Research Office, Naval Research Office, Air Force, or the U.S. Government.

8. Author Contributions

Seungwook Han co-developed the project and contributed in all aspects of experiments and writing.

Jyothish Pari co-developed the project and contributed in all aspects of experiments and writing.

Samuel Gershman contributed to the paper's narrative and writing.

Pulkit Agrawal co-developed the project direction, advised SH and JP, and played a significant role in paper writing.

References

- Agrawal, P., Girshick, R., and Malik, J. Analyzing the performance of multilayer neural networks for object recognition. In *Computer Vision–ECCV 2014: 13th European Conference, Zurich, Switzerland, September 6-12, 2014, Proceedings, Part VII 13*, pp. 329–344. Springer, 2014.
- Agrawal, P., Carreira, J., and Malik, J. Learning to see by moving. In *Proceedings of the IEEE international conference on computer vision*, pp. 37–45, 2015.
- Alami, R., Abubaker, A., Achab, M., Seddik, M. E. A., and Lahlou, S. Investigating regularization of self-play language models, 2024. URL https://arxiv.org/abs/2404.04291.
- Aleš, J. Neural turing machines: Convergence of copy tasks. *arXiv preprint arXiv:1612.02336*, 2016.
- Aryabumi, V., Su, Y., Ma, R., Morisot, A., Zhang, I., Locatelli, A., Fadaee, M., Üstün, A., and Hooker, S. To code, or not to code? exploring impact of code in pre-training. *arXiv* preprint arXiv:2408.10914, 2024.
- Baradad, M., Wulff, J., Wang, T., Isola, P., and Torralba, A. Learning to see by looking at noise, 2022. URL https://arxiv.org/abs/2106.05963.
- Baradad, M., Chen, C.-F., Wulff, J., Wang, T., Feris, R., Torralba, A., and Isola, P. Procedural image programs for representation learning, 2023. URL https://arxiv.org/abs/2211.16412.
- Berges, V.-P., Oğuz, B., Haziza, D., Yih, W.-t., Zettlemoyer, L., and Gosh, G. Memory layers at scale. *arXiv preprint arXiv:2412.09764*, 2024.
- Carreira, J., Agrawal, P., Fragkiadaki, K., and Malik, J. Human pose estimation with iterative error feedback. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 4733–4742, 2016.
- Cat's Eye Technologies. Languages: Befunge-93, 1993. URL https://catseye.tc/article/Languages.md#befunge-93. Accessed: 2025-01-28.
- Chan, B., Chen, X., György, A., and Schuurmans, D. Toward understanding in-context vs. in-weight learning. *arXiv* preprint arXiv:2410.23042, 2024.
- Chan, S., Santoro, A., Lampinen, A., Wang, J., Singh, A., Richemond, P., McClelland, J., and Hill, F. Data distributional properties drive emergent in-context learning in transformers. *Advances in Neural Information Processing Systems*, 35:18878–18891, 2022.

- Chen, H., Waheed, A., Li, X., Wang, Y., Wang, J., Raj, B., and Abdin, M. I. On the diversity of synthetic data and its impact on training large language models, 2024. URL https://arxiv.org/abs/2410.15226.
- Chu, T., Zhai, Y., Yang, J., Tong, S., Xie, S., Schuurmans, D., Le, Q. V., Levine, S., and Ma, Y. Sft memorizes, rl generalizes: A comparative study of foundation model post-training, 2025. URL https://arxiv.org/abs/2501.17161.
- Cowan, N. The magical number 4 in short-term memory: a reconsideration of mental storage capacity. *Behavioral and Brain Sciences*, 24(1):87–114; discussion 114–185, Feb 2001. doi: 10.1017/s0140525x01003922.
- DeepSeek-AI. Deepseek-v3 technical report, 2024. URL https://arxiv.org/abs/2412.19437.
- DeepSeek-AI. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning, 2025. URL https://arxiv.org/abs/2501.12948.
- Doersch, C., Gupta, A., and Efros, A. A. Unsupervised visual representation learning by context prediction. In *Proceedings of the IEEE international conference on computer vision*, pp. 1422–1430, 2015.
- Donahue, J., Jia, Y., Vinyals, O., Hoffman, J., Zhang, N., Tzeng, E., and Darrell, T. Decaf: A deep convolutional activation feature for generic visual recognition. corr. *arXiv* preprint arXiv:1310.1531, 2013.
- Dong, Q., Li, L., Dai, D., Zheng, C., Ma, J., Li, R., Xia, H., Xu, J., Wu, Z., Liu, T., et al. A survey on in-context learning. *arXiv preprint arXiv:2301.00234*, 2022.
- Elman, J. L. Learning and development in neural networks: The importance of starting small. *Cognition*, 48(1):71–99, 1993.
- Gao, L., Schulman, J., and Hilton, J. Scaling laws for reward model overoptimization. In Krause, A., Brunskill, E., Cho, K., Engelhardt, B., Sabato, S., and Scarlett, J. (eds.), Proceedings of the 40th International Conference on Machine Learning, volume 202 of Proceedings of Machine Learning Research, pp. 10835–10866. PMLR, 23–29 Jul 2023. URL https://proceedings.mlr.press/v202/gao23h.html.
- Graves, A. Neural turing machines. *arXiv preprint* arXiv:1410.5401, 2014.
- Graves, A., Wayne, G., Reynolds, M., Harley, T., Danihelka, I., Grabska-Barwińska, A., Colmenarejo, S. G., Grefenstette, E., Ramalho, T., Agapiou, J., Badia, A. P., Hermann, K. M., Zwols, Y., Ostrovski, G., Cain, A., King, H.,

- Summerfield, C., Blunsom, P., Kavukcuoglu, K., and Hassabis, D. Hybrid computing using a neural network with dynamic external memory. *Nature*, 538(7626):471–476, 2016. ISSN 0028-0836. doi: 10.1038/nature20101.
- Gui, J., Chen, T., Zhang, J., Cao, Q., Sun, Z., Luo, H., and Tao, D. A survey on self-supervised learning: Algorithms, applications, and future trends. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 46(12):9052–9071, 2024. doi: 10.1109/TPAMI.2024.3415112.
- Guu, K., Lee, K., Tung, Z., Pasupat, P., and Chang, M. Retrieval augmented language model pre-training. In *International conference on machine learning*, pp. 3929–3938. PMLR, 2020.
- Ho, N., Schmid, L., and Yun, S.-Y. Large language models are reasoning teachers. *arXiv preprint arXiv:2212.10071*, 2022.
- Hosseini, A., Yuan, X., Malkin, N., Courville, A., Sordoni, A., and Agarwal, R. V-star: Training verifiers for self-taught reasoners, 2024. URL https://arxiv.org/abs/2402.06457.
- HuggingFace. Cosmopedia: A guide to large language models. https://huggingface.co/blog/cosmopedia, 2024. Accessed: 2025-01-24.
- Jaech, A., Kalai, A., Lerer, A., Richardson, A., El-Kishky, A., Low, A., Helyar, A., Madry, A., Beutel, A., Carney, A., et al. Openai o1 system card. arXiv preprint arXiv:2412.16720, 2024.
- Jayaraman, D. and Grauman, K. Learning image representations tied to ego-motion, 2016. URL https://arxiv.org/abs/1505.02206.
- Jin, M., Luo, W., Cheng, S., Wang, X., Hua, W., Tang, R., Wang, W. Y., and Zhang, Y. Disentangling memory and reasoning ability in large language models. arXiv preprint arXiv:2411.13504, 2024.
- Kim, N., Schuster, S., and Toshniwal, S. Code pretraining improves entity tracking abilities of language models. *arXiv* preprint arXiv:2405.21068, 2024.
- Krishna, K., Bigham, J., and Lipton, Z. C. Does pretraining for summarization require knowledge transfer?, 2021. URL https://arxiv.org/abs/2109.04953.
- Kullback, S. and Leibler, R. A. On Information and Sufficiency. *The Annals of Mathematical Statistics*, 22(1):79 86, 1951. doi: 10.1214/aoms/1177729694. URL https://doi.org/10.1214/aoms/1177729694.
- Lampinen, A. K., Dasgupta, I., Chan, S. C., Matthewson, K., Tessler, M. H., Creswell, A., McClelland, J. L., Wang,

- J. X., and Hill, F. Can language models learn from explanations in context? *arXiv preprint arXiv:2204.02329*, 2022.
- Lewis, P., Perez, E., Piktus, A., Petroni, F., Karpukhin, V., Goyal, N., Küttler, H., Lewis, M., tau Yih, W., Rocktäschel, T., Riedel, S., and Kiela, D. Retrieval-augmented generation for knowledge-intensive nlp tasks, 2021. URL https://arxiv.org/abs/2005.11401.
- Lightman, H., Kosaraju, V., Burda, Y., Edwards, H., Baker, B., Lee, T., Leike, J., Schulman, J., Sutskever, I., and Cobbe, K. Let's verify step by step, 2023. URL https://arxiv.org/abs/2305.20050.
- Liu, N. F., Lin, K., Hewitt, J., Paranjape, A., Bevilacqua, M., Petroni, F., and Liang, P. Lost in the middle: How language models use long contexts. *Transactions of the Association for Computational Linguistics*, 12:157–173, 2024.
- Lu, K., Grover, A., Abbeel, P., and Mordatch, I. Pretrained transformers as universal computation engines, 2021. URL https://arxiv.org/abs/2103.05247.
- Luong, T. Q., Zhang, X., Jie, Z., Sun, P., Jin, X., and Li, H. Reft: Reasoning with reinforced fine-tuning. arXiv preprint arXiv:2401.08967, 2024.
- Meta. The llama 3 herd of models, 2024. URL https://arxiv.org/abs/2407.21783.
- Microsoft. Phi-4 technical report, 2024. URL https://arxiv.org/abs/2412.08905.
- Miller, G. A. The magical number seven, plus or minus two: Some limits on our capacity for processing information. *Psychological Review*, 63(2):81–97, Mar 1956. doi: 10. 1037/h0043158.
- Mirzadeh, I., Alizadeh, K., Shahrokhi, H., Tuzel, O., Bengio, S., and Farajtabar, M. Gsm-symbolic: Understanding the limitations of mathematical reasoning in large language models, 2024. URL https://arxiv.org/abs/2410.05229.
- Montuori, C., Gambarota, F., Altoé, G., and Arfé, B. The cognitive effects of computational thinking: A systematic review and meta-analytic study. *Computers & Education*, 210:104961, 2024. ISSN 0360-1315. doi: https://doi.org/10.1016/j.compedu.2023.104961. URL https://www.sciencedirect.com/science/article/pii/S0360131523002385.
- Newport, E. L. Constraints on learning and their role in language acquisition: Studies of the acquisition of American Sign Language. *Language Sciences*, 10(1):147–172, 1988.

- OpenAI. Gpt-4 technical report, 2024. URL https://arxiv.org/abs/2303.08774.
- Ouyang, L., Wu, J., Jiang, X., Almeida, D., Wainwright, C. L., Mishkin, P., Zhang, C., Agarwal, S., Slama, K., Ray, A., Schulman, J., Hilton, J., Kelton, F., Miller, L., Simens, M., Askell, A., Welinder, P., Christiano, P., Leike, J., and Lowe, R. Training language models to follow instructions with human feedback, 2022. URL https://arxiv.org/abs/2203.02155.
- Paaßen, B. and Schulz, A. Reservoir memory machines. *arXiv preprint arXiv:2003.04793*, 2020.
- Paulus, R. A deep reinforced model for abstractive summarization. *arXiv preprint arXiv:1705.04304*, 2017.
- Petty, J., van Steenkiste, S., and Linzen, T. How does code pretraining affect language model task performance? *arXiv* preprint arXiv:2409.04556, 2024.
- Scherer, R., Siddiq, F., and Sánchez Viveros, B. The cognitive benefits of learning computer programming: A meta-analysis of transfer effects. *Journal of Educational Psychology*, 111(5):764–792, 2019. doi: 10.1037/edu0000314.
- Silver, D., Huang, A., Maddison, C. J., Guez, A., Sifre, L., Van Den Driessche, G., Schrittwieser, J., Antonoglou, I., Panneershelvam, V., Lanctot, M., et al. Mastering the game of go with deep neural networks and tree search. *Nature*, 529(7587):484–489, 2016.
- Silver, D., Hubert, T., Schrittwieser, J., Antonoglou, I., Lai, M., Guez, A., Lanctot, M., Sifre, L., Kumaran, D., Graepel, T., Lillicrap, T., Simonyan, K., and Hassabis, D. Mastering chess and shogi by self-play with a general reinforcement learning algorithm, 2017. URL https://arxiv.org/abs/1712.01815.
- Singh, A., Co-Reyes, J. D., Agarwal, R., Anand, A., Patil, P., Garcia, X., Liu, P. J., Harrison, J., Lee, J., Xu, K., Parisi, A., Kumar, A., Alemi, A., Rizkowsky, A., Nova, A., Adlam, B., Bohnet, B., Elsayed, G., Sedghi, H., Mordatch, I., Simpson, I., Gur, I., Snoek, J., Pennington, J., Hron, J., Kenealy, K., Swersky, K., Mahajan, K., Culp, L., Xiao, L., Bileschi, M. L., Constant, N., Novak, R., Liu, R., Warkentin, T., Qian, Y., Bansal, Y., Dyer, E., Neyshabur, B., Sohl-Dickstein, J., and Fiedel, N. Beyond human data: Scaling self-training for problem-solving with language models, 2024. URL https://arxiv.org/abs/2312.06585.
- Skalse, J., Howe, N., Krasheninnikov, D., and Krueger, D. Defining and characterizing reward gaming. *Advances in Neural Information Processing Systems*, 35:9460–9471, 2022.

- Thalmann, M., Souza, A. S., and Oberauer, K. How does chunking help working memory? *Journal of Experimental Psychology: Learning, Memory, and Cognition*, 45(1): 37–55, January 2019. doi: 10.1037/xlm0000578.
- Uesato, J., Kushman, N., Kumar, R., Song, F., Siegel, N., Wang, L., Creswell, A., Irving, G., and Higgins, I. Solving math word problems with process- and outcomebased feedback, 2022. URL https://arxiv.org/abs/2211.14275.
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, L., and Polosukhin, I. Attention is all you need, 2023. URL https://arxiv.org/abs/1706.03762.
- Walker, J., Gupta, A., and Hebert, M. Dense optical flow prediction from a static image, 2015. URL https://arxiv.org/abs/1505.00295.
- Wang, P., Li, L., Shao, Z., Xu, R. X., Dai, D., Li, Y., Chen, D., Wu, Y., and Sui, Z. Math-shepherd: Verify and reinforce llms step-by-step without human annotations, 2024a. URL https://arxiv.org/abs/2312.08935.
- Wang, X., Wei, J., Schuurmans, D., Le, Q., Chi, E., Narang, S., Chowdhery, A., and Zhou, D. Self-consistency improves chain of thought reasoning in language models, 2023a. URL https://arxiv.org/abs/2203.11171.
- Wang, Y., Ko, C.-Y., and Agrawal, P. Visual pre-training for navigation: What can we learn from noise?, 2023b. URL https://arxiv.org/abs/2207.00052.
- Wang, Z., Wang, C., Dong, Z., and Ross, K. Pretraining with synthetic data helps offline reinforcement learning, 2024b. URL https://arxiv.org/abs/2310.00771.
- Wei, J., Tay, Y., Bommasani, R., Raffel, C., Zoph, B., Borgeaud, S., Yogatama, D., Bosma, M., Zhou, D., Metzler, D., et al. Emergent abilities of large language models. arXiv preprint arXiv:2206.07682, 2022.
- Wei, J., Wang, X., Schuurmans, D., Bosma, M., Ichter, B., Xia, F., Chi, E., Le, Q., and Zhou, D. Chain-of-thought prompting elicits reasoning in large language models, 2023. URL https://arxiv.org/abs/2201.11903.
- Wikipedia. Brainfuck. https://en.wikipedia.org/wiki/Talk:Brainfuck, 2025. Accessed: 2025-01-28.
- Wu, Y., Rabe, M. N., Li, W., Ba, J., Grosse, R. B., and Szegedy, C. Lime: Learning inductive bias for primitives

- of mathematical reasoning. In *International Conference* on *Machine Learning*, pp. 11251–11262. PMLR, 2021.
- Wu, Y., Li, F., and Liang, P. S. Insights into pre-training via simpler synthetic tasks. *Advances in Neural Information Processing Systems*, 35:21844–21857, 2022.
- Wu, Z., Qiu, L., Ross, A., Akyürek, E., Chen, B., Wang, B., Kim, N., Andreas, J., and Kim, Y. Reasoning or reciting? exploring the capabilities and limitations of language models through counterfactual tasks, 2024. URL https://arxiv.org/abs/2307.02477.
- Xie, C., Huang, Y., Zhang, C., Yu, D., Chen, X., Lin, B. Y., Li, B., Ghazi, B., and Kumar, R. On memorization of large language models in logical reasoning. *arXiv* preprint arXiv:2410.23123, 2024.
- Yang, A., Yang, B., Hui, B., Zheng, B., Yu, B., Zhou, C., Li, C., Li, C., Liu, D., Huang, F., Dong, G., Wei, H., Lin, H., Tang, J., Wang, J., Yang, J., Tu, J., Zhang, J., Ma, J., Yang, J., Xu, J., Zhou, J., Bai, J., He, J., Lin, J., Dang, K., Lu, K., Chen, K., Yang, K., Li, M., Xue, M., Ni, N., Zhang, P., Wang, P., Peng, R., Men, R., Gao, R., Lin, R., Wang, S., Bai, S., Tan, S., Zhu, T., Li, T., Liu, T., Ge, W., Deng, X., Zhou, X., Ren, X., Zhang, X., Wei, X., Ren, X., Liu, X., Fan, Y., Yao, Y., Zhang, Y., Wan, Y., Chu, Y., Liu, Y., Cui, Z., Zhang, Z., Guo, Z., and Fan, Z. Qwen2 technical report, 2024. URL https://arxiv.org/abs/2407.10671.
- Yao, S., Yu, D., Zhao, J., Shafran, I., Griffiths, T., Cao, Y., and Narasimhan, K. Tree of thoughts: Deliberate problem solving with large language models. *Advances in Neural Information Processing Systems*, 36, 2024.
- Zelikman, E., Wu, Y., Mu, J., and Goodman, N. D. Star: Bootstrapping reasoning with reasoning, 2022. URL https://arxiv.org/abs/2203.14465.
- Zelikman, E., Harik, G., Shao, Y., Jayasiri, V., Haber, N., and Goodman, N. D. Quiet-star: Language models can teach themselves to think before speaking, 2024. URL https://arxiv.org/abs/2403.09629.
- Zhang, T., Patil, S. G., Jain, N., Shen, S., Zaharia, M., Stoica, I., and Gonzalez, J. E. Raft: Adapting language model to domain specific rag, 2024. URL https://arxiv.org/abs/2403.10131.
- Zhong, Z. and Andreas, J. Algorithmic capabilities of random transformers. *arXiv preprint arXiv:2410.04368*, 2024.
- Ziegler, D. M., Stiennon, N., Wu, J., Brown, T. B., Radford, A., Amodei, D., Christiano, P., and Irving, G. Fine-tuning language models from human preferences. arXiv preprint arXiv:1909.08593, 2019.

A. Brainf**k and Befunge Experimental Details

A.1. Details on Experimental Protocol

The number of examples used for each language-task evaluation are as follows:

Brainf**k Copy: 100
Brainf**k Print: 676
Brainf**k Sort: 100
Befunge Print: 100
Befunge Fibonacci: 1
Befunge Factorial: 15

A.2. Brainf**k Prompt

```
You are a helpful coding assistant.
Brainfuck is an esoteric programming language with a minimalist set of commands. It
   operates on an array of memory cells (initially all set to zero) and a data pointer
   that starts at the beginning of this array. The commands are as follows:
> - Move the data pointer to the right (increment the pointer to point to the next memory
< - Move the data pointer to the left (decrement the pointer to point to the previous
   memory cell).
+ - Increment the byte at the data pointer (increase the value in the current memory cell
- - Decrement the byte at the data pointer (decrease the value in the current memory cell
   by 1).
. - Output the byte at the data pointer as an ASCII character (e.g., if the value is 65,
   it outputs 'A').
, - Read one byte of input and store its ASCII value in the byte at the data pointer.
Looping:
[ - If the byte at the data pointer is zero, jump forward to the command after the
   corresponding ']'.
] - If the byte at the data pointer is non-zero, jump back to the command after the
   corresponding '['.
Loops are used to iterate over a section of code until the byte at the data pointer
   becomes zero. They can be nested, but you must ensure each '[' has a matching ']'.
Memory and Data Pointer:
- Brainfuck operates on an array of memory cells (commonly 30,000 cells).
- All cells are initially set to zero.
- The data pointer can be moved left and right to access different cells.
- The ^{\prime}+^{\prime} and ^{\prime}-^{\prime} commands modify the value of the cell at the data pointer.
- You must manage memory manually, ensuring that the pointer does not move outside the
   bounds of the array.
ASCII Character Values:
- Lowercase letters have the following ASCII values:
  - 'a' = 97
  - 'b' = 98
  - 'c' = 99
  - 'd' = 100
  - 'e' = 101
  - 'f' = 102
```

```
- 'q' = 103
  -'h' = 104
 -'i' = 105
 -'\dot{j}' = 106
  - 'k' = 107
 - '1' = 108
  - 'm' = 109
 - 'n' = 110
 - 'o' = 111
 - 'p' = 112
 -'q' = 113
 -'r' = 114
 - 's' = 115
  - 't' = 116
  - 'u' = 117
  - 'v' = 118
  -'w' = 119
  - 'x' = 120
 - 'y' = 121
  -'z' = 122
### Instruction: Generate a Brainfuck program to print 'ey'
### Program: +++++++++|>+++++++++-|>+.<++++|>++++<-|>++++
### Instruction: Generate a Brainfuck program to print 'ez'
### Program: ++++++++|>+++++++-|>+.<++++|>++++-|>+.++++.
### Instruction: Generate a Brainfuck program to print 'hi'
```

Listing 4. Prompt for Brainf**k evaluation. This example is for the task of printing and the number of example instruction and programs pairs varies with the number of in-context example specified for evaluation. Only the instruction and program parts change for the other tasks of sorting and copying.

A.3. Befunge Prompt

```
You are a helpful coding assistant.
Befunge is a two-dimensional, stack-based esoteric programming language where the
   instruction pointer (IP) moves across a grid in multiple directions. The commands
   control movement, stack manipulation, and program output. Here's a guide on how to use
    Befunge with examples:
1. **Grid and Execution Flow**:
Befunge code is written on a 2D grid. The IP starts at the top left and moves according to
    directional commands like '>' (right), '<' (left), '^' (up), and 'v' (down).
2. **Basic Commands**:
- ** '+ - * / '**: Perform arithmetic with the top two stack values.
- **'>' '<' '^' 'v'**: Control the direction of the IP.
- **'_' '|'**: Conditional directions; '_' moves IP right if 0, left if non-zero; '|'
  moves IP down if 0, up if non-zero.
- **'@'**: Ends the program.
 **'"'**: Toggle string mode, pushing ASCII values of characters onto the stack.
 **`0-9`**: Push numbers onto the stack.
 **'.' ','**: Output values; '.' outputs a number, ',' outputs a character.
- **`#`**: Trampoline, which skips the next cell in the current direction.
3. **Stack Operations**:
- **`:`** duplicates the top stack value, **`$`** removes the top stack value, and **`\`**
    swaps the top two values.
4. **Self-Modifying Code**:
```

```
Befunge allows the code to modify itself at runtime using the **'p'** (put) and **'g'** (
   get) commands, where 'p' writes to a grid position and 'g' reads from a position.
5. **Examples**:
- **Hello, World!**:
   v",olleH">:#,_@
   >"dlroW",
   Explanation: This program uses '"', ',', and '_' to output "Hello, World!" as it moves
        around the grid.
 **Addition of Two Numbers** (e.g., '3 + 5'):
   >3 5+ .0
    111
   Explanation: '3' and '5' are pushed to the stack, '+' adds them, '.' outputs the
       result, and '@' ends the program.
-**Countdown from 9 to 0**:
   >9876543210v
   v:,_@
Explanation: Numbers 9 to 0 are pushed to the stack in reverse order. ':' duplicates the
   top value, ',' outputs it as a character, '_' checks if it's zero to change direction,
    and '@' terminates.
6. **Program Termination**:
Always use the '@' command to end execution.
### Instruction: Generate a Brainfuck program to print 'ey'
### Program: ++++++++|>+++++++-|>+.<+++|>++++|>+++++
### Instruction: Generate a Brainfuck program to print 'ez'
### Program: ++++++++|>+++++++-|>+.<++++|>++++-|>++++.
### Instruction: Generate a Brainfuck program to print 'hi'
```

Listing 5. Prompt for Brainf**k evaluation. This example is for the task of printing and the number of example instruction and programs pairs varies with the number of in-context example specified for evaluation. Only the instruction and program parts change for the other tasks of sorting and copying.

A.4. Synthetic Task Details

We designed a synthetic math task to ensure that the base model, Qwen/Qwen2.5-1.5B-Instruct, could occasionally generate accurate reasoning traces while still producing incorrect ones. This was important for our RL training, as it ensured that the base model could explore correct reasoning traces with a non-trivial probability, making RL training significantly more efficient.

We created 100 training examples and 100 test examples. To evaluate the model's outputs, we developed custom verification code that processes the model's responses to determine whether they correctly answer the given question. Our verification system accepts multiple valid answer formats, ensuring flexibility in evaluation. Additionally, we manually post-filtered the evaluation outputs to correct cases where the verification process incorrectly classified a response.

For model training, we used LoRA with the following configuration:

Listing 6. LoRA Configuration for Qwen2-1.5B

```
lora_config = LoraConfig(
    r=256,
    lora_alpha=32,
    target_modules=["q_proj", "k_proj", "v_proj"],
    lora_dropout=0.05,
    bias="none",
    task_type="CAUSAL_LM"
)
```

A.5. Prompt Format and Sample Responses

Listing 7. Prompt and CoT sample response

```
[SYSTEM]
You are a helpful assistant. Think step by step concisely and answer the question in the
                                        following format: Solution: (...)
  [USER]
Which of the vectors are orthogonal to [1, -1, -1]? (a) [3, 5, 0] (b) [-5, 2, 2] (c) [-1, -1]?
                                      -2, 4] (d) [1, 2, -1], output the answer as solution:
To determine which vectors are orthogonal to the vector ([1, -1, -1]), we need to check
                                  if the dot product of each vector with ([1, -1, -1]) is zero. Let's calculate the
                                      dot product for each vector:
1. For vector ([3, 5, 0]):
                                  [1, -1, -1] \cdot [3, 5, 0] = 1 \cdot [-1] 
                                                                     \neq 0
                               So, \backslash ([3, 5, 0] \backslash) is not orthogonal.
2. For vector ([-5, 2, 2]):
                                  [1, -1, -1] \cdot [-5, 2, 2] = 1 \cdot (-5) + (-1) \cdot (-1)
                                                                     = -9 \setminus neq 0
                                \1
                               So, ([-5, 2, 2]) is not orthogonal.
3. For vector ([-1, -2, 4]):
                                1/
                                [1, -1, -1] \cdot (-1, -2, 4] = 1 \cdot (-1) \cdot (-1) \cdot (-2) + (-1) \cdot (-1
                                                                              -4 = -3 \setminus neq 0
                               So, ([-1, -2, 4]) is not orthogonal.
4. For vector ([1, 2, -1]):
                                [1, -1, -1] \cdot [1, 2, -1] = 1 \cdot [1, -1, -1] \cdot [1, -1, -1]
                               So, ([1, 2, -1]) is orthogonal.
Therefore, the only vector that is orthogonal to ([1, -1, -1]) is ([1, 2, -1]).
Solution: d) [1, 2, -1]
```

Listing 8. Prompt and sample response from SFT model

```
[SYSTEM]
You are a helpful assistant. Think step by step concisely and answer the question in the
   following format: Solution: (...)
[USER]
```

General Reasoning Requires Learning to Reason from the Get-go

```
Which of the vectors are orthogonal to [1, -1, -1]? (a) [3, 5, 0] (b) [-5, 2, 2] (c) [-1, -2, 4] (d) [1, 2, -1], output the answer as solution: [ASSISTANT] solution: (d)
```