

## Application of Fractional Derivatives in Characterization of ECG graphs of Right Ventricular Hypertrophy Patients

---

Srijan Sengupta<sup>1a</sup>, Uttam Ghosh<sup>1b</sup>, Susmita Sarkar<sup>1c</sup> and Shantanu Das<sup>2</sup>

<sup>1</sup> Department of Applied Mathematics, University of Calcutta, Kolkata, India

<sup>2</sup> Reactor Control Systems Design Section E & I Group BARC Mumbai, India

Email: <sup>1a</sup>[srijansengupta.math@gmail.com](mailto:srijansengupta.math@gmail.com), <sup>1b</sup>[uttam\\_math@yahoo.co.in](mailto:uttam_math@yahoo.co.in), <sup>1c</sup>[susmita62@yahoo.co.in](mailto:susmita62@yahoo.co.in),  
<sup>2</sup>[shantanu@barc.gov.in](mailto:shantanu@barc.gov.in)

### Abstract

---

There are many functions which are continuous everywhere but non-differentiable at some or all points such functions are termed as unreachable functions. Graphs representing such unreachable functions are called unreachable graphs. For example ECG is such an unreachable graph. Classical calculus fails in their characterization as derivatives do not exist at the unreachable points. Such unreachable functions can be characterized by fractional calculus as fractional derivatives exist at those unreachable points where classical derivatives do not exist. Definition of fractional derivatives have been proposed by several mathematicians like Grunwald-Letnikov, Riemann-Liouville, Caputo and Jumarie to develop the theory of fractional calculus. In this paper we have used Jumarie type fractional derivative and consequently the phase transition (P.T.) which is the difference between left fractional derivative and right fractional derivatives to characterize those points. A comparative study has been done between normal ECG sample and problematic ECG sample (Right Ventricular Hypertrophy) by the help of above mentioned mathematical tool.

### Keywords:

Fractional Derivative of Jumarie type, Right Ventricular Hypertrophy, Phase Transition.

---

### 1. Introduction:

Basically fractional calculus was born in the year 1695 by raising a letter written by Leibniz to L'Hospital that "Can the meaning of derivatives with integer order be generalized to derivatives with non-integer orders?". It has become a rich area of research in the field of basic sciences and engineering since second half of the twentieth century [1-11]. This calculus is the generalization of differentiation and integration to an arbitrary order having applications in fluid mechanics, quantum mechanics, biomathematics including signal processing, control theory, etc. The most useful definitions of fractional derivative are Riemann-Liouville [2], Caputo [12], and Modified Riemann-Liouville [13,14]. Jumarie modified the Riemann-Liouville definition of fractional derivative to make derivative of constant zero which is non-zero in Riemann-Liouville sense [2,3]. Jumarie also modified the Caputo definition of fractional derivative as Caputo definition is applicable only for differentiable functions [2,3,12].

ECG (Electro-Cardiogram) is a continuous graph having non-differentiable points where classical derivative does not exist but fractional derivatives exist. Thus concept of fractional calculus thus can be applied to characterize those non-differentiable points of ECG graphs which may give a better measure for diagnosis of different heart diseases.

In this paper we shall characterize non-differentiable or unreachable points of ECG graphs using left modified and right modified Riemann-Liouville definitions [1-3,14] of half order fractional derivatives. The difference between left and right modified Riemann-Liouville derivative at a non

differentiable point is known as Phase Transition (P.T.) at that point. In this paper we also find the mean and standard deviation of all non-differentiable points of ECG to get a better solution to interpret this type of ECGs. To characterize these graphs ECGs are taken from internet arbitrarily. ECG is the pictographic representation of electrical charge depolarization and repolarization of the heart muscle[16]. There are several types of heart diseases such as right ventricular hypertrophy, left ventricular hypertrophy, right bundle branch block, left bundle branch block etc.[16] which can be detected by finding level of phase transition at some particular leads of patient's ECGs. Our main objective of this paper is to find some measures which will help the medical experts to diagnose right ventricular hypertrophy (RVH) disease from patient's ECG[16-17].

The rest of this paper is organized as follows: Section 2 describes some preliminaries about this paper; Section 3 describes about ECG and the right ventricular hypertrophy (RVH) disease in detail; Section 4 describes four theorems to obtain fractional derivative, phase transition, mean and standard deviation of phase transition values at the non-differentiable points of any ECG which are found for abnormal and normal ECGs in tabular form in section 5 and 6 respectively. In Section 5 and 6 Doctoral view of that ECGs are also given in tabular form. Then section 7 we draw the bar diagrams of phase transition values of non-differentiable points of leads of different ECGs and finally this paper is concluded in Section 8.

## 2.0 Some Preliminaries

### 2.1 Fractional Order Derivative

The fractional derivative is one of the oldest topic in mathematics but the definition of fractional derivative is modified day by day by many Mathematicians like Leibnitz, L-hospital, Grunwald-Letnikov, Riemann-Liouville, Caputo, Jumarie and others. Jumarie definition is basically modification of the Riemann-Liouville definition of fractional derivative as fractional order derivative of any constant is non zero in Riemann-Liouville sense whereas it is zero in Jumarie and Caputo sense. But the Caputo definition of fractional derivative can be applied only on differentiable functions whereas Jumarie definition of fractional derivative is applied for any continuous functions wherever it may be differentiable or not. In this paper we have used the Jumarie definition of fractional derivative to characterize the non-differentiable points in ECGs. The definition of fractional derivatives are as follows:

#### 2.1.1 Grunwald-Letnikov definition

Let  $f(x)$  be any function then the  $\alpha$ -th order derivative  $\alpha \in \mathbb{R}$  of  $f(x)$  is defined by

$${}_a D_x^\alpha f(x) = \lim_{\substack{h \rightarrow 0 \\ nh \rightarrow x-a}} h^{-\alpha} \sum_{r=0}^n \binom{\alpha}{r} f(x-rh) = \frac{1}{\Gamma(-\alpha)} \int_a^x \frac{f(\xi)}{(x-\xi)^{\alpha+1}} d\xi \quad (1)$$

Where  $\alpha$  is any arbitrary number real or complex and  $\binom{\alpha}{r} = \frac{\alpha!}{r!(\alpha-r)!} = \frac{\Gamma(\alpha+1)}{\Gamma(r+1)\Gamma(\alpha-r+1)}$

The above formula becomes fractional order integration if we replace  $\alpha$  by  $-\alpha$  which is

$${}_a D_x^{-\alpha} f(x) = \frac{1}{\Gamma(\alpha)} \int_a^x (x-\xi)^{\alpha-1} f(\xi) d\xi \quad (2)$$

Using the above formula we get for  $f(x) = (x-a)^\gamma$ ,

$${}_a D_x^\alpha (x-a)^\gamma = \frac{1}{\Gamma(-\alpha)} \int_a^x (x-\xi)^{-(\alpha+1)} (\xi-a)^\gamma d\xi$$

Using the substitution  $\xi = a + \eta(x-a)$  we have for  $\xi = a, \eta = 0$  and for  $\xi = x, \eta = 1$ ;  $d\xi = (x-a)d\eta$ ,  $(x-\xi) = x-a-\eta(x-a) = (x-a)(1-\eta)$ ;  $(\xi-a) = \eta(x-a)$ , we get the following

$$\begin{aligned} {}_a D_x^\alpha (x-a)^\gamma &= \frac{1}{\Gamma(-\alpha)} \int_a^x (x-\xi)^{-(\alpha+1)} (\xi-a)^\gamma d\xi = \frac{(x-a)^{\gamma-\alpha}}{\Gamma(-\alpha)} \int_0^1 \eta^\gamma (1-\eta)^{-(\alpha+1)} d\eta \\ &= \frac{\Gamma(\gamma+1)}{\Gamma(\gamma+1-\alpha)} (x-a)^{\gamma-\alpha}, (\alpha < 0, \gamma > -1) \end{aligned}$$

If the function  $f(x)$  be such that  $f^{(k)}(x)$ ,  $k = 1, 2, 3, \dots, m+1$  is continuous in the closed interval  $[a, x]$  and  $m \leq \alpha < m+1$  then

$${}_a D_x^\alpha f(x) = \sum_{k=0}^m \frac{f^{(k)}(a)(x-a)^{-\alpha+k}}{\Gamma(-\alpha+k+1)} + \frac{1}{\Gamma(-\alpha+m+1)} \int_a^x (x-\xi)^{m-\alpha} f^{(m+1)}(\xi) d\xi \quad (3)$$

### 2.1.2 Riemann-Liouville (R-L) definition of fractional derivative

Let the function  $f(x)$  is one time integrable then the integro-differential expression

$${}_a D_x^\alpha f(x) = \frac{1}{\Gamma(-\alpha+m+1)} \left( \frac{d}{dx} \right)^{m+1} \int_a^x (x-\xi)^{m-\alpha} f(\xi) d\xi \quad (4)$$

is known as the Riemann-Liouville definition of fractional derivative [3] with  $m \leq \alpha < m+1$ .

In Riemann-Liouville definition the function  $f(x)$  is getting fractionally integrated and then differentiated  $m+1$  whole-times but in obtaining the formula (3)  $f(x)$  must be  $m+1$  time differentiable. If the function  $f(x)$  is  $m+1$  whole times differentiable then the definition (1), (3) and (4) are equivalent.

Using integration by parts formula in (2), that is  ${}_a D_x^{-\alpha} f(x) = \frac{1}{\Gamma(\alpha)} \int_a^x (x-\xi)^{\alpha-1} f(\xi) d\xi$  we get

$${}_a D_x^{-\alpha} f(x) = \frac{f(a)(x-a)^\alpha}{\Gamma(\alpha+1)} + \frac{1}{\Gamma(\alpha+1)} \int_a^x (x-\xi)^\alpha f'(\xi) d\xi \quad (5)$$

The left R-L fractional derivative is defined by

$${}_a D_x^\alpha f(x) = \frac{1}{\Gamma(k-\alpha)} \left( \frac{d}{dx} \right)^k \int_a^x (x-\xi)^{k-\alpha-1} f(\xi) d\xi$$

$$k-1 \leq \alpha < k \quad (6)$$

and the right R-L derivative is

$${}_x D_b^\alpha f(x) = \frac{1}{\Gamma(k-\alpha)} \left( -\frac{d}{dx} \right)^k \int_x^b (\xi-x)^{k-\alpha-1} f(\xi) d\xi \quad k-1 \leq \alpha < k \quad (7)$$

In above definitions  $k \in \mathbb{Z}$  i.e. integer just greater than alpha and  $\alpha > 0$   $\alpha \in \mathbb{R}$

From the above definition it is clear that if at time  $t=x$  the function  $f(x)$  describes a certain dynamical system developing with time then for  $\xi < x$ , where  $x$  is the present time then state  $f(x)$  represent the past time and similarly if  $\xi > x$  then  $f(x)$  represent the future time. Therefore the left derivative represents the past state of the process and the right hand derivative represents the future stage.

### 2.1.3 Caputo definition of fractional derivative

In the R-L type definition the initial conditions contains the limit of R-L fractional derivative such as

$\lim_{x \rightarrow a} {}_a D_t^{\alpha-1} = b_1$  etc that is fractional initial staes. But if the initial conditions are  $f(a) = b_1, f'(a) = b_2 \dots$

type then R-L definition fails and to overcome these problems M. Caputo [9] proposed new definition of fractional derivative in the following form

$${}_a^c D_t^\alpha f(t) = \frac{1}{\Gamma(\alpha - n)} \int_a^t \frac{f^{(n)}(\tau)}{(t - \tau)^{\alpha + 1 - n}} d\tau, n - 1 < \alpha < n \quad (8)$$

Under natural condition on the function  $f(t)$  and as  $\alpha \rightarrow n$  the Caputo derivative becomes a conventional  $n$ -th order derivative of the function. The main advantage of the Caputo derivative is the initial conditions of the fractional order derivatives are conventional derivative type-i.e requiring integer order states.

In R-L derivative the derivative of Constant (C) is non-zero. Since

$$\begin{aligned} {}_0 D_t^\alpha C &= \frac{1}{\Gamma(-\alpha)} \int_0^t (t - \tau)^{-\alpha - 1} C d\tau = \frac{Ct^{-\alpha}}{\Gamma(-\alpha)} \int_0^1 (1 - x)^{-\alpha - 1} dx, \text{ Where } \tau = tx = - \left[ \frac{Ct^{-\alpha}}{\Gamma(-\alpha)} \frac{(1 - x)^{-\alpha}}{-\alpha} \right]_0^1 \\ &= \frac{Ct^{-\alpha}}{\Gamma(1 - \alpha)} \end{aligned}$$

which differ from the classical derivative.

#### 2.1.4 Modified definitions of fractional derivative

On the other hand to overcome the misconception derivative of a constant is zero in the conventional integer order derivative Jumarie [6] revised the R-L derivative in the following form

$$\begin{aligned} D_x^\alpha f(x) &= \frac{1}{\Gamma(-\alpha)} \int_0^x (x - \xi)^{-\alpha - 1} f(\xi) d\xi, \text{ for } \alpha < 0 \\ &= \frac{1}{\Gamma(1 - \alpha)} \frac{d}{dx} \int_0^x (x - \xi)^{-\alpha} [f(\xi) - f(0)] d\xi, \text{ for } 0 < \alpha < 1 \\ &= \left( f^{(\alpha - n)}(x) \right)^{(n)} \text{ for } n \leq \alpha < n + 1, n \geq 1. \end{aligned}$$

The above definition [6] is developed using left R-L derivative. Similarly using the right R-L derivative other type can be develop. Note in the above definition for negative fractional orders the expression is just Riemann-Liouville fractional integration. The modification is carried out in R-L the derivative formula, for the positive fractional orders alpha. The idea is to remove the offset value of function at start point of the fractional derivative from the function, and carry out R-L derivative usually done for the function.

Using the right R-L definition we established [8] the right modified definition of the fractional derivative in the following form


$$\begin{aligned} D_x^\alpha f(x) &= - \frac{1}{\Gamma(-\alpha)} \int_x^b (\xi - x)^{-\alpha - 1} f(\xi) d\xi, \quad \text{for } \alpha < 0 \\ &= - \frac{1}{\Gamma(1 - \alpha)} \frac{d}{dx} \int_x^b (\xi - x)^{-\alpha} [f(b) - f(\xi)] d\xi, \quad \text{for } 0 < \alpha < 1 \\ &= \left( f^{(\alpha - n)}(x) \right)^{(n)} \text{ for } n \leq \alpha < n + 1, n \geq 1. \end{aligned}$$

#### 2.2 Unreachable Functions

Those functions which are continuous everywhere but not-differentiable at some point or all point, termed as unreachable functions like as (i)  $|x - a|$  is unreachable at  $x = a$  where  $a$  is any point in real line, (ii)

$x \sin \frac{1}{x}$  is unreachable at  $x=0$  etc. similarly Weierstrass function, white noise, Brownian motion [1] are

also unreachable functions. ECGs are also these types of graphs which are continuous but have some non-differentiable points. The points Q, R, S of QRS complexes of a PQRST wave of any lead of ECG may be differentiable or non-differentiable which is shown in fig-1. For non-differentiable points we cannot describe it by classical sense but here fractional sense is applicable.

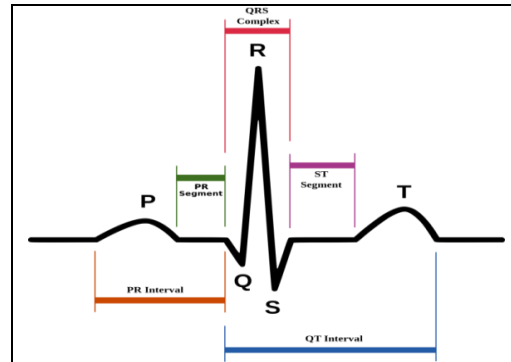

**Fig-1: A normal shape of PQRST wave in ECG**

### 2.3 Phase Transition

The difference between the left and right modified Riemann-Liouville derivative at unreachable points of any continuous graph is termed as Phase Transition at that point of that graph [14].

### 3.0 About ECG

#### 3.1 Some Preliminaries on ECG Leads

The heart's electrical activity recorded from electrodes on the body surface by the 12-lead electrocardiogram. This section describes the basic components of the ECG and the lead system used to record the ECG tracings. There are twelve leads which are I, II, III, AVR, AVL, AVF obtained from the 'limb' and V1, V2, V3, V4, V5, V6 which are obtained from the 'chest'. The first six represents the different electrical situation of the Atria and the later six represents the different electrical situation of the Ventricle. The six V leads (V1-V6) look at the heart in horizontal plane, from the front and the left side [16].

I, II, and AVL-looks at the left lateral surface of the heart.

III and AVF-looks at the interior surface of the atria.

AVR looks at the right atria.

V1 and V2 look at the right ventricle.

V3 and V4 look at septum between ventricles and the anterior wall of the left ventricle.

V5 and V6 represent the anterior and lateral wall of the left ventricle

#### 3.2 Right Ventricular Hypertrophy (RVH)

Right Ventricular Hypertrophy is a condition where the muscle wall of heart's right ventricle becomes thickened (hypertrophy). This can arise due to chronic pressure overload, similar to that of Left Ventricular Hypertrophy [18]. Since blood travels through the right ventricle to the lungs via pulmonary arteries, if the condition of RVH occurs then pulmonary circulation decreases i.e. blood does not flow well from the heart to the lungs of the body, then extra stress can be placed on the right ventricle. An ECG with Right Ventricular Hypertrophy may or may not show a right axis deviation on the graph [16].

**Symptoms:**

1. Pulmonary Hypertension
2. Pulmonary embolism
3. Chronic lungs disease
4. Mitral stenosis
5. Congenital heart disease

**Criteria of RVH in ECG lead:**

1. R wave in V1 lead + S wave in V5 and V6 lead is greater than 11 mm
2. R wave in V1 lead is greater than 7 mm
3. The ratio of R wave and S wave in V1 lead is greater than 1 mm
4. R wave in V5 or V6 lead is less than 5 mm
5. S wave in V5 or V6 lead is greater than 7 mm
6. The ratio of R wave and S wave in V5 or V6 lead is less than 1 mm

**4. Application of fractional derivative in ECG Graph:**

Now we have to study the non-differentiable points of the PQRST waves in ECG leads with the help of fractional derivatives. Here we have to find out the half-order fractional derivative (both left and right) and calculate the corresponding Normalized Phase Transition values (N.P.T.) by the help of the following theorems.

**Theorem 1:** Let us consider the function

$$f(x) = \begin{cases} ax + b, & p \leq x \leq q \\ cx + d, & q \leq x \leq r \end{cases}$$

with  $a \neq c$ . It is continuous at  $x=q$  such that  $aq+b = cq+d$  but not differentiable at that point. Then left fractional derivative, right fractional derivative and phase transition at that point  $x=q$  are respectively:

$$f_L^{(\alpha)}(q) = \frac{a(q-p)^{1-\alpha}}{\Gamma(2-\alpha)} \quad f_R^{(\alpha)}(q) = \frac{c(r-q)^{1-\alpha}}{\Gamma(2-\alpha)};$$

$$P.T = \frac{(a(q-p)^{1-\alpha} - c(r-q)^{1-\alpha})}{\Gamma(2-\alpha)}$$

**Theorem 2:** Let us consider the function

$$f(x) = \begin{cases} ax + b, & p \leq x \leq q \\ cx^2 + gx + h, & q \leq x \leq r \end{cases}$$

with  $a \neq 2cq+g$ . It is continuous at  $x=q$  such that  $aq+b = cq^2+gq+h$  but not differentiable at that point. Then left fractional derivative, right fractional derivative and corresponding phase transition at that point  $x=q$  are respectively:

$$f_L^{(\alpha)}(q) = \frac{a(q-p)^{1-\alpha}}{\Gamma(2-\alpha)}$$

$$f_R^{(\alpha)}(q) = \frac{1}{\Gamma(1-\alpha)} \left( c\alpha \frac{(r-q)^{2-\alpha}}{2-\alpha} + \left( \frac{\alpha(2cq+g)}{1-\alpha} + (cq+cr+g) \right) (r-q)^{1-\alpha} \right)$$

$$P.T. = \frac{1}{\Gamma(1-\alpha)} \left( \frac{a(q-p)^{1-\alpha}}{1-\alpha} - c\alpha \frac{(r-q)^{2-\alpha}}{2-\alpha} - \left( \frac{\alpha(2cq+g)}{1-\alpha} + (cq+cr+g) \right) (r-q)^{1-\alpha} \right)$$

**Theorem 3:** Let us consider the function

$$f(x) = \begin{cases} ax^2 + bx + c, & p \leq x \leq q \\ gx + h, & q \leq x \leq r \end{cases}$$

with  $2aq+b \neq g$ . It is continuous at  $x=q$  such that  $aq^2+bq+c = gq+h$  but not differentiable at that point. Then left fractional derivative, right fractional derivative and corresponding phase transition at that point  $x=q$  are respectively:

$$f_L^{(\alpha)}(q) = \frac{1}{\Gamma(1-\alpha)} \left( -a\alpha \frac{(q-p)^{2-\alpha}}{2-\alpha} + \left( \frac{\alpha(2aq+b)}{1-\alpha} + (ap+aq+b) \right) (q-p)^{1-\alpha} \right)$$

$$f_R^{(\alpha)}(q) = \frac{g(r-q)^{1-\alpha}}{\Gamma(2-\alpha)}$$

$$P.T. = \frac{1}{\Gamma(1-\alpha)} \left( -a\alpha \frac{(q-p)^{2-\alpha}}{2-\alpha} + \left( \frac{\alpha(2aq+b)}{1-\alpha} + (ap+aq+b) \right) (q-p)^{1-\alpha} - \frac{g(r-q)^{1-\alpha}}{1-\alpha} \right)$$

**Theorem 4:** Let us consider the function

$$f(x) = \begin{cases} ax^2 + bx + c, & p \leq x \leq q \\ gx^2 + hx + m, & q \leq x \leq r \end{cases}$$

with  $a \neq g$  or  $b \neq h$ . It is continuous at  $x=q$  such that  $aq^2+bq+c = gq^2+hq+m$  but not differentiable at that point. Then left fractional derivative, right fractional derivative and corresponding phase transition at that point  $x=q$  are respectively:

$$f_L^{(\alpha)}(q) = \frac{1}{\Gamma(1-\alpha)} \left( -a\alpha \frac{(q-p)^{2-\alpha}}{2-\alpha} + \left( \frac{\alpha(2aq+b)}{1-\alpha} + (ap+aq+b) \right) (q-p)^{1-\alpha} \right)$$

$$f_R^{(\alpha)}(q) = \frac{1}{\Gamma(1-\alpha)} \left( g\alpha \frac{(r-q)^{2-\alpha}}{2-\alpha} + \left( \frac{\alpha(2gq+h)}{1-\alpha} + (gr+gq+h) \right) (r-q)^{1-\alpha} \right)$$

$$P.T. = \frac{1}{\Gamma(1-\alpha)} \left( -a\alpha \frac{(q-p)^{2-\alpha}}{2-\alpha} + \left( \frac{\alpha(2aq+b)}{1-\alpha} + (ap+aq+b) \right) (q-p)^{1-\alpha} - \left( g\alpha \frac{(r-q)^{2-\alpha}}{2-\alpha} + \left( \frac{\alpha(2gq+h)}{1-\alpha} + (gr+gq+h) \right) (r-q)^{1-\alpha} \right) \right)$$

## 5. Normal ECG




Now we shall characterize the ECG graphs by the help of fractional derivative to compare normal ECGs with abnormal ECGs (RVH). For this purpose we shall consider  $\frac{1}{2}$ - order fractional derivatives. The non-differentiable points Q, R, S of QRS complexes of PQRST wave of any leads are used here usually points, not as waves. If Q or S point is not prominent at QRS complex of any lead of the ECGs under consideration then we cannot find the Left Fractional Derivative and Right Fractional Derivative at that point. We have denoted those cases by 'NA' i.e. 'Not Arise'. To investigate the characteristics of the ECG we here consider normal ECG and problematic ECGs(in our case RVH ECG to be compared with normal ECG).

Since RVH is characterized by ratio of R and S wave in V1, V5 and V6 leads. Thus these paper contributed only P.T. values at non-differentiable points at those leads. So our concern is to find any distinguishing measurements of P.T values at non-differentiable points on those leads to characterize the problematic ECG (in our case RVH) with normal ECG.

Thus our paper contributed only P.T. values at non-differentiable points at those leads for RVH ECGs. So our concern to find any distinguishing measurements of P.T values at non-differentiable points R and S wave in V1, V5 and V6 leads to characterize the problematic ECG (in our case RVH) with normal ECG. Following tables are new and constructed from our fractional calculus methodology.

i) Left and right fractional derivatives and phase transition have been calculated at the Q,R,S points of V1 lead in table, V5 lead in table and V6 lead in table. Then we also find mean and standard deviation of P.T. values at non-differentiable points of considerable leads of ECG graphs. In these tables we have not calculated fractional derivatives and hence phase transition at those points where integer order derivatives exist as the curves are smooth there and fractional derivatives are Not Arise (NA) there. Since RVH is described by ratio of R:S in V1,V5 and V6 leads.

**i. Normal ECG1:**

									
<b>1.</b>									
PQRST waves	Length of R wave (mm) in V1	Length of S wave (mm) in V1	Length of S wave (mm) in V5	Length of S wave (mm) in V6	Length of R wave (mm) in V5	Length of R wave (mm) in V6	R:S in V1 (mm)	R:S in V5 (mm)	R:S in V6 (mm)
1 <sup>st</sup>	4	9.5	21	15	18	14.5	0.42	0.86	0.97
2 <sup>nd</sup>	4.5	10.5	21	15	18	14.5	0.43	0.86	0.97
3 <sup>rd</sup>			20.5	14	18	13.5		0.88	0.96
Length of R wave in V1+S wave in V5 (mm) S1					Length of R wave in V1+S wave in V6 (mm) S2				
25					19				
25.5					19.5				
25					19				
25.5					19.5				
24.5					18				
25					18.5				



**Table 1A:** Length of S wave in V1, V2 and length of R wave in V5 and V6 and their ratios and length of S1, S2.

Here, we see that in table-1A lengths of R wave in V1 is less than 7 mm and length of R wave in V5 and V6 lead are greater than 5 mm but length of S wave in V5,V6 respectively are not less than 7 mm whereas ratios of R and S wave in V1 is less than 1 and in V5 and V6 are close to 1. So from Doctor's point of view this graph is normal ECG graph.

Now we have to consider above techniques mentioning in section5 characterizing this normal ECG first by us with Fractional Calculus. To do this job first we calculated Left Fractional Derivative and Right Fractional Derivative and corresponding Phase Transition (P.T.) values at non-differentiable points of considerable leads of examined ECG graphs; with these set of P.T. values we also determined mean and standard deviation of P.T. values for all non-differentiable points of considerable leads of examined ECG graphs to get my desired results.

In the following tables we have presented the fractional derivatives and phase transition values of the non-differentiable points of different leads of ECG presented in table-1A.

		Left Fractional Derivative	Right Fractional Derivative	Phase Transition
1 <sup>ND</sup>	For PQ:QR at Q	0	6.383076	6.383076
	For QR:RS at R	6.383076	-15.159807	21.542883
	For RS:ST at S	-15.159807	10.372499	25.532306
2 <sup>ST</sup>	For PQ:QR at Q	0	5.077706	5.077706
	For QR:RS at R	5.077706	-16.755576	21.833282
	For RS:ST at S	-16.755576	7.978846	24.734422

**Table 1B:** Phase transition at the non-differentiable points Q,R,S of lead V1

		Left Fractional Derivative	Right Fractional Derivative	Phase Transition
1 <sup>ST</sup>	For PQ:QR at Q	-1.520174	28.723844	30.244018
	For QR:RS at R	28.723844	-33.511152	62.234996
	For RS:ST at S	-33.511152	3.385138	36.896290
2 <sup>ND</sup>	For PQ:QR at Q	-1.595769	28.723844	30.319613
	For QR:RS at R	28.723844	-23.695962	52.419806
	For RS:ST at S	-23.695962	4.787307	28.483269
3 <sup>RD</sup>	For PQ:QR at Q	-3.191538	28.723844	31.915382
	For QR:RS at R	28.723844	-32.713267	61.437111
	For RS:ST at S	-32.713267	2.820948	35.534215

**Table 1C:** Phase transition at the non-differentiable points Q,R,S of lead V5

		Left Fractional Derivative	Right Fractional Derivative	Phase Transition
1 <sup>ST</sup>	For PQ:QR at Q	-2.350790	23.138652	25.489442
	For QR:RS at R	23.138652	-16.925688	40.064340
	For RS:ST at S	-16.925688	3.191538	20.117226
2 <sup>ND</sup>	For PQ:QR at Q	-2.350790	18.892630	21.243420
	For QR:RS at R	18.892630	-23.936537	42.829167
	For RS:ST at S	-23.936537	1.302940	25.239477
3 <sup>RD</sup>	For PQ:QR at Q	-2.280261	21.542883	23.823144
	For QR:RS at R	21.542883	-15.797308	37.340191

	For RS:ST at S	-15.797308	2.393654	18.190962
--	----------------	------------	----------	-----------

**Table 1D:** Phase transition at the non-differentiable points Q,R,S of lead V6

Now we construct a table with mean and standard deviation of phase transition values at the non-differentiable points of considerable ECG graph to get a better solution.

Non-differentiable Points	Examined Leads	Mean	SD
Q point	V1 lead	5.730391	0.923035979
	V5 lead	30.82633767	0.943897145
	V6 lead	23.51866867	2.139323404
R point	V1 lead	21.6880825	0.205343102
	V5 lead	58.69730433	5.451091094
	V6 lead	40.07789933	2.744513121
S point	V1 lead	25.133364	0.564189187
	V5 lead	33.63792467	4.515713494
	V6 lead	21.182555	3.643018712

**Table 1E:** Mean and Standard Deviation of Phase transition at the non-differentiable points Q,R,S of lead V1,V5&V6

ii. **Normal ECG 2:**

PQRST waves		Length of R wave (mm) in V1	Length of S wave (mm) in V1	Length of S wave (mm) in V5	Length of S wave (mm) in V6	Length of R wave (mm) in V5	Length of R wave (mm) in V6	R:S in V1 (mm)	R:S in V5 (mm)	R:S in V6 (mm)
1 <sup>st</sup>		2.8	19.7	17.6	18	17.9	19.2	0.14	1.02	1.07
2 <sup>nd</sup>		3.1	18.8	19.6	18.2	19.4	19.5	0.16	0.99	1.07
3 <sup>rd</sup>		3.2	19.5	18.3	18.6	18.6	19.9	0.16	1.02	1.07
Length of R wave in V1+S wave in V5 (mm) S1					Length of R wave in V1+S wave in V6 (mm) S2					
20.4					20.8					
22.4					21					
21.1					21.4					
20.7					21.1					
22.7					21.3					
21.4					21.7					
20.8					21.2					
22.8					21.4					
21.5					21.8					

**Table 2A:** Length of S wave in V1, V2 and length of R wave in V5 and V6 and their ratios and length of S1, S2.

Here, we see that in table-2A lengths of R wave in V1 is less than 7 mm and length of R wave in V5 and V6 lead are greater than 5 mm but length of S wave in V5,V6 respectively are not less than 7 mm whereas

ratios of R and S wave in V1 is less than 1 and in V5 and V6 are greater than 1. So from Doctor's point of view this graph is normal ECG graph.

In the following tables we have presented the fractional derivatives and phase transition values of the non-differentiable points of different leads of ECG presented in table-2A in similar way.

		P.T. values of V1	P.T. values of V5	P.T. values of V6
1 <sup>st</sup>	For PQ:QR at Q	NA*	23.4741	27.7903
	For QR:RS at R	33.7053	53.9826	62.0691
	For RS:ST at S	38.4275	32.0749	NA
2 <sup>nd</sup>	For PQ:QR at Q	NA	30.0893	27.4551
	For QR:RS at R	34.3529	60.7762	63.7091
	For RS:ST at S	36.2674	34.6120	NA
3 <sup>rd</sup>	For PQ:QR at Q	NA	24.4952	30.2656
	For QR:RS at R	31.8500	50.1233	51.7140
	For RS:ST at S	38.4311	26.6582	NA

**Table 2B:** Phase transition at the non-differentiable points Q,R,S of V1,V5 and V6 leads

\*NA-If Q or S point is not prominent at QRS complex of any lead of the ECGs under consideration i.e. the curves are smooth at that point then we cannot find the Left Fractional Derivative and Right Fractional Derivative at that point. We have denoted those cases by 'NA' i.e. 'Not Arise'. The above table has this type of consideration.

Now we construct a table with mean and standard deviation of phase transition values at the non-differentiable points of considerable ECG graph to get a better solution.

Non-differentiable Points	Examined Leads	Mean	SD
Q point	V1 lead	NA	NA
	V5 lead	26.01953	3.561308
	V6 lead	28.50367	1.535056
R point	V1 lead	33.30273	1.299104
	V5 lead	54.9607	5.393383
	V6 lead	59.16407	6.503847
S point	V1 lead	37.70867	1.248175
	V5 lead	31.11503	4.062849
	V6 lead	NA	NA

**Table 2C:** Mean and Standard Deviation of Phase transition at the non-differentiable points Q,R,S of lead V1,V5&V6

## 6. Problematic ECG

### Problematic ECG1

V1			V5			V6			
PQRST waves	Length of R wave (mm)	Length of S wave (mm)	Length of S wave (mm)	Length of S wave (mm)	Length of R wave (mm) in	Length of R wave (mm)	R:S in V1 (mm)	R:S in V5 (mm)	R:S in V6 (mm)

	in V1	in V1	in V5	in V6	V5	in V6			
1 <sup>st</sup>	10.7	8.1	15.2	10.6	7.8	6.5	1.32	0.51	0.61
2 <sup>nd</sup>	10	8	17.8	11.1	8.8	7.1	1.25	0.49	0.64
Length of R wave in V1+S wave in V5 (mm) S1					Length of R wave in V1+S wave in V6 (mm) S2				
25.9					21.3				
28.5					21.8				
25.2					20.6				
27.8					21.1				

**Table 3A:** Length of S wave in V1, V2 and length of R wave in V5 and V6 and their ratios and length of S1, S2.

Here, we see that in table-3A lengths of R wave in V1 and length of S wave in V5, V6 respectively are all greater than 7 mm but length of R wave in V5 and V6 lead are not less than 5 mm whereas ratios of R and S wave in V1 is greater than 1 and in V5 and V6 are less than 1. Also length of S1, S2 are all greater than 11 mm of that table. So from Doctor's point of view this patient has cardiac problem which called Right Ventricular Hypertrophy.

In the following tables we have presented the fractional derivatives and phase transition values of the non-differentiable points of different leads of ECG presented in table-3A in similar way.

		P.T. values of V1	P.T. values of V5	P.T. values of V6
1 <sup>st</sup>	For PQ:QR at Q	26.0803932	NA	NA
	For QR:RS at R	36.4947865	33.2203698	25.1153
	For RS:ST at S	14.7037186	25.7151588	23.6948
2 <sup>nd</sup>	For PQ:QR at Q	17.4327977	NA	NA
	For QR:RS at R	26.8886555	39.3007419	20.8981
	For RS:ST at S	16.333122	35.4445989	20.3390


**Table 3B:** Phase transition at the non-differentiable points Q, R, S of V1, V5 and V6 leads

Now we construct a table with mean and standard deviation of phase transition values at the non-differentiable points of considerable ECG graph to get a better solution.

Non-differentiable Points	Examined Leads	Mean	SD
Q point	V1 lead	21.7566	6.114773
	V5 lead	NA	NA
	V6 lead	NA	NA
R point	V1 lead	31.69172	6.79256
	V5 lead	36.26056	4.299472
	V6 lead	23.0067	2.982054
S point	V1 lead	15.51842	1.152162
	V5 lead	30.57988	6.879753
	V6 lead	22.01692	2.372916

**Table 3C:** Mean and Standard Deviation of Phase transition at the non-differentiable points Q, R, S of lead V1, V5 & V6

i. **Problematic ECG2:**

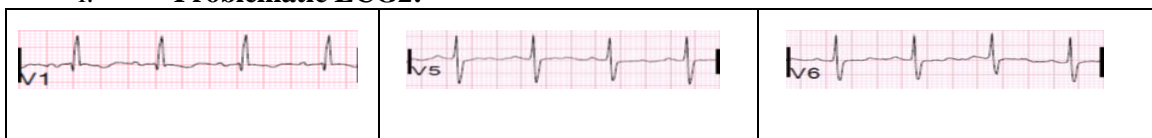

PQRST waves	Length of R wave (mm) in V1	Length of S wave (mm) in V1	Length of S wave (mm) in V5	Length of S wave (mm) in V6	Length of R wave (mm) in V5	Length of R wave (mm) in V6	R:S in V1 (mm)	R:S in V5 (mm)	R:S in V6 (mm)
1 <sup>st</sup>	10.7	8.8	19.2	15.6	9.1	8.6	1.22	0.47	0.55
2 <sup>nd</sup>	10.1	9.3	19.4	15.3	10.3	8.8	1.09	0.53	0.58
	11	9	17.1	14	9.1	8.1	1.22	0.53	0.58
	10.9	8.9	19.8	15.2	10	8.8	1.22	0.51	0.58
Length of R wave in V1+S wave in V5 (mm)					Length of R wave in V1+S wave in V6 (mm)				
S1					S2				
29.9					26.3				
30.1					26				
27.8					24.7				
30.5					25.9				
29.3					25.7				
29.5					25.4				
27.2					24.1				
29.9					25.3				
30.2					26.6				
30.4					26.3				
28.1					25				
30.8					26.2				
30.1					26.5				
30.3					26.2				
28					24.9				
30.7					26.1				

**Table 4A:** Length of S wave in V1, V2 and length of R wave in V5 and V6 and their ratios and length of S1, S2.

Here, we see that in table-5A lengths of R wave in V1 and length of S wave in V5, V6 respectively are all greater than 7 mm but length of R wave in V5 and V6 lead are not less than 5 mm whereas ratios of R and S wave in V1 is greater than 1 and in V5 and V6 are less than 1. Also length of S1, S2 are all greater than 11 mm of that table. So from Doctor's point of view this patient has cardiac problem which called Right Ventricular Hypertrophy.

In the following tables we have presented the fractional derivatives and phase transition values of the non-differentiable points of different leads of ECG presented in table-4A in similar way.

		P.T. values of V1	P.T. values of V5	P.T. values of V6
1 <sup>st</sup>	For PQ:QR at Q	21.210452	NA	NA
	For QR:RS at R	30.1310726	37.1478021	31.2891687
	For RS:ST at S	15.7002922	34.5669156	25.1595267
2 <sup>nd</sup>	For PQ:QR at Q	16.7788313	NA	NA
	For QR:RS at R	24.4743855	44.5219585	38.9823975
	For RS:ST at S	13.7510722	36.6391728	21.4870607

3 <sup>rd</sup>	For PQ:QR at Q	19.5922919	NA	NA
	For QR:RS at R	32.0811607	34.5425282	24.6282722
	For RS:ST at S	16.05711705	25.9435303	22.9338048
4 <sup>th</sup>	For PQ:QR at Q	19.4358294	NA	NA
	For QR:RS at R	20.4990607	47.6872047	39.3608674
	For RS:ST at S	8.199727814	30.6882091	21.7925225

**Table 4B:** Phase transition at the non-differentiable points Q,R,S of V1,V5 and V6 leads  
Now we construct a table with mean and standard deviation of phase transition values at the non-differentiable points of considerable ECG graph to get a better solution.

Non-differentiable Points	Examined Leads	Mean	SD
Q point	V1 lead	19.25435	1.834999
	V5 lead	NA	NA
	V6 lead	NA	NA
R point	V1 lead	26.79642	5.294556
	V5 lead	40.97487	6.155181
	V6 lead	33.56518	7.023408
S point	V1 lead	13.42705	3.629269
	V5 lead	31.95946	4.708362
	V6 lead	22.84323	1.664994

**Table 4c:** Mean and Standard Deviation of Phase transition at the non-differentiable points Q,R,S of lead V1,V5&V6

## 7. Bar diagram of Phase transition values

In this section we have drawn bar diagrams of phase transition values of non-differential points of V1,V5and V6 leads of the above described normal and problematic ECGs. Figure 1 represents the bar diagram for normal ECG and figure 2 represents the bar diagram for problematic ECGs.

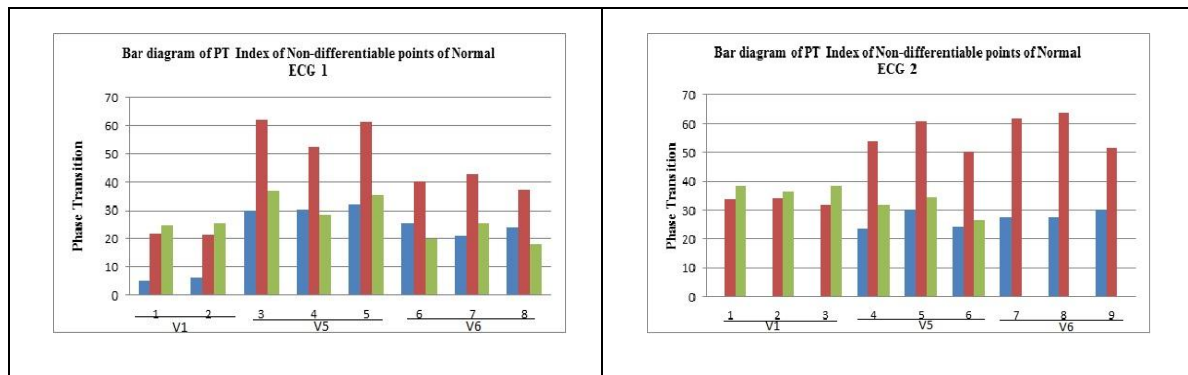


Figure1: Bar diagram of P.T. values of two Normal ECGS

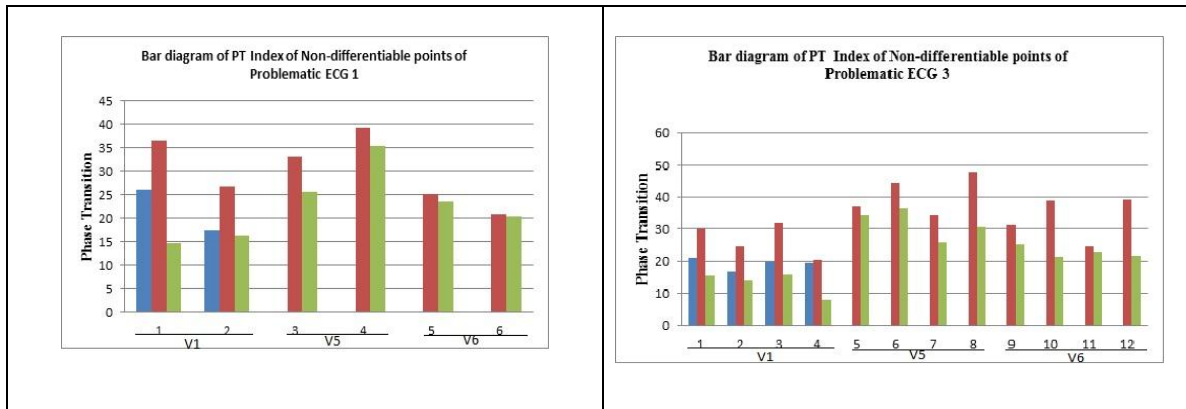


Figure2: Bar diagram of P.T. values of five Problematic ECGS

## 8. Conclusion

In this paper we have compared normal ECGs with the ECGs of RVH patients using fractional calculus. The tables represent the fractional derivatives of half-order together with their level of phase transition value at the non-differentiable points. It is clear from the Bar diagram that the P.T. values at S is higher than the P.T. values at R of V1 lead of normal ECGs whenever the opposite case holds for RVH ECGs. Also from Bar diagram we see that for V5 and V6 leads the difference between P.T. values at R and S point is small i.e. near to 1 for RVH ECG whereas these difference is large for normal ECGs. Also from tables of section 5 and 6 we see that the standard deviation at that point of our considerable leads indicate the P.T. values are consistent or not i.e. high and small values of standard deviation mean values are scattered and consistence respectively. Physically these mean the non-differentiable point of leads take near about same position for smaller value of standard deviation. Similarly the opposite case holds for higher value of standard deviation. So these are remarkable comparison of Normal ECG with Problematic ECG with fractional derivative techniques which is exactly new vision first adapted by us. As ECG is a rough curve so we will use Fractional Dimension, Hurst Exponent method etc. for our next consideration to give better solution. Thus by studying large number of ECG it is possible to find the a suitable range for the phase transition (P.T) values at the non-differentiable points that will help the doctors to determine the RVH conditions of patients. Also this type of study is not reported elsewhere. This method is a new method we are reporting for the first time-could be an aid for differential diagnostics in medical science.

## 9. Acknowledgement

Acknowledgments are to **Board of Research in Nuclear Science (BRNS), Department of Atomic Energy Government of India** for financial assistance received through BRNS research project no. 37(3)/14/46/2014-BRNS with BSC BRNS, title "Characterization of unreachable (Holderian) functions via Local Fractional Derivative and Deviation Function and to "**Indo-German Conference on Modelling, Simulation and Optimization in Applications**" organized by **Department of Mathematics, Bankura University** for giving me an opportunity to present this paper.

## 10. References

[1] S. Das. Functional Fractional Calculus 2<sup>nd</sup> Edition, Springer-Verlag 2011.

- [2] I. Podlubny. Fractional Differential Equations, Mathematics in Science and Engineering, Academic Press, San Diego, Calif, USA. 1999;198.
- [3] K. S. Miller, B. Ross. An Introduction to the Fractional Calculus and Fractional Differential Equations. John Wiley & Sons, New York, NY, USA; 1993.
- [4] K. Diethelm. The analysis of Fractional Differential equations. Springer-Verlag, 2010.
- [5] A. Kilbas , H. M. Srivastava, J.J. Trujillo. Theory and Applications of Fractional Differential Equations. North-Holland Mathematics Studies, Elsevier Science, Amsterdam, the Netherlands, 204. 2006.
- [6] Adam Loverro and Fractional Calculus: History, definitions and Applications for the Engineer.
- [7] ] S. Momani and Z. Odibat. Analytical approach to linear fractional partial differential equations arising in fluid mechanics. Physics Letters A .2006. 355. 271-279.
- [8] F. Mainardi, Fractional relaxation–oscillation and fractional diffusion-wave phenomena, Chaos Soliton Fract. 7 (9) (1996) 1461–1477.
- [9] ] S. S. Ray , R.K. Bera. An approximate solution of a nonlinear fractional differential equation by Adomian decomposition method. Applied Mathematics and Computation . 167 (2005) 561–571.
- [10] V. S. Erturk and S. Momani. Solving systems of fractional differential equations using differential transform method. Journal of Computational and Applied Mathematics 215 (2008) 142 – 151
- [11] K. Balachandran, S. Divya, L.R. Germa, J. J. Trujillo. Relative controllability of nonlinear neutral fractional integro-differential systems with distributed delays in control. Mathematical Methods in the Applied Sciences. 2015. DOI: 10.1002/mma.3470
- [12] M. Caputo, “Linear models of dissipation whose  $q$  is almost frequency independent-ii,” *Geophysical Journal of the Royal Astronomical Society*, 1967.13(5).529-539.
- [13] G. Jumarie, Modified Riemann-Liouville derivative and fractional Taylor series of non-differentiable functions further results, Computers and Mathematics with Applications, 2006. 51. 1367-1376.
- [14] U. Ghosh, S. Sengupta, S. Sarkar and S. Das. Characterization of non-differentiable points of a function by Fractional derivative of Jumarie type. European Journal of Academic Essays 2015. 2(2): 70-86.
- [15] K.M.Kolwankar and A.D.Gangal, "Fractional differentiability of nowhere differentiable functions ", Chaos 6, (4), (1996) 505-513
- [16] J. R. Hampton. The ECG made easy. Eighth ed. 2010.
- [17] ECGs are available from Internet (free Google Images).