

SCHRÖDINGER OPERATORS PERIODIC IN OCTANTS

EVGENY KOROTYAEV AND JACOB SCHACH MOLLER

ABSTRACT. We consider Schrödinger operators with periodic potentials in the positive quadrant for $\dim > 1$ with Dirichlet boundary condition. We show that for any integer N and any interval I there exists a periodic potential such that the Schrödinger operator has N eigenvalues counted with the multiplicity on this interval and there is no other spectrum on the interval. Furthermore, to the right and to the left of it there is an essential spectrum. Moreover, we prove similar results for Schrödinger operators for other domains. The proof is based on the inverse spectral theory for Hill operators on the real line.

1. INTRODUCTION AND MAIN RESULTS

1.1. Introduction. We consider Schrödinger operators H on the domain D given by

$$\begin{aligned} H &= -\Delta_x^+ - \Delta_y + V(x, y), \\ (x, y) \in D &= \mathbb{R}_+^{d_1} \times \mathbb{R}^{d_2}, \quad d_1 + d_2 = d \geq 2, \quad d_1, d_2 \geq 0. \end{aligned} \quad (1.1)$$

Here the operator Δ_x^+ is the Laplacian in the octant $\mathbb{R}_+^{d_1}$ with the Dirichlet boundary conditions on the boundary $\partial\mathbb{R}_+^{d_1}$ and the operator Δ_y is the Laplacian in the space \mathbb{R}^{d_2} . We assume that the potential V belongs to $L_{real}^\infty(D)$ and is octant periodic, see Condition V.

In order to define octant periodic potentials we need additional definitions. Let $\omega = (\omega_j)_1^m$ be a sequence of $+$ or $-$ and the set of all these sequences we denote by Ω_m . For any $\omega \in \Omega_m$ we define the octants $\mathcal{R}_\omega \subset \mathbb{R}^m$ by

$$\mathcal{R}_\omega = \mathbb{R}_{\omega_1} \times \mathbb{R}_{\omega_2} \times \dots \times \mathbb{R}_{\omega_m}, \quad \omega = (\omega_j)_1^m \in \Omega_m.$$

In particular, if $d = 3$ and $\omega = (+, +, +)$, then we have the positive octant $\mathcal{R}_\omega = \mathbb{R}_+^3$. Note that three axial planes ($x_1 = 0, x_2 = 0, x_3 = 0$) divide space \mathbb{R}^3 into eight octants, each with a coordinate sign from $(-, -, -)$ to $(+, +, +)$.

Definition V. A potential $V(z), z = (x, y) \in \mathbb{R}_+^{d_1} \times \mathbb{R}^{d_2}$ is called octant periodic if it has the decomposition

$$V(x, y) = \sum_{\omega \in \Omega_{d_2}} V_\omega(x, y) \chi_\omega(y), \quad (1.2)$$

where χ_ω is the characteristic function of the octant \mathcal{R}_ω and the function $V_\omega(z), z = (x, y)$ is periodic in \mathbb{R}^d and satisfies

$$V(z + \mathbf{p}_j \mathbf{e}_j) = V(z), \quad \forall z \in \mathbb{R}^d, \quad j = 1, \dots, d, \quad (1.3)$$

for some constants $\mathbf{p}_j > 0, j = 1, 2, \dots, d$, where and $\mathbf{e}_1 = (1, 0, 0, \dots), \mathbf{e}_2 = (0, 1, 0, 0, \dots)$ is the standard basis in \mathbb{R}^d .

Date: August 13, 2018.

Key words and phrases. spectral bands, periodic Schrödinger operator, eigenvalues.

For each ω we define Schrödinger operators H_ω with periodic potentials V_ω on \mathbb{R}^d by

$$H_\omega = -\Delta_z + V_\omega(z). \quad (1.4)$$

It is well known that the spectrum of each operator H_ω is absolutely continuous and is an union of an unbounded interval and a finite number of non-degenerated bounded intervals. In the next theorem we show the existence of eigenvalues of H with some octant periodic potentials.

Theorem 1.1. *i) Let $H = -\Delta_x^+ - \Delta_y + V(x, y)$, where $(x, y) \in D = \mathbb{R}_+^{d_1} \times \mathbb{R}^{d_2}$, $d_1, d_2 \geq 0$, $d_1 + d_2 = d \geq 2$ and the potential $V \in L^\infty(D)$ is octant periodic. Then*

$$\bigcup_{\omega \in \Omega_{d_2}} \sigma(H_\omega) \subseteq \sigma_{ess}(H). \quad (1.5)$$

ii) Let $I = (a, b) \subset \mathbb{R}$ be a finite open interval. Then for any integer $N \geq 0$ there exists an octant periodic potential $V \in L^\infty(D)$ such that $H = -\Delta_x^+ - \Delta_y + V(z)$ on D has N eigenvalues counted with multiplicity on I . Moreover, the interval I does not contain the essential spectrum, to the right and to the left of it there is a essential spectrum.

Remark. 1) The relation (1.5) is standard. Its proof follows from the Floquet theory for periodic operators.

2) In the simple case we have Schrödinger operators $H = -\Delta_x^+ + V(x)$ on the quadrant \mathbb{R}_+^2 , where the operator Δ_x^+ is the Laplacian in the domain \mathbb{R}_+^2 with the Dirichlet boundary conditions on the boundary $\partial\mathbb{R}_+^2$. We assume that the potential V is octant periodic. This theorem describe the spectrum of H on the positive quadrant.

3) The proof of ii) is based on the inverse spectral theory from [K99].

Now we discuss an existence of eigenvalue of the operator H acting on \mathbb{R}^d below the essential spectrum.

Theorem 1.2. *There exists a octant periodic real potential V such that the operator $H = -\Delta_y + V(y)$ on \mathbb{R}^d has exactly one simple eigenvalue on some interval $(-\infty, E)$ and there are no other spectrum on it.*

Remark. There is a problem to show that there is only one eigenvalue below the continuous spectrum.

1.2. Historical review. Davies and Simon [DS78] study the Schrödinger operators with potential, which periodic in half-space. The model one dimensional case with periodic potentials on the half-line is considered in [K00], [K05]. In series of papers [HK11],[HK11x],[HKSV15], Hempel and Kohlmann with co-authors consider the different type of dislocation problem in solid state physics. The surface density of states is investigated in [JL01], [KS01]. Scattering on the periodic boundary is considered in [F06], [JL03].

In the simple case $d = 1$ we need to describe the spectrum of two operators:

- In Section 2 we consider the Schrödinger operator h on the space $L^2(\mathbb{R}_+)$ given by

$$hy = -y'' + vy,$$

with the boundary condition $y(0) = 0$. Here the potential v is real 1-periodic and $v \in L^1(0, 1)$. In our proof results from [K99], [K06] about the inverse problem for h from is crucial and is presented in Theorem 2.1.

- We also consider the so-called half-solid operator T_τ , $\tau \in \mathbb{R}$ acting on $L^2(\mathbb{R})$ and given by

$$T_\tau = -\frac{d^2}{dx^2} + q_\tau(x), \quad q_\tau(x) = \begin{cases} \tau & \text{if } x < 0 \\ v(x) & \text{if } x > 0 \end{cases}, \quad (1.6)$$

where the potential $v \in L^2_{real}(\mathbb{T})$. By the physical point of view v is the potential of a crystal and the constant τ is the potential of a vacuum. Roughly speaking the potential q_τ is the octant periodic and has the form $q_\tau = V_+\chi_+ + V_-\chi_-$, where $V_+ = v$ and $V_- = \tau$ and χ_\pm are the characteristic functions of the half-line \mathbb{R}_\pm . In our proof results from [K05] about spectral properties of h from is crucial and is presented in Theorem 2.1. Moreover, we need additional results formulated in Lemmas 3.1 and 3.2.

2. PERIODIC SCHRÖDINGER OPERATORS ON THE HALF-LINE

2.1. Preliminary. We consider the Schrödinger operator h acting on the space $L^2(\mathbb{R}_+)$ and given by

$$hy = -y'' + vy,$$

with the boundary condition $y(0) = 0$. Here the potential v is real 1-periodic and satisfies $v \in L^1(0, 1)$. The spectrum of h consists of an absolutely continuous part $\sigma_{ac}(h)$ (the union of the bands σ_n , $n \geq 0$ separated by gaps γ_n) plus at most one eigenvalue in each non-empty gap γ_n , $n \in \mathbb{N}$, [KS12], [Z69]. Here the bands σ_n and gaps γ_n are given by (see Fig. 1)

$$\sigma_{ac}(h) = \bigcup_{n \geq 0} \sigma_n, \quad \sigma_n = [\lambda_n^+, \lambda_{n+1}^-], \quad \gamma_n = (\lambda_n^-, \lambda_n^+), \quad n \in \mathbb{N}, \quad (2.1)$$

We also set $\gamma_0 = (-\infty, \lambda_0^+)$ and $\lambda_0^+ = 0$. Here λ_n^\pm satisfy

$$\begin{aligned} \lambda_0^+ &< \lambda_1^- \leq \lambda_1^+ \leq \lambda_{n-1}^- < \lambda_n^- \leq \lambda_n^+ < \dots, \\ \lambda_n^\pm &= (\pi n)^2 + O(1) \quad \text{as } n \rightarrow \infty. \end{aligned} \quad (2.2)$$

The bands σ_n , $n \geq 0$ satisfy (see e.g. [M81] or [K97])

$$|\sigma_n| = \lambda_{n+1}^- - \lambda_n^+ \leq \pi^2(2n + 1), \quad \forall n \geq 0. \quad (2.3)$$

The sequence (2.2) is the spectrum of the equation

$$-y'' + v(x)y = \lambda y, \quad \lambda \in \mathbb{C}, \quad (2.4)$$

with the 2-periodic condition $y(x+2) = y(x)$ ($x \in \mathbb{R}$). If a gap degenerates, $\gamma_n = \emptyset$ for some $n \geq 1$, then the corresponding bands σ_n and σ_{n+1} touch. This happens when $\lambda_n^- = \lambda_n^+$; this number is then a double eigenvalue of the 2-periodic problem (2.4). The lowest eigenvalue $\lambda_0^+ = 0$ is always simple and has a 1-periodic eigenfunction. Generally, the eigenfunctions corresponding to eigenvalues λ_{2n}^\pm are 1-periodic, those for λ_{2n+1}^\pm are 1-anti-periodic in the sense that $y(x+1) = -y(x)$ ($x \in \mathbb{R}$).

Introduce the two canonical fundamental solutions $\vartheta(x, \lambda)$, $\varphi(x, \lambda)$ of the equation (2.4), satisfying the initial conditions $\varphi'(0, \lambda) = \vartheta(0, \lambda) = 1$ and $\varphi(0, \lambda) = \vartheta'(0, \lambda) = 0$. Here and in the following u' denotes the derivative w.r.t. the first variable. The Lyapunov function (Hill discriminant) of the periodic equation (2.4) is then defined by

$$\mathfrak{F}(\lambda) = \frac{1}{2}(\varphi'(1, \lambda) + \vartheta(1, \lambda)), \quad \lambda \in \mathbb{C}.$$

Note that $\sigma_{ac}(h) = \{\lambda \in \mathbb{R} : \mathfrak{F}(\lambda) \in [-1, 1]\}$, see [Ti58].

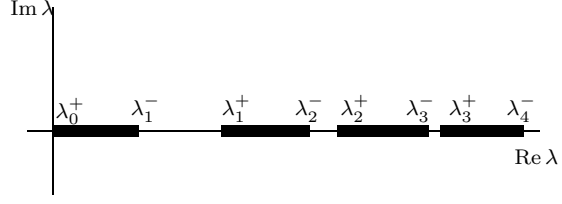


FIGURE 1. The cut domain $\mathbb{C} \setminus \cup \mathfrak{S}_n$ and the cuts (bands) $\mathfrak{S}_n = [E_{n-1}^+, E_n^-]$, $n \geq 1$

2.2. Riemann surface. The function $\mathfrak{F}(\lambda)$ is entire and is real on the real line. Introduce the function ϕ , which is analytic in \mathbb{C}_+ and given by

$$\phi(\lambda) = (1 - \mathfrak{F}^2(\lambda))^{\frac{1}{2}}, \quad \lambda \in \overline{\mathbb{C}}_+, \quad (2.5)$$

where the branch is defined by the condition $\phi(\lambda + i0) > 0$ for $\lambda \in \sigma_0 = [\lambda_0^+, \lambda_1^-]$. We also introduce the two-sheeted Riemann surface Λ of $\phi(\lambda)$ obtained by joining the upper and lower rims of two copies of the cut plane $\mathbb{C} \setminus \sigma_{ac}(h)$ in the usual (crosswise) way, see e.g. [KS12]. We denote the n -th open gap on the first, physical sheet Λ_1 by $\gamma_n^{(1)}$ and its counterpart on the second, nonphysical sheet Λ_2 by $\gamma_n^{(2)}$, and set the "circle" gap γ_n^\bullet by

$$\gamma_n^\bullet := \overline{\gamma_n^{(1)}} \cup \overline{\gamma_n^{(2)}}. \quad (2.6)$$

2.3. Floquet solutions. The Floquet solutions $\psi^\pm(x, \lambda)$, $\lambda \in \Lambda$, of the equation (2.4) are given by

$$\begin{aligned} \psi_\pm(x, \lambda) &= \vartheta(x, \lambda) + m_\pm(\lambda)\varphi(x, \lambda), \\ \text{where } m_\pm &= \frac{a \pm i\phi}{\varphi(1, \cdot)}, \quad a(\lambda) = \frac{1}{2}(\varphi'(1, \lambda) - \vartheta(1, \lambda)), \end{aligned} \quad (2.7)$$

$$\varphi(1, \lambda)\psi_+(\cdot, \lambda) \in L^2(\mathbb{R}_+) \quad \forall \lambda \in \Lambda_1 = \mathbb{C} \setminus \sigma_{ac}(h).$$

Note that in the trivial case $v = 0$, we have $\psi^\pm(x, \lambda) = e^{\pm ix\sqrt{\lambda}}$.

Introduce a function $b(\lambda) = -i\phi(\lambda)$. It is known that (see e.g. [K05])

$$b(\lambda) = (-1)^n \sqrt{\mathfrak{F}^2(\lambda) - 1}, \quad \lambda \in \gamma_n \in \Lambda, \quad (2.8)$$

where the branch $\sqrt{\mathfrak{F}(\lambda)^2 - 1} > 0$ as $\lambda \in \gamma_n^1 \subset \Lambda^1$ and $\sqrt{\mathfrak{F}(\lambda)^2 - 1} < 0$ as $\lambda \in \gamma_n^2 \subset \Lambda^2$.

Below we need the simple identities

$$a^2 + 1 - \mathfrak{F}^2 = 1 - \varphi'(1, \cdot)\vartheta(1, \cdot) = -\varphi(1, \cdot)\vartheta'(1, \cdot). \quad (2.9)$$

2.4. Eigenvalues and resonances. It is well known (see e.g. [KS12], [Z69]) that, for each $f \in C_0^\infty(\mathbb{R}_+)$, $f \neq 0$, the function $g(\lambda) = ((h - \lambda)^{-1}f, f)$ has a meromorphic extension from the physical sheet Λ_1 to the whole Riemann surface Λ . By definition,

If g has a pole at some $\lambda_0 \in \Lambda_1$ for some f , then λ_0 is an eigenvalue of h and $\lambda_0 \in \bigcup_{n \geq 0} \gamma_n^{(1)}$.

If g has a pole at some $\lambda_0 \in \Lambda_2$ for some f , then λ_0 is a resonance of h . In particular, if $\lambda_0 \in \gamma_n^{(2)}$ for some $n \geq 0$, then λ_0 is anti-bound state of h and $\lambda_0 \in \bigcup_{n \geq 1} \gamma_n^{(2)}$.

If g has asymptotics $g(\lambda) = \frac{1}{\sqrt{t}}(1 + O(t))$ as $t = \lambda - \lambda_0 \rightarrow 0$ for some $\lambda_0 \in \{\lambda_n^+, \lambda_n^-\}$, $n \geq 1$, then λ_0 is a virtual state of h .

It is well known that for the case $v \neq \text{const}$, see [KS12], [Z69], the function g has exactly one simple pole μ_n^\bullet on each "circle" gap $\gamma_n^\bullet \neq \emptyset, n \geq 1$ and there are no others. Here $\mu_n^\bullet \in \gamma_n^\bullet$ is a so-called state of h and its projection onto the complex plane coincides with the n -th eigenvalue, μ_n , of the Dirichlet boundary value problem

$$-y_n'' + vy_n = \mu_n y_n, \quad y_n(0) = y_n(1) = 0, \quad x \in [0, 1], \quad n \geq 1.$$

Moreover, if $\gamma_n \neq \emptyset$, then exactly one of the following three cases holds,

- 1) $\mu_n^\bullet \in \gamma_n^{(1)}$ is an eigenvalue,
- 2) $\mu_n^\bullet \in \gamma_n^{(2)}$ is a resonance (it is a so-called anti-bound state),
- 3) $\mu_n^\bullet \in \{\lambda_n^+, \lambda_n^-\}$ is a virtual state. Here the function $g(\mu_n^\bullet + z^2)$ has a pole at 0.

There are no other states of h , so h has only eigenvalues, virtual states and anti-bound states. If there are exactly $N \geq 1$ non-degenerate gaps in the spectrum of $\sigma_{ac}(h)$, then the operator h has exactly N states; the closed gaps $\gamma_n = \emptyset$ and the semi infinite gap $(-\infty, 0)$ do not contribute any states. In particular, if $\gamma_n = \emptyset$ for all $n \geq 1$, then $v = \text{const}$ ([K98], [K99]) and thus h has no states. A more detailed description of the states of h is given in Theorem 2.1 below.

2.5. Inverse problem. We need the following results from the inverse spectral theory for the operator h on the half-line, in the form convenient for us. We define the real Hilbert spaces

$$\mathcal{H}_\alpha = \left\{ q \in L^2(0, 1) : \int_0^1 q(x) dx = 0, \quad q^{(\alpha)} \in L^2(0, 1) \right\}, \quad \alpha \geq 0,$$

and let $\mathcal{H} = \mathcal{H}_0$. Introduce the real Hilbert spaces $\ell_\alpha^2, \alpha \in \mathbb{R}$ of the sequences $(f_n)_1^\infty$ equipped with the norms

$$\|f\|_{\ell_\alpha^2}^2 = \sum_{n \geq 1} (2\pi n)^{2\alpha} f_n^2 < \infty,$$

and let $\ell^2 = \ell_0^2$.

Defining the mapping $\xi : \mathcal{H} \rightarrow \ell^2 \oplus \ell^2$ by

$$v \mapsto \xi = (\xi_n)_1^\infty, \quad \xi_n = (\xi_{1n}, \xi_{2n}) \in \mathbb{R}^2$$

where the components ξ_{1n}, ξ_{2n} are given by

$$\xi_{1n} = \frac{\lambda_n^- + \lambda_n^+}{2} - \mu_n^2, \quad \xi_{2n} = \left| \frac{|\gamma_n|^2}{4} - \xi_{1n}^2 \right|^{\frac{1}{2}} \text{sign}_n, \quad \xi_n^2 = \frac{1}{4} |\gamma_n|^2, \quad (2.10)$$

where

$$\text{sign}_n = \begin{cases} +1 & \text{if } \mu_n^\bullet \text{ is an eigenvalue,} \\ -1 & \text{if } \mu_n^\bullet \text{ is a resonance,} \\ 0 & \text{if } \mu_n^\bullet \text{ is a virtual state,} \end{cases} \quad n \geq 1. \quad (2.11)$$

This mapping ξ is described by the following result from [K99], [K98], [K06]:

Theorem 2.1. *The mapping $v \rightarrow \xi$ acting from \mathcal{H} to $\ell^2 \oplus \ell^2$ is a real analytic isomorphism between the real Hilbert spaces \mathcal{H} and $\ell^2 \oplus \ell^2$ and satisfies*

$$\|v\| \leq 4\|\xi\|(1 + \|\xi\|^{\frac{1}{3}}), \quad \|\xi\| \leq \|v\|(1 + \|v\|)^{\frac{1}{3}}, \quad (2.12)$$

where $\|v\|^2 = \int_0^1 v^2(x) dx$ and $\|\xi\|^2 = \frac{1}{4} \sum_{n \geq 1} |\gamma_n|^2$. Moreover, if $\alpha \in \mathbb{N}$, then $(|\gamma_n|)_1^\infty \in \ell_\alpha^2$ iff the derivative $q^{(\alpha)}$ belongs to \mathcal{H} .

Remark. 1) Thus we have that for any non-negative sequence $\varkappa = (\varkappa_n)_1^\infty \in \ell^2$, there are unique 2-periodic eigenvalues λ_n^\pm ($n \in \mathbb{N}_0$), for some $p \in \mathcal{H}$, such that each $\varkappa_n = \lambda_n^+ - \lambda_n^-$, ($n \in \mathbb{N}$). Consequently, from the gap lengths $(|\gamma_n|)_1^\infty$ one can uniquely recover the Riemann surface Λ as well as the points $\lambda_n^- = \lambda_n^+$ where $\varkappa_n = 0$. Furthermore, for any additional sequence $\tilde{\lambda}_n^0 \in \gamma_n^\bullet$ ($n \in \mathbb{N}$), there is a unique potential $p \in \mathcal{H}$ such that each state λ_n^0 of the corresponding operator coincides with $\tilde{\lambda}_n^0$ ($n \in \mathbb{N}$). The results of [K99] were extended in [K03] to periodic distributions $v = p'$, where $p \in \mathcal{H}$.

2) We can consider the Schrödinger operator \tilde{h} acting on the space $L^2(\mathbb{R}_+)$ and given by

$$hy = -y'' + vy,$$

with the Neumann boundary condition $y(0) = 0$. The spectrum of \tilde{h} consists of an absolutely continuous part $\sigma_{ac}(\tilde{h}) = \sigma_{ac}(h)$ (the union of the bands $\sigma_n, n \geq 0$ separated by gaps γ_n , see (2.1)) plus at most one eigenvalue in each non-empty gap $\gamma_n, n \in \mathbb{N}$. Here also we can consider the resonances for the Schrödinger operator \tilde{h} , similar to the the resonances for the Schrödinger operator h . These eigenvalues and the resonances for \tilde{h} coincide with the eigenvalues $\nu_n, n \geq 0$ of the problem

$$-y'' + vy = \lambda y, \quad y'(0) = y'(1) = 0. \quad (2.13)$$

The eigenvalues $\nu_n, n \geq 0$ satisfy

$$\nu_0 \leq \lambda_0^+, \quad \nu_n \in [\lambda_n^-, \lambda_n^+] \quad \forall n \geq 1. \quad (2.14)$$

Here also we can consider the resonances for the Schrödinger operator \tilde{h} , similar to the the resonances for the Schrödinger operator h .

3. ONE DIMENSIONAL HALF-SOLID

In this section we consider the case of one-dimensional octant periodic potentials in the specific form given by (3.1). We consider the half-solid operator $T_\tau, \tau \in \mathbb{R}$ acting on $L^2(\mathbb{R})$ and given by

$$T_\tau = -\frac{d^2}{dx^2} + q_\tau(x), \quad q_\tau(x) = \begin{cases} \tau & \text{if } x < 0 \\ v(x) & \text{if } x > 0 \end{cases}, \quad (3.1)$$

where the potential $v \in L^2_{real}(\mathbb{T})$. By the physical point of view v is the potential of a crystal and the constant τ is the potential of a vacuum. In order to describe the spectrum of T_τ we use some properties of the operator $h = -\frac{d^2}{dx^2} + v$ on the half-line from Section 2.

We recall needed results about operators T_τ from [K05]. We have the following simple results about the spectrum of $\sigma(T_\tau)$ given by

$$\sigma(T_\tau) = \sigma_{ac}(T_\tau) \cup \sigma_{disc}(T_\tau), \quad \sigma_{ac}(T_\tau) = \sigma_{ac}(h) \cup [\tau, \infty). \quad (3.2)$$

Our goal is to study the eigenvalues in the gaps $\gamma_n(T_\tau), n \geq 0$, and to find how these eigenvalues depend on τ . We take any integer $N \geq 1$. We describe the basic properties of the one dimensional half-solid operator T_τ :

- If $\tau \leq \lambda_1^-$, then there is no any gap in the spectrum of T_τ and we get

$$\sigma_{ac}(T_\tau) = (\tau_0, \infty), \quad \text{where} \quad \tau_0 = \min\{\lambda_0^+, \tau\}. \quad (3.3)$$

- If $\tau \in \gamma_N \cup \sigma_N = (\lambda_N^-, \lambda_{N+1}^-]$, for some $N \geq 1$, then the spectrum of T_τ has the form:

$$\sigma(T_\tau) = \sigma_0 \cup \sigma_1 \cup \dots \cup \sigma_{N-1} \cup \tilde{\sigma}_N, \quad \tilde{\sigma}_N = [\tau_N, \infty), \quad \tau_N = \min\{\lambda_N^+, \tau\}. \quad (3.4)$$

Thus, there are possible gaps in the spectrum $\sigma_{ac}(T_\tau)$ given by

$$\gamma_j(T_\tau) = \gamma_j(h), \quad j = 0, 1, \dots, N-1, \quad \gamma_N(T_\tau) = (\lambda_N^-, \tau_N). \quad (3.5)$$

Moreover, in each open gap $\gamma_j(T_\tau) \neq \emptyset, j = 0, 1, \dots, N$ there is at most one eigenvalue $\mu_j(\tau)$.

- We introduce the Weyl-type functions Ψ_\pm , which are solutions of the equation

$$-y'' + q_\tau y = \lambda y \quad (3.6)$$

and satisfy

$$\Psi_\pm(\cdot, \lambda) \in L^2(\mathbb{R}_\pm), \quad \forall \lambda \in \Lambda_\tau = \mathbb{C} \setminus \sigma_{ac}(T_\tau).$$

They have the forms

$$\begin{aligned} \Psi_+(x, \lambda) &= \psi^+(x, \lambda), \quad x \geq 0; \\ \Psi_-(x, \lambda) &= e^{x\sqrt{\tau-\lambda}}, \quad x \leq 0, \end{aligned}$$

for $\lambda < \tau, \lambda \in \Lambda_\tau$ and here ψ^+ given by (2.7). These functions $\Psi_\pm(x, \lambda)$ are analytic in the cut domain Λ_τ and are continuous up to the boundary.

- We define the Wronskians

$$w(\lambda) = \{\Psi_-, \Psi_+\} = m_+(\lambda) - \sqrt{\tau - \lambda}, \quad \lambda \in \Lambda_\tau. \quad (3.7)$$

The function $w(\lambda)$ on the first sheet Λ_τ has finite number of zeros, which are simple and coincide with eigenvalues of the operator T_τ .

- Using (2.7) we rewrite the Wronskian $w(\lambda)$ in the gap $\gamma_n \subset \Lambda_\tau, \lambda < \tau$ in the form

$$w(\lambda) = m^+(\lambda) - \sqrt{\tau - \lambda} = \frac{a(\lambda) - b(\lambda)}{\varphi(1, \lambda)} - \sqrt{\tau - \lambda}, \quad \lambda < \tau, \lambda \in \gamma_n \subset \Lambda_\tau, \quad (3.8)$$

where

$$\sqrt{\tau - \lambda} > 0, \quad \text{if } \lambda < \tau, \lambda \in \Lambda_\tau, \quad (-1)^n b(\lambda) = \sqrt{\Delta^2(\lambda) - 1} > 0, \quad \lambda \in \gamma_n \in \Lambda_\tau, \quad (3.9)$$

Lemma 3.1. *Assume that the operator $hy = -y'' + vy, y(0) = 0$ on $L^2(\mathbb{R}_+)$ has an open gap $I = (\lambda^-, \lambda^+)$ in the continuous spectrum and an eigenvalue $\mu \in (\lambda^-, \lambda^+)$ for some $v \in L^2(\mathbb{T})$. Then for any constant τ large enough the operator T_τ defined by (3.1) has an eigenvalue $\mu_\tau \in I$ such that*

$$\mu_\tau - \mu = \frac{c(\mu)}{\sqrt{\tau}} + \frac{O(1)}{\tau} \quad \text{as } \tau \rightarrow \infty, \quad (3.10)$$

where $c(\mu) = \frac{2b(\mu)}{\varphi_\lambda(1, \mu)} \neq 0$ and here $\varphi_\lambda(1, \mu) = \frac{\partial}{\partial \lambda} \varphi(1, \mu)$.

Proof. i) Due to (3.8) the eigenvalues of T_τ are zeros of the Wronskian

$$w(\lambda) = m_+(\lambda) - \sqrt{\tau - \lambda} = \frac{a(\lambda) - b(\lambda)}{\varphi(1, \lambda)} - \sqrt{\tau - \lambda}$$

on the first sheet Λ_τ . Consider the two functions $m_+(\lambda) = \frac{a(\lambda) - b(\lambda)}{\varphi(1, \lambda)}$ and $\sqrt{\tau - \lambda}$ on the gap (λ^-, λ^+) , where $\tau \gg \lambda_+$. The point $\mu \in I$ is an eigenvalue of the operator h . Then due to (2.9) we have $a^2(\mu) = b^2(\mu) \neq 0$. Then the function $m_+(\lambda)$ is a meromorphic in the disk around the centrum of the gap γ_n and has the following asymptotics

$$m_+(\lambda) = \frac{c(\mu)}{\lambda - \mu} + O(1) \quad \text{as } \lambda \rightarrow \mu. \quad (3.11)$$

Thus the equation $m_+(\lambda) = \sqrt{\tau - \lambda}$ has a unique solution $\mu_\tau \rightarrow \mu$ as $\tau \rightarrow \infty$ given by (3.10), since

$$\frac{c(\mu)}{\mu_\tau - \mu} + O(1) = \sqrt{\tau} + O(\tau^{-\frac{1}{2}}).$$

■

Now we prove the main result of this section.

Lemma 3.2. *i) Let integer $N \geq 1, \alpha \geq 0$ and let $\gamma > 0$. Then there exists a potential $v \in \mathcal{H}_\alpha$ such that the first N gaps in the spectrum of the operator h on $L^2(\mathbb{R}_+)$ are open and satisfy*

$$|\gamma_j| = \gamma, \quad \forall j = 1, 2, \dots, N. \quad (3.12)$$

Moreover, in addition for any points $\lambda_j \in \gamma_j, j = 1, 2, \dots, N$, then exists a periodic potential $v \in \mathcal{H}_\alpha$ such that each $\lambda_j = \mu_j, j = 1, 2, \dots, N$ is an eigenvalue of the operator h .

ii) Let in addition q_τ be given by (3.1) and let τ be large enough. Then each $\gamma_j, j = 1, 2, \dots, N$ is a gap in the spectrum of T_τ and on each γ_j exists an eigenvalue $\mu_j(\tau) \in \gamma_j$ such that

$$\mu_j(\tau) - \mu_j = \frac{c(\mu_j)}{\tau^{\frac{1}{2}}} + \frac{O(1)}{\tau} \quad \text{as } \tau \rightarrow \infty, \quad (3.13)$$

where $c(\mu) = \frac{2b(\mu)}{\varphi_{\lambda(1, \mu)}} \neq 0$.

iii) Let $\lambda_0^+ = 0$ and let $\nu_0 \leq \lambda_0^+ = 0$ be the first Neumann eigenvalue (see (2.14)) of the problem (2.13). Then for any $\alpha \geq 0$ there exists a potential $v \in \mathcal{H}_\alpha$ such that $m_+(0) > 0$ and the operator T_τ has an eigenvalue $E < 0$ for each $\tau \in (\nu_0, m_+(0)^2) \neq \emptyset$.

Proof. i) It follows from Theorem 2.1.

ii) It follows from Lemma 3.1.

iii) We define $\rho := m_+(\lambda_0^+) = \frac{a(\lambda_0^+)}{\varphi(1, \lambda_0^+)}$ for some potential $v \in \mathcal{H}_\alpha$. We recall a needed result from [K05] about the first eigenvalue:

if $\rho < 0$, then $\#(T_\tau, \gamma_0(T_\tau)) = 0$,

if $\rho > 0$, then

$$\#(T_\tau, \gamma_0(T_\tau)) = \begin{cases} 0, & \text{if } \tau \leq \nu_0 \text{ or } \tau \geq \rho^2 \\ 1, & \text{if } \nu_0 < \tau < \rho^2 \end{cases}. \quad (3.14)$$

Assume that $\rho > 0$ for some potential $v \in \mathcal{H}_\alpha$. Then due to (3.14) the operator T_τ has an eigenvalue $E < \lambda_0^+ = 0$ for each $\tau \in (\nu_0, \rho^2)$.

We show that $\rho > 0$ for some potential $v \in \mathcal{H}_\alpha$. Below we take $v = p(x+t)$ for some $p \in L^2(\mathbb{T})$ and small t . We assume that p satisfies

Condition P. 1) the function $p, p'' \in L^2(\mathbb{T})$;

2) $p(1-x) = p(x), \forall x \in [0, 1]$, i.e., the potential p is even on the interval $[0, 1]$;

3) $p(x) > \delta > 0$ for all $x \in [0, \varepsilon]$ for some small constants $\delta, \varepsilon > 0$.

Recall that we put $\lambda_0^+ = 0$ and in this case we have $\int_0^1 p(x)dx > 0$ (see e.g. [K97]), and then item 3) in Condition P is possible since $\int_0^1 p(x)dx > 0$. We define the fundamental solutions $\varphi(x, \lambda, t), \vartheta(x, \lambda, t)$ of the following equation with the shifted potential

$$\begin{aligned} -y'' + p(x+t)y &= \lambda y, \quad \lambda \in \mathbb{C}, \quad t \in \mathbb{R}, \\ \varphi_x(0, \lambda, t) &= \vartheta(0, \lambda, t) = 1, \quad \varphi(0, \lambda, t) = \vartheta_x(0, \lambda, t) = 0. \end{aligned} \quad (3.15)$$

For the shifted potential $v = p(\cdot + t)$ we define the Lyapunov functions $\mathfrak{F}(\lambda, t) = \frac{1}{2}(\varphi'(1, \lambda, t) + \vartheta(1, \lambda, t))$. Note that we have $\mathfrak{F}(\lambda, t) = \mathfrak{F}(\lambda, 0)$, i.e., the Lyapunov function $\mathfrak{F}(\lambda, t)$ for (3.15)

coincides with the Lyapunov function for the case $t = 0$ (see [L87]). We also define the functions

$$a(\lambda, t) = \frac{1}{2}(\varphi'(1, \lambda, t) - \vartheta(1, \lambda, t)), \quad m_+(\lambda, t) = \frac{a(\lambda, t) - \phi(\lambda)}{\varphi(1, \lambda, t)}.$$

Let $\dot{u} = \frac{\partial}{\partial t}u$. We have the equations

$$\dot{a}(\lambda, t) = -\vartheta_x(1, \lambda, t) - (\lambda - p(t))\varphi(1, \lambda, t), \quad \forall (\lambda, t) \in \mathbb{C} \times \mathbb{R}, \quad (3.16)$$

see [L87]. Then the properties of p give

$$\dot{a}(0, t) = -\vartheta'(1, 0, t) + p(t)\varphi(1, 0, t) > \delta\varphi(1, 0, t) > 0 \quad \forall t \in [0, \varepsilon],$$

since $\vartheta'(1, 0, t) \leq 0$ (its first zero $\nu_0 \leq 0$) and $\varphi(1, 0, t) > 0$ (its first zero $\mu_1 > 0$) which yields

$$a(0, t) = a(0, 0) + \int_0^t \dot{a}(0, \tau) d\tau = \int_0^t \dot{a}(0, \tau) d\tau > 0, \quad (3.17)$$

since $a(0, 0) = 0$ for all even potentials (see Lemma 3.4. in [K05]). This implies $m_+(0, t) = \frac{a(0, t)}{\varphi(1, 0, t)} > 0$ for the potential $v(x) = p(x + t)$ all $t \in [0, \varepsilon]$. ■

4. MODEL OPERATORS ON \mathbb{R}_+^d AND \mathbb{R}^d

4.1. Specific periodic Schrödinger operators on the half-line. Consider the Schrödinger operator given by

$$hf = -f'' + vf \quad \text{on } L^2(\mathbb{R}_+), \quad f(0) = 0.$$

Recall that the spectrum of h consists of an absolutely continuous part (which is a union of non-degenerate spectral bands $\sigma_n = [\lambda_n^+, \lambda_{n+1}^-], n \geq 0$) plus at most one eigenvalue in each open gap $\gamma_n = (\lambda_n^-, \lambda_n^+), n \geq 1$ between bands [KS12], [Z69] (see Fig.1) and the λ_n^\pm satisfy (2.2).

Now we begin to construct a specific potential v . Here we use results about the gap-lengths mapping from Lemma 3.2 i). Due to these results about the gap-lengths mapping, we take the potential $v \in \mathcal{H}_\alpha$ for any fixed $\alpha \geq 0$ such that the first N gaps $\gamma_1, \dots, \gamma_N$ and other ones $\gamma_n, n > N$ in the spectrum of h satisfy

$$\begin{aligned} \gamma = |\gamma_1| = |\gamma_2| = |\gamma_3| = \dots = |\gamma_N| &= \frac{\pi^2 4(N+1)^2}{\varkappa}, \quad 0 < \varkappa \ll 1, \\ \sum_{n>N} n^{2\alpha} |\gamma_n|^2 &= Q < \infty. \end{aligned} \quad (4.1)$$

The value Q is not important in our consideration and thus we can take any $\alpha \geq 0$. Thus (4.1) and the estimate (2.3) give

$$\begin{aligned} \lambda_n^- &= \gamma(n-1) + A_n, \quad \lambda_n^+ = \gamma n + A_n, \quad A_n = \sum_{j=0}^n |\sigma_j|, \\ |A_n| &\leq \pi^2 \sum_{j=0}^n (2j+1) = \pi^2(n+1)^2 \leq \pi^2(N+1)^2 \leq \frac{\varkappa}{4} \gamma. \end{aligned} \quad (4.2)$$

Due to Theorem 2.1 in each open gap $\gamma_n, n = 1, 2, \dots, N$ we choose exactly one eigenvalue μ_n^\bullet by

$$\mu_n^\bullet = \lambda_n^- + \frac{\gamma}{4d} \in \gamma_n^1. \quad (4.3)$$

Moreover, (4.2) gives

$$\mu_n^\bullet = \lambda_n^- + \frac{\gamma}{4d} = \gamma(n - 1 + \frac{1}{4d}) + A_n, \quad \forall n = 1, \dots, N. \quad (4.4)$$

It is convenient to define the "normalized" operator

$$h_\gamma = \frac{1}{\gamma}h.$$

Then the spectrum of h_γ consists of an absolutely continuous part $\sigma_{ac}(h_\gamma) = \bigcup_{n \geq 0} s_n$ plus at most one eigenvalue in each non-empty gap g_n , $n \in \mathbb{N}$, but exactly one eigenvalue $e_n = \frac{\mu_n}{\gamma}$ in each open gap g_n , $n = 1, \dots, N$. Here the spectrum of h_γ has the bands $s_n = \frac{\sigma_n}{\gamma}$ and gaps $g_n = \frac{\gamma_n}{\gamma}$. In particular, we have

$$s_0 = \frac{\sigma_0}{\gamma}, \quad s_n = \frac{\sigma_n}{\gamma} = [n + \frac{A_n}{\gamma}, n + \frac{A_{n+1}}{\gamma}], \quad g_n = \frac{\gamma_n}{\gamma}, \quad n = 1, 2, \dots, N,$$

where A_n is defined in (4.2). The first bands satisfy

$$|s_n| = \frac{|\sigma_n|}{\gamma} \leq \frac{\pi^2}{\gamma}(2n + 1) \leq \frac{\varkappa}{2(N+1)}, \quad \forall n = 0, \dots, N. \quad (4.5)$$

Thus these spectral bands s_n are very small and very close to the points n and satisfy

$$\text{dist}\{s_n, n\} \leq \frac{A_{n+1}}{\gamma} \leq \frac{\varkappa}{4}, \quad n = 0, 1, \dots, N. \quad (4.6)$$

In this case due to (4.1) the gaps g_n satisfy

$$|g_n| = 1, \quad n = 1, \dots, N. \quad (4.7)$$

In each gap g_n , $n = 1, \dots, N$, there exists exactly one eigenvalue e_n of h_γ such that

$$e_n = \frac{\mu_n}{\gamma} = e_n^0 + \frac{A_n}{\gamma}, \quad e_n^0 = n - 1 + \frac{1}{4d} = n - 1 + e_1, \quad e_1 = \frac{1}{4d}, \quad \frac{A_n}{\gamma} \leq \frac{\varkappa}{4}. \quad (4.8)$$

4.2. Schrödinger operators on \mathbb{R}_+^2 . We consider Schrödinger operators $H_+ = h_1 + h_2$ on the quadrant \mathbb{R}_+^2 . Here h_1 and h_2 are defined on the half-line and depend on one variable and given by

$$h_j y = -y'' + v(x_j)y, \quad y(0) = 0, \quad j = 1, 2,$$

where the potential $v \in L^2(\mathbb{T})$. For large constant γ we define a new operator

$$H_\gamma = \frac{1}{\gamma}H_+ = \frac{1}{\gamma}(h_1 + h_2).$$

We take the operator H_γ , when the variables are separated. We show that H_γ has (first) bands which are very small and their positions are very close to the integer n . The union of group of bands close to the integer n is a cluster K_n . Between the two neighbor clusters K_n and K_{n+1} there exists a big gap. On this gap there exist n eigenvalues.

- We define bands (i.e., the basic bands) $S_{i,j}^0$ of the operator H_γ and their clusters K_n^0 by

$$S_{i,j}^0 = s_i + s_j, \quad K_n^0 = \bigcup_{i+j=n} S_{i,j}^0, \quad i, j, n \in \mathbb{Z}_+ = \{0, 1, 2, 3, \dots\}, \quad (4.9)$$

where we define $A + B = \{z = x + y : x \in A, y \in B\}$ for sets A, B . In particular, we have

$$K_0^0 = S_{0,0}^0, \quad K_1^0 = S_{1,0}^0, \quad K_2^0 = S_{2,0}^0 \cup S_{1,1}^0, \dots, \quad (4.10)$$

If γ is large enough, then due to (4.6), (4.5) we estimate the position of bands $S_{i,j}^0$ and their lengths $|S_{i,j}^0|$ by

$$\text{dist}\{S_{i,j}^0, i+j\} \leq \frac{\varkappa}{2}, \quad |S_{i,j}^0| \leq \frac{\varkappa}{(N+1)} \quad (4.11)$$

for all $i, j = 0, 1, \dots, N$. This yields the position of their clusters K_n^0 and their diameters by

$$\text{dist}\{K_n^0, n\} \leq \frac{\varkappa}{2} \quad \text{diam } K_n^0 \leq \frac{3}{2}\varkappa \quad (4.12)$$

for all $n = 0, 1, \dots, N$.

- We define the surface bands $S_{i,j}^1$ of the operator H_γ and their clusters K_n^1 , by

$$S_{i,j}^1 = e_i + s_j, \quad K_n^1 = \bigcup_{i+j=n+1} S_{i,j}^1, \quad i, j, n \geq 0. \quad (4.13)$$

In particular, we have

$$K_0^1 = S_{0,1}, \quad K_1^1 = S_{0,2}^1 \cup S_{1,1}^1, \quad K_2^1 = S_{0,3}^1 \cup S_{1,2}^1 \cup S_{2,1}^1, \dots \quad (4.14)$$

Using arguments similar to the case of the bands $S_{i,j}^0$ we determine the position of surface bands $S_{i,j}^1$ and their lengths $|S_{i,j}^1|$ by

$$\text{dist}\{S_{i,j}^1, e_i^0 + j\} \leq \frac{\varkappa}{2}, \quad |S_{i,j}^1| \leq \frac{\varkappa}{2(N+1)} \quad (4.15)$$

for all $i, j = 0, 1, \dots, N$. This yields the position of their clusters K_n^1 and their diameters by

$$\text{dist}\{K_n^1, e_1^0 + n\} \leq \frac{\varkappa}{2}, \quad \text{diam } K_n^1 \leq \varkappa \quad (4.16)$$

for all $n = 0, 1, \dots, N$.

- The operator H_γ has **eigenvalues** $E_{i,j}$ and their cluster K_n^e given by

$$E_{i,j} = e_i + e_j, \quad i, j \geq 1, \quad K_n^e = \{E = E_{i,j}, i+j = n+1\}, \quad n \geq 1, \quad (4.17)$$

The cluster K_n^e has n eigenvalues of the operator H_+ . In particular, we have

$$K_1^e = \{E_{1,1}\}, \quad K_2^e = \{E_{1,2}, E_{2,1}\}, \quad K_3^e = \{E_{1,3}, E_{2,2}, E_{3,1}\}, \dots \quad (4.18)$$

The identity (4.8) gives

$$E_{i,j} = e_i^0 + e_j^0 + \frac{A_i}{\gamma} + \frac{A_j}{\gamma}, \quad |E_{i,j} - e_i^0 - e_j^0| \leq \frac{\varkappa}{2} \quad (4.19)$$

for all $i, j = 1, 2, \dots, N$. This yields the position of their clusters K_n^e and their diameters by

$$\text{dist}\{K_n^e, 2e_1 + n - 1\} \leq \frac{\varkappa}{2}, \quad \text{diam } K_n^e \leq \varkappa, \quad (4.20)$$

for all $n = 1, 2, \dots, N$.

- Thus we can describe $\sigma_{ac}(H_+)$ and $\sigma_{disc}(H_+)$ by

$$\sigma_{ac}(H_+) = \bigcup_{n \geq 0} (K_n^0 \cup K_n^1), \quad \sigma_{disc}(H_+) = \bigcup_{n \geq 1} K_n^e. \quad (4.21)$$

Now combining all estimates (4.12)-(4.16) we deduce that between two sets $K_n^0 \cup K_n^1$ and $K_{n+1}^0 \cup K_{n+1}^1$ for each $n = 0, 1, \dots, N$ there exists an interval I_n given by

$$I_n = [I_n^-, I_n^+] = [e_1^0 + n + 4\varkappa, n + 1 - 4\varkappa], \quad (4.22)$$

such that $\text{dist}\{I_n, \sigma_{ac}(H_+)\} \geq 2\varkappa,$

i.e., the distance between the interval I_n and two sets $K_n^0 \cup K_n^1$ and $K_{n+1}^0 \cup K_{n+1}^1$ is greater than 2κ . Moreover, due to (4.18)-(4.20) the eigenvalue cluster K_n^e satisfies:

$$K_n^e \subset I_n, \quad \forall n = 1, \dots, N. \quad (4.23)$$

4.3. Schrödinger operators on \mathbb{R}_+^3 . We consider Schrödinger operators H_+ on the corner \mathbb{R}_+^3 given by

$$H_+ = -\Delta_+ + V_+, \quad V_+(x) = v(x_1) + v(x_2) + v(x_3), \quad x = (x_j)_1^3 \in \mathbb{R}_+^3 \quad (4.24)$$

where the potential v is 1-periodic and $v \in L^2(0, 1)$. We rewrite the operator H in the form

$$H_+ = h_1 + h_2 + h_3, \quad h_j = h_0 + v(x_j) \quad (4.25)$$

Define the operator H_γ by

$$H_\gamma = \frac{1}{\gamma} H = h_{1,\gamma} + h_{2,\gamma} + h_{3,\gamma}, \quad h_{j,\gamma} = \frac{h_j}{\gamma}.$$

- We define bands $S_{i,j,k}^0$ of the operator H_γ and their clusters K_n^0 , $n = 0, 1, \dots, N$ by

$$S_{i,j,k}^0 = s_i + s_j + s_k, \quad i, j, k \in \mathbb{Z}_+, \quad K_n^0 = \bigcup_{i+j+k=n} S_{i,j,k}^0, \quad n \in \mathbb{Z}_+, \quad (4.26)$$

and in particular,

$$K_0^0 = S_{0,0,0}^0 = s_0 + s_0 + s_0, \quad K_1^0 = S_{0,0,1}^0, \quad K_2^0 = S_{0,0,2}^0 \cup S_{0,1,1}^0, \dots$$

Recall that we define $A + B$ for sets A, B by $A + B = \{z = x + y : (x, y) \in A \times B\}$. Similar to 2dim case we deduce that

$$S_{i,j,k}^0 \sim i + j + k, \quad K_n^0 \sim n, \quad \forall n = 1, 2, \dots, N. \quad (4.27)$$

In 3-dimensional case we have two types of the surface (guided) bands $S_{i,j,k}^1$ and $S_{i,j,k}^2$.

- **The first type of surface (guided) bands.** We define the surface (guided) bands $S_{i,j,k}^1$ of the operator H_γ and their clusters K_n^1 , $n = 1, \dots, p$ by

$$S_{i,j,k}^1 = s_i + s_j + e_k, \quad K_n^1 = \bigcup_{i+j+k=n+1} S_{i,j,k}^1, \quad i, j, n \in \mathbb{Z}_+, \quad k \in \mathbb{N}, \quad (4.28)$$

The position of surface bands $S_{i,j,k}^1$ and their clusters K_n^1 are given by

$$S_{i,j,k}^1 \sim i + j + k - 1 + e_1 = n - 1 + e_1, \quad K_n^1 \sim n - 1 + e_1. \quad (4.29)$$

These clusters are separated by gaps \mathcal{G}_n , $n = 1, 2, \dots, p$. Thus we have

$$K_1^1 = S_{0,0,1}^1, \quad K_2^1 = S_{0,0,2}^1, \quad K_3^1 = S_{0,0,3}^1 \cup S_{1,0,2}^1, \dots, \quad K_N^1 = S_{0,N}^1 \cup S_{1,N-1}^1 \cup \dots \quad (4.30)$$

- **The second type of surface (guided) bands.** We define the surface (guided) bands $S_{i,j,k}^2$ of the operator H_γ and their clusters K_n^2 , $n = 1, \dots, p$ by

$$S_{i,j,k}^2 = e_i + e_j + s_k, \quad K_n^2 = \bigcup_{i+j+k=n+2} S_{i,j,k}^2, \quad i, j \in \mathbb{N}, \quad k, n \in \mathbb{Z}_+. \quad (4.31)$$

The positions of the surface bands $S_{i,j,k}^2$ and the cluster K_n^2 are given by

$$S_{i,j,k}^2 \sim i + j + k - 2 + 2e_1 = n - 2 + 2e_1, \quad K_n^2 \sim n - 1 + 2e_1. \quad (4.32)$$

These clusters are separated by gaps \mathcal{G}_n , $n = 1, 2, \dots, p$. Thus we have

$$K_1^2 = S_{0,0,1}^2, \quad K_2^2 = S_{0,0,2}^2, \quad K_3^2 = S_{0,0,3}^2 \cup S_{1,0,2}^2, \dots, \quad K_N^2 = S_{0,N}^2 \cup S_{1,N-1}^2 \cup \dots \quad (4.33)$$

• **Eigenvalues.** The operator H_γ has eigenvalues $E_{i,j,k}$ and their cluster K_n^e given by

$$E_{i,j,k} = e_i + e_j + e_k, \quad i, j, k \in \mathbb{N}, \quad K_n^e = \{E = E_{i,j,k}, i + j + k = n + 3\}, \quad n \in \mathbb{Z}_+. \quad (4.34)$$

The positions of eigenvalues $E_{i,j,k}, i + j + k = n + 3$ and their cluster K_n^e are given by

$$E_{i,j,k} \sim i + j + k - 3 + 3e_1 = n + 3e_1, \quad K_n^e \sim n + 3e_1. \quad (4.35)$$

The sets $\sigma_{ac}(H)$ and $\sigma_{disc}(H)$ are given by

$$\sigma_{ac}(H_+) = \cup_{n \geq 0} (K_n^0 \cup K_n^1 \cup K_n^2), \quad \sigma_{disc}(H_+) = \cup_{n \geq 1} K_n^e \quad (4.36)$$

Later on we repeat the proof for the case $d = 2$. ■

4.4. Specific 1dim half-solid potentials. Consider the operator $T_\tau f = -f'' + q_\tau f$ on $L^2(\mathbb{R})$, where the potential q_τ is given by (3.1). We take any fix integer $N \geq 1$ and numbers $\gamma, \tau > 0$ large enough. Due to Lemma 3.2 we obtain that there exists a periodic potential v such that the first N gaps $\gamma_j, j = 1, 2, \dots, N$ in the spectrum of the operator h are open. Moreover, there exists an eigenvalue $\mu_j(\tau)$ in each this gap γ_j and they satisfy

$$\mu_j(\tau) \in \gamma_j \quad |\gamma_j| = \gamma, \quad \forall j = 1, 2, \dots, N, \quad (4.37)$$

$$\sigma_{ac}(T_\tau) = \sigma_0 \cup \sigma_1 \cup \dots \cup \sigma_{N-1} \cup \tilde{\sigma}_N, \quad \tilde{\sigma}_N \subset [\lambda_N^+, \infty). \quad (4.38)$$

Here the bands $\sigma_0, \sigma_1, \dots, \sigma_{N-1}$ and the set $\tilde{\sigma}_N$ are separated by gaps $\gamma_j, j = 1, 2, \dots, N$ and each eigenvalue $\mu_n(\tau)$ satisfies (3.13).

Now we begin to construct a specific potential v . Here we use results about the gap-lengths mapping from [K99]. Due to Theorem 2.1 about the gap-lengths mapping, we take the potential $v \in L^2(\mathbb{T})$ such that the first N gaps $\gamma_1, \dots, \gamma_N$ in the spectrum of h are open and these gaps satisfy

$$\gamma = |\gamma_1| = \dots = |\gamma_N| = \frac{\pi^2 4(N+1)^2}{\varkappa}, \quad 0 < \varkappa \ll 1, \quad (4.39)$$

and in each big gap $\gamma_n, n = 1, 2, \dots, N$ there exists exactly one eigenvalue $\mu_n(\tau)$.

Define the operator $T_{\tau,\gamma} = \frac{1}{\gamma} T_\tau$. From the properties of T_τ we deduce that the spectrum of $T_{\tau,\gamma}$ consists of an absolutely continuous part $\sigma_{ac}(T_{\tau,\gamma}) = \bigcup_{n \geq 0} s_n$ plus at most one eigenvalue in each non-empty gap $g_n, n \in \mathbb{N}$, where the bands s_n and gaps g_n are given by

$$s_0 = \frac{\sigma_0}{\gamma}, \quad s_n = \frac{\sigma_n}{\gamma}, \quad g_n = \frac{\gamma_n}{\gamma}, \quad n \in \mathbb{N}_N = \{1, \dots, N\},$$

and they satisfy (4.5)-(4.7). In each gap $g_n, n = 1, \dots, N$, there exists exactly one eigenvalue e_n given by

$$e_n = \frac{\mu_n}{\gamma} = e_n^0 + \varepsilon_n, \quad e_n^0 = n - 1 + \frac{1}{4d}, \quad |\varepsilon_n| \leq \frac{\varkappa}{4}, \quad n \in \mathbb{N}_N, \quad (4.40)$$

since we take τ large enough. Thus roughly speaking the spectrum of the operators \mathbb{T}_τ on $L^2(\mathbb{R})$ and h (on $L^2(\mathbb{R}_+)$) is the same on the interval $[0, \lambda_N^+]$. They have the same bands $\sigma_0, \dots, \sigma_N$ and the same gaps $\gamma_1, \dots, \gamma_N$. Moreover, their eigenvalues in each gap γ_n are very close, since we take τ large enough.

4.5. **Model Schrödinger operators on \mathbb{R}^2 .** We consider Schrödinger operators H on the plane \mathbb{R}^2 given by

$$H = T_{\tau,1} + T_{\tau,2}, \quad (4.41)$$

the proof for the case $\mathbb{R}^d, d \geq 3$ is similar. Here each $T_{\tau,j} = -\frac{d^2}{dx_j^2} + q_\tau(x_j)$ acts on \mathbb{R} and the potential q_{j_s} is determined in Subsection 4.4. The spectrum of $T_{\tau,j}$ and h_j are similar on the interval $[0, \lambda_N^+]$. Then the spectrum of the sum $T_{\tau,1} + T_{\tau,2}$ is similar to the spectrum of $h_1 + h_2$ on the interval $[0, 2\lambda_N^+]$. The proof repeats the case $h_1 + h_2$.

4.6. **Schrödinger operators on $\mathbb{R}_+ \times \mathbb{R}$.** Consider the operator $H = h_1 + T_{\tau,2}$ on the half-plane $\mathbb{R}_+ \times \mathbb{R}$, where the operator $h_1 y = -y'' + v(x_1)y$, $y(0) = 0$ acts on the half-line and depends on one variable $x_1 > 0$; the operator $T_{\tau,2} = -\frac{d^2}{dx_2^2} + q_s(x_2)$ acts on \mathbb{R} and the potential $q_\tau(x_2)$ is defined by (3.1) and the constant τ is large enough. The spectrum of $T_{\tau,2}$ and h_1 are similar on the interval $[0, \lambda_N^+]$ for N, τ large enough. The proof repeats the case $h_1 + h_2$.

5. PROOF OF MAIN THEOREMS

Proof Theorem 1.1 i) We consider an operator $H_+ = -\Delta + V$ on \mathbb{R}_+^2 , where V is \mathbb{Z}^2 -periodic, the proof for other cases is similar. Let $H = -\Delta + V$ on \mathbb{R}^2 . Define functions $g_n \in C_0^\infty(\mathbb{R})$ and $G_n \in C_0^\infty(\mathbb{R}^2), n \geq 1$ by:

$$\begin{aligned} g_n|_{w_n} = 1, \quad w_n = [4^n, 4^n + n], \quad \text{supp } g_n = [4^n - 1, 4^n + n + 1], \\ G_n(x) = g_n(x_1)g_n(x_2), \quad \text{supp } G_n \subset \mathbb{R}_+^2. \end{aligned} \quad (5.1)$$

Let $\mathcal{T}_2 = \mathbb{R}^2/\mathbb{Z}^2$. For any $\lambda \in \sigma(H)$ there exists a function $\psi(x, k) = e^{i(k,x)}u(x, k)$, which satisfies

$$\begin{aligned} (-\Delta + V(x))\psi(x, k) = \lambda\psi(x, k), \quad \forall x \in \mathbb{R}^2, \\ u(\cdot, k) \in L^2(\mathcal{T}_2), \quad \int_{\mathcal{T}_2} |u(x, k)|^2 dx = 1, \end{aligned} \quad (5.2)$$

for some $k \in \mathbb{R}^2$. Define the sequence $\psi_n(x, k) = \frac{1}{c_n} G_n(x)\psi(x, k)$, where $c_n > 0$ is given by

$$c_n^2 = \int_{\mathbb{R}^2} |G_n(x)\psi(x, k)|^2 dx.$$

The function $u(x, k)$ is \mathbb{Z}^2 periodic, then due to (5.2) we obtain

$$c_n^2 = \int_{\mathbb{R}^d} |G_n(x)\psi(x, k)|^2 dx = n^2 + O(n) \quad (5.3)$$

as $n \rightarrow \infty$. Thus the sequence ψ_n satisfies

- 1) $\|\psi_n(\cdot, k)\| = 1$ and $\Delta\psi_n \in L^2(\mathbb{R}^2)$, for all $n \in \mathbb{N}$,
- 2) $\psi_n \perp \psi_m$ for all $n \neq m$, and $\psi_n \rightarrow 0$ weakly as $n \rightarrow \infty$

Thus $\lambda \in \sigma_{\text{ess}}(H_+)$, since standard arguments imply

$$\|(H_+ - \lambda)\psi_n(\cdot, k)\| = \|(H - \lambda)\psi_n(\cdot, k)\| \rightarrow 0 \quad \text{as } n \rightarrow \infty.$$

ii). Consider an operator $H_\varepsilon = H_+ + \varepsilon W$ on \mathbb{R}_+^d for the case $d = 2$, the proof for the case $z = x, d \geq 3$ is similar. Here the operator H_+ is defined in subsection 4.2. Recall that for any $n \geq 1$ there exists a specific potential $v \in L^2(\mathbb{T})$ such that on the interval $I_n = (a, b)$ (defined by (4.22)) contains n eigenvalues of the operator H_+ . Moreover, the distance between the interval I_n and two cluster spectral sets $K_n^0 \cup K_n^1$ and $K_{n+1}^0 \cup K_{n+1}^1$ is greater than 2κ .

We have $H_0 = H_+$, where the real coupling constant ε is small enough and W satisfies

$$W \in L^\infty(\mathbb{R}_+^2), \quad \|W\|_{L^\infty(\mathbb{R}_+^2)} \leq 1, \quad 0 < \varepsilon \leq \varkappa^3. \quad (5.4)$$

We define contours $c_n = \{\lambda \in \mathbb{C} : \text{dist}\{\lambda, I_n\} = \varkappa\}$. Due to (5.4) the operator H_ε has n eigenvalues inside the contours c_n , since we have

$$\begin{aligned} P_n(\varepsilon) &= -\frac{1}{2\pi i} \int_{c_n} R_\varepsilon(z) dz, \\ R_\varepsilon(z) &= R_+(z) - R_+(z)\varepsilon W R_\varepsilon(z), \\ \|R_\varepsilon(z) - R_+(z)\| &\leq \varepsilon \|R_+(z)\| \|R_\varepsilon(z)\| \leq \frac{\varepsilon}{\varkappa^2} \leq \varkappa \quad \forall z \in c_n. \end{aligned} \quad (5.5)$$

This yields

$$\|P_n(\varepsilon) - P_n(0)\| \leq \varkappa < 1. \quad (5.6)$$

and then the operators $P_n(\varepsilon)$ and $P_n(0)$ have the same dimension. In order to show that the intervals $[a_-, a]$ and $[b, b_+]$ contain the essential spectrum of H for some $a_- < a$ and $b < b_+$ we use similar arguments.

Now we consider Schrödinger operators $H_\varepsilon = H_0 + \varepsilon W$ on the domain $D = \mathbb{R}_+^{d_1} \times \mathbb{R}^{d_2}$, $d_1 + d_2 = d \geq 2$, where the real coupling constant ε is small enough and W satisfies

$$W \in L^\infty(D), \quad \|W\|_{L^\infty(D)} \leq 1. \quad (5.7)$$

The operator $H_0 = H_{01} + H_{02}$, where H_{01}, H_{02} are given by

$$H_{01} = -\Delta_x + \sum_{j=1}^{d_1} v(x_j), \quad H_{02} = -\Delta_y + \sum_{j=1}^{d_2} v(y_j), \quad x = (x_j) \in \mathbb{R}_+^{d_1}, y = (y_j) \in \mathbb{R}^{d_2}.$$

The proof for this case is similar and is based on the \blacksquare

Proof Theorem 1.2. We consider Schrödinger operators $H = T_{\tau,1} + T_{\tau,2}$ on the plane \mathbb{R}^2 , the proof for the case \mathbb{R}^d , $d \geq 3$ is similar. Here each operator $T_{\tau,j}$ acts on \mathbb{R} and given by

$$T_{\tau,j} = -\frac{d^2}{dy_j^2} + q_\tau(y_j), \quad y = (y_1, y_2) \in \mathbb{R}^2,$$

where the potential q_τ is determined in (3.1). By Lemma 3.2, iii), each operator $T_{\tau,j}$, $j = 1, 2$ on $L^2(\mathbb{R})$ has an eigenvalue E_0 below the continuous spectrum $\sigma_{ac}(T_{\tau,j}) = [\tau_0, \infty)$ for some potential $v \in L^2(\mathbb{T})$ and some $\tau \in \mathbb{R}$, where $\tau_0 = \min\{\tau, \lambda_0^+\}$. Then the operators $H = T_{\tau,1} + T_{\tau,2}$ has the eigenvalue E_0 below the continuous spectrum $\sigma_{ac}(H) = [\tau_0 + E_0, \infty)$. Consider an operator $H_\varepsilon = H + \varepsilon W$, where $\varepsilon > 0$ is small enough and W satisfies (1.2). It is well know that under small perturbation, the isolated eigenvalue is still eigenvalue. \blacksquare

Acknowledgments. Various parts of this paper were written during Evgeny Korotyaev's stay as a VELUX Visiting Professor at the Department of Mathematics, Aarhus University, Denmark. He is grateful to the institute for the hospitality. In addition, our study was supported by the Danish Free Science Council grant No1323-00360.

REFERENCES

- [DS78] Davis, E.; Simon, B. Scattering systems with different spartial asymptotics on the left and right, Commun. math. Phys. 63(1978), 277-301.
 [F06] Frank, R. On the Laplacian in the halfspace with a periodic boundary condition. Ark. Mat. 44 (2006), no. 2, 277-298.

- [HK11] Hempel, R.; Kohlmann, M. A variational approach to dislocation problems for periodic Schrödinger operators. *J. Math. Anal. Appl.* 381 (2011), no. 1, 166-178.
- [HK11x] Hempel, R.; Kohlmann, M. Spectral properties of grain boundaries at small angles of rotation. *J. Spectr. Theory* 1 (2011), no. 2, 197-219.
- [HKS15] Hempel, R.; Kohlmann, M.; Stautz, M.; Voigt, J., Bound states for nano-tubes with a dislocation. *J. Math. Anal. Appl.* 431 (2015), no. 1, 202-227.
- [JL01] Jaksic, V.; Last, Y. Surface states and spectra. *Comm. Math. Phys.* 218 (2001), no. 3, 459-477.
- [JL03] Jaksic, V.; Last, Y. Scattering from subspace potentials for Schrödinger operators on graphs. *Markov Process. Related Fields* 9 (2003), no. 4, 661-674.
- [Ki95] Kittel, C. *Introduction to solid state physics*. New York: Wiley, 1995.
- [K97] Korotyaev, E. The estimates of periodic potentials in terms of effective masses. *Comm. Math. Phys.* 183 (1997), no. 2, 383-400.
- [K06] Korotyaev, E. Estimates for the Hill operator. II. *J. Differential Equations* 223 (2006), no. 2, 229-260.
- [K05] Korotyaev, E. Schrödinger operator with a junction of two 1-dimensional periodic potentials. *Asymptot. Anal.* 45 (2005), no. 1-2, 73-97.
- [K03] Korotyaev, E. Characterization of the spectrum of Schrödinger operators with periodic distributions. *Int. Math. Res. Not.* 2003, no. 37, 2019-2031.
- [K00] Korotyaev, E. Lattice dislocations in a 1-dimensional model. *Comm. Math. Phys.* 213 (2000), no. 2, 471-489.
- [K99] Korotyaev, E. Inverse problem and the trace formula for the Hill operator. II. *Math. Z.* 231 (1999), no. 2, 345-368.
- [K98] Korotyaev, E. Estimates of periodic potentials in terms of gap lengths. *Comm. Math. Phys.* 197 (1998), no. 3, 521-526.
- [KS12] Korotyaev, E.; Schmidt, K. On the resonances and eigenvalues for a 1D half-crystal with localized impurity, *J. Reine Angew. Math.* 2012, Issue 670, 217-248.
- [KS01] Kostykin, V.; Schrader, R. Regularity of the surface density of states. *J. Funct. Anal.* 187 (2001), no. 1, 227-246.
- [L87] Levitan B.M. *The Inverse Sturm-Liouville Problems*. VMU Science. Press, Utrecht, 1987.
- [M81] J. Moser, An example of a Schrödinger operator with almost periodic potential and nowhere dense spectrum, *Comment. Math. Helv.* 56 (1981), 198-224.
- [Ti58] Titchmarsh, E. *Eigenfunction expansions associated with second-order differential equations 2*, Oxford, Clarendon Press 1958.
- [Z69] Zheludev V. On the spectrum of Schrödinger operator with periodic potentials on the half-line. *Trudy kafedry mat. anal. Kaliningrad Univ.* 1969.

SAINT-PETERSBURG STATE UNIVERSITY, UNIVERSITetskAYA NAB. 7/9, ST. PETERSBURG, 199034, RUSSIA, KOROTYAEV@GMAIL.COM, E.KOROTYAEV@SPBU.RU,

INSTITUT FOR MATEMATISKE FAG, AARHUS UNIVERSITET, NY MUNKEGADE 8000 AARHUS C, DENMARK, JACOB@MATH.AU.DK