

Vision-Encoders (Already) Know What They See: Mitigating Object Hallucination via Simple Fine-Grained CLIPScore

Hongseok Oh Wonseok Hwang
University of Seoul
{cxv0519, wonseok.hwang}@uos.ac.kr

Abstract

Recently, Large Vision-Language Models (LVLMs) show remarkable performance across various domains. However, these models suffer from object hallucination. This study revisits the previous claim that the primary cause of such hallucination lies in the limited representational capacity of the vision encoder. Our analysis reveals that the capacity of the vision encoder itself is already enough for detecting object hallucination. Based on this insight, we propose a Fine-grained CLIPScore (F-CLIPScore), a simple yet effective evaluation metric that enhances object-level granularity by incorporating text embeddings at the noun phrase level. Evaluations on the OHD-Caps benchmark show that F-CLIPScore significantly outperforms conventional CLIPScore in accuracy by a large margin of **39.6%** without additional training. We further validate F-CLIPScore by showing that LVLM trained with the data filtered using F-CLIPScore exhibits reduced hallucination.

1 Introduction

Recent studies highlight Large Vision-Language Models (LVLMs) as a leading method for integrating vision and language (Liu et al., 2023; Wang et al., 2024a; Zhu et al., 2023; Chen et al., 2024). However, similar to the hallucination observed in large language models (LLMs) for textual modalities (Ji et al., 2023; Zhang et al., 2023), LVLMs also suffer from object hallucination where the model describes nonexistent objects or misidentifies objects in an image, which significantly affects the reliability of LVLM-based applications (Li et al., 2023a; Liu et al., 2024b).

Recently, to investigate the main cause of the object hallucination, Liu et al. (2024c) built OHD-Caps, a dataset designed to measure object hallucination. The dataset comprises (image, captions) pairs where a model needs to select the best caption that does not show hallucinations. They found the



CLIPScore (w/o training): A lady and two children in the street playing with a tennis racquet, a car nearby, and a chair.

CLIPScore (trained): A lady and two dogs in the park playing with a frisbee.

F-CLIPScore (w/o training): A lady and two children in the street playing with a tennis racquet.

Figure 1: A representative example from the OHD-Caps test set. The original CLIP selects sentences containing both "children" and "tennis", but add hallucinated objects while the OHD-Caps-trained CLIP does not. However, the latter exhibits hallucinations involving "dog" and "frisbee". On the other hand, F-CLIPScore selects the sentence that did not add or alter hallucinated objects.

selection based on CLIPScore shows the accuracy 10–20% and the further fine-tuning with the proposed objective function with the dataset enhance the accuracy up to 80–90%.

However, when they connected the OHD-Caps-trained CLIP (Radford et al., 2021) to an LVLM and conducted full fine-tuning, the resulting accuracy sometimes drops showing lower performance compared to original CLIP (for instance, 1st row of Table 4 in (Liu et al., 2024c) shows the accuracy in POPE benchmarks (Li et al., 2023b) drops from 85.4% to 81.2%). Additionally, we observe that the OHD-Caps-trained CLIP tended to select samples with hallucinations involving changes to the object itself, as shown in Figure 1. In contrast, the original CLIP tended to select text containing

hallucinations regarding the presence of additional objects. These observations may indicate that there is room for further investigation into whether the vision encoder’s capacity is indeed the primary factor contributing to object hallucination.

To address this issue, we introduce Fine-grained CLIPScore (F-CLIPScore), a novel image-text correlation metric. F-CLIPScore leverages a simple sentence parser like spaCy (Honnibal et al., 2020) and the forward pass of a Vision-Language Model (VLM) like CLIP (Radford et al., 2021), offering an efficient way to evaluate the vision encoder’s representational capacity. Our experimental results show that applying F-CLIPScore to the OHD-Caps test set improves accuracy by **+39.6%**. This suggests that F-CLIPScore effectively detect object hallucination in VLMs without requiring additional training of the vision encoder, indicating that the limited capacity of the vision encoder may not be the primary cause of object hallucination. Additionally, we verify that using F-CLIPScore for pretraining data curation in LVLMs enables the training of models with reduced hallucination, even with significantly fewer data samples. Notably, in LVLM pretraining, data curation alone improved POPE accuracy by 4.9% compared to the baseline.

The key contributions of this study are as follows:

- We introduce Fine-grained CLIPScore, a novel evaluation metric that relies solely on forward propagation.
- Reassessing the assumption that object hallucination stems primarily from the vision encoder’s limited capacity.
- Demonstrating that F-CLIPScore enables more efficient LVLM training with reduced object hallucination through pretraining data curation.

Our code is available at <https://github.com/abzb1/f-clip>.

2 Related Work

Object hallucination refers to cases in which the generated textual descriptions include objects that do not correspond to the given image (Liu et al., 2024b). LVLMs generally consist of three components: a vision encoder, an LLM, and an adapter (Liu et al., 2023). The structural characteristics of LVLMs contribute to object hallucination,

which arises from multiple intertwined factors (Liu et al., 2024b). While some studies argue that hallucinations can be mitigated by enhancing the decoding process of the LLM (Manevich and Tsarfaty, 2024; Wang et al., 2024b), others suggest that the root cause lies in the limited representational capacity of the vision encoder (Liu et al., 2024c). Additionally, some research indicates that training the adapter with contrastive data is essential to reduce object hallucination (Jiang et al., 2024). And the trained bias of the model has also been identified as a cause of hallucination (Hu et al., 2023; Liu et al., 2024a).

CLIPScore (Hessel et al., 2021) is a reference-free evaluation method that assesses the consistency between an image and text caption by computing the cosine similarity between the embeddings generated by the vision encoder and text encoder of the CLIP model. Beyond its application in measuring caption quality, several studies have also leveraged CLIPScore for data curation in the training of Vision-Language Models (VLMs) (Schuhmann et al., 2021; Gadre et al., 2023).

A recent study (Liu et al., 2024c) utilized CLIPScore to evaluate object hallucination in Vision-Language Models (VLMs). Their findings suggest that this phenomenon stems from the limited capacity of the vision encoder. In this study, we carefully reassess this claim and demonstrate that object hallucination is not necessarily caused by the limitations of the vision encoder alone.

3 Methods

3.1 Motivation

Based on our initial observation that OHD-Caps-trained CLIP does not necessarily yield better results when combined with LVLM (Section 1), we further investigate how fine-tuning affects the embedding vectors produced by CLIP’s vision and text encoders. We compute the cosine similarity between two embedding vectors: one from the original CLIP-L and the other from the OHD-Caps-trained CLIP-L, using the entire image-text pairs in the OHD-Caps test set. The results show although there are significant changes in both image and text embedding vectors (Figure 2(a), (b)), there are no significant differences between cases where original CLIP-L answered correctly (blue) or not (orange). In contrast, Figure 2(c) reveals significant changes in text embeddings for captions with hallucination (purple), and without hallucination (green)

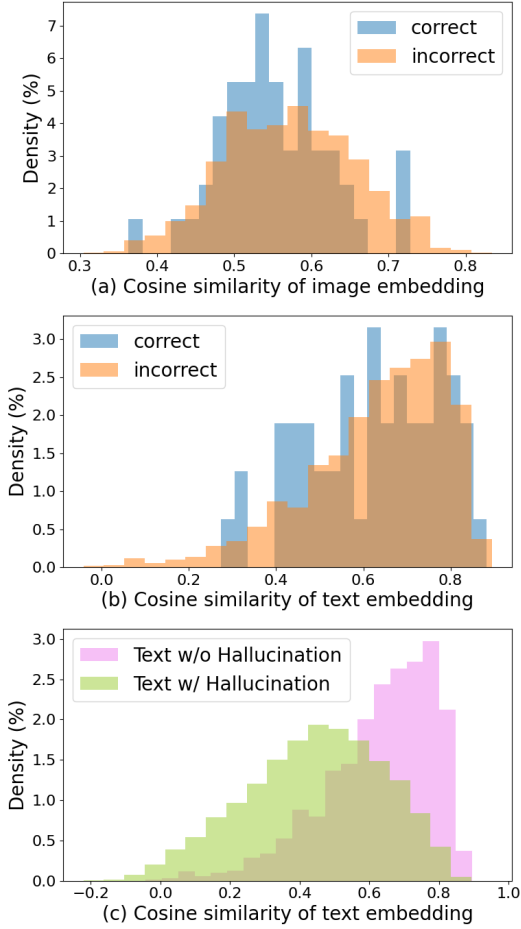


Figure 2: Histograms of cosine similarity between two embedding vectors: one from the original CLIP-L and the other from the OHD-Caps-trained CLIP-L. (a) The histogram from the vision encoders. Correct (blue) indicates the scores are from the examples where original CLIP-L predict the ground truth. The other examples are colored in orange. (b) The histogram from the text encoders. Same color scheme is employed. Measured only on ground truth text. (c) The cosine similarity distribution between text embeddings of text without object hallucination (purple) and with object hallucination text (green) for all samples.

highlighting the distinct adaptation of text representation. These observations suggest that OHD-Caps training may shift the representation space of the vision encoder while enhancing the text encoder’s discriminative ability.

3.2 Fine-grained CLIPScore

Motivated by this observation, we propose a simple metric called Fine-grained CLIPScore (F-CLIPScore), which enhances the discriminative power of the VLM in order to utilize textual information with more granularity without additional training. F-CLIPScore first utilizes the spaCy parser (Honnibal et al., 2020) to extract nouns

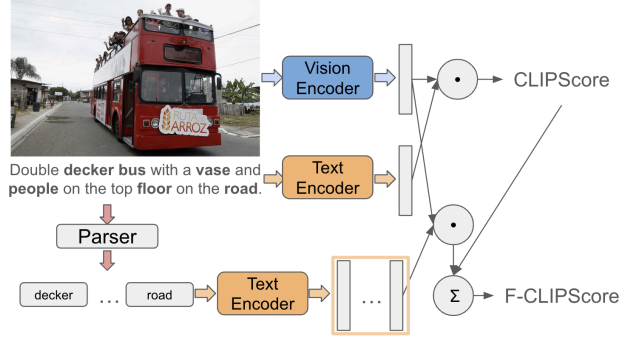


Figure 3: The graphical representation of F-CLIPScore.

from a given sentence, ensuring a finer-grained evaluation of textual content. Then, it evaluates the quality of an image caption by averaging the CLIPScore of the entire sentence and each individual noun (Figure 3). Mathematically, given a full sentence s and a total of N nouns, denoted as n_i , F-CLIPScore is defined as

$$\text{F-CLIPScore}(s) = \frac{\text{CLIPScore}(s) + \sum_{i=1}^N \text{CLIPScore}(n_i)}{N + 1} \quad (1)$$

4 Experiments

The F-CLIPScore evaluation only introduced additional parser processing time (less than a per sentence), as the added nouns were batch-processed. For training CLIP on the OHD-Caps train set, we used an effective batch size of 64 and a learning rate of $1e-5$, which required 3 hours on an H100 GPU. For LLaVA pretraining, we employed an effective batch size of 128 and a learning rate of $1e-3$, which took 7 hours on two H100 GPUs.

5 Results

By utilizing the F-CLIPScore, which directly leverages the image embeddings from the CLIP vision encoder without any training or gradients, while only adding a parsing process during forward propagation, we can efficiently gain insights into whether the issue of object hallucination arises from the limited capability of the vision encoder.

5.1 F-CLIPScore on OHD-Caps

We evaluated the OHD-Caps (Liu et al., 2024c) test set, an object hallucination assessment dataset, using the proposed F-CLIPScore. As shown in Table 1, evaluation results with CLIP ViT-L (Radford et al., 2021) indicate that F-CLIPScore outperformed the baseline model by up to 39.6% without additional training (row 1 vs. 2). However, it

still performed 21.8% to 38.6% worse than trained models (row 2 vs. row 3). This may indicate that although CLIP vision encoders may not be the main cause of object hallucination, further training may enhance their capability.

Table 1: Accuracy on the OHD-Caps test set evaluated with OpenAI CLIP-L.

OHD-Caps ACC (% , \uparrow)			
Metric	coco	flickr30k	nocaps
w/o training			
CLIPScore	22.6	22.6	12.4
F-CLIPScore	62.2	62.2	46.6
trained w/ OHD-loss [†]			
CLIPScore	84.0	89.2	85.2
trained w/ F-CLIPScore loss			
CLIPScore	85.0	89.0	86.4

[†]: Reproduced (Liu et al., 2024c)

To test whether F-CLIPScore is orthogonal to the proposed method from Liu et al. (2024c), we modify the loss as

$$L = L_{CLIP} + L_{OHD} + \frac{\alpha}{B} \sum_{i=1}^B (1 - \text{F-CLIPScore}(I_i, C_i)) \quad (2)$$

, where L_{CLIP} is the contrastive loss proposed in (Radford et al., 2021), and L_{OHD} is the marginal loss proposed in (Liu et al., 2024c). B denotes the batch size, while I_i and C_i are the i -th positive pair. α is a hyperparameter that we set to 0.2.

Applying F-CLIPScore as a loss improved performance by +1.0 percentage point on the COCO subset and +1.2 percentage points on the Flickr30K subset (Table 1, bottom row). Given the relatively small difference in performance, it is possible that the model has already overfitted to the dataset.

5.2 LVLM Pretrain Data Curation with F-CLIPScore

As shown in Section 5.1, F-CLIPScore was able to exhibit competent performance in detecting object hallucination without training. We aimed to investigate whether F-CLIPScore could influence the pretraining process of LVLM that connects the vision encoder and LLM. To explore this, we utilized F-CLIPScore to filter the pretraining data for LLaVA (Liu et al., 2023).

As shown in Table 2, training the alignment model using only the top 70% of data curated by F-

Table 2: POPE benchmark accuracy after LLaVA pre-training. We use CLIP-L (Radford et al., 2021) as a vision encoder, and Llama 2 7B (Touvron et al., 2023) as an LLM backbone. ‘trained’ indicates the OHD-Caps-trained CLIP-L.

POPE Acc (\uparrow , %)	Filtering rate (%)				
Filtering Method	20	30	40	50	60
CLIPScore (w/o train)	52.2	47.3	50.0	53.1	50.0
F-CLIPScore (w/o train)	51.6	55.5	50.6	50.1	51.8
CLIPScore (trained)	49.8	49.8	50.8	49.8	52.6
w/o filtering	50.58				

CLIPScore led to a +4.9% improvement in POPE accuracy compared to training on the entire dataset (second row). On the other hand, when using the OHD-Caps-trained CLIP for filtering, the improvement was marginal.

These results may suggest that F-CLIPScore effectively measures object hallucination-related quality even in general dataset. We thought this was due to F-CLIPScore not requiring any fine-tuning, which preserves general capabilities while enabling detecting object hallucination.

Furthermore, our findings highlight that object hallucination can be mitigated solely through curated data by training only the adapter, without modifying the vision encoder or LLM. This underscores the need to explore alternative causes of object hallucination beyond capacity of the vision encoder.

6 Conclusion

We introduce F-CLIPScore, a simple yet effective metric for evaluating fine-grained image-caption alignment and addressing object hallucination in Vision-Language Models. Unlike conventional CLIPScore, which relies solely on sentence-level embeddings, F-CLIPScore also incorporates noun-level embeddings. This refinement allows the model to better mitigate object hallucination without requiring additional training for the vision encoder. We validate F-CLIPScore by showing a +39.6% accuracy in OHD-Caps benchmark. We also show that data curation based on F-CLIPScore can enhance LVLM performance in hallucination mitigation, even with a reduced dataset. These results may indicate that the limitations of existing evaluation metrics are one possible origin of object hallucination, which fails to efficiently reveal the capacity of the vision encoder.

Limitations

While this study proposes a method for analyzing and mitigating object hallucination using F-CLIPScore, it is subject to the following limitations. First, we were unable to conduct experiments on the Supervised Fine-Tuning (SFT) for Large Vision-Language Models (LVLMs). In the LVLM training pipeline, after the alignment pre-training phase—where the vision encoder and LLM remain frozen—the SFT stage follows, in which these components are unfrozen and further trained. However, due to computational resource limitations, we did not fully explore the potential impact of F-CLIPScore during SFT. Future work could investigate ways to incorporate F-CLIPScore into the SFT process to enhance training effectiveness.

Second, our method faces linguistic constraints and challenges in multilingual generalization. This study employs the spaCy parser (Honnibal et al., 2020) to extract noun phrases from text, a technique that performs relatively reliably in well-structured languages such as English. However, parsing accuracy may vary across different languages, potentially leading to inconsistencies in F-CLIPScore computation. To address this, future research should explore the scalability of F-CLIPScore by evaluating its effectiveness on multilingual datasets and refining the parsing methodology for broader linguistic applicability.

References

- Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, Bin Li, Ping Luo, Tong Lu, Yu Qiao, and Jifeng Dai. 2024. [Intern vl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks](#). In *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 24185–24198.
- Samir Yitzhak Gadre, Gabriel Ilharco, Alex Fang, Jonathan Hayase, Georgios Smyrnis, Thao Nguyen, Ryan Marten, Mitchell Wortsman, Dhruva Ghosh, Jieyu Zhang, Eyal Orgad, Rahim Entezari, Giannis Daras, Sarah M Pratt, Vivek Ramanujan, Yonatan Bitton, Kalyani Marathe, Stephen Mussmann, Richard Vencu, Mehdi Cherti, Ranjay Krishna, Pang Wei Koh, Olga Saukh, Alexander Ratner, Shuran Song, Hananeh Hajishirzi, Ali Farhadi, Romain Beaumont, Sewoong Oh, Alex Dimakis, Jenia Jitsev, Yair Carmon, Vaishaal Shankar, and Ludwig Schmidt. 2023. [Datacomp: In search of the next generation of multimodal datasets](#). In *Thirty-seventh Conference on Neural Information Processing Systems Datasets and Benchmarks Track*.
- Jack Hessel, Ari Holtzman, Maxwell Forbes, Ronan Le Bras, and Yejin Choi. 2021. [CLIPScore: A reference-free evaluation metric for image captioning](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7514–7528, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Matthew Honnibal, Ines Montani, Sofie Van Lan-deghem, and Adriane Boyd. 2020. [spacy: Industrial-strength natural language processing in python](#).
- Hongyu Hu, Jiyuan Zhang, Minyi Zhao, and Zhenbang Sun. 2023. [CIEM: Contrastive instruction evaluation method for better instruction tuning](#). In *NeurIPS 2023 Workshop on Instruction Tuning and Instruction Following*.
- Ziwei Ji, Nayeon Lee, Rita Frieske, Tiezheng Yu, Dan Su, Yan Xu, Etsuko Ishii, Ye Jin Bang, Andrea Madotto, and Pascale Fung. 2023. [Survey of hallucination in natural language generation](#). *ACM Comput. Surv.*, 55(12).
- Chaoya Jiang, Haiyang Xu, Mengfan Dong, Jiaying Chen, Wei Ye, Ming Yan, Qinghao Ye, Ji Zhang, Fei Huang, and Shikun Zhang. 2024. [Hallucination augmented contrastive learning for multimodal large language model](#). *Preprint*, arXiv:2312.06968.
- Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Xin Zhao, and Ji-Rong Wen. 2023a. [Evaluating object hallucination in large vision-language models](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 292–305, Singapore. Association for Computational Linguistics.
- Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Xin Zhao, and Ji-Rong Wen. 2023b. [Evaluating object hallucination in large vision-language models](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 292–305, Singapore. Association for Computational Linguistics.
- Fuxiao Liu, Kevin Lin, Linjie Li, Jianfeng Wang, Yaser Yacoob, and Lijuan Wang. 2024a. [Mitigating hallucination in large multi-modal models via robust instruction tuning](#). In *The Twelfth International Conference on Learning Representations*.
- Hanchao Liu, Wenyuan Xue, Yifei Chen, Dapeng Chen, Xiutian Zhao, Ke Wang, Liping Hou, Rongjun Li, and Wei Peng. 2024b. [A survey on hallucination in large vision-language models](#). *Preprint*, arXiv:2402.00253.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. 2023. [Visual instruction tuning](#). In *Advances in Neural Information Processing Systems*, volume 36, pages 34892–34916. Curran Associates, Inc.
- Yufang Liu, Tao Ji, Changzhi Sun, Yuanbin Wu, and Aimin Zhou. 2024c. [Investigating and mitigating object hallucinations in pretrained vision-language](#)

- (CLIP) models. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 18288–18301, Miami, Florida, USA. Association for Computational Linguistics.
- Avshalom Manevich and Reut Tsarfaty. 2024. Mitigating hallucinations in large vision-language models (LVLMs) via language-contrastive decoding (LCD). In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 6008–6022, Bangkok, Thailand. Association for Computational Linguistics.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. 2021. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR.
- Christoph Schuhmann, Richard Vencu, Romain Beaumont, Robert Kaczmarczyk, Clayton Mullis, Aarush Katta, Theo Coombes, Jenia Jitsev, and Aran Komatsuzaki. 2021. *Laion-400m: Open dataset of clip-filtered 400 million image-text pairs*. *Preprint*, arXiv:2111.02114.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. *Llama 2: Open foundation and fine-tuned chat models*. *Preprint*, arXiv:2307.09288.
- Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Yang Fan, Kai Dang, Mengfei Du, Xuancheng Ren, Rui Men, Dayiheng Liu, Chang Zhou, Jingren Zhou, and Junyang Lin. 2024a. *Qwen2-vl: Enhancing vision-language model’s perception of the world at any resolution*. *Preprint*, arXiv:2409.12191.
- Xintong Wang, Jingheng Pan, Liang Ding, and Chris Biemann. 2024b. Mitigating hallucinations in large vision-language models with instruction contrastive decoding. In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 15840–15853, Bangkok, Thailand. Association for Computational Linguistics.
- Yue Zhang, Yafu Li, Leyang Cui, Deng Cai, Lemao Liu, Tingchen Fu, Xinting Huang, Enbo Zhao, Yu Zhang, Yulong Chen, Longyue Wang, Anh Tuan Luu, Wei Bi, Freda Shi, and Shuming Shi. 2023. *Siren’s song in the ai ocean: A survey on hallucination in large language models*. *Preprint*, arXiv:2309.01219.
- Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. 2023. *Minigt-4: Enhancing vision-language understanding with advanced large language models*. *Preprint*, arXiv:2304.10592.