

Multi²: Multi-Agent Test-Time Scalable Framework for Multi-Document Processing

Juntai Cao^{1*}, Xiang Zhang^{1*}, Raymond Li¹, Chuyuan Li¹, Shafiq Joty², Giuseppe Carenini¹

¹ University of British Columbia

² Salesforce Research

{jtcao7, raymond1, chuyuan.li, carenini}@cs.ubc.ca

xzhang23@ualberta.ca, sjoty@salesforce.com

Abstract

Recent advances in test-time scaling have shown promising results in improving Large Language Models (LLMs) performance through strategic computation allocation during inference. While this approach has demonstrated strong performance improvements in logical and mathematical reasoning tasks, its application to natural language generation (NLG), especially summarization, has yet to be explored. Multi-Document Summarization (MDS) is a challenging task that focuses on extracting and synthesizing useful information from multiple lengthy documents. Unlike reasoning tasks, MDS requires a more nuanced approach to prompt design and ensemble, as there is no “best” prompt to satisfy diverse summarization requirements. To address this, we propose a novel framework that leverages inference-time scaling for this task. Precisely, we take prompt ensemble approach by leveraging various prompt to first generate candidate summaries and then ensemble them with an aggregator to produce a refined summary. We also introduce two new evaluation metrics: Consistency-Aware Preference (CAP) score and LLM Atom-Content-Unit (ACU) score, to enhance LLM’s contextual understanding while mitigating its positional bias. Extensive experiments demonstrate the effectiveness of our approach in improving summary quality while identifying and analyzing the scaling boundaries in summarization tasks.¹

1 Introduction

Test-time scaling (or inference-time scaling) has emerged as a promising approach for enhancing LLM’s performance beyond traditional architectural or data improvements (OpenAI, 2024). While

^{*}Equal contribution.

¹Our code, model outputs, and evaluation module will be made publicly available upon acceptance.

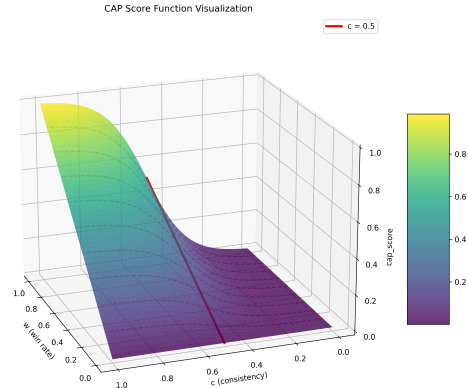


Figure 1: Visualization of our proposed Consistency-aware Preference (CAP) Score for text generation task. Applying LLMs’ strong language understanding ability, CAP assign higher score to summary which *consistently* gets ranked higher by the LLM.

earlier work focused on relationships between models’ capabilities, size, and training resources, recent research demonstrates that strategic compute allocation during inference can yield substantial performance gains. For instance, studies show that increased inference computation produces better results than equivalent investments in pretraining (Snell et al., 2024; Agarwal et al., 2024; Muenighoff et al., 2025).

Research on test-time scaling has largely centered on logical and math reasoning tasks, leaving traditional natural language generation (NLG) tasks relatively unexplored. This gap is particularly notable in text summarization, a domain where LLMs have already demonstrated significant advances, generating summaries competitive with human performance (Xiao et al., 2024; Zhang et al., 2024c; Pu et al., 2023). Beyond generation, LLMs have proven effective as judges when guided by well-designed evaluation protocols (Liu et al., 2024b,c). Recent expansions in context window sizes have created new opportunities to study scal-

ing effects on length-constrained tasks like summarization (Liu et al., 2022). However, LLMs still struggle with key challenges including hallucination, incomplete coverage, language inconsistency, and verbosity (Zhang et al., 2024f; Liu et al., 2024b; Zhang et al., 2023b; Belem et al., 2024; Zhang et al., 2023a).

In this paper, we aim to examine LLMs’ summarization capabilities and their scaling properties by focusing on the multi-document summarization (MDS) task. MDS requires synthesizing and linking information across lengthy documents, handling information redundancy, maintaining factual consistency, and generating coherent and concise summaries while preserving key details. In addition, MDS demands effective reasoning to determine relevance and priority among diverse pieces of information. These characteristics make MDS particularly time- and labor-intensive (Van Veen et al., 2024). To tackle these challenges, we propose a multi-agent approach that leverages prompt ensemble techniques to scale summarization at test time. While traditional prompt ensemble methods exist—such as (a) applying different sampling strategies to a single prompt (Li et al., 2023b), or (b) varying few-shot examples within prompts (Arora et al., 2022)—their direct application to summarization presents notable limitations. The first approach merely explores variations in the output space, while the second heavily relies on example-based learning, which is better suited for reasoning tasks (Zhang and Ding, 2024a). Furthermore, summarization differs fundamentally from reasoning tasks (Zhang et al., 2024e), where specific prompts like “*Let’s think step by step*” (Kojima et al., 2022) can effectively guide models through predetermined reasoning patterns (Zhang et al., 2024d). In contrast, no single “optimal” prompt exists for generating summaries that satisfy diverse requirements. Given these distinctions, summarization demands a more sophisticated approach to prompt ensemble techniques. We provide a comprehensive theoretical analysis of our approach in Appendix A.

Therefore, we propose Multi² framework (Fig. 2) to address this challenge by generating multiple summaries through diverse prompts that maintain consistent requirements. We then employ an aggregation strategy to construct a comprehensive final summary that leverages the strengths of each summary candidate. While increased inference-time computation generally improves performance, re-

cent studies have also identified an *inverse scaling* phenomenon, where excessive computation can paradoxically degrade performance (Gao et al., 2022; Stroebel et al., 2024). We also investigate this phenomenon by systematically varying the number of samples and examining its boundaries.

Another challenge in MDS is the reliability of automatic evaluation metrics. Traditional metrics like ROUGE (Lin, 2004a) have proven insufficient for capturing summary quality, while more recent LLM-based metrics—such as Auto-ACU (Liu et al., 2023b), LLMCompare (Liu et al., 2024b), and LLMRank (Liu et al., 2024c)—show limitations, including constraints in contextual understanding for smaller models and persistent positional biases (Wang et al., 2024c). We specifically highlight **positional bias**, where LLMs tend to favor summaries appearing in a particular position (first or second in a pairwise comparison), leading to inconsistencies in evaluation, particularly during test-time scaling. To improve evaluation consistency, we propose two novel metrics: Consistency-Aware Preference (CAP) score and LLM Atom-Content-Unit (LLM-ACU) score. As shown in our experiments, these metrics leverage LLMs’ contextual understanding while incorporating mechanisms to mitigate positional bias, ensuring more reliable and robust summary assessment.

In summary, (1) We present the first comprehensive investigation of test-time scaling laws in text summarization, extending the analysis beyond traditionally explored reasoning tasks; (2) We introduce a new framework Multi² that enhances summarization performance through ensemble at test time; (3) We propose two novel LLM-based evaluation protocols for text summarization and provide reference ACU datasets for quantitative assessment of summary quality, changing the way evaluation is done in summarization tasks compared to traditional ROUGE-score-like metrics.

2 Related Work

2.1 Test-time scaling

Test-time scaling strategies can be broadly classified into three categories: repeated sampling, deliberative approaches, and self-refinement. Repeated sampling leverages techniques like temperature sampling (Ackley et al., 1985), top- k , and top- p sampling (Holtzman et al., 2020) to generate diverse outputs, which are then enhanced through aggregation strategies such as majority voting (Wang

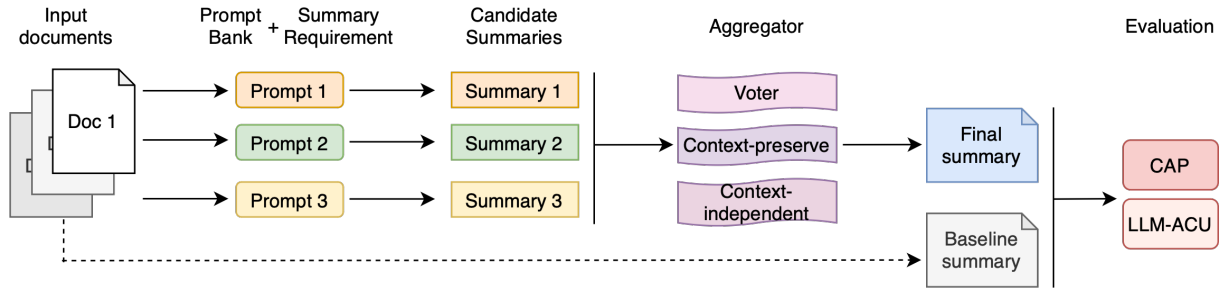


Figure 2: Overview of Multi² summarization inference-time scaling framework. Documents are first summarized by independent LLM agents, each guided by a different prompt from a curated prompt bank and constrained by user requirements. The resulting summaries are then processed by an aggregator (Voter, Context-Preserving Summarizer, or Context-Independent Summarizer) to generate the final consolidated summary.

et al., 2023b), weighted majority voting (Li et al., 2023a), or best-of- n selection (Cobbe et al., 2021).

Recent work (Brown et al., 2024; Wu et al., 2024; Stroebel et al., 2024; Zhao et al., 2025) demonstrates that repeated sampling can significantly expand LLM capabilities across various domains. **Deliberative approaches** incorporate structured reasoning through methods like chain-of-thought prompting (Wei et al., 2023) and tree search. These approaches range from informed search methods (Zhuang et al., 2024; Wang et al., 2024a) to Monte Carlo Tree Search (MCTS) variants (Tian et al., 2024; Zhang et al., 2024b,a). A key characteristic of tree search methods is to use process reward models (PRMs) to guide the search trajectory during generation (Yao et al., 2023; Zelikman et al., 2024). **Self-refinement** (Madaan et al., 2023) enables models to iteratively improve their responses through self-critique and editing. Additionally, all categories of test-time scaling methods can be enhanced through model ensembling (Wang et al., 2024b; Jin et al., 2024; Chen et al., 2024) to combine the strengths of multiple models to achieve better performance.

Tree search methods often struggle with the high-dimensional search space created by multiple source documents, making it computationally intensive to explore meaningful trajectories. Self-refinement approaches, which rely on iterative improvements, may lead to information loss as they tend to focus on refining a single perspective rather than maintaining diverse viewpoints from multiple documents. Therefore, we adopt the repeated sampling approach to scale MDS at test time, using diverse prompts to generate multiple perspectives that are then consolidated through specialized aggregation methods.

2.2 Multi Document Summarization

Multi-document summarization (MDS) has evolved significantly from traditional methods (Erkan and Radev, 2004; Mehdad et al., 2014; Gerani et al., 2014) to modern approaches powered by neural networks, which introduced encoder-decoder architectures for better summary generation (Liu and Lapata, 2019; Zhang et al., 2020a; Giorgi et al., 2022; Li et al., 2022). The advent of LLMs has boosted MDS capabilities even further, with models demonstrating impressive zero- and few-shot performance (Zhang et al., 2024c). Recent work has shifted the focus from architectural modifications to improve LLMs’ summarization abilities to exploring various prompting strategies (Xiao et al., 2024; Liu et al., 2024b). Despite these advances, MDS continues to face challenges including maintaining cross-document consistency, ensuring factual accuracy, and addressing content incompleteness where key information may be omitted (Belem et al., 2024). In this paper, we propose to tackle these challenges through a scaling approach that leverages prompt ensemble techniques to generate more comprehensive and accurate summaries.

Traditional evaluation metrics for summarization, such as ROUGE (Lin, 2004b), only rely on lexical overlap with reference summaries. These metrics often fail to capture semantic similarity and summary quality adequately (Bhandari et al., 2020). This limitation has led to the development of learned metrics that better align with human judgments (Yuan et al., 2021; Zhang et al., 2020b). The emergence of LLMs has enabled even more sophisticated evaluation approaches. Recent work has explored using LLMs as evaluation agents (Liu et al., 2024b,c), demonstrating their ability to assess multiple quality dimensions including coher-

ence, faithfulness, and informativeness. However, these approaches face challenges such as positional bias and inconsistency across different model sizes (Wang et al., 2024c; Shi et al., 2024). In this paper, we address these limitations by proposing two novel metrics that remain consistent regardless of position or choice of evaluation model.

3 Multi² Framework

3.1 Multi-agent Text Generation

Our Multi² test-time scaling framework for MDS is illustrated in Figure 2. The framework operates in two main stages: candidate generation and summary aggregation. In the first stage, input documents are processed by multiple independent LLM agents using randomly selected prompts from a curated prompt bank, simulating real-world summarization scenarios. The generated candidate summaries, along with the original requirements, are then passed to the aggregator module. The aggregator module implements three distinct approaches: vote, context-preserving summarizer (CPS), and context-independent summarizer (CIS).

The **vote** agent evaluates all candidate summaries against the original input documents and provides a detailed explanation before selecting the best summary. To mitigate positional bias (Section 5.2), we explicitly require the agent to complete its reasoning before indicating its final selection, ensuring the choice is constrained by the documented rationale. Instead of selecting the best candidate summary, CPS and CIS aggregate the candidate summaries into a final summary. The **CPS** agent generates a refined summary by consulting both the original documents and the candidate summaries, aiming for completeness and conciseness. In contrast, the **CIS** agent focuses solely on the candidate summaries without access to the original documents, producing a consolidated summary through reference-based synthesis. We attached our prompts for aggregation agents in Appendix D.2.

The details of ensemble framework and an theoretical ground for such ensemble on prompt space level and its complexity analysis can be referred to in Appendix A.

3.2 LLM-based Metrics for text Generation

3.2.1 Positional Bias and Motivation

Recent approaches to automatic evaluation have increasingly leveraged LLMs, either through comparative (pairwise) assessment or direct scoring mech-

anisms. However, both approaches face challenges. Comparative methods struggle with positional bias, an inherent limitation of LLM judges. While previous research (Liu et al., 2024c) suggested that advanced models (like gpt-4o) might mitigate this issue, our experiments in Section 5.2 demonstrate that LLM evaluations remain extremely susceptible to position-dependent variations, especially on contextual tasks like MDS. Direct scoring approaches face different challenges: defining clear scoring guidelines could be difficult, and ensuring consistent application of grading rubrics across different generations remains challenging. Moreover, the complexity of nuanced scoring—a task challenging even for human evaluators who struggle more with five-point Likert scales than binary preferences—makes it particularly difficult for LLMs to provide reliable quantitative assessments. The pairwise comparative setup offers utility to practitioners (e.g., evaluation for A/B testing) while eliciting evaluations better aligned with human judgment from automatic evaluators (Wang et al., 2023a; Liu et al., 2024a).

To address these limitations and enable reliable large-scale evaluation of generated summaries, we propose two novel metrics Consistency-aware Preference (CAP) score and LLM-ACU score. These metrics are specifically designed to mitigate positional bias, while providing repeatable quantitative measurements for systematic comparison of summary quality.

3.2.2 Consistency-Aware Preference Score

We develop the Consistency-Aware Preference (CAP) score as an enhancement to the LLMCompare (Liu et al., 2024b) method for quantitatively evaluating preference rates of summaries compared to a baseline. LLMCompare employs an LLM judge to evaluate two summaries against the source documents, determining which is superior (1 or 2) or if they are equivalent (tie). To address the positional bias (detailed in Section 3.2.1), we implement a metric with two-phase comparison process. First, we use an LLM as judge to obtain preferences with summaries (target and baseline) in their original positions. Then, we swap the positions of the two summaries and obtain a second set of preferences, relabeling them based on their new positions to eliminate labeling bias. From this two-step comparison, we compute the *win rates* (w_1 , w_2) of the target summarization method against the baseline in each step, and the *consistency rate* (C)

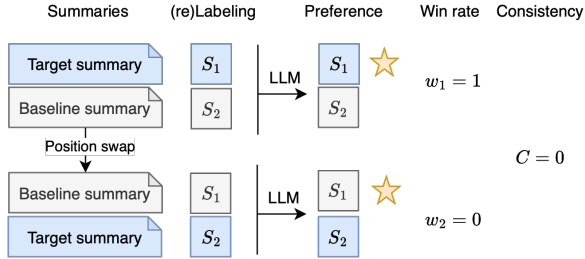


Figure 3: Two-step calculation of CAP using LLM. In this example, LLM prefers the first summary in both step 1 and step 2, resulting in inconsistent evaluation.

of predictions across both orderings (Figure 3).

Importantly, when evaluating consistency, if either comparison (i.e., before or after the swapping) results in a tie, we consider it consistent with any outcome in the other comparison to avoid overpenalizing borderline cases. The final CAP score is computed as follows:

$$\text{CAP} = W_{\text{pref}} \frac{1}{1 + \exp^{-k(C-0.5)}}, \quad (1)$$

where W_{pref} refers to *preference rate* calculated from *win rates* (w_1 and w_2); C refers to *consistency score*; k controls sensitivity to consistency variations (default to 10 according to our experiments on a validation set). In practice, the preference weight W_{pref} can be determined using either max-pooling or averaging:

$$W_{\text{pref}}^{\text{max}} = \max(w_1, w_2) \quad (2)$$

$$W_{\text{pref}}^{\text{avg}} = \frac{(w_1, w_2)}{2} \quad (3)$$

Figure 1 illustrates the distribution of CAP score across different preference weights W and consistency values C . The CAP score is designed to reflect both the *preference rate* and *consistency score*, ensuring a reliable evaluation. A high CAP score is achieved only when both factors are high, meaning the model consistently prefers the same summary. If the model’s predictions are stable, the CAP score varies proportionally with the *preference rate*. However, when predictions are inconsistent, the CAP score remains low regardless of the preference outcome, as the metric intentionally penalizes unreliable decisions.

3.2.3 LLM-ACU Score

Inspired by the Atomic Content Unit (ACU) score (Liu et al., 2023a,b), we propose an LLM-based ACU metric to quantitatively measure the completeness of summaries. The process consists of

two phases. First, using few-shot prompting, we guide an LLM to extract ACUs from reference summaries. These ACUs are designed to capture essential factual units that are independently interpretable without references. In the evaluation phase, we present the extracted ACUs alongside the model generated summary and ask an LLM to determine which of the ACUs are entailed in the generated summary. The final score f for a set of summaries S and their corresponding ACU sets \mathcal{A} is computed as the average unnormalized ACU score:

$$f(S, \mathcal{A}) = \frac{1}{|S|} \sum_{s \in S} \frac{e_s}{|\mathcal{A}_s|}, \quad (4)$$

where e_s represents the number of ACUs in the system output that are entailed by the gold standard ACUs \mathcal{A}_s determined by the LLM. We use gpt-4o for both ACU extraction² and entailment verification.

Recent work suggests that fine-tuning primarily enables format adaptation rather than information acquisition in language models (Allen-Zhu and Li, 2024). Therefore, we do not finetune models for extracting ACUs and checking entailment, but instead leverage the advanced language understanding capabilities of LLMs directly for both steps.

4 Experiment Setup

Datasets. We evaluate our framework on two datasets: MultiNews (Fabbri et al., 2019) for general-purpose summarization and OpenASP (Amar et al., 2023) for aspect-based summarization. These datasets represent distinct summarization challenges, with MultiNews focusing on general-purpose news article consolidation and OpenASP targeting aspect-specific information extraction and synthesis. For a balanced comparison, we conduct our experiments on the test sets of both datasets. For MultiNews, we select the first 600 entries from its test set to match the size of OpenASP’s test set.

Models. To investigate scaling properties and leverage extended context windows, we evaluate our framework using two state-of-the-art models of different scales: gpt-4o and gpt-4o-mini. These models enable us to analyze how performance scales with model size while maintaining consistent architectural characteristics.

²Our extracted ACUs for MultiNews and OpenASP datasets will be released.

# Samples	Baseline		gpt-4o				gpt-4o-mini				Vote	
	High	Avg	CIS		CPS		CIS		CPS			
			High	Avg	High	Avg	Max	Avg	Max	Avg	Max	Avg
	2			0.69	0.51	0.82	0.62	0.67	0.49	0.80	0.61	0.37
3			0.73	0.55	0.79	0.62	0.72	0.53	0.72	0.54	0.27	0.16
4	0.25	0.15	0.68	0.50	0.82	0.64	0.73	0.55	0.80	0.60	0.27	0.16
5			0.71	0.52	0.85	0.69	0.81	0.62	0.78	0.60	0.28	0.17
6			0.79	0.60	0.81	0.63	0.77	0.57	0.77	0.60	0.37	0.23

Table 1: CAP scores on Multinews dataset using gpt-4o and gpt-4o-mini models with context-independent summarizer (CIS) and context-preserving summarizer (CPS). The aggregator using Vote is model-invariant. We report CAP with max-pooled (“High”) and average (“Avg”) preference scores (W_{pref}). Baseline shows both max-pooled and average CAP across all samples. Best scores per column are shown in **bold**.

Prompt Bank. We adapt the prompt collection from Lior et al. (2024) to explore the prompt space. While some prompts in their work were originally designed for extractive summarization, we modified them for abstractive summary generation while preserving their core instructional elements. The prompts are shown in Appendix D.1.

Implementation Details. We establish our baseline using summaries generated by gpt-4o with a single prompt randomly selected from our prompt bank using a fixed random seed. We then conduct experiments by scaling this baseline approach across models of varying sizes and applying different aggregation methods to combine the generated summaries. For experimental consistency, we run each configuration twice with the default temperature setting (0.8) and report the averaged results. In our experiments, we focused on two primary control variables: (1) the inference model size, and (2) the scaling factor, determined by the number of ensembled samples.

5 Results

5.1 Main Results

Our experimental results are presented across four tables. The CAP scores are shown in Table 1 for MultiNews and Table 2 for OpenASP, respectively. The completeness scores, i.e., LLM-ACU scores, are shown in Table 4 for MultiNews and Table 3 for OpenASP, respectively. We also provide an analysis of how summary length correlates with the number of captured ACUs in Appendix C. In essence, we demonstrate that our prompt ensemble approach successfully captures diverse information from source documents by generating longer but

informationally dense summaries.

Effectiveness of Test-Time Scaling. Our experiments demonstrate significant improvements through inference-time scaling across both preference (Table 1 and 2) and completeness metrics (Table 4 and 3).

On MultiNews, starting from a low preference baseline, all scaling methods show substantial gains in overall quality. For completeness specifically, CPS aggregator achieves the strongest performance in information coverage, with gpt-4o-mini showing substantial gains from a baseline of 47.13 to 54.64 with 6 samples. Similarly for OpenASP, despite beginning from a stronger preference baseline, scaling with prompt ensemble still provides notable improvements in overall quality. The completeness metrics show comparable trends, with CPS improving gpt-4o-mini’s coverage from 42.35 to 47.82 using 5 samples. These results consistently demonstrate that scaling at test time can effectively enhance both summarization quality and information coverage across different datasets. Analysis of the LLM-ACU scores reveals several patterns in information preservation during scaling. First, CPS consistently outperforms both CIS and voting approaches across all experimental conditions, suggesting that access to source documents during ensemble is crucial for maintaining comprehensive coverage. Second, the completeness improvements are more pronounced on MultiNews (up to 7.51 points) compared to OpenASP (up to 5.47 points), suggesting that general-purpose summarization may benefit more from diverse prompt sampling in terms of information capture.

# Samples	Baseline		gpt-4o				gpt-4o-mini				Vote	
	High	Avg	CIS		CPS		CIS		CPS		Max	Avg
			Max	Avg	Max	Avg	Max	Avg	Max	Avg		
2			0.63	0.50	0.70	0.55	0.73	0.57	0.79	0.63	0.61	0.45
3			0.72	0.57	0.76	0.59	0.75	0.60	0.83	0.69	0.64	0.48
4	0.51	0.36	0.72	0.55	0.74	0.59	0.77	0.62	0.83	0.71	0.66	0.51
5			0.74	0.59	0.76	0.61	0.82	0.67	0.86	0.72	0.64	0.48
6			0.74	0.60	0.77	0.60	0.81	0.66	0.85	0.72	0.56	0.42

Table 2: CAP scores on OpenASP dataset under the same settings as in Table 1.

Scaling Boundaries and Limitations. Our analysis reveals clear boundaries in the effectiveness of inference-time scaling across both preference and completeness metrics. For preferences, both datasets (Yin et al., 2023) exhibit saturation points around 5-6 samples, beyond which the benefits diminish or reverse. This inverse scaling phenomenon is particularly evident in MultiNews, where CPS performance peaks at 5 samples (0.85/0.69) before declining to 0.81/0.63 at 6 samples. Similarly for completeness, gpt-4o’s scores with CPS plateau around 5-6 samples (52.70 and 52.40 respectively), with gpt-4o-mini showing similar saturation patterns. The scaling limitations manifest differently across ensemble methods. In terms of completeness, voting shows minimal improvement across all sample sizes (maximum gain of 1.2 points), suggesting that simple selection-based ensemble may be insufficient for maintaining comprehensive information coverage. The impact of document context during ensemble emerges as a crucial factor. While CIS performs better than voting, it consistently achieves lower completeness scores than CPS, indicating that losing document context during ensemble creates a ceiling on information preservation. These observations suggest that excessive ensemble sizes may introduce noise rather than improvements, and that the choice of ensemble method significantly affects both quality

LLM-ACU (OpenASP)		gpt-4o		gpt-4o-mini		Vote
# Samples	Baseline	CIS	CPS	CIS	CPS	
2		43.05	44.16	44.36	46.07	43.86
3		44.00	45.00	45.04	47.35	44.03
4	42.35	43.64	45.51	45.05	47.55	44.47
5		44.07	46.47	46.13	47.82	44.47
6		44.66	46.30	46.35	47.46	45.00

Table 3: Comparison of LLM-ACU scores on OpenASP dataset under same settings as Table 4.

LLM-ACU (MultiNews)		gpt-4o		gpt-4o-mini		Vote
# Samples	Baseline	CIS	CPS	CIS	CPS	
2		48.75	51.00	49.14	52.35	47.44
3		49.25	51.11	50.03	52.88	48.31
4	47.13	49.69	51.96	51.02	54.17	48.29
5		50.86	52.70	50.95	53.90	47.65
6		50.35	52.40	51.70	54.64	48.34

Table 4: Comparison of LLM-ACU scores on MultiNews dataset using different ensemble methods. The vote scores are model-invariant and apply to both models. Baseline indicates single sample performance without prompt ensemble. Best score for each model and aggregation agent is shown in **bold**.

and coverage outcomes. This highlights the importance of identifying optimal scaling thresholds and maintaining document context throughout the ensemble process.

Scaling Effect across Model Sizes. Our experiments with gpt-4o and gpt-4o-mini reveal interesting patterns in how model size interacts with scaling benefits across two key dimensions: completeness and preference scores. In terms of completeness, gpt-4o-mini often achieves larger relative improvements compared to gpt-4o when scaled through prompt ensemble. For instance, on MultiNews, gpt-4o-mini’s CPS performance improves by 7.51 points from baseline to peak, while gpt-4o shows a more modest improvement of 5.27 points. This suggests that prompt ensemble can partially compensate for model size limitations in terms of information capture. However, the absolute performance gap between the two models persists despite scaling. gpt-4o maintains higher baseline performance and generally achieves better peak scores, particularly with fewer ensembled samples. This indicates that while scaling can enhance the capabilities of smaller models, it can-

not completely bridge the fundamental differences in model capacities. Regarding preference scores, the relationship between model size and performance is more nuanced. While gpt-4o generally outperforms gpt-4o-mini on MultiNews when using CPS, the smaller model achieves competitive results with CIS. More surprisingly, on OpenASP, gpt-4o-mini consistently outperforms its larger version across both CIS and CPS aggregators. This suggests that the benefits of model scale are not uniform across different summarization tasks, and that smaller models, when combined with appropriate scaling strategies, may sometimes be more effective. These findings challenge the assumption that larger models necessarily benefit more from inference-time scaling and emphasize the importance of considering both model size and ensemble size in optimization strategies. Moreover, the persistence of completeness gaps across datasets suggests that model size remains a crucial factor in determining the upper bounds of summarization quality, even when enhanced through inference-time scaling techniques, though this relationship does not extend uniformly to preference metrics.

Model	Dataset	Sum1 Win	Sum2 Win
GPT	MultiNews	456	92
Claude	MultiNews	262	336
GPT	OpenASP	355	177
Claude	OpenASP	186	401

Table 5: Model Preference Analysis - Number of wins when comparing summaries in order {Sum1, Sum2}.

Model	Dataset	Sum2 Win	Sum1 Win
GPT	MultiNews	468	86
Claude	MultiNews	285	308
GPT	OpenASP	384	174
Claude	OpenASP	188	396

Table 6: Model Preference Analysis - Number of wins when comparing summaries in order {Sum2, Sum1}.

Model/Dataset	Disc.(%)	Pref Pos	Inc. Ratio
GPT/MultiNews	56.00%	1	333:3
Claude/MultiNews	16.67%	2	27:73
GPT/OpenASP	30.03%	1	174:5
Claude/OpenASP	34.72%	2	6:217

Table 7: Model Consistency Analysis - Comparing discrepancy rates, positional bias, and inconsistency ratios between gpt-4o and claude-3.5-sonnet.

5.2 Positional Bias and Choice of Evaluation Models.

In this section, we analyze the positional bias and consistency of two mainstream LLMs (gpt-4o and claude-3.5-sonnet).

Tables 5 and 6 demonstrate a clear positional bias in both models’ evaluations, though in opposing directions. gpt-4o shows a strong preference for summaries presented in the first position, with notably higher win ratios across both datasets. Conversely, claude-3.5-sonnet exhibits a preference for summaries in the second position, though this bias is relatively less pronounced in the MultiNews dataset. This positional bias is further confirmed in Table 7, where the inconsistency ratios tell a similar story. The discrepancy percentages indicate that claude-3.5-sonnet generally achieves better consistency on MultiNews, though both models show comparable discrepancy rates on OpenASP. While claude demonstrates marginally better consistency metrics overall, we opted to use gpt-4o in our final implementation due to practical considerations regarding speed and computational budget constraints. Since our evaluation framework incorporates both consistency and preference metrics, the choice between these models does not significantly impact the validity of our methodology or results.

These findings suggest that positional bias is still an inherent challenge in current language models when performing comparative evaluations, regardless of the specific model architecture or training approach. This observation underscores the importance of implementing appropriate debiasing strategies in evaluation frameworks.

6 Conclusion

In this work, we introduced Multi² framework for test-time scaling in MDS through prompt ensemble, demonstrating that strategic computation allocation during inference can effectively improve summary quality. Our experiments showed that increasing summary length through prompt ensemble leads to better information coverage while maintaining efficiency, and our novel evaluation metrics, CAP score and LLM-ACU score, provide more reliable assessments of summary quality. Through systematic analysis, we also identified the scaling boundaries in summarization tasks, providing insights into the limitations and optimal configurations of our approach.

Our findings also suggest two promising future research directions: (1) incorporating test time search algorithms to dynamically guide the prompt ensemble process and optimize summary generation, and (2) extending our evaluation metrics beyond summarization to assess model performance in reasoning tasks. These directions underscore the broader potential of optimizing LLMs’ test time behavior across diverse applications, particularly in scenarios requiring both factual accuracy and logical consistency.

Limitations

Our multi-agent text summarization system faces some limitations, primarily stemming from our reliance on large language models (LLMs) for evaluation. This approach incurs additional computational costs and requires computational resources, limiting the frequency and depth of evaluations. Additionally, the black-box nature of LLMs complicates the understanding of evaluation outcomes, making it challenging to pinpoint errors.

References

- David H. Ackley, Geoffrey E. Hinton, and Terrence J. Sejnowski. 1985. [A learning algorithm for boltzmann machines](#). *Cognitive Science*, 9(1):147–169.
- Rishabh Agarwal, Avi Singh, Lei M. Zhang, Bernd Bohnet, Luis Rosias, Stephanie Chan, Biao Zhang, Ankesh Anand, Zaheer Abbas, Azade Nova, John D. Co-Reyes, Eric Chu, Feryal Behbahani, Aleksandra Faust, and Hugo Larochelle. 2024. [Many-shot in-context learning](#). *Preprint*, arXiv:2404.11018.
- Zeyuan Allen-Zhu and Yuanzhi Li. 2024. [Physics of language models: Part 3.1, knowledge storage and extraction](#). *Preprint*, arXiv:2309.14316.
- Shmuel Amar, Liat Schiff, Ori Ernst, Asi Shefer, Ori Shapira, and Ido Dagan. 2023. [OpenAsp: A benchmark for multi-document open aspect-based summarization](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 1967–1991, Singapore. Association for Computational Linguistics.
- Simran Arora, Avaniika Narayan, Mayee F. Chen, Laurel Orr, Neel Guha, Kush Bhatia, Ines Chami, Frederic Sala, and Christopher Ré. 2022. [Ask me anything: A simple strategy for prompting language models](#). *Preprint*, arXiv:2210.02441.
- Catarina G. Belem, Pouya Pezeskhpour, Hayate Iso, Seiji Maekawa, Nikita Bhutani, and Estevam Hruschka. 2024. [From single to multi: How llms hallucinate in multi-document summarization](#). *Preprint*, arXiv:2410.13961.
- Manik Bhandari, Pranav Narayan Gour, Atabak Ashfaq, and Pengfei Liu. 2020. [Metrics also disagree in the low scoring range: Revisiting summarization evaluation metrics](#). In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 5702–5711, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Bradley Brown, Jordan Juravsky, Ryan Ehrlich, Ronald Clark, Quoc V. Le, Christopher Ré, and Azalia Mirhoseini. 2024. [Large language monkeys: Scaling inference compute with repeated sampling](#). *Preprint*, arXiv:2407.21787.
- Lingjiao Chen, Jared Quincy Davis, Boris Hanin, Peter Bailis, Ion Stoica, Matei Zaharia, and James Zou. 2024. [Are more LLM calls all you need? towards the scaling properties of compound AI systems](#). In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. 2021. [Training verifiers to solve math word problems](#). *arXiv preprint arXiv:2110.14168*.
- Yann Dubois, Percy Liang, and Tatsunori Hashimoto. 2024. [Length-controlled alpacaeval: A simple debiasing of automatic evaluators](#). In *First Conference on Language Modeling*.
- Günes Erkan and Dragomir R. Radev. 2004. [Lexrank: Graph-based lexical centrality as salience in text summarization](#). *ArXiv*, abs/1109.2128.
- Alexander Fabbri, Irene Li, Tianwei She, Suyi Li, and Dragomir Radev. 2019. [Multi-news: A large-scale multi-document summarization dataset and abstractive hierarchical model](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 1074–1084, Florence, Italy. Association for Computational Linguistics.
- Leo Gao, John Schulman, and Jacob Hilton. 2022. [Scaling laws for reward model overoptimization](#). *Preprint*, arXiv:2210.10760.
- Shima Gerani, Yashar Mehdad, Giuseppe Carenini, Raymond T. Ng, and Bitan Nejat. 2014. [Abstractive summarization of product reviews using discourse structure](#). In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1602–1613, Doha, Qatar. Association for Computational Linguistics.
- John Giorgi, Luca Soldaini, Bo Wang, Gary Bader, Kyle Lo, Lucy Lu Wang, and Arman Cohan. 2022. [Open domain multi-document summarization: A comprehensive study of model brittleness under retrieval](#). In *Conference on Empirical Methods in Natural Language Processing*.
- Ari Holtzman, Jan Buys, Li Du, Maxwell Forbes, and Yejin Choi. 2020. [The curious case of neural text degeneration](#). In *8th International Conference on*

- Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net.
- Zhengyu Hu, Linxin Song, Jieyu Zhang, Zheyuan Xiao, Tianfu Wang, Zhengyu Chen, Nicholas Jing Yuan, Jianxun Lian, Kaize Ding, and Hui Xiong. 2024. [Explaining length bias in llm-based preference evaluations](#). *Preprint*, arXiv:2407.01085.
- Zhi Jin, Sheng Xu, Xiang Zhang, Tianze Ling, Nanqing Dong, Wanli Ouyang, Zhiqiang Gao, Cheng Chang, and Siqi Sun. 2024. [Contranovo: A contrastive learning approach to enhance de novo peptide sequencing](#). In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 144–152.
- Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. 2022. [Large language models are zero-shot reasoners](#). *Advances in neural information processing systems*, 35:22199–22213.
- Raymond Li, Wen Xiao, Linzi Xing, Lanjun Wang, Gabriel Murray, and Giuseppe Carenini. 2022. [Human guided exploitation of interpretable attention patterns in summarization and topic segmentation](#). *Preprint*, arXiv:2112.05364.
- Yifei Li, Zeqi Lin, Shizhuo Zhang, Qiang Fu, Bei Chen, Jian-Guang Lou, and Weizhu Chen. 2023a. [Making language models better reasoners with step-aware verifier](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5315–5333, Toronto, Canada. Association for Computational Linguistics.
- Yifei Li, Zeqi Lin, Shizhuo Zhang, Qiang Fu, Bei Chen, Jian-Guang Lou, and Weizhu Chen. 2023b. [Making large language models better reasoners with step-aware verifier](#). *Preprint*, arXiv:2206.02336.
- Chin-Yew Lin. 2004a. [Rouge: A package for automatic evaluation of summaries](#). In *Text summarization branches out*, pages 74–81.
- Chin-Yew Lin. 2004b. [ROUGE: A package for automatic evaluation of summaries](#). In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Gili Lior, Avi Caciularu, Arie Cattan, Shahar Levy, Ori Shapira, and Gabriel Stanovsky. 2024. [Seam: A stochastic benchmark for multi-document tasks](#). *Preprint*, arXiv:2406.16086.
- Puyuan Liu, Xiang Zhang, and Lili Mou. 2022. [A character-level length-control algorithm for non-autoregressive sentence summarization](#). *Advances in Neural Information Processing Systems*, 35:29101–29112.
- Yang Liu and Mirella Lapata. 2019. [Hierarchical transformers for multi-document summarization](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 5070–5081, Florence, Italy. Association for Computational Linguistics.
- Yinhong Liu, Han Zhou, Zhijiang Guo, Ehsan Shareghi, Ivan Vulić, Anna Korhonen, and Nigel Collier. 2024a. [Aligning with human judgement: The role of pairwise preference in large language model evaluators](#). *arXiv preprint arXiv:2403.16950*.
- Yixin Liu, Alex Fabbri, Pengfei Liu, Yilun Zhao, Linyong Nan, Ruilin Han, Simeng Han, Shafiq Joty, Chien-Sheng Wu, Caiming Xiong, and Dragomir Radev. 2023a. [Revisiting the gold standard: Grounding summarization evaluation with robust human evaluation](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 4140–4170, Toronto, Canada. Association for Computational Linguistics.
- Yixin Liu, Alexander Fabbri, Jiawen Chen, Yilun Zhao, Simeng Han, Shafiq Joty, Pengfei Liu, Dragomir Radev, Chien-Sheng Wu, and Arman Cohan. 2024b. [Benchmarking generation and evaluation capabilities of large language models for instruction controllable summarization](#). In *Findings of the Association for Computational Linguistics: NAACL 2024*, pages 4481–4501, Mexico City, Mexico. Association for Computational Linguistics.
- Yixin Liu, Alexander Fabbri, Yilun Zhao, Pengfei Liu, Shafiq Joty, Chien-Sheng Wu, Caiming Xiong, and Dragomir Radev. 2023b. [Towards interpretable and efficient automatic reference-based summarization evaluation](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 16360–16368, Singapore. Association for Computational Linguistics.
- Yixin Liu, Kejian Shi, Alexander R. Fabbri, Yilun Zhao, Peifeng Wang, Chien-Sheng Wu, Shafiq Joty, and Arman Cohan. 2024c. [Reife: Re-evaluating instruction-following evaluation](#). *Preprint*, arXiv:2410.07069.
- Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegrefe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, Shashank Gupta, Bodhisattwa Prasad Majumder, Katherine Hermann, Sean Welleck, Amir Yazdanbakhsh, and Peter Clark. 2023. [Self-refine: Iterative refinement with self-feedback](#). In *Thirty-seventh Conference on Neural Information Processing Systems*.
- Yashar Mehdad, Giuseppe Carenini, and Raymond T. Ng. 2014. [Abstractive summarization of spoken and written conversations based on phrasal queries](#). In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1220–1230, Baltimore, Maryland. Association for Computational Linguistics.
- Niklas Muennighoff, Zitong Yang, Weijia Shi, Xiang Lisa Li, Li Fei-Fei, Hannaneh Hajishirzi, Luke Zettlemoyer, Percy Liang, Emmanuel Candès, and Tatsunori Hashimoto. 2025. [s1: Simple test-time scaling](#). *Preprint*, arXiv:2501.19393.
- OpenAI. 2024. [Learning to reason with llms](https://openai.com/index/). <https://openai.com/index/>

- [learning-to-reason-with-llms/](#) [Accessed: 01/08/2025].
- Xiao Pu, Mingqi Gao, and Xiaojun Wan. 2023. [Summarization is \(almost\) dead](#). *Preprint*, arXiv:2309.09558.
- Lin Shi, Chiyu Ma, Wenhua Liang, Weicheng Ma, and Soroush Vosoughi. 2024. [Judging the judges: A systematic study of position bias in llm-as-a-judge](#). *Preprint*, arXiv:2406.07791.
- Charlie Snell, Jaehoon Lee, Kelvin Xu, and Aviral Kumar. 2024. [Scaling llm test-time compute optimally can be more effective than scaling model parameters](#). *Preprint*, arXiv:2408.03314.
- Benedikt Stroebel, Sayash Kapoor, and Arvind Narayanan. 2024. [Inference scaling flaws: The limits of llm resampling with imperfect verifiers](#). *Preprint*, arXiv:2411.17501.
- Ye Tian, Baolin Peng, Linfeng Song, Lifeng Jin, Dian Yu, Haitao Mi, and Dong Yu. 2024. [Toward self-improvement of llms via imagination, searching, and criticizing](#). *Preprint*, arXiv:2404.12253.
- Dave Van Veen, Cara Van Uden, Louis Blankemeier, Jean-Benoit Delbrouck, Asad Aali, Christian Bluethgen, Anuj Pareek, Malgorzata Polacin, William Collins, Neera Ahuja, Curtis P. Langlotz, Jason Hom, Sergios Gatidis, John Pauly, and Akshay S. Chaudhari. 2024. [Adapted large language models can outperform medical experts in clinical text summarization](#). *Nature Medicine*.
- Chaojie Wang, Yan Chen Deng, Zhiyi Lyu, Liang Zeng, Jujie He, Shuicheng Yan, and Bo An. 2024a. [Q*: Improving multi-step reasoning for llms with deliberative planning](#). *arXiv preprint arXiv:2406.14283*.
- Junlin Wang, Jue Wang, Ben Athiwaratkun, Ce Zhang, and James Zou. 2024b. [Mixture-of-agents enhances large language model capabilities](#). *Preprint*, arXiv:2406.04692.
- Peiyi Wang, Lei Li, Liang Chen, Zefan Cai, Dawei Zhu, Binghuai Lin, Yunbo Cao, Lingpeng Kong, Qi Liu, Tianyu Liu, and Zhifang Sui. 2024c. [Large language models are not fair evaluators](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 9440–9450, Bangkok, Thailand. Association for Computational Linguistics.
- Peiyi Wang, Lei Li, Liang Chen, Zefan Cai, Dawei Zhu, Binghuai Lin, Yunbo Cao, Qi Liu, Tianyu Liu, and Zhifang Sui. 2023a. [Large language models are not fair evaluators](#). *arXiv preprint arXiv:2305.17926*.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc V Le, Ed H. Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. 2023b. [Self-consistency improves chain of thought reasoning in language models](#). In *The Eleventh International Conference on Learning Representations*.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. 2023. [Chain-of-thought prompting elicits reasoning in large language models](#). *Preprint*, arXiv:2201.11903.
- Yangzhen Wu, Zhiqing Sun, Shanda Li, Sean Welleck, and Yiming Yang. 2024. [Scaling inference computation: Compute-optimal inference for problem-solving with language models](#). In *The 4th Workshop on Mathematical Reasoning and AI at NeurIPS'24*.
- Wen Xiao, Yujia Xie, Giuseppe Carenini, and Pengcheng He. 2024. [Personalized abstractive summarization by tri-agent generation pipeline](#). In *Findings of the Association for Computational Linguistics: EACL 2024*, pages 570–581, St. Julian's, Malta. Association for Computational Linguistics.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. 2023. [React: Synergizing reasoning and acting in language models](#). *Preprint*, arXiv:2210.03629.
- Yuwei Yin, Jean Kaddour, Xiang Zhang, Yixin Nie, Zhenguang Liu, Lingpeng Kong, and Qi Liu. 2023. [Ttida: Controllable generative data augmentation via text-to-text and text-to-image models](#). *arXiv preprint arXiv:2304.08821*.
- Weizhe Yuan, Graham Neubig, and Pengfei Liu. 2021. [Bartscore: Evaluating generated text as text generation](#). *ArXiv*, abs/2106.11520.
- Eric Zelikman, Georges Harik, Yijia Shao, Varuna Jayasiri, Nick Haber, and Noah D. Goodman. 2024. [Quiet-star: Language models can teach themselves to think before speaking](#). *Preprint*, arXiv:2403.09629.
- Dan Zhang, Sining Zhoubian, Ziniu Hu, Yisong Yue, Yuxiao Dong, and Jie Tang. 2024a. [Rest-mcts*: Llm self-training via process reward guided tree search](#). *Preprint*, arXiv:2406.03816.
- Di Zhang, Jianbo Wu, Jingdi Lei, Tong Che, Jiatong Li, Tong Xie, Xiaoshui Huang, Shufei Zhang, Marco Pavone, Yuqiang Li, Wanli Ouyang, and Dongzhan Zhou. 2024b. [Llama-berry: Pairwise optimization for o1-like olympiad-level mathematical reasoning](#). *Preprint*, arXiv:2410.02884.
- Jingqing Zhang, Yao Zhao, Mohammad Saleh, and Peter J. Liu. 2020a. [Pegasus: Pre-training with extracted gap-sentences for abstractive summarization](#). *Preprint*, arXiv:1912.08777.
- Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q. Weinberger, and Yoav Artzi. 2020b. [Bertscore: Evaluating text generation with bert](#). *Preprint*, arXiv:1904.09675.
- Tianyi Zhang, Faisal Ladhak, Esin Durmus, Percy Liang, Kathleen McKeown, and Tatsunori B. Hashimoto. 2024c. [Benchmarking large language models for news summarization](#). *Transactions of the Association for Computational Linguistics*, 12:39–57.

Xiang Zhang, Muhammad Abdul-Mageed, and Laks VS Lakshmanan. 2024d. Autoregressive+ chain of thought= recurrent: Recurrence’s role in language models’ computability and a revisit of recurrent transformer. *arXiv preprint arXiv:2409.09239*.

Xiang Zhang, Juntao Cao, and Chenyu You. 2024e. Counting ability of large language models and impact of tokenization. *arXiv preprint arXiv:2410.19730*.

Xiang Zhang and Dujian Ding. 2024a. [Supervised chain of thought](#). *Preprint*, arXiv:2410.14198.

Xiang Zhang and Dujian Ding. 2024b. Supervised chain of thought. *arXiv preprint arXiv:2410.14198*.

Xiang Zhang, Senyu Li, Bradley Hauer, Ning Shi, and Grzegorz Kondrak. 2023a. [Don’t trust ChatGPT when your question is not in English: A study of multilingual abilities and types of LLMs](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 7915–7927, Singapore. Association for Computational Linguistics.

Xiang Zhang, Senyu Li, Ning Shi, Bradley Hauer, Zijun Wu, Grzegorz Kondrak, Muhammad Abdul-Mageed, and Laks VS Lakshmanan. 2024f. Cross-modal consistency in multimodal large language models. *arXiv preprint arXiv:2411.09273*.

Xiang Zhang, Ning Shi, Bradley Hauer, and Grzegorz Kondrak. 2023b. Bridging the gap between babelnet and hownet: Unsupervised sense alignment and sememe prediction. In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 2789–2798.

Eric Zhao, Pranjal Awasthi, and Sreenivas Gollapudi. 2025. [Sample, scrutinize and scale: Effective inference-time search by scaling verification](#). *Preprint*, arXiv:2502.01839.

Yuchen Zhuang, Xiang Chen, Tong Yu, Saayan Mitra, Victor Bursztyn, Ryan A. Rossi, Somdeb Sarkhel, and Chao Zhang. 2024. [Toolchain*: Efficient action space navigation in large language models with a* search](#). In *The Twelfth International Conference on Learning Representations*.

A Ensemble of Prompt for Text Generation

A.1 Prompt Ensemble Formulation

In our approach, we leverage a prompt ensemble mechanism to improve the quality of generated text. Let x denote the input text and $\mathcal{P} = \{p_1, p_2, \dots, p_N\}$ be a collection of prompts designed to elicit different aspects of information from the underlying language model. For each prompt $p_i \in \mathcal{P}$, the model produces an output y_i according to a generation function f :

$$y_i = f(x, p_i).$$

The intuition behind this methodology is that different prompts p_i induce the model to focus on distinct features or details in the input x , thereby generating complementary outputs.

To combine these outputs, we define an aggregation function $g : \mathcal{Y}^N \rightarrow \mathcal{Y}$ that fuses the individual outputs $\{y_1, y_2, \dots, y_N\}$ into a final output y :

$$y = g(y_1, y_2, \dots, y_N).$$

A common choice for g in our experiments is a weighted average or majority voting scheme, although the exact form of g may vary depending on the application. The overall system can therefore be formalized as:

$$y = g(f(x, p_1), f(x, p_2), \dots, f(x, p_N)).$$

This formulation ensures that the final generated text y benefits from the diverse perspectives provided by the prompt ensemble. Empirical results indicate that the ensemble method consistently outperforms individual prompt-based generations, as it effectively mitigates the shortcomings of any single prompt by incorporating a broader range of contextual insights from the input x .

A.2 Prompt Space Theory

In this section, we formalize the notion of the *prompt space* and analyze its complexity in the context of Chain-of-Thought (CoT) reasoning. The prompt space, denoted as \mathcal{P} , represents the set of all possible step templates that a language model (LM) may generate or be guided to generate during the reasoning process. Each template $p \in \mathcal{P}$ is a discrete instruction that dictates how information is to be extracted from the latent representation $h \in R^d$ and subsequently discretized into a sequence of tokens $o = (o_1, o_2, \dots, o_k)$. In effect, the prompt space forms the interface between the continuous latent space and the discrete textual output (Zhang et al., 2024d).

The latent vector h is assumed to encode m bits of information relevant to the task at hand. When the model follows a given prompt template p , it extracts up to s bits of information per reasoning step. Thus, each template can be viewed as a function

$$p : h \rightarrow o, \quad o \in \{0, 1\}^s,$$

where the mapping is constrained by the model’s capacity to “read out” a subset of the information encoded in h . The total number of unique ways to

extract s bits from m bits is given combinatorially by

$$C(m, s) = \binom{m}{s} = \frac{m!}{s!(m-s)!}.$$

This expression characterizes the *prompt space complexity*, as it represents the number of potential step templates available to the model at each CoT step.

In practice, the prompt space is not uniformly sampled; instead, the LM employs learned heuristics to navigate this enormous space. That is, while the theoretical upper bound $C(m, s)$ may be astronomically high, the effective search space is significantly reduced through task-specific training and, in many cases, human supervision. In an unsupervised setting, the model’s intrinsic biases might lead it to select suboptimal templates, thereby increasing the difficulty of navigating the subsequent *answer space* \mathcal{S} – the space of all possible reasoning paths and final outputs.

More formally, let f denote the underlying computation that updates the hidden state:

$$h_{t+1} = f(h_t, p),$$

For brevity, we summarize the CoT process as follows: for $t = 1, \dots, T$,

$$o_t = p_t(h_{t-1}), \quad h_t = f(h_{t-1}, p_t).$$

This compact notation encapsulates the iterative extraction of output tokens o_t and the recurrent update of the hidden state h_t via the chosen prompt p_t .

Here, the selection of each $p_t \in \mathcal{P}$ not only determines the immediate output o_t but also has a cascading effect on the evolution of the hidden state h_t and, consequently, the trajectory within the answer space \mathcal{S} .

This intricate relationship between the prompt space and the answer space can be seen as a two-tier search problem: first, the model must identify a suitable template p from the high-dimensional prompt space \mathcal{P} , and then it must effectively navigate the answer space \mathcal{S} defined by the recurrence $h_t \rightarrow h_{t+1}$. Empirical evidence shows that even small deviations in the chosen template p can lead to exponentially larger errors in the final answer, underscoring the sensitivity of the overall reasoning process to prompt selection.

In summary, the prompt space theory emphasizes that the effectiveness of CoT reasoning hinges on the model’s ability to manage the combinatorial

complexity inherent in extracting relevant information from its latent space. Supervised methods, which incorporate task-specific guidance, can significantly reduce the search complexity from the theoretical bound $C(m, s)$ by constraining the model to a subset of high-quality prompts. This not only simplifies the navigation of the answer space but also enhances the overall reliability of the reasoning process. The insights derived here build upon recent analyses in the literature (Zhang and Ding, 2024b).

B Human Evaluation

To evaluate the effectiveness of our proposed scaling approach, we conducted a human evaluation study involving three graduate students. The evaluators were presented with 10 samples, each containing summaries generated by our three ensemble methods (Voting, CIS, and CPS) using the optimal ensemble size of 5, as determined by our automatic evaluation. Each sample also included the corresponding baseline summary for comparison. The evaluation was structured as a preference-based comparison between each ensemble method and the baseline. For each sample, evaluators were asked to indicate their preference between the ensemble-generated summary and the baseline summary, resulting in 30 comparisons per method (10 samples \times 3 aggregation types). The human evaluation results strongly support the effectiveness of our proposed methods, particularly the CPS approach. The voting-based ensemble was preferred over the baseline in 60% of cases (18/30 comparisons). The CIS method demonstrated stronger performance, being preferred in 76.7% of comparisons (23/30). Most notably, the CPS method achieved unanimous preference, being chosen over the baseline in all comparisons (29/30). These results demonstrate a clear hierarchy among the ensemble methods, with CPS showing superior performance in human evaluation. The strong preference for CPS (96.7%) aligns with our automatic evaluation findings, confirming that the method produces summaries that are not only technically sound but also qualitatively superior from a human perspective. The significant improvement over both the baseline and other ensemble methods suggests that CPS effectively captures and maintains important aspects of text summarization that human readers value.

C Impact of Generation Length

Previous work (Hu et al., 2024; Dubois et al., 2024) reveals LLM evaluation mechanisms tend to favor long summaries. This raises an important question: do longer summaries actually contain more useful information? To investigate this, we study the relationship between generation length and summary quality using the general-purpose MDS dataset MultiNews.

The results in Table 8 demonstrate how different configurations of our framework affect summary length and the associated computational costs. While the summary length increases substantially from baseline to our most comprehensive setting (from 129.4 to 201.17 words), the computational cost grows more slowly, suggesting efficient information packaging. The CPS aggregator consistently produces longer summaries than CIS, particularly with gpt-4o-mini, indicating its effectiveness in capturing diverse information from source documents without introducing excessive computational overhead.

Experiment	# Words	Word/ACU
Baseline	129.4	17.03
gpt-4o/CIS	147.61	18.42
gpt-4o/CPS	163.15	19.51
gpt-4o-mini/CIS	172.45	20.74
gpt-4o-mini/CPS	201.17	22.63

Table 8: Summary length and word cost per ACU across different model configurations on MultiNews dataset. Length shows the average number of words in generated summaries, while Cost measures the average number of words needed to capture each ACU.

D Prompts

D.1 Summarization Prompts

In Tables 9 and 10, we present the prompt bank used for the MultiNews dataset. Similarly, Tables 11 and 12 contain the prompt bank for the OpenASP dataset. These prompts were adapted and modified from the work of Lior et al. (2024). We utilized the same few-shot examples as provided in their benchmark.

D.2 Ensemble Prompts

We present our summary ensemble prompts for general purpose MDS (for datasets like MultiNews)

in Table 13, and for aspect- (or query-) based MDS (for datasets like OpenASP) in Table 14.

No.	Prompt
1	In this task, you are presented with multiple news articles about related topics. Your job is to generate a summary that integrates information from the provided articles. Your summary should be short and concise, that includes content only from the provided articles, avoiding any external data sources.
2	Please provide a brief summary by synthesizing only the key points from the articles provided. Focus on the main arguments and conclusions without incorporating any information from outside these texts. Keep your summary concise and directly related to the content of the documents.
3	Generate a concise summary using only the information from the provided articles. Your summary should distill the most essential information, capturing the core insights without adding any external content. Aim for brevity and clarity in your summarization.
4	Please sift through the provided articles and distill their essence into a sharp, concise summary. Focus solely on the facts and key points within these texts, avoiding any embellishment or reference to external information. Your summary should read like a bullet-point list of the most critical insights.
5	You are presented with multiple news articles about related topics. Summarize the contents in a way that captures the key information in a narrative form, but strictly using the details mentioned in the provided documents. Keep it engaging yet brief.
6	Imagine you're preparing a brief for a decision-maker who has limited time. Summarize the provided documents by extracting only the most essential information. Present this in a clear, straightforward manner, focusing on the key facts and figures.
7	Using only the details from the articles I've given you, craft a summary that distills the most important information. Avoid any interpretations or external data, and keep your summary short and direct. Emphasize the main arguments, data points, and conclusions.
8	Operate as an information synthesizer: Draw the essence from multiple articles, focusing solely on the information contained within them. Your summary should be a tight, focused digest of the articles, free from any influence of external data.
9	Scan through the provided articles and compile a summary that highlights only the most significant facts and figures, ensuring the exclusion of all external references. Aim for clarity and brevity.
10	Operate as an academic summarizer: Imagine you are creating a summary for an academic review. Extract and emphasize the most pertinent information, ensuring your summary remains true to the original texts and free of external content.

Table 9: Summarization Prompt Bank for MultiNews Dataset (Part 1)

No.	Prompt
11	Condense the provided information into a compact summary that emphasizes the main points and crucial data from the documents. Exclude any external information to maintain the integrity of the sources.
12	From the provided articles, pull out the core messages and data points. Shape these into a brief, clear summary that directly reflects the content of the documents without any external additions.
13	Compile a concise summary from the news articles given, focusing only on the information contained within. Your summary should integrate the main points without adding any outside information.
14	Create a succinct summary by focusing exclusively on the details provided in the articles. Avoid using any external sources and ensure the summary remains clear and to the point.
15	Produce a brief summary that distills the essential facts from the provided articles. Keep your summary strictly to the content presented in the documents, avoiding external influences.
16	Develop a concise summary using only the information from the articles provided. Emphasize the main points and conclusions while avoiding the inclusion of any external data.
17	Prepare a short, integrated summary by synthesizing key points from the given news articles. Ensure that no external content is included and that the summary is clear and direct.
18	Your task is to distill the primary information from the provided articles into a concise summary. Make sure to exclude any external sources and focus strictly on the given texts.
19	Summarize the provided articles by extracting only the key information and conclusions. Your summary should be brief and must not incorporate any external data.
20	Generate a clear and brief summary using just the information from the provided articles. Focus on distilling the essential points and data without referencing external content.

Table 10: Summarization Prompt Bank for MultiNews Dataset (Part 2)

No.	Prompt
1	In this task you are required to generate an aspect-based summary of a set of documents related the same topic. Please write a short, concise aspect-based summary, only summarize content from the above documents, avoiding any external data sources.
2	Your goal is to create a short, concise aspect-based summary of the given documents. Summarize the key points accurately, using only the information from these documents and excluding any external sources.
3	Produce a brief, aspect-based summary of the collection of documents on the same topic. Ensure your summary is concise and derived only from the provided documents, avoiding any external data sources.
4	Your task is to generate a detailed yet concise aspect-based summary from a collection of documents that focus on the same topic. Begin by thoroughly examining each document to understand the main aspects and themes. Then, synthesize this information into a coherent summary that highlights the significant points.
5	Given a set of documents related to a specific topic, generate a short, concise aspect-based summary. Ensure that the summary is based solely on the content of the documents provided.
6	You will receive several documents on the same topic. Your task is to write a brief aspect-based summary, using only the information from the provided documents and excluding any external sources.
7	You are tasked with generating an aspect-based summary of several documents. Summarize the content briefly and accurately, using only the information from the documents give.
8	In this task, you are required to create an aspect-based summary of a set of documents all related to the same topic. Carefully read through each document and identify the key aspects discussed. Summarize these aspects in a concise manner, ensuring that your summary captures the essential points.
9	You are tasked with producing an aspect-based summary for a series of documents related to the same topic. Start by analyzing each document to identify the critical aspects covered. Your goal is to condense this information into a clear and concise summary.
10	Generate a concise aspect-based summary of the given documents. Focus on summarizing the content based solely on the information from these documents, avoiding any external sources.

Table 11: Summarization Prompt Bank for OpenASP Dataset (Part 1)

No.	Prompt
11	Create a concise aspect-based summary for the provided set of documents. Focus on the main aspects and themes discussed in these documents, ensuring that your summary is based entirely on the content of the provided documents.
12	Produce a short and precise aspect-based summary of the given documents. Identify the key aspects discussed in these documents and synthesize a concise summary based solely on the provided content.
13	You will receive a collection of documents focused on the same topic. Your task is to create an aspect-based summary that highlights the key aspects discussed in these documents. Ensure your summary is brief and does not include any external information.
14	You are provided with multiple documents related to a single topic. Your task is to generate an aspect-based summary that captures the main aspects discussed in these documents. Ensure your summary is concise and solely based on the provided texts.
15	You are tasked with generating an aspect-based summary of several documents on the same topic. Carefully review each document, identify the main aspects, and write a brief summary that captures these aspects using only the provided documents.
16	Your role is to create an educational summary for students using a collection of documents on the same topic. Focus on the main aspects that would help students understand the core concepts discussed in the documents.
17	Imagine you are preparing a briefing for a busy executive who needs to understand the key aspects of several documents quickly. Summarize the most important points from these documents in a concise manner.
18	As an advanced AI tasked with summarizing documents, your goal is to generate an aspect-based summary. Think of yourself as a summarization expert, extracting the most critical aspects from the documents provided.
19	Imagine you are a journalist tasked with writing a summary article based on a series of documents related to a single topic. Identify the key aspects discussed in these documents and compose a brief, coherent summary.
20	Your task is to act as a knowledge distiller, creating a concise aspect-based summary from a series of documents on the same topic. Focus on identifying and summarizing the critical aspects discussed in these documents.
21	You are an AI assistant tasked with providing a summary for a set of documents related to a specific topic. Focus on the key aspects and themes discussed in these documents. Create a summary that captures these aspects in a concise manner, ensuring that your summary is based solely on the provided documents and excludes any external information.

Table 12: Summarization Prompt Bank for OpenASP Dataset (Part 2)

Ensemble Type	Content
Vote	<p>Provide your explanation, then select the best summary of the given documents based on clarity, accuracy, conciseness, and completeness.</p> <p>Documents: {doc}</p> <p>Summary 1: {sum1}</p> <p>Summary 2: {sum2}</p> <p>...</p> <p>Explanation: “Your explanation here”</p> <p>Decision: [1-5]</p>
CIS	<p>Take all provided summaries into account and generate a better, cohesive summary. Combine and refine the content from the summaries to ensure clarity, accuracy, conciseness, and completeness. Provide the final summary directly.</p> <p>Summary 1: {sum1}</p> <p>Summary 2: {sum2}</p> <p>...</p> <p>Final revised summary:</p>
CPS	<p>Take all provided summaries into account and generate a better, cohesive summary of the given documents. Combine and refine the content from the summaries to ensure clarity, accuracy, conciseness, and completeness. Provide the final summary directly.</p> <p>Documents: {doc}</p> <p>Summary 1: {sum1}</p> <p>Summary 2: {sum2}</p> <p>...</p> <p>Final revised summary:</p>

Table 13: Ensemble Prompts for General MDS

Ensemble Type	Content
Vote	<p>Provide your explanation, then select the best summary of the given documents based on clarity, accuracy, conciseness, and completeness, focusing on the specified aspect.</p> <p>Example Response: Explanation: “Your explanation here” Decision: 1 (or 2 or 3 or 4 or 5) Aspect: {query} Documents: {doc} Summary 1: {sum1} Summary 2: {sum2} ... Response:</p>
CIS	<p>Take all provided summaries into account and generate a better, cohesive summary, focusing on the specified aspect. Combine and refine the content from the summaries to ensure clarity, accuracy, conciseness, and completeness. Provide the final summary directly.</p> <p>Aspect: {query} Summary 1: {sum1} Summary 2: {sum2} ... Final revised summary:</p>
CPS	<p>Take all provided summaries into account and generate a better, cohesive summary of the given documents, focusing on the specified aspect. Combine and refine the content from the summaries to ensure clarity, accuracy, conciseness, and completeness. Provide the final summary directly.</p> <p>Aspect: {query} Documents: {doc} Summary 1: {sum1} Summary 2: {sum2} ... Final revised summary:</p>

Table 14: Ensemble Prompts for Aspect-based MDS