

# Controlling local thermal states in classical many-body systems

P. Ben-Abdallah<sup>1,\*</sup> and A. W. Rodriguez<sup>2,†</sup>

<sup>1</sup>Laboratoire Charles Fabry, UMR 8501, Institut d'Optique, CNRS,

Université Paris-Saclay, 2 Avenue Augustin Fresnel, 91127 Palaiseau Cedex, France.

<sup>2</sup>Department of Electrical Engineering, Princeton University, Princeton, New Jersey 08544, USA.

(Dated: August 22, 2022)

The process of thermalization in many-body systems is driven by complex interactions among sub-systems and with the surrounding environment. Here we lay the theoretical foundations for the active control of local thermal states in these systems close to their equilibrium state. In particular we describe how to (i) force some part of the system to evolve according to a prescribed law during the relaxation process (i.e. thermal targeting problem), (ii) insulate some elements from the rest of the system or (iii) synchronize their evolution during the relaxation process. We also derive the general conditions a system must fulfill in order that some parts relax toward a minimal temperature with a minimum energetic cost or relax toward a prescribed temperature with a minimum time. Finally, we consider several representative examples in the context of systems exchanging heat radiatively.

Many-body heat exchange is of tremendous importance to understand the thermalization process of complex networks and more generally to understand and control their dynamic evolution. The local thermal state in these systems is closely related to collective interactions between all elementary constituents and with the surrounding environment. Many strategies have been proposed to date to actively control this evolution by way of external drives. Hence, by modulating some intensive quantities, such as the temperature or chemical potential, an additional flux to the primary flux induced by a temperature bias can be generated and used to control heat exchange. This shuttling effect [1–4] results from the variation of the local curvature of flux with respect to these parameters. When the system displays a negative differential thermal resistance (i.e. a negative curvature of flux), this effect can contribute to inhibit the primary flux, potentially pumping heat from cold to hotter parts of the system. A slow cycling modulation of control parameters near-topological singularities [5, 6] such as exceptional points can also be used to enhance or inhibit energy exchange within a system. Finally, the spatiotemporal modulation of thermal properties in these systems, such as thermal conductivity or specific heat, in systems can add a convective component [7] to the otherwise diffusive flux. This leads to an apparent change of heat transport regime which can be exploited to control heat flows in solids networks at mesoscopic and macroscopic scales.

In this Letter we describe a mathematical framework for dynamic control of these systems, and discuss several problems of practical interest including local thermal targeting, thermal insulation of sub-elements and the synchronization of local thermal states during the relaxation process. We also derive the conditions that these systems must fulfill in order to accelerate the relaxation process with a minimum energetic cost and to cool some elements with a minimum time. We finally illustrate the efficiency of control on concrete situations.

To start let us consider a generic many-body system comprised of  $N$  bodies interacting among themselves as well as with an external bath at temperature  $T_b$ . The time evolution of thermal state  $\mathbf{T} = {}^t(T_1, \dots, T_N)$  of this system under temporal driving is governed by an energy balance (master) equation of general form

$$C_i \frac{dT_i}{dt} = \sum_{j \neq i} \mathcal{P}_{j \rightarrow i}(\mathbf{T}; T_b, t), \quad i = 1, \dots, N. \quad (1)$$

Here  $\mathcal{P}_{j \rightarrow i}$  denotes the power received by the  $i^{\text{th}}$  element from the  $j^{\text{th}}$  element within the system or from exchange with the external environment and  $C_i$  its heat capacity. Close to the equilibrium state  $\mathbf{T}_{\text{eq}} = {}^t(T_b, \dots, T_b)$  the net power can be linearized and expressed in terms of pairwise thermal conductance  $G_{ij} = \lim_{T_j \rightarrow T_i} \frac{\mathcal{P}_{j \rightarrow i}}{T_j - T_i}$ , with  $G_{ib}$  denoting the conductance between the element  $i$  and the bath. In this approximation equations (2) can be formally recasted under the matricial form

$$\frac{d\mathbf{T}}{dt} = \hat{\mathbf{G}}(t)\mathbf{T} + \mathbf{U}(t), \quad (2)$$

where  $\hat{\mathbf{G}}(t)$  denotes the conductances matrix (normalized by the thermal inertia) with  $\hat{G}_{ij} = -(\sum_{j \neq i} G_{ij} + G_{ib})\delta_{ik} - (1 - \delta_{ik})G_{ik}$  and  $\mathbf{U}(t) = (u_1, \dots, u_N)$  is the (normalized) power vector (in  $K/s$  unit) setting all interactions with the external environment that is with the bath and external actuations (i.e.  $u_i = G_{ib}T_b + C_i$ ). It turns out that thermal state at any time reads,

$$\mathbf{T}(t) = \mathbf{R}(0, t)\mathbf{T}_0 + \int_0^t \mathbf{R}(\tau, t)\mathbf{U}(\tau)d\tau, \quad (3)$$

where  $\mathbf{R}$  is the resolvent of the system (2) and  $\mathbf{T}_0 = (T_1(0), \dots, T_N(0))$  is the initial thermal state. In reciprocal systems (i.e.  $\hat{\mathbf{G}}$  is symmetric)

$$\mathbf{R}(s, t) = \exp\left(\int_s^t \hat{\mathbf{G}}(\tau)d\tau\right), \quad (4)$$

so that

$$\begin{aligned} \mathbf{T}(t) = & \exp\left(\int_0^t \hat{\mathbf{G}}(\tau)d\tau\right)\mathbf{T}_0 \\ & + \int_0^t \exp\left(\int_\tau^t \hat{\mathbf{G}}(\tau')d\tau'\right)\mathbf{U}(\tau)d\tau. \end{aligned} \quad (5)$$

Targeting of thermal state and thermal insulation:

Starting from this general expression we can derive the conditions needed in order to locally control the temporal evolution of the system. This so called thermal targeting problem consists of finding the appropriate (external) command in order for the system to relax toward a given targeted thermal state. The simplest targeting problem is the temperature control of the  $j^{th}$  element of a system by using an extra power (command)  $C_i(t)$  ( $i \neq j$ ) which is either injected on (i.e.  $C_i > 0$ ) or extracted from (i.e.  $C_i < 0$ ) the  $i^{th}$  element so that the power vector reads  $\mathbf{U} = {}^t(u_1, \dots, u_i + C_i, \dots, u_N)$ . If we denote by  $T_j^{targ}$  the target temperature, then it is straightforward to show from expression (5) that the optimal command  $C_i^*$  solves the following Volterra integral equations

$$V_{ji}.C_i(t) := \int_0^t K_{ji}(\tau, t)C_i(\tau)d\tau = g_j(t), \quad (6)$$

with the kernel

$$K_{ji}(\tau, t) \equiv \mathbb{R}_{ji}(\tau, t) \quad (7)$$

and the second member

$$\begin{aligned} g_j(t) = & T_j^{targ}(t) - \sum_k K_{jk}(0, t)T_{0k} \\ & - \sum_k \int_0^t K_{jk}(\tau, t)u_k(\tau)d\tau. \end{aligned} \quad (8)$$

Moreover, the untargeted temperatures  $T_{m \neq j}$  are modified by the external commands and obey the following law

$$T_m(t) = \hat{T}_m(t) + \int_0^t K_{mi}(\tau, t)C_i^*(\tau)d\tau, \quad (9)$$

where  $\hat{T}_m$  denotes the natural (free) evolution of the temperature without external command. It is straightforward to generalize this single targeting problem to an arbitrary number of targets.

Beside this problem we can also find the conditions required to maintain the local thermal state associated with the  $j$ th element (i.e.  $\dot{T}_j^{targ}(t) = 0$ ) while the rest of the system is free to relax. The solution of this thermal insulation problem can be readily obtained by taking the time derivative of Eq. (6) which relates the command to the local temperature. By doing so we immediately get the equation the command must satisfy

$$\int_0^t \frac{\partial K_{ji}(\tau, t)}{\partial t} C_i(\tau)d\tau = \dot{g}_j(t). \quad (10)$$

As noted previously, the untargeted temperatures are directly impacted by the command and obey relation (9).

Synchronization of local thermal states:

The second class of problem which can be considered is the synchronization of local thermal states during the relaxation process. This problem consists in finding ad hoc external commands to synchronize the temporal evolution of different local states during the relaxation process. The simplest synchronization problem consists in finding two commands  $C_j(t)$  and  $C_k(t)$  applied on the  $j^{th}$  and  $k^{th}$  elements of system in order to synchronize the temperatures of two elements  $m$  and  $n$  along the relaxation (i.e.  $T_m(t) = T_n(t)$  for  $t > t^*$ ). Using expression (5) with  $\mathbf{U} = {}^t(u_1, \dots, u_j + C_j, \dots, u_k + C_k, \dots, u_N)$  and two targets temperatures  $T_m^{targ}(t)$  and  $T_k^{targ}(t)$  which satisfy the condition  $T_m^{targ}(t) = T_k^{targ}(t)$  for  $t > t^*$  it is straightforward to show that the optimal commands  $\mathbf{C}_{jk}(t) = {}^t(C_j(t), C_k(t))$  are solution of the matricial Volterra integral equation

$$\int_0^t \mathbf{K}_{mn,jk}(\tau, t)\mathbf{C}_{jk}(\tau)d\tau = \mathbf{g}_{mn}(t), \quad (11)$$

with

$$\mathbf{K}_{mn,jk}(\tau, t) = \begin{pmatrix} K_{mj}(\tau, t) & K_{mk}(\tau, t) \\ K_{nj}(\tau, t) & K_{nk}(\tau, t) \end{pmatrix} \quad (12)$$

and

$$\mathbf{g}_{mn}(t) = {}^t(T_m^{targ}(t) - \hat{T}_m(t), T_n^{targ}(t) - \hat{T}_n(t)). \quad (13)$$

Active cooling with a minimum energetic cost:

When a system is prepared at a higher temperature relative to its environment, it will cool down toward the equilibrium temperature  $T_{env}$  after some general time  $t^*$ . According to the general solution (3), the relaxation time is given by

$$\begin{aligned} \mathbf{T}(t^*) = & \exp\left(\int_0^{t^*} \hat{\mathbf{G}}(\tau)d\tau\right)\mathbf{T}_0 \\ & + \int_0^{t^*} \exp\left(\int_\tau^{t^*} \hat{\mathbf{G}}(\tau')d\tau'\right)\mathbf{U}(\tau)d\tau \approx \mathbf{T}_\infty, \end{aligned} \quad (14)$$

where  $\mathbf{T}_\infty = {}^t(T_{env}, \dots, T_{env})$ . This moment corresponds to the time when the global equilibrium is reached that is when all elements have the same temperature as the environment temperature. It seems obvious from this relation that the free relaxation time can in general be reduced by extracting a sufficient amount of power from all elements having a temperature higher than the environment temperature. But such a brute force strategy is obviously not optimal and it is strongly energy consuming. Further below, we derive non-trivial conditions for cooling down part of the many-body system under minimum energy consumption, by either injecting or extracting power locally within the system. Formally, this

problem is a linear control problem with a quadratic cost. In its simplest form, this problem consists of solving (2) for a power vector  $\mathbf{U} = (u_1, \dots, u_j + C_j, \dots, u_N)$  subject to the quadratic cost

$$J(C_j) = T_i^2(\bar{t}) + \int_0^{\bar{t}} C_j^2(\tau) d\tau, \quad (15)$$

$C_j$  being the command applied on body  $j$  over a given time interval  $[0, \bar{t}]$  in order to minimize the temperature of  $i^{\text{th}}$  element at time  $\bar{t}$  using a minimum energy consumption  $E(\bar{t}) = \int_0^{\bar{t}} C_j^2(\tau) d\tau$ . Notice that although the temperature is a positive quantity the cost function has been written, for convenience, with respect to  $T_i^2$ . Writing down  $T_i$  explicitly in terms of in term of both the free temperature  $\hat{T}_i$  and the command this function reads

$$J(C_j) = [\hat{T}_i(\bar{t}) + \int_0^{\bar{t}} \mathbf{R}_{ij}(\tau, \bar{t}) C_j(\tau) d\tau]^2 + \int_0^{\bar{t}} C_j^2(\tau) d\tau. \quad (16)$$

$J$  being a strictly convex functional ( $\partial^2 J / \partial C_j^2 = 2(\beta + t) > 0$  where we have set  $\beta(t) = \int_0^t \mathbf{R}_{ij}(\tau, t) d\tau$ ) the optimal command  $C_j^*$  can be uniquely determined. Hence, by taking the derivative of (16) with respect to  $C_j$  we see that the optimal command must satisfy the constraint

$$G[C_j] = \int_0^{\bar{t}} \hat{K}_{ij}(\tau, \bar{t}) C_j(\tau) d\tau + \hat{g}_i(\bar{t}) = 0, \quad (17)$$

where we have set

$$\hat{K}_{ij}(\tau, \bar{t}) = \beta(\bar{t}) \mathbf{R}_{ij}(\tau, \bar{t}) + 1 \quad (18)$$

and

$$\hat{g}_i(\bar{t}) = \hat{T}_i(\bar{t}) \beta(\bar{t}). \quad (19)$$

It follows that to minimize  $E(C_j)$  under the constraint (17) the command must satisfy the following equation

$$[E + \lambda G]'(C_j) = 0, \quad (20)$$

where  $\lambda$  is the Lagrangian multiplier and the prime denotes the derivative of the functional  $E + \lambda G$  with respect to the command. Applying the Euler-Lagrange relations for the Lagrangian  $L(\tau, C_j, \dot{C}_j) = C_j^2 + \lambda \hat{K}_{ij}(\tau, \bar{t}) C_j$  associated to this equation it follows that

$$C_j^2 + \lambda \hat{K}_{ij} C_j = \alpha, \quad (21)$$

where  $\alpha$  is a constant. Hence the optimal command reads

$$C_j^*(\tau) = 1/2[\lambda \hat{K}_{ij}(\tau, \bar{t}) - \sqrt{\lambda^2 \hat{K}_{ij}^2(\tau, \bar{t}) + 4\alpha}], \quad (22)$$

where the constants  $\lambda$  and  $\alpha$  are uniquely determined from the two boundary conditions at  $t = 0$  and  $t = \bar{t}$  for the command. After a straightforward calculation we

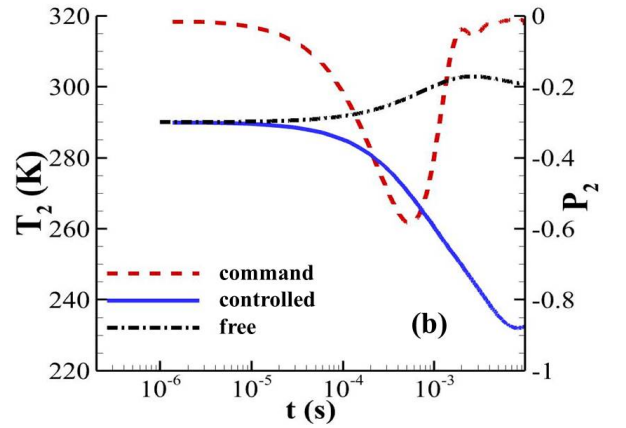
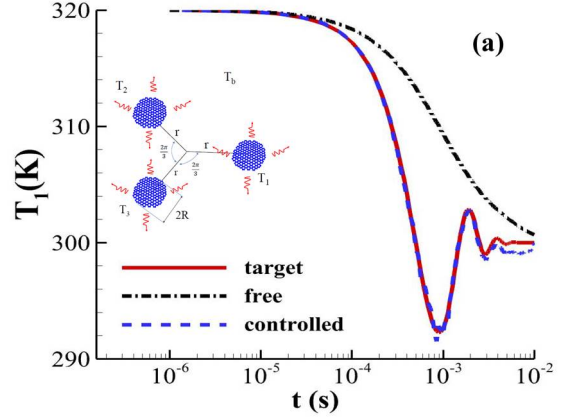


Figure 1: Targetting of the local thermal state of a three-body system consisting of graphene disks of radius  $R = 50 \text{ nm}$  (heat capacity  $C = 4.19 \times 10^{-18} \text{ J.K}^{-1}$ ) regularly distributed on a circle of radius  $r = 50 R$  and embedded in a thermal bath at temperature  $T_b = 300 \text{ K}$ . The disks have the same Fermi level ( $E_F = 0.1 \text{ eV}$ ) and they are initially held at temperatures  $T_1(0) = 320 \text{ K}$ ,  $T_2(0) = 290 \text{ K}$  and  $T_3(0) = 310 \text{ K}$ . The target temperature (a) is controlled with a noisy command (5% of white noise). (b) Evolution of the temperature of controlled disk under the action of the command  $C_2$  and (normalized) control power  $P_2 = C \cdot C_2 / [G_{bb} \cdot (T_b - T_2)]$ .

get  $\alpha = C_j^2(\bar{t})$  and  $\lambda = \frac{C_j^2(0) - C_j^2(\bar{t})}{C_j(0) \hat{K}_{ij}(0, \bar{t})}$ . As the minimal temperature is concerned it takes the form

$$T_i(\bar{t}) = \hat{T}_i(\bar{t}) + \int_0^{\bar{t}} \mathbf{R}_{ij}(\tau, \bar{t}) C_j^*(\tau) d\tau. \quad (23)$$

This problem can be generalized in order to identify multiple optimal command  $\mathbf{C}^* = (C_{a1}^*, \dots, C_{aN}^*)$  to minimize at time  $\bar{t}$  the temperature  $\mathbf{T} = {}^t(T_{b1}, \dots, T_{bM})$  of several elements with a minimum energy cost. In this case the cost function reads

$$J(\mathbf{C}) = \|\mathbf{T}(\bar{t})\|_M^2 + \int_0^{\bar{t}} \|\mathbf{C}(\tau)\|_N^2 d\tau. \quad (24)$$

Relaxation with a minimum of time:

Another problem of practical importance is to consider the relaxation of the system under a minimum time constraint. In its simplest form, this implies finding a command over a bounded set  $C_{min} \leq C_j \leq C_{max}$ , where  $C_{min} \leq 0$  and  $C_{max} \geq 0$ , in order to minimize the relaxation time  $t^*$  of  $i^{th}$  element (up to the environment temperature). Formally, this problem consists in the determination of the command  $C_j$  which minimizes the cost  $J(C_j) = t^*$  so that the  $i^{th}$  element reaches the surrounding temperature

$$T_{env} = \hat{T}_i(t^*) + \int_0^{t^*} \mathbb{R}_{ij}(\tau, t^*) C_j(\tau) d\tau, \quad (25)$$

$\hat{T}_i$  being the temperature followed by this element without external control. According to the Pontryagin maximum principle the optimal command is of the bang-bang type and reads  $C_j^*(\tau) = C_{min}$  if  $X_{ij}^{-1}(\tau) > 0$  (resp.  $C_j^*(\tau) = C_{max}$  if  $X_{ij}^{-1}(\tau) < 0$ ) for each time  $0 \leq t \leq t^*$  where we have set  $\mathbf{X}^{-1}(\tau) = \exp(-\int_0^\tau \hat{\mathbf{G}}(s) ds)$ .

We now illustrate the various external control functionals above by considering several simple examples. First, let us consider a system composed of three graphene disks of radius  $R$  placed at the vertices of an equilateral triangle as sketched in Fig.1. We assume this triangle is circumscribed to a circle of radius  $r$  which is smaller than the thermal wavelength of every particle and is embedded in an external bath at temperature  $T_b$ , such that heat exchange among the particles is dominated by near fields [8]. In accordance with the Landauer formalism [8, 9], near field heat exchange between disks close to thermal equilibrium may be described by pairwise conductances,

$$G_{ij} = \int_0^\infty \frac{d\omega}{2\pi} \frac{\partial \Theta}{\partial T} \mathcal{T}_{i,j}(\omega). \quad (26)$$

Here  $\Theta(\omega, T) = \hbar\omega / [e^{\frac{\hbar\omega}{k_B T}} - 1]$  denotes the mean energy of a harmonic oscillator in thermal equilibrium at temperature  $T$  and  $\mathcal{T}_{i,j}(\omega)$  is the transmission coefficient, at the frequency  $\omega$ , between two disks. In the dipolar approximation the later reads [10, 11]

$$\mathcal{T}_{ij}(\omega) = \frac{4}{3} k_0^4 \text{ImTr} \left[ \boldsymbol{\alpha}_j \mathbb{G}_{ji} \frac{\boldsymbol{\alpha}_i - \boldsymbol{\alpha}_i^\dagger}{2i} \mathbb{G}_{ji}^\dagger \right], \quad (27)$$

where  $k_0 = \omega/c$  with the light velocity  $c$  and  $\mathbb{G}_{ij}$  denotes the dyadic Green tensor between the  $i^{th}$  and the  $j^{th}$  particle in the N-dipole system [12]. Here  $\boldsymbol{\alpha}_i$  denotes the electric polarizability tensor [13–15] associated with the  $i^{th}$  particle. Heat-exchange between the disks and the bath can be described through a correction  $G_{ib} = \beta G_{bb}$  of the blackbody conductance  $G_{bb} = 4\sigma S T_b^3$  around the bath temperature  $T_b$ , with a correction factor  $\beta \ll 1$ . Here  $S$  denotes the apparent surface of disk and  $\sigma$  stands for the Stefan-Boltzmann constant. In Fig.1(a) we plot

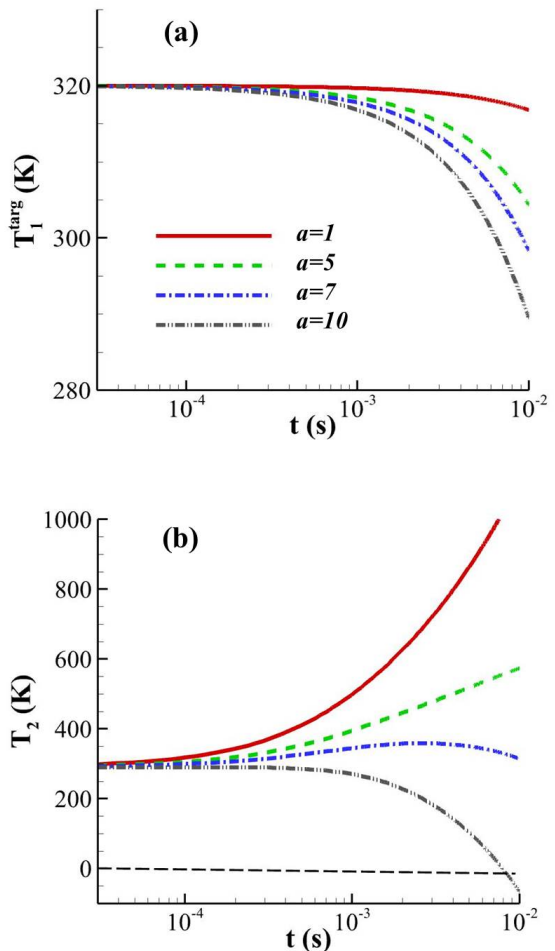


Figure 2: Reachability of a prescribed target temperature profile,  $T_1^{targ}(t) = T_1(0)e^{-at}$ , for the same system of Fig. 1, under noisy command (5% of white noise) applied on disk 2. Shown are various (a) target temperature profiles corresponding to disk 1, along with the corresponding (b) effective temperature of disk 2 along the trajectory. The onset of large (even negative) temperature variations suggests some target profiles are unreachable/unphysical.

the temporal evolution of the first disk temperature under the action of a noisy command (extracted power) applied on the second disk given an initial thermal state and we compare this evolution with its free evolution in the absence of the command. Furthermore, Fig. 1(b) shows the temperature evolution of the second disk under the external command, along with the corresponding command “cost” function. Notably, the targeted temperature is shown not only to be physically but also efficiently reachable, with both temperature and command functions always remaining physically admissible. Fig. (2) on the other hand shows that this is not always the case, as some target temperatures require either unphysical cost functions or lead to untargeted temperatures far

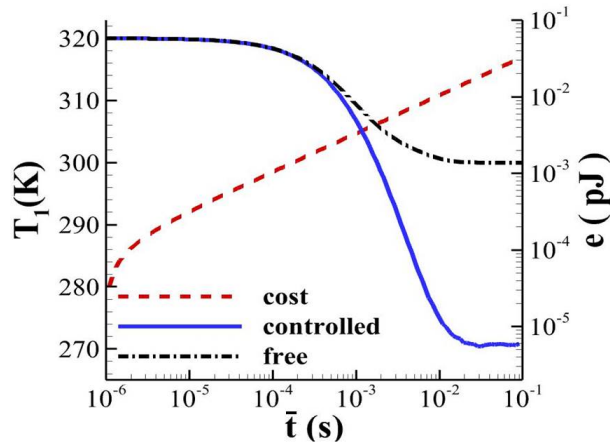


Figure 3: Optimal cooling under a minimum energy cost constraint, for the same system of Fig. 1, under noisy command (5% of white noise) applied on disk 2. Shown on the plot are the temperature of disk 1 along with the corresponding associated energy cost  $e = C \cdot \sqrt{\int_0^{\bar{t}} C_j^2(\tau) d\tau}$  between the initial time and  $\bar{t}$  where the optimal temperature is reached. The boundary conditions for the command power are set to  $C \cdot C_2(0) = 4.19 \text{ fW}$  and  $C \cdot C_2(\bar{t}) = 21 \text{ fW}$ .

away from equilibrium (even negative), thus invalidating the linear approximation above. This situation imposes general conditions on the commandability which must be fulfilled for a given system to reach a given target. Using the Volterra operator introduced in (6) it is straightforward to derive from expressions (6) and (9), the following commandability conditions

$$T_k(t) = \hat{T}_k(t) + V_{ki} V_{ji}^{-1} g_j [T_j^{targ}(t)] \geq 0 \quad (28)$$

linking the target  $T_j^{targ}$  and the local temperatures  $T_k$  at time  $t$  given an initial thermal state.

Keeping the same system we now seek the lowest temperature the first disk can reach by controlling the temperature of disk 2 with a minimum energetic cost. The result plotted in Fig. 3 with respect to the optimization time  $\bar{t}$  given specific boundary conditions for the command (see caption of Fig.3) show that the temperature of first disk can be significantly reduced in comparison with the free relaxation process using a reasonably low energy cost. It is clear that this discrepancy can be either enlarged or reduced by an appropriate change on the boundary conditions for the command. However, in a similar way as to the targeting problem, a commandability condition analog to relation (28) must be respected to keep the controlled temperatures physically admissible (close to thermal equilibrium). In Figs.4 we also solve the cooling problem with a minimum time on the same system using a bang-bang type control applied on the second disk. Obviously both the cooling problem with

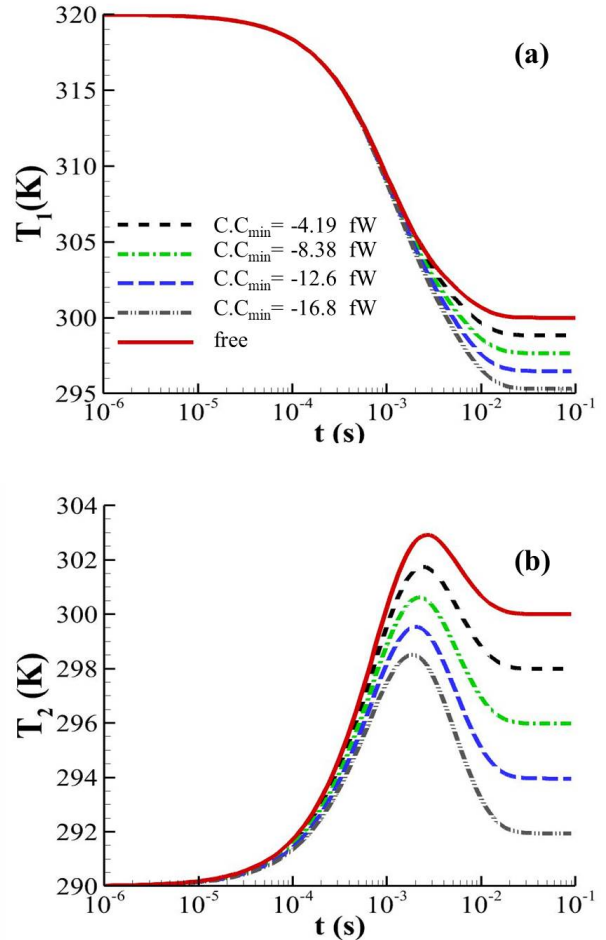


Figure 4: Optimal cooling of disk 1 with a minimum time in the same system as in Fig.1 with a bang-bang command applied on disk 2. The red continue curves denotes the free evolution. Temperature evolution of first disk (a) and of second disk (b) with different minima  $C_{min}$  for the command.

a minimum cost and the cooling problem with a minimum time strongly depends on the accessible range for the command.

In conclusion we laid the theoretical foundations for an active control of many-body systems close to their equilibrium state. We have demonstrated how their thermal state can be dynamically and locally manipulated using external commands showing the feasibility and versatility of indirect control for the dynamic evolution of local thermal states. In particular we have shown that the relaxation process can be significantly modified via the action of an external drive with power requirements comparable (and depending on the situation) much smaller than the corresponding heat exchange between the particles and/or the bath. This theoretical framework can be extended to deal with the control of systems with thermally dependent conductances matrices and non-reciprocal sys-

tems.

This research was supported in part by the National Science Foundation under Grant No. PHY-1748958. P. B.-A. acknowledges the support of the French Agence Nationale de la Recherche (ANR), under grant ANR-21-CE30-0030 (NBODHEAT). A.R.W. acknowledges support from the National Science Foundation under the Emerging Frontiers in Research and Innovation (EFRI) programme, grant no. EFMA-1640986, the Cornell Center for Materials Research (MRSEC) through award no. DMR-1719875, and the Defense Advanced Research Projects Agency (DARPA) under grant agreements no. HR00112090011, no. HR00111820046 and no. HR00111047197.

---

\* Electronic address: pba@institutoptique.fr

† Electronic address: arod@princeton.edu

- [1] N. Li, P. Hänggi and B. Li, *Europhys. Lett.* **84**, 40009 (2008).
- [2] N. Li, F. Zhan, P. Hänggi and B. Li, *Phys. Rev. E* **80**, 011125, (2009).
- [3] I. Latella, R. Messina, J. M. Rubi and P. Ben-Abdallah, *Phys. Rev. Lett.* **121**, 023903 (2018).
- [4] R. Messina and P. Ben-Abdallah, *Phys. Rev. B* **101**, 165435 (2020).
- [5] H. Li, L. J. Fernández-Alcázar, F. Ellis, B. Shapiro and T. Kottos, *Phys. Rev. Lett.*, **123**, 165901 (2019).
- [6] G. Xu, Y. Li, W. Li, S. Fan and C.-W. Qiu, *Phys. Rev. Lett.* **127**, 105901 (2021).
- [7] D. Torrent, O. Poncelet and J.-C. Batsale, *Phys. Rev. Lett.*, **120**, 125501 (2018).
- [8] P. Ben-Abdallah, S.-A. Biehs, and K. Joulain, *Phys. Rev. Lett.* **107**, 114301 (2011).
- [9] S.-A. Biehs, R. Messina, P.S. Venkataram, A. W. Rodriguez, J. C. Cuevas and P. Ben-Abdallah, *Rev. Mod. Phys.*, **93**, 025009 (2021).
- [10] R. M. Abraham Ekeroth, A. García-Martín, and J. C. Cuevas, *Phys. Rev. B* **95**, 235428 (2017).
- [11] R. M. Abraham Ekeroth, P. Ben-Abdallah, J. C. Cuevas and A. García-Martín, *ACS Photonics* **5** 705 (2018).
- [12] E. M. Purcell and C. R. Pennypacker, *Astrophys. J.* **186**, 705 (1973).
- [13] S. Albaladejo, R. Gómez-Medina, L. S. Froufe-Pérez, H. Marinchio, R. Carminati, J. F. Torrado, G. Armelles, A. García-Martín, and J. J. Sáenz, *Optics Express*, **18**, 4, pp. 3556-3567 (2010).
- [14] S. Thongrattanasiri, F. H.L. Koppens, F. J. G. de Abajo, *Phys. Rev. Lett.*, **108**, 047401 (2012).
- [15] P. Ben-Abdallah, A. Belarouci, L. Frechette and S.-A. Biehs, *Appl. Phys. Lett.*, **107**, 053109 (2015).