

The Optimality of Blocking Designs in Equally and Unequally Allocated Randomized Experiments with General Response

DAVID AZRIEL^{*1}, ABBA M. KRIEGER^{†2}, AND ADAM KAPELNER^{‡3}

¹*Faculty of Industrial Engineering and Management, The Technion, Haifa, Israel*

²*Department of Statistics, The Wharton School of the University of Pennsylvania, USA*

³*Department of Mathematics, Queens College, CUNY, USA*

August 15, 2023

Abstract

We consider the performance of the difference-in-means estimator in a two-arm randomized experiment under common experimental endpoints such as continuous (regression), incidence, proportion and survival. We examine performance under both equal and unequal allocation to treatment groups and we consider both the Neyman randomization model and the population model. We show that in the Neyman model, where the only source of randomness is the treatment manipulation, there is no free lunch: complete randomization is minimax for the estimator's mean squared error. In the population model, where each subject experiences response noise with zero mean, the optimal design is the deterministic perfect-balance allocation. However, this allocation is generally NP-hard to compute and moreover, depends on unknown response parameters. When considering the tail criterion of Kapelner et al. (2021), we show the optimal design is less random than complete randomization and more random than the deterministic perfect-balance allocation. We prove that Fisher's blocking design provides the asymptotically optimal degree of experimental randomness. Theoretical results are supported by simulations in all considered experimental settings.

Keywords: experimental design, optimal design, blocking, unequal randomization, restricted randomization, incidence endpoint, count endpoint, survival endpoint, logistic regression

^{*}Electronic address: davidazr@technion.ac.il

[†]Electronic address: krieg@wharton.upenn.edu

[‡]Electronic address: kapelner@qc.cuny.edu; Principal Corresponding author

1 Background

We consider a classic problem: an experiment with $2n$ *subjects* (*individuals*, *participants* or *units*). The experiment has two *arms* (*treatments*, *manipulations* or *groups*) which we will call treatment and control denoted T and C and the number of treatments denoted n_T and number of controls denoted n_C . We consider one clearly defined *outcome* (*response* or *endpoint*) of interest for the $2n$ subjects denoted $\mathbf{y} = [y_1, \dots, y_{2n}]^\top$ which is of general type: either continuous, incidence, count or uncensored survival. Subjects have p observed subject-specific *covariates* (*measurements*, *features* or *characteristics*) denoted $\mathbf{x}_i \in \mathbb{R}^p$ for the i th subject.

The majority of clinical trials allocate equally to treatment and control, $n_T = n_C$. However, there are many practical situations where they are allocated unequally: to reduce the cost of the trial (e.g the treatment is an expensive surgery and the control is an inexpensive placebo), avoid loss of power from drop-out or cross-over, various ethical concerns, for gaining additional information on one manipulation preferentially (Dumville et al., 2006), as well as if the response variance is known to be heterogeneous across manipulations (Wong and Zhu, 2008). Torgerson and Campbell (1997) makes the general recommendation that unequal allocation should be employed more often in the case of economic concerns. We consider herein both equal and unequal allocation, i.e. $n_T \leq n_C$ without loss of generality. We consider n_T and n_C to be fixed and later in this section we refer the reader to previous work that provides a procedure for selecting an appropriate degree of imbalance based on some of the reasons listed above. Further, since the more common design is the equal allocation case, to allow easy visual simplification of our mathematical expressions, we sometimes employ the following notation: $r := n_T/n \in (0, 1]$ and $\tilde{r} := n_C/n = 2 - r \in [1, 2)$. This notation has the benefit that substitution of $r = \tilde{r} = 1$ or $r - \tilde{r} = 0$ implies the equal allocation setting.

Further, the setting we investigate is where all \mathbf{x}_i 's are known beforehand and considered fixed. This non-sequential setting was studied by Fisher (1925) when assigning treatments to agricultural plots and is still of great importance today. In fact, this setting is found in “many phase I studies [that] use ‘banks’ of healthy volunteers ... [and] ... in most cluster randomised trials, the clusters are identified before treatment is started” (Senn, 2013, page 1440). The more common *sequential* experimental setting where subjects arrive one-by-one and must be assigned on the spot (hence all \mathbf{x}_i 's are not seen beforehand), we will leave for future work. Sverdlov and Ryznik (2019) provides an extensive discussion and simulation of common sequential unequal allocation designs.

Formally defined, the *randomization* (*allocation* or an *assignment*) is a vector $\mathbf{w} = [w_1, \dots, w_{2n}]^\top$ whose entries indicate whether the subject received T (coded numerically as +1) or C (coded numerically as -1) and thus this vector is an element in $\{-1, +1\}^{2n}$. After the sample is provided, the only degree of control the experimenter has is to choose the entries of \mathbf{w} . The process that results in the choices of such allocations of the $2n$ subjects to the two arms is termed an experimental *design* (*strategy*, *algorithm*, *method* or *procedure*.) Experimental design is thus a generalized multivariate Bernoulli random variable that we denote \mathbf{W} and its number of allocations as $N_{\mathbf{W}}$. The design can be degenerate, i.e. $N_{\mathbf{W}} = 1$. We first discuss some historic designs for equal allocation then move to the limited literature on unequal allocation.

The typical “gold-standard” design, the balanced complete randomization design (BCRD, Wu, 1981, p. 1171) has the balance constraint where $\sum_i w_i = 0$ and that each of these $\binom{2n}{n}$ vectors satisfying that balance constraint are equally likely. This design cannot be considered in our setting of unequal randomization where instead all designs must satisfy the imbalance constraint $\sum_{i=1}^n w_i = n_T - n_C < 0$ for all their allocations \mathbf{w} . The analogue design of BCRD will be the unique design where all $\binom{2n}{n_T} = \binom{2n}{n_C}$ vectors satisfy this imbalance constraint which we will term the imbalanced complete randomization design (iBCRD) although it has other names (Sverdlov and Ryznik, 2019, Section 3.1.1). Since BCRD is a special case of iBCRD, going forward we will refer to both as i/BCRD. Any other design we will call “restricted” as it is restricted to use fewer assignment vectors.

The act of randomization itself has been given the high distinction of “the gold standard”. Cornfield (1959, p. 245) gives two reasons: (1) known and unknown covariate differences among the groups will be small and bounded and (2) it is the “reasoned basis” for causal inference, a paraphrasing of Fisher (1935, p. 14). However, there is a large problem with employing i/BCRD that was identified at the inception of the idea with Fisher (1925) — under some unlucky \mathbf{w} ’s there are large differences in the distribution of observed covariates between the two groups. The amount of covariate value heterogeneity between groups we term *observed imbalance*. This observed imbalance creates variance during estimation. Through an abuse of terminology, many times the literature denotes this as simply *imbalance*, but this is an ambiguous term since it usually ignores the state of imbalance in the unobserved covariates which also creates variance during estimation.

Mitigating the chance of large observed imbalances is the predominant reason for employing a restricted randomization procedure. These procedures take the observed covariate values as input and compute assignments with small observed imbalance as output. Fisher (1925, p. 251) wrote “it is still possible to eliminate much of the . . . heterogeneity, and so increase the accuracy of our [estimator], by laying restrictions on the order in which the strips are arranged”. Here, he introduced the *block design*, a restricted design still popular today, especially in clinical trials. Blocking in the case of unequal randomization requires each blocks’ allocations to largely respect the allocation ratio r ; and this design is usually termed the *permuted block design* (Ryznik and Sverdlov, 2018, Section 2.2.2). Another early mitigation approach can be found in Student (1938, p. 366) who wrote that after an unlucky, highly imbalanced randomization, “it would be pedantic to [run the experiment] with [an assignment] known beforehand to be likely to lead to a misleading conclusion”. His solution is for “common sense [to prevail] and chance [be] invoked a second time”. In foregoing the first assignment and *rerandomizing* to find a better assignment, all allocations worse than a predetermined threshold of observed imbalance are eliminated. This classic strategy has been rigorously investigated only recently (Morgan and Rubin, 2012; Li et al., 2018) in the case of equal allocation. Another idea is to allocate treatment and control among similar subjects by using a pairwise matching (PM) design (Greevy et al., 2004). PM cannot be used for unequal allocation as it demands each pair to have one treatment and one control hence $n_T = n_C$. In the unequal allocation design, one can instead perform $(n_C/n_T) : 1$ matching. If n_C/n_T is not a natural number, some matches will have $\lfloor n_C/n_T \rfloor$ control subjects for one treatment subject and some matches can have $\lceil n_C/n_T \rceil$ control subjects for one treatment subject (in approximately the correct proportion). An algorithm to

create these tuples based on intra-subject observed covariate distance is only known to be able to be solved in polynomial time when each matched set has one treated and one control. Clearly, this more general $(n_C/n_T) : 1$ matching problem is more complex and might very well be NP-hard. All of the above-mentioned restricted designs are still “random” in the sense that there are still exponentially many possible allocations.

One may wonder about the “optimal” design strategy. Regardless of how optimality is defined on whichever criterion, this is an impossible question to answer. The multivariate Bernoulli random variable has $2^{2n} - 1$ parameters, an exponentially large number (Teugels, 1990, Section 2.3). Finding the optimal design is thus tantamount to solving for exponentially many parameters using only the $2n$ observations, a hopelessly unidentifiable task. Thus, to find an “optimal” design, the space of designs must be limited.

One way of limiting the space of designs is to do away with any notion of randomization whatsoever and instead locate a *deterministic optimal design* with one optimal allocation vector \mathbf{w}_* . An early advocate of this approach was Smith (1918) and a good review of classic works advocating this approach such as Kiefer and Wolfowitz (1959) is given in Steinberg and Hunter (1984, Chapter 3). A particularly edgy advocate is Harville (1975) who penned an article titled “Experimental Randomization: Who Needs It?”. Although unpalatable to modern ears that have been conditioned to the concept that “randomization is the gold standard”, this work and our previous work showed that when doing estimation and assuming the *population model* (a notion we will introduce later and discuss at length), there is no need for randomness in the design.

How does one find this unique allocation \mathbf{w}_* ? One needs to first define a numerical metric of imbalance as a function of the \mathbf{x} ’s and \mathbf{w} . Then, the optimization problem becomes a binary integer programming problem where the unequal allocation requirement would merely alter one of the inputted constraints. These types of problems are usually NP-hard but can be approximated via numerical optimization (Bertsimas et al., 2015; Kallus, 2018). Sometimes there are polynomial-time algorithms that provide “good-enough” solutions for practical purposes, e.g. branch and bound (Land and Doig, 1960). Selection of the imbalance metric is arbitrary but recent work by Kallus (2018) posits an appropriate metric to use based on assumptions about the structure of the response function.

There are even other designs that attempt to retain the best of both worlds i.e. randomizing while simultaneously optimizing. For instance, Krieger et al. (2019) starts with BCRD and greedily switches pairs of treatment and control subjects until reaching a locally optimal minimum of observed covariate imbalance. This procedure provably retains most of the randomness of BCRD while achieving provably minuscule observed imbalance. Zhu and Liu (2021) also use pair-switching but do so non-greedily and thus can explore the space of forced-balanced allocations more completely. Harshaw et al. (2019) use the Gram-Schmidt Walk design to provide allocations that have high-degree of randomness and low observed imbalance. Another approach is the Finite Selection Model procedure of Chattopadhyay et al. (2022). They employ a sequentially controlled Markovian random sampling to assign w_i ’s based on a D -optimality criterion.

We now turn to unequal allocation. Most of the extant literature focuses on (a) computing the allocation proportions and (b) how to then allocate sequentially. We are not aware of work that discusses unequal-allocation design vis-a-vis the consideration of minimizing

observed imbalance in the non-sequential setting where all \mathbf{x} 's are known a priori.

The first attempt at (a) is based on heterogeneous treatment costs: Nam (1973) assumes a continuous endpoint distributed normally. Tymofeyev et al. (2007) propose an optimization framework for (a) in the binary response case and shows it is usually convex. Feng and Hu (2018) employ this framework for (b). Sverdlov and Ryznik (2019) propose a procedure for (a) for two or more treatment groups with a normally distributed regression endpoint. Their objective is to minimize the overall cost of the experiment subject to a minimum requirement for statistical power. Further, they discuss performance under both the *population model* and *randomization model*, two different worldviews that are fundamental to the differing results in this work. We view this work as complementary; the extensive work on (a) can be applied directly herein as a pre-step to choose r before implementing the design we recommend.

The above gives a short introduction to the wide range of design ideas. At the “extremes” of this range, there is i/BCRD on one side and the minimized observed imbalance deterministic design on the other side. Everything in between these extremes attempts to compromise between observed imbalance and degree of randomness.

Is randomness worth sacrificing for less observed imbalance? This question was investigated in Kapelner et al. (2021) for the case of a continuous outcome under equal treatment-control allocation (henceforth referred to as “our previous work”). There was a threefold answer: (I) if the experimenter is concerned that nature may provide the worst possible unobserved covariates then one should never sacrifice any randomness, (II) if the experimenter treats the unobserved covariates as random noise that can be averaged over, then one should sacrifice all randomness and (III) if the experimenter is concerned of tail events of unobserved covariates then one should sacrifice some randomness. A related work is Nordin and Schultzberg (2022), which studies a measure of how correlated different assignment vectors in a design are with each other. They show that the variance of the MSE increases linearly in this measure. Therefore, in order to avoid high variance of the MSE, one needs to consider designs where this correlation metric is small.

The purpose of this work is to reconsider the above question for the most common endpoints in experiments and clinical trials: continuous, incidence, survival, count and proportion and for treatment allocation that are both equal and unequal across treatments. We prove that our previous work’s results generalize. We further uncover the asymptotic optimality of blocking designs in (III). We define our experimental setting formally in Section 2, discuss criteria of performance and theoretical results in Section 3, provide simulation evidence of our results in Section 4 and conclude in Section 5.

2 Problem Setup

Consider the potential outcome framework of Rubin (2005) and let \mathbf{y}_T and \mathbf{y}_C denote the vectors of all subject responses under the treatment and control respectively. For each $i = 1, \dots, 2n$ the observed response y_i is $y_{T,i}$ (respectively, $y_{C,i}$) if $w_i = +1$ (respectively, $w_i = -1$). In a vector form, the $2n$ random responses \mathbf{Y} can be expressed as

$$\mathbf{Y} = \frac{1}{2}(\mathbf{y}_T + \mathbf{y}_C + \text{Diag}[\mathbf{W}](\mathbf{y}_T - \mathbf{y}_C)). \quad (1)$$

Note that the randomness in the responses in Equation 1 is only due to the randomness in the design \mathbf{W} . This limitation of randomness to the design exclusively is known as the *randomization model* or *Neyman Model* (Freedman, 2008; Lin, 2013; Rosenberger and Lachin, 2016, Chapter 6.3) in contrast to a *population model*, which we will describe in Section 3.2.

We consider the sample average treatment effect as our estimand,

$$\tau := \frac{1}{2n} \mathbf{1}_{2n}^\top (\mathbf{y}_T - \mathbf{y}_C). \quad (2)$$

This estimand is a natural target of inference for all outcome types. In the incidence setting, this estimand is the mean probability difference (also called the *risk difference*). Sometimes, practitioners prefer the risk ratio, odds ratio or log odds ratio. Future work can examine additional estimands beyond the mean probability difference in the setting of the binary outcome.

An intuitive estimate for our estimand is $\hat{\tau} = \bar{y}_T - \bar{y}_C$ where \bar{y}_T and \bar{y}_C are the average response in the treatment and control groups respectively when computed for a specific \mathbf{w} from any design \mathbf{W} . Using Equation 1 and the elementary computation found in Section A.1 of the Supplementary Material, we can conveniently express this estimate's estimator as

$$\hat{\tau} = \frac{1}{2n} \left(\mathbf{1}_{2n}^\top \left(\frac{\mathbf{y}_T}{r} - \frac{\mathbf{y}_C}{\tilde{r}} \right) + \mathbf{W}^\top \left(\frac{\mathbf{y}_T}{r} + \frac{\mathbf{y}_C}{\tilde{r}} \right) \right). \quad (3)$$

In order to prove results about the performance of this estimator under different designs, we now make two assumption about the design space:

Assumption 2.1. *All assignments respect a specific equal or unequal allocation, i.e. $\mathbf{w}^\top \mathbf{1}_{2n} = (r - \tilde{r})n$ for all \mathbf{w} in the support of \mathbf{W} . Note this quantity is zero under equal allocation.*

Assumption 2.2. *All subjects have equal probability of being assigned the treatment condition, i.e. $\mathbb{E}[\mathbf{W}] = \frac{1}{2}(r - \tilde{r})\mathbf{1}_{2n}$. Note this quantity is the zero vector under equal allocation.*

Computation found in Section A.2 of the Supplementary Material shows our estimator is unbiased under Assumption 2.2. The mean squared error (MSE) over all assignments is thus its variance which can be expressed as the quadratic form

$$\text{MSE}_{\mathbf{W}}[\hat{\tau}] = \frac{1}{4n^2} \mathbf{v}^\top \Sigma_{\mathbf{W}} \mathbf{v} \quad (4)$$

where the defining matrix $\Sigma_{\mathbf{W}}$ denotes $\text{Var}[\mathbf{W}]$, the variance-covariance matrix of the design, and $\mathbf{v} := \mathbf{y}_T/r + \mathbf{y}_C/\tilde{r}$.

We will be analyzing performance for many types of responses. It will be useful to express potential outcome as a sum of two components: (a) what we will call the response “mean” μ_i which is a function of the observed covariates \mathbf{x}_i and the assignment w_i and (b) z_i which is a function of unobserved covariates z_i and the assignment w_i . Thus,

$$\mathbf{y}_T = \boldsymbol{\mu}_T + \mathbf{z}_T \in \mathcal{Y}, \quad \mathbf{y}_C = \boldsymbol{\mu}_C + \mathbf{z}_C \in \mathcal{Y} \quad (5)$$

where $\boldsymbol{\mu}_T$ and $\boldsymbol{\mu}_C$ are the stacked vectors of the response means when $\boldsymbol{w} = +\mathbf{1}_{2n}$ and $\boldsymbol{w} = -\mathbf{1}_{2n}$ respectively and \boldsymbol{z}_T and \boldsymbol{z}_C are the stacked vectors of z_i 's when $\boldsymbol{w} = +\mathbf{1}_{2n}$ and $\boldsymbol{w} = -\mathbf{1}_{2n}$ respectively. The potential response values belong to different sets \mathcal{Y} depending on response type.

The response types we consider are formally listed in Table 1 (column 1) and this table also lists common generalized linear models (GLMs) for each of the responses' means (column 4). These means likewise belong to different sets Θ , where Θ is the space of the μ_i 's (column 5). In the population model, the z_i 's are conceptualized as randomly-realized *noise* or *errors*. Regardless of what one believes about their origination, the critical fact is they cannot be modeled with the information the experimenter has at hand. Of course since $z_i = y_i - \mu_i$, the space of permissible values of the z_i 's is analogously limited for each response type to be within $\mathcal{Y} - \Theta$ and the space \mathcal{V} will be different for each response type.

| Response type name | \mathcal{Y} | Model Name | Common $\mu_{T,i}$ and $\mu_{C,i}$ | Θ |
|-------------------------|------------------------------------|--------------------|---|---------------|
| Continuous | \mathbb{R} | Linear | $\beta_0 + \boldsymbol{\beta}^\top \boldsymbol{x}_i + \beta_T w_i$ | \mathbb{R} |
| Incidence Proportion | $\{0, 1\}$ $(0, 1)$ | Log Odds Linear | $\left(1 + e^{-(\beta_0 + \boldsymbol{\beta}^\top \boldsymbol{x}_i + \beta_T w_i)}\right)^{-1}$ | $(0, 1)$ |
| Count Survival | $\{0, 1, \dots\}$ $(0, \infty)$ | Log Linear | $e^{(\beta_0 + \boldsymbol{\beta}^\top \boldsymbol{x}_i + \beta_T w_i)}$ | $(0, \infty)$ |

Table 1: Response types considered in this work. For the example mean response model, the β 's are unknown parameters to be estimated of which β_T is most often of paramount interest to the experimenter.

3 Analyzing Designs

It is impossible to employ the MSE as the criterion in which we compare different designs since \boldsymbol{z}_T and \boldsymbol{z}_C are not observed. Thus, as in our previous work, we do not employ MSE as the performance criterion *directly* but instead remove the dependence on the z_i 's in three different ways to arrive at three different practical criteria (a) the worst-case MSE, (b) the mean MSE and (c) the tail MSE. These are explored in the next three sections respectively.

3.1 The Worst Case MSE

We attempt to find the best design under an adversarial nature that provides us the worst possible $\boldsymbol{z}_T, \boldsymbol{z}_C$ values,

$$\boldsymbol{W}_* = \arg \min_{\boldsymbol{W} \in \mathcal{W}} \sup_{\boldsymbol{z}_T, \boldsymbol{z}_C} \text{MSE}_{\boldsymbol{W}}[\hat{\tau}]$$

where \mathcal{W} denotes the space of all legal designs whose allocations satisfy Assumptions 2.1 and 2.2. In the supremum operation, the space of legal \boldsymbol{z}_T 's and \boldsymbol{z}_C 's will then depend on the response type. Since the \boldsymbol{z} vectors sum with $\boldsymbol{\mu}$ to yield the response (Equation 5) and the response averages are subtracted to compute \boldsymbol{v} , this inner problem is equivalent to

$\sup_{\mathbf{v} \in \mathcal{V}} \mathbf{v}^\top \boldsymbol{\Sigma}_W \mathbf{v}$, where \mathcal{V} is the space of all possible \mathbf{v} 's. When \mathcal{V} is unbounded the problem is ill-defined as the inner supremum is infinite. Thus, to make the problem realistic (response metrics in real-world experiments are bounded), we limit the space of vectors to $\mathcal{V}_M \subset \mathcal{V}$. The definition of the subspace \mathcal{V}_M depends on the response: for the continuous case it is natural to bound the space by the norm of \mathbf{v} , while for the count and survival response it is appropriate to bound the sup norm of \mathbf{v} . Thus, we define

$$\mathcal{V}_M := \begin{cases} \{\mathbf{v} \in \mathbb{R}^{2n} : \|\mathbf{v}\| \leq 1\} & \text{continuous response} \\ \{0, 1/r, 1/\tilde{r}, 1/r + 1/\tilde{r}\}^{2n} & \text{incidence} \\ (0, 1/r + 1/\tilde{r})^{2n} & \text{proportion responses} \\ \{\mathbf{v} \in \{i/r + j/\tilde{r} : i, j \in \mathbb{N}_0\}^n : \max(\mathbf{v}) \leq M\} & \text{count} \\ \{\mathbf{v} \in (0, \infty)^n : \max(\mathbf{v}) \leq M\} & \text{survival responses} \end{cases} \quad (6)$$

where M is a large positive constant such that $\mathbb{P}(Y_i > M)$ is negligible for all subjects. The design location problem then becomes

$$\mathbf{W}_* = \arg \min_{\mathbf{W} \in \mathcal{W}} \max_{\mathbf{v} \in \mathcal{V}_M} \mathbf{v}^\top \boldsymbol{\Sigma}_W \mathbf{v} \quad (7)$$

which is exactly tractable for the case of the response being continuous. In this case, the inner maximum is the largest eigenvalue of $\boldsymbol{\Sigma}_W$. The \mathbf{W} that minimizes this largest eigenvalue is such where each subject is assigned on the basis of a fair coin flip and is either called the *complete randomization* design (Rosenberger and Lachin, 2016, Chapter 3.2) or the *Bernoulli Trial* (Imbens and Rubin, 2015, Chapter 4.2). In this design, $\mathbf{W} = \mathbf{I}_{2n}$ which mirrors the minimax result found in Kallus (2018, Section 2.1). However, this design violates our space of considered designs which are only those that satisfy a prespecified allocation to the two treatments (Assumption 2.1). Within the space of allowable designs, we have the following no free lunch result which follows from Kapelner et al. (2021, Theorem 2.1) and proven in Section A.3 in the Supplemental Material.

Theorem 3.1. *Under Assumptions 2.1 and 2.2 and continuous response, i/BCRD is the minimax optimal design in the case of unequal / equal allocation for the worst case MSE criterion (Equation 7).*

If the response is non-continuous, the max problem embedded within Equation 7 is generally intractable. In order to make this problem tractable, we further limit the set of designs to block designs.

3.1.1 The Optimal Design Among Block Designs

We denote block designs with B blocks as $\mathbf{W} \in BL(B)$. Each block is of size n_B , where $n_B := 2n/B$, and in each block there will be exactly $\frac{n_T}{2n}n_B$ subjects assigned to the treatment manipulation and $\frac{n_C}{2n}n_B$ subjects assigned to the control manipulation; thereby the number of subjects in each block respects the overall unequal (and equal) allocation. It is assumed that n_B , $\frac{n_T}{2n}n_B$ and $\frac{n_C}{2n}n_B$ are integers. The block design with the smallest number of blocks ($B = 1$) is equivalent to i/BCRD.

It is clear that $BL(B)$ satisfies Assumptions 2.1 and 2.2. The computation in Appendix A.3 applied to each block implies that Σ_W is block diagonal with blocksize n_B where the blocks are all equal to $r\tilde{r}(n_B\mathbf{I}_{n_B} - \mathbf{J}_{n_B})/(n_B - 1)$ where \mathbf{J}_{n_B} denotes the $n_B \times n_B$ matrix of all ones.

We show in Theorem 3.2 that i/BCRD is minimax among blocking designs, for all response types considered. The proof is found in Section A.4 in the Supplemental Material.

Theorem 3.2. *Consider the responses listed in Table 1 and the definition of \mathcal{V}_M given in Equation 6, then we have that*

$$\text{i/BCRD} = \arg \min_{\mathbf{W} \in BL(B)} \max_{\mathbf{v} \in \mathcal{V}_M} \mathbf{v}^\top \Sigma_W \mathbf{v}.$$

In summary, if one wishes to gauge design performance by the *worst case MSE*, there is no free lunch; there is no way to mitigate observed covariate imbalances as they will expose your estimator to tail events in the unobserved covariates.

3.2 The Mean MSE

The minimax criterion forces a design that is extremely conservative to protect against the most adversarial \mathbf{v} which is one arbitrary direction in \mathcal{V}_M , a large $2n$ -dimensional space. Why not instead design with the “average \mathbf{v} ” in mind? As the \mathbf{x}_i ’s are fixed (and thus the $\boldsymbol{\mu}_T$ and $\boldsymbol{\mu}_C$ are fixed), we then must consider the \mathbf{z}_C and \mathbf{z}_T as random noise realizations. This is equivalent to assuming that each subject is sampled from a large population also known formally as the *population model* assumption (Rosenberger and Lachin, 2016, Chapter 6.2) whose validity is highly contested especially in clinical trials (Lachin, 1988). Regardless of the long-standing debate between the population model and the randomization model, many practitioners assume the population model implicitly and we will likewise in the next two subsections. The mean MSE of this section is one of the most common criteria in the experimental literature.

We formally let \mathbf{Z}_T and \mathbf{Z}_C be the vector random variables that generate the \mathbf{z}_T and \mathbf{z}_C vectors respectively (quantities that are canonically denoted with the Greek letter epsilon). We assume $\mathbb{E}[\mathbf{Z}_T] = \mathbb{E}[\mathbf{Z}_C] = \mathbf{0}_n$ and that the components in \mathbf{Z}_T are independent, the components of \mathbf{Z}_C are independent and the components of the former and latter are mutually independent. Although the distributional form of both \mathbf{Z}_T and \mathbf{Z}_C are dependent upon the response type specified by \mathcal{Y} , we do not make any formal distributional assumptions.

We now consider the criterion defined as the expectation of the MSE of Equation 4 over \mathbf{Z}_T and \mathbf{Z}_C . Section A.5 in the Supplementary Material shows this to be

$$\mathbb{E}_{\mathbf{Z}_T, \mathbf{Z}_C} [\text{MSE}_{\mathbf{W}}[\hat{\tau}]] = \frac{1}{4n^2} \boldsymbol{\mu}^\top \Sigma_W \boldsymbol{\mu} + c_Z \quad (8)$$

where $\boldsymbol{\mu} := \boldsymbol{\mu}_T/r + \boldsymbol{\mu}_C/\tilde{r}$ and c_Z is a constant with respect to the design \mathbf{W} defined in Section A.5. Thus, the optimization problem can then be expressed as $\arg \min_{\mathbf{W} \in \mathcal{W}} \boldsymbol{\mu}^\top \Sigma_W \boldsymbol{\mu}$. Since $\Sigma_W = N_{\mathbf{W}}^{-1} \sum_{k=1}^{N_{\mathbf{W}}} \mathbf{w}_k \mathbf{w}_k^\top - \mathbb{E}[\mathbf{W}] \mathbb{E}[\mathbf{W}]^\top$ where the latter term is constant for all designs by Assumption 2.2, the optimization problem can alternatively be expressed as

$$\mathbf{W}_* = \arg \min_{\mathbf{W} \in \mathcal{W}} \frac{1}{N_{\mathbf{W}}} \sum_{k=1}^{N_{\mathbf{W}}} (\boldsymbol{\mu}^\top \mathbf{w}_k)^2. \quad (9)$$

The terms in the above sum are the squared imbalance for a specific allocation between the potential means in treatment and control summed.

In the case of equal allocation, the design that satisfies Assumption 2.2 and solves the optimization problem is the design with $N_{\mathbf{W}} = 2$ where the two vectors are \mathbf{w}_* , $-\mathbf{w}_*$ where \mathbf{w}_* is defined to be the unique vector minimizing imbalance in the potential response means. This is an NP-hard problem but there are heuristics that could solve it approximately given $\boldsymbol{\mu}$ as input. In the case of unequal allocation, Equation 9 is a difficult problem to solve as the observed covariate imbalances must be minimized while each subject is being placed into the T group in the exact proportion $\frac{n_T}{2n}$ over all $N_{\mathbf{W}}$ vectors. We do not know of a heuristic that can perform this task and we leave its investigation for future work.

However, even in the case of equal allocation, the quantity $\boldsymbol{\mu}$ is unknown a priori (e.g. because the values of the parameters β_j are unknown in the example mean response models given in Table 1, column 4). Thus, in real-world scenarios the vector \mathbf{w}_* is impossible to locate even for the simplest GLMs using heuristic methods. There is one exception — the case of $p = 1$, a linear response model, continuous response and additive treatment effect. Here, the mean response model is $\boldsymbol{\mu} = ((\beta_0 + \beta_T)/r + (\beta_0 - \beta_T)/\tilde{r}) \mathbf{1}_{2n} + \beta_1(1/r + 1/\tilde{r})\mathbf{x}$. Thus, the optimization problem of Equation 9 is solved by the unique vector that minimizes $|\mathbf{x}^\top \mathbf{w}|$. This problem alone can be approximated by numerical methods (Kapelner et al., 2021, Section 2.2.5).

In summary, finding the optimal design under this mean MSE criterion is generally intractable. In order to make the problem tractable, we again consider the space of block designs only as in Section 3.1.1.

3.2.1 The Optimal Design Among Block Designs

Unlike before, we additionally assume that the order of the elements in the vector $\boldsymbol{\mu}$ is known, that is, without loss of generality,

$$\frac{\mu_{T,1}}{r} + \frac{\mu_{C,1}}{\tilde{r}} \leq \frac{\mu_{T,2}}{r} + \frac{\mu_{C,2}}{\tilde{r}} \leq \dots \leq \frac{\mu_{T,n}}{r} + \frac{\mu_{C,n}}{\tilde{r}}. \quad (10)$$

When $p = 1$, this assumption is true for all the GLMs given in Table 1 (column 4) since $\mu_{T,i}/r + \mu_{C,i}/\tilde{r}$ are monotone in x_i . For $p > 1$, this assumption is reasonable when a “severity” covariate is observed such that $\mu_{T,i}/r + \mu_{C,i}/\tilde{r}$ is monotone in this covariate; see also Kapelner et al. (2022) who discusses this assumption for binary response.

Consider the block designs with respect to this order as defined at the end of Section 3.1. Let k be the smallest possible block size (i.e., k is the smallest integer such that both $\frac{n_T}{2n}k$ and $\frac{n_C}{2n}k$ are integers). Theorem 3.3 implies that $BL(k)$ has the smallest mean MSE among block designs. Its proof can be found in Section A.6 of the Supplemental Material.

Theorem 3.3. *Consider the mean criterion given in Equation 8, then*

$$\mathbb{E}_{\mathbf{Z}_T, \mathbf{Z}_C} [\text{MSE}_{BL(k)} [\hat{\tau}]] \leq \mathbb{E}_{\mathbf{Z}_T, \mathbf{Z}_C} [\text{MSE}_{BL(m)} [\hat{\tau}]], \quad (11)$$

for all the vectors $\boldsymbol{\mu}$ that satisfy the order condition of Equation 10 and for any possible block size m where both $\frac{n_T}{2n}m$ and $\frac{n_C}{2n}m$ are integers.

Note that the inequality of Equation 11 is tight if $2n - 1$ of the entries in $\boldsymbol{\mu}$ are zero and the remaining entry is one, we get equality when $m = 1$ corresponding to the the iBCRD design. In the case of equal allocation, the minimum block size is $n_B = k = 2$ corresponding to the PM design.

3.3 The MSE's Tail

The *worst case MSE* design focuses on tail events and thus is too conservative and the *mean MSE* design is either intractable or might lead to idiosyncratic \mathbf{z}_t 's and \mathbf{z}_C 's that introduce large mean squared error with non-negligible probability. Our previous work proposed a tail criterion of MSE in the random quantities \mathbf{Z}_T and \mathbf{Z}_C that incorporates both the mean and tail events. We will see there is a fundamental trade-off: shrinking the mean MSE increases the tail risk of MSE.

Since MSE is by definition nonnegative, the right tail at a high quantile q (e.g. 95% or 99%) can be expressed as

$$Q := \text{Quantile}_{\mathbf{Z}_T, \mathbf{Z}_C} [\text{MSE}_{\mathbf{W}} [\hat{\tau}], q] = \mathbb{E}_{\mathbf{Z}_T, \mathbf{Z}_C} [\text{MSE}_{\mathbf{W}} [\hat{\tau}]] + c_{\mathbf{W}, q} \sqrt{\text{Var}_{\mathbf{Z}_T, \mathbf{Z}_C} [\text{MSE}_{\mathbf{W}} [\hat{\tau}]]}$$

where \mathbf{W} and q determine the constant $c_{\mathbf{W}, q}$. Using the expectation from Equation 8 and the variance term computed in Section A.7 in the Supplemental Material, we can express the tail criterion as

$$Q = \frac{1}{4n^2} \left(c_Z + \mathcal{B}_1 + c_{\mathbf{W}, q} \sqrt{r^2 \tilde{r}^2 \kappa_Z + 4(\mathcal{B}_2 + \mathcal{S}) + 2\mathcal{R}} \right) \quad (12)$$

where the κ_Z term is a scalar constant with respect to the design \mathbf{W} and a metric similar to the sum of excess kurtoses in the components of \mathbf{Z}_T and \mathbf{Z}_C (see Section A.7 of the Supplementary Material for its formal definition) and the four other terms are functions of the design described below.

$\mathcal{B}_1 := \boldsymbol{\mu}^\top \boldsymbol{\Sigma}_{\mathbf{W}} \boldsymbol{\mu}$ This is the active term in the MSE expression of Equation 8 which was explained as a squared difference or “imbalance” term capturing how different the observed covariates’ contribution to the response are between treatment and control groups. This term is unaffected by the distribution of the unobserved \mathbf{Z}_T and \mathbf{Z}_C .

$\mathcal{B}_2 := \boldsymbol{\mu}^\top \boldsymbol{\Sigma}_{\mathbf{W}} \boldsymbol{\Sigma}_Z \boldsymbol{\Sigma}_{\mathbf{W}} \boldsymbol{\mu}$ where $\boldsymbol{\Sigma}_Z := \text{Var}[\mathbf{Z}_T]/r + \text{Var}[\mathbf{Z}_C]/\tilde{r}$. This term is a squared difference or imbalance term weighted by the subject-specific variance terms. If all variances of the unobserved effects are bounded, this behaves similarly to term \mathcal{B}_1 as it is bounded above by a constant times \mathcal{B}_1 (see the proof of Theorem 3.6 below).

$\mathcal{S} := r\tilde{r}\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \boldsymbol{\gamma}_Z$ where $\boldsymbol{\gamma}_Z := \mathbb{E}[Z_T^3]/r + \mathbb{E}[Z_C^3]/\tilde{r}$, a constant with respect to the design. The term \mathcal{S} measures an average difference or imbalance between the responses in the two groups (a quantity not squared and hence has a sign) and weighted by the subject-specific skewnesses. If the distribution of the \mathbf{Z}_T and \mathbf{Z}_C are approximately symmetric, this term vanishes. Theorem 3.6 below shows that \mathcal{S} is asymptotically negligible for block designs.

$\mathcal{R} := \text{tr}[(\boldsymbol{\Sigma}_W \boldsymbol{\Sigma}_Z)^2]$ If all variances of the unobserved effects are the same, this term reduces to a constant times $\|\boldsymbol{\Sigma}_W\|_F^2$ which equals n when $\mathbf{W} = \text{CRD}$ (indicating maximal randomness) and equals n^2 when \mathbf{W} is a nearly deterministic mirrored pair of vectors (indicating the minimal randomness of the PB design). Thus, this term is a measure of the degree of randomness of the design. The $\boldsymbol{\Sigma}_Z$ factor emphasizes or deemphasizes randomness in certain subjects weighted by the subject-specific variance terms of \mathbf{Z}_T and \mathbf{Z}_C . For example, in the case of a binary response, subjects with $\mu_i \approx 50\%$ would have higher values of the variance of their unobserved terms than other subjects resulting in a higher contribution for their degree of randomness in this overall term.

Although the design also affects the constant $c_{\mathbf{W},q}$, it seems to remain more or less constant with respect to a certain quantile. This constant's role is to emphasize or deemphasize the contribution of the three terms \mathcal{B}_2 , \mathcal{S} , \mathcal{R} vis-a-vis term \mathcal{B}_1 . We henceforth consider $c_{\mathbf{W},q}$ as a fixed number and thus denote it by c hereafter. It is helpful during our theoretical exploration to define a shifted and scaled quantity of the tail criterion $\tilde{Q} = 4n^2Q - c_Z$,

$$\tilde{Q} = \mathcal{B}_1 + c \times \sqrt{r^2 \tilde{r}^2 \kappa_Z + 4(\mathcal{B}_2 + \mathcal{S}) + 2\mathcal{R}}. \quad (13)$$

The minimization of Q is equivalent to minimization of \tilde{Q} . However, this minimization $\mathbf{W}_*|q := \arg \min_{\mathbf{W} \in \mathcal{W}} \{\tilde{Q}(q)\}$ (i.e., the optimal design for the tail criterion as a function of q) is *impossible* to compute as $c_Z, c_{\mathbf{W},q}, \kappa_Z, \boldsymbol{\mu}_T, \boldsymbol{\mu}_C, \boldsymbol{\Sigma}_Z$ and $\boldsymbol{\gamma}_Z$ are unknown. And even if they were to be known, the problem would still be computationally intractable.

We instead focus on an asymptotic analysis of the terms of \tilde{Q} . For all designs, $c_Z = \kappa_Z = O(n)$ as they are sums of subject-specific constants. The terms \mathcal{B}_1 , \mathcal{B}_2 , \mathcal{S} and \mathcal{R} are design-specific and thus under the experimenter's control.

Our results are organized as follows. We first locate the asymptotic lower bound of \tilde{Q} providing a definition of asymptotic optimality in Section 3.3.1. We then asymptotically analyze select designs beginning with i/BCRD (representing “pure” randomness) in Section 3.3.2 and PB (representing “pure” deterministic optimization) in Section 3.3.3. These two designs were found to be optimal for the worst case MSE criterion (Section 3.1) and the mean MSE criterion (Section 3.2) respectively but we show neither are optimal when gauged by the tail criterion \tilde{Q} . We then prove that the optimal tail design must lie between these two extremes of pure randomness and pure optimization in Section 3.3.4. We then prove in Section 3.3.5 that Fisher's blocking design with number of blocks on the order between $n^{1/4}$ and n achieves the lower bound and hence an asymptotically optimal design.

3.3.1 An Asymptotic Lower Bound for the Tail Criterion for Any Design

To prove the lower bound, we first assume the following standard three boundedness conditions of the moments of the Z_i 's. Let $\boldsymbol{\rho}$ denote the vector of the diagonal entries in Σ_Z .

Assumption 3.1. *The entries of $\boldsymbol{\rho}$ are bounded above by \bar{C}_ρ and below by \underline{C}_ρ for some positive constants $\underline{C}_\rho, \bar{C}_\rho$ and $\frac{1}{2n}\|\boldsymbol{\rho}\|^2 \rightarrow \bar{\rho}$ for some positive constant $\bar{\rho}$.*

Assumption 3.2. *$\frac{1}{2n}\|\boldsymbol{\gamma}_Z\|^2 \leq C_\gamma$ for some positive constant C_γ .*

Assumption 3.3. *$\frac{1}{2n}\kappa_Z \rightarrow \bar{\kappa}_Z$ for some constant $\bar{\kappa}_Z$.*

In Section A.8 of the Supplementary Material, we prove the following result.

Theorem 3.4. *Under Assumptions 3.1–3.3,*

$$\liminf_{n \rightarrow \infty} \frac{1}{\sqrt{n}} \tilde{Q} \geq cr\tilde{r}\sqrt{2(\bar{\kappa}_Z + 2\bar{\rho})}. \quad (14)$$

To get some intuition about the lower bound of Equation 14, notice that for i/BCRD, $\frac{\mathcal{R}}{n} \rightarrow 2r^2\tilde{r}^2\bar{\rho}$. Thus, a design attains the lower bound of Equation 14, if it is asymptotically as random as i/BCRD, and the balance terms \mathcal{B}_1 and \mathcal{B}_2 (as well as \mathcal{S}) are asymptotically negligible. In Theorem 3.6 below we show that block designs with a few number of blocks attains the lower bound under some additional conditions.

3.3.2 The Tail Criterion under i/BCRD

By the arguments in Section A.10 of the Supplementary Material, $\mathcal{B}_1 = O(n)$, $\mathcal{R} = O(n)$ (Equation 31), $\mathcal{B}_2 = O(n)$ (Equation 29) and $|\mathcal{S}| = O(n)$ (Equation 30) where the first two results are also found in Section 2.2.7 of our previous work for the homoscedastic case. It follows that under i/BCRD the dominant term in \tilde{Q} (Equation 13) is \mathcal{B}_1 , which is $O(n)$.

3.3.3 The Tail Criterion under PB

In the case of equal allocation, the *PB* design is composed of a single \mathbf{w}_* and its mirror $-\mathbf{w}_*$ that both uniquely minimize $|(\boldsymbol{\mu}_T + \boldsymbol{\mu}_C)^\top \mathbf{w}|$. Here, $\mathcal{B}_1 = O(n^3 2^{-2n})$ as shown in Kallus (2018, Section 3.3) and $\mathcal{R} = O(n^2)$ as shown in Section A.9 of the Supplementary Material. Furthermore, \mathcal{B}_2 is of the same order of \mathcal{B}_1 (Equation 29) and $|\mathcal{S}| \leq \sqrt{O(n)\mathcal{B}_1}$ (Equation 30) as also shown in Section A.9 of the Supplementary Material. Thus, under PB the dominant term in \tilde{Q} (Equation 13) is $\sqrt{\mathcal{R}}$, which is $O(n)$. Thus, PB has the same asymptotic performance as i/BCRD.

3.3.4 The Asymptotically Optimal Design Harmonizes These Two Extreme Designs

In Section A.9 of the Supplementary Material, we prove the following result.

Theorem 3.5. *Under Assumptions 3.1–3.3 and under equal allocation, we have that under both i/BCRD and PB, $\frac{1}{\sqrt{n}}\tilde{Q} \rightarrow \infty$*

Theorem 3.5 implies that the asymptotically optimal tail criterion design of (Equation 12), if it exists, must be less imbalanced / less random than i/BCRD (i.e. the orders of \mathcal{B}_1 and \mathcal{B}_2 must increase slower than the rate n) and more imbalanced / more random than PB (i.e. the order of \mathcal{R} must increase slower than the rate n^2).

3.3.5 The Asymptotically Optimal Block Design

We now study the quantile MSE criterion under the set of block designs with number of blocks B similar to the previous two sections. We aim to locate the optimal B as a function of n that minimizes (asymptotically) the quantile criterion.

To prove our results we make two assumptions about blocking designs and provide intuition that motivates these assumptions.

Assumption 3.4. $\mathcal{B}_1 \approx n/B^2$ and if $\frac{B}{n^{1/4}} \rightarrow 1$ then $\mathcal{B}_1 \rightarrow C_{\mathcal{B}_1}$ for some constant $C_{\mathcal{B}_1}$.

The notation $a_n \approx b_n$ denotes that the limit of a_n/b_n is finite and positive. Assumption 3.4 is motivated by noticing that

$$\sum_{i=1}^{n_B} (v_{b,i} - \bar{v}_b)^2 \approx \frac{n}{B^3} \quad (15)$$

where \mathbf{v}_b is the sub-vector of \mathbf{v} that corresponds to the b -th block is reasonable. This is because for $b = 1$ (and similarly for the other block sizes) $v_{1,1}, \dots, v_{1,n_B}$ are in $[0, v_{n_B}]$ and $v_{n_B} \approx M/B$ if the v 's are ordered approximately uniformly in $[0, M]$. Therefore, the sample variance satisfies

$$\frac{1}{n_B} \sum_{i=1}^{n_B} (v_{1,i} - \bar{v}_1)^2 \approx \frac{1}{B^2},$$

and since $n_B = 2n/B$, Equation 15 follows. Equation 15 implies Assumption 3.4 because under block designs we have that

$$\mathcal{B}_1 = \mathbf{v}^\top \Sigma_W \mathbf{v} = r\tilde{r} \sum_{b=1}^B \mathbf{v}_b^\top \mathbf{B} \mathbf{v}_b,$$

where $\mathbf{B} = \frac{n_B}{n_B-1} \mathbf{I}_{n_B} - \frac{1}{n_B-1} \mathbf{J}_{n_B}$. We have that $\mathbf{B}\mathbf{1} = \mathbf{0}$, therefore,

$$\mathbf{v}_b^\top \mathbf{B} \mathbf{v}_b = (\mathbf{v}_b - \mathbf{1}\bar{v}_b)^\top \mathbf{B} (\mathbf{v}_b - \mathbf{1}\bar{v}_b) = \frac{n_B}{n_B-1} \sum_{i=1}^{n_B} (v_{b,i} - \bar{v}_b)^2 \approx \frac{n_B}{n_B-1} \frac{n}{B^3},$$

where the last approximation comes from Equation 15. Hence,

$$\mathcal{B}_1 = r\tilde{r} \sum_{b=1}^B \mathbf{v}_b^\top \mathbf{B} \mathbf{v}_b \approx B \frac{n_B}{n_B-1} \frac{n}{B^3} \approx \frac{n}{B^2},$$

where the last equality is true because $1 \leq \frac{n_B}{n_B-1} \leq 2$.

Assumption 3.5. $\frac{B\boldsymbol{\rho}^T\boldsymbol{\Sigma}_W\boldsymbol{\rho}}{n^2} \rightarrow 0$.

When B is of smaller order than n , then Assumption 3.5 holds true because

$$\frac{B\boldsymbol{\rho}^T\boldsymbol{\Sigma}_W\boldsymbol{\rho}}{n^2} \leq \frac{B\lambda_{\max}(\boldsymbol{\Sigma}_W)\|\boldsymbol{\rho}\|^2}{n^2} = \frac{Br\tilde{r}\frac{n_B}{n_B-1}\|\mathbf{v}\|^2}{n^2} \leq \frac{2r\tilde{r}B\|\mathbf{v}\|^2}{n^2} \rightarrow 0.$$

If $B/n \rightarrow \alpha \in (0, 1]$, then the v 's are balanced by the design in the sense that $\mathbf{v}^T\boldsymbol{\Sigma}_W\mathbf{v} \approx 1/n$. If the second moments $\boldsymbol{\rho}$ are correlated with the first moments \mathbf{v} , then it is expected that $\boldsymbol{\rho}^T\boldsymbol{\Sigma}_W\boldsymbol{\rho}$ will be small. In fact it enough to require that $\boldsymbol{\rho}^T\boldsymbol{\Sigma}_W\boldsymbol{\rho} = o(n)$ for Assumption 3.5 to hold. In the homoskedastic case, Assumption 3.5 is always true because then $\boldsymbol{\rho} = \sigma^2\mathbf{1}$ and thus $\boldsymbol{\rho}^T\boldsymbol{\Sigma}_W\boldsymbol{\rho} = 0$. The main result is now given and is proven in Section A.10 of the Supplementary Material.

Theorem 3.6. *Under Assumptions 3.1–3.5,*

- (i) *If $\frac{B}{n^{1/4}} \rightarrow 0$, then $\frac{1}{\sqrt{n}}\tilde{Q} \rightarrow \infty$.*
- (ii) *If $\frac{B}{n^{1/4}} \rightarrow 1$, then $\frac{1}{\sqrt{n}}\tilde{Q} \rightarrow C_{\mathcal{B}_1} + cr\tilde{r}\sqrt{2(\bar{\kappa}_Z + 2\bar{\rho})}$.*
- (iii) *If $\frac{B}{n^{1/4}} \rightarrow \infty$ and $\frac{B}{n} \rightarrow 0$, then $\frac{1}{\sqrt{n}}\tilde{Q} \rightarrow cr\tilde{r}\sqrt{2(\bar{\kappa}_Z + 2\bar{\rho})}$.*
- (iv) *If $\frac{B}{n} \rightarrow \alpha$, for $\alpha \in (0, 1]$, then $\frac{1}{\sqrt{n}}\tilde{Q} \rightarrow cr\tilde{r}\sqrt{2\left(\bar{\kappa}_Z + 2\bar{\rho}\frac{1}{1-\alpha/2}\right)}$.*

Theorem 3.6(iii) implies that block designs with $B/n^{1/4} \rightarrow \infty$ and $B/n \rightarrow 0$ are asymptotically optimal for the tail criterion i.e. it obtains the lower bound of Equation 14.

Assumption 3.4 is reasonable when the v_i 's are ordered and are approximately uniform. If this is not the case, it is expected that \mathcal{B}_1 decreases slower with B , and then the optimal block size might be of larger order than $n^{1/4}$. For example, if $\mathcal{B}_1 \approx n/B$ (instead of n/B^2), then similar arguments used to prove Theorem 3.6 will instead imply that the optimal block size B satisfies $B/n^{1/2} \rightarrow \infty$ and $B/n \rightarrow 0$.

Even if the v_i 's are not ordered and not approximately uniform, in order for block designs to attain the lower bound it is enough to require that there exists a block design with $B/n \rightarrow 0$ such that its balance term \mathcal{B}_1 is $o(\sqrt{n})$, which is much weaker than Assumption 3.4.

4 Simulations

We simulate under a variety of scenarios to verify the performance of the simple estimator (Equation 3) under the tail criterion (Equation 12) comports with the results of Theorem 3.6 for blocking designs of varying block sizes across all response types. We simulate under equal allocation and unequal allocation where $n_C/n_T = 2$.

The sample size simulated is $2n = 96$ so that we have both a realistically-sized experiment and a wide variety of homogeneously-sized blocking designs, $B \in \{1, 2, 3, 4, 6, 8, 12, 16, 24, 48\}$ for equal allocation and $B \in \{1, 2, 4, 8, 16, 32\}$ for the unequal allocation of two controls for every treatment. We simulate under a number of different covariates $p \in \{1, 2, 5\}$.

We use all five common response types: continuous, incidence, proportion, count and survival. All response mean models are GLMs and hence contain an internal linear component $\mu_i := \beta_0 + \beta_1 x_{i,1} + \dots + \beta_p x_{i,p}$ (see columns 3 and 4 of Table 1). The values of the covariate coefficients are kept constant for all response types: all $\beta = [+1/5 \ -1/5 \ +1/5 \ -1/5 \ +1/5]$ and $\beta_0 = -1/5$. One set of fixed covariates are drawn for each pair of response type and number of covariates p . Covariate values are always drawn iid and response values are always drawn independently. Covariate distributions, response distributions and other response parameters are found in Table 2.


| Response type name | Covariate Distribution | Response Distribution | Response Parameters |
|--------------------|------------------------|--|---------------------|
| Continuous | $U(-1, 1)$ | $\mathcal{N}(\mu_i, \sigma^2)$ | $\sigma = 1$ |
| Incidence | $U(-3, 3)$ | Bernoulli (μ_i) | N/A |
| Proportion | $U(-1, 1)$ | Beta ($\phi\mu_i, \phi(1 - \mu_i)$) | $\phi = 2$ |
| Count | $U(-1, 1)$ | Poisson (μ_i) | N/A |
| Survival | $U(-1, 1)$ | Weibull ($\mu_i/\Gamma(1 + 1/k), k$) | $k = 4$ |

Table 2: Simulation settings and parameters.


The tail criterion is computed on the distribution of the MSE over $\mathbf{Z}_T, \mathbf{Z}_C$. To approximate this quantile, we generate $N_y := 100,000$ pairs $\mathbf{y}_T, \mathbf{y}_C$ using draws from the response distribution (and hence implicitly draw pairs $\mathbf{z}_T, \mathbf{z}_C$). Using these draws, we compute \mathbf{v} and then can exactly compute the MSE via the quadratic form of Equation 4. (The entries of Σ_W are for each block design specified by the specific B). We approximate the $q = .95$ tail criterion using the empirical 95th percentile of the N_y MSE values.

For our theoretical results to hold for block designs, the subjects (and thus the entries of \mathbf{v}) must be ordered in blocks corresponding to the block-diagonal structure of Σ_W . For $p = 1$, simply ordering the subjects in the order of the one covariate measurement satisfies this requirement for all B . For $p > 1$, block designs were constructed as a function of the first two covariates (as the number of blocks increases exponentially in p , a common problem in experimental practice). We approximate an optimal block design for two covariates by first ordering the subjects by the first covariate. Then within blocks of size $2n_B$, we sort by the second covariate. Thus, we emphasize, simulation results for $p > 1$ will be approximate.

The $q = .95$ results for equal allocation are presented in Figure 1a. We can see that for $p = 1$ and all response types, $B \in \{2, 4, 8\}$ are the best-performing designs. As $n^{1/4} \approx 3.4$ and $n^{1/2} \approx 11.3$, four blocks and eight blocks reasonably comport with this order of magnitude. This empirical result also vindicates the assumptions made about the blocking design (Assumptions 3.4 and 3.5) and additionally demonstrates the asymptotic results apply in the realistic experimental sample size of $n \approx 100$. For $p > 1$, our theorems do not exactly apply as the v_i 's are not precisely ordered into the blocks, but only approximately blocked by the arrangement of two covariates. Notwithstanding, the results for $p > 1$ overall demonstrate the robustness of our theoretical results to situations of imperfect blocking; and imperfect blocking is the blocking designs employed in real-world experiments. Figure 1b shows the results for unequal allocation where treatment is administered to 1/3 of the subjects. Here, we see the same picture as in the equal allocation simulation as our theory predicts.

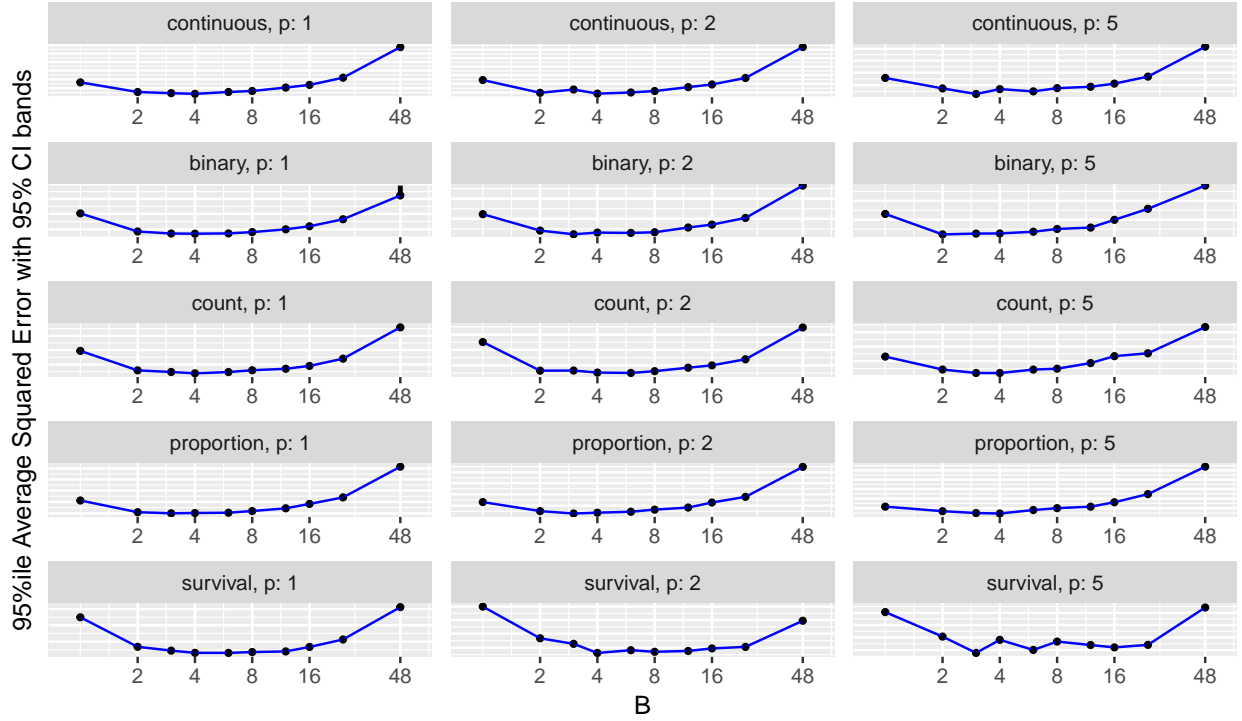

(a) Equal Allocation

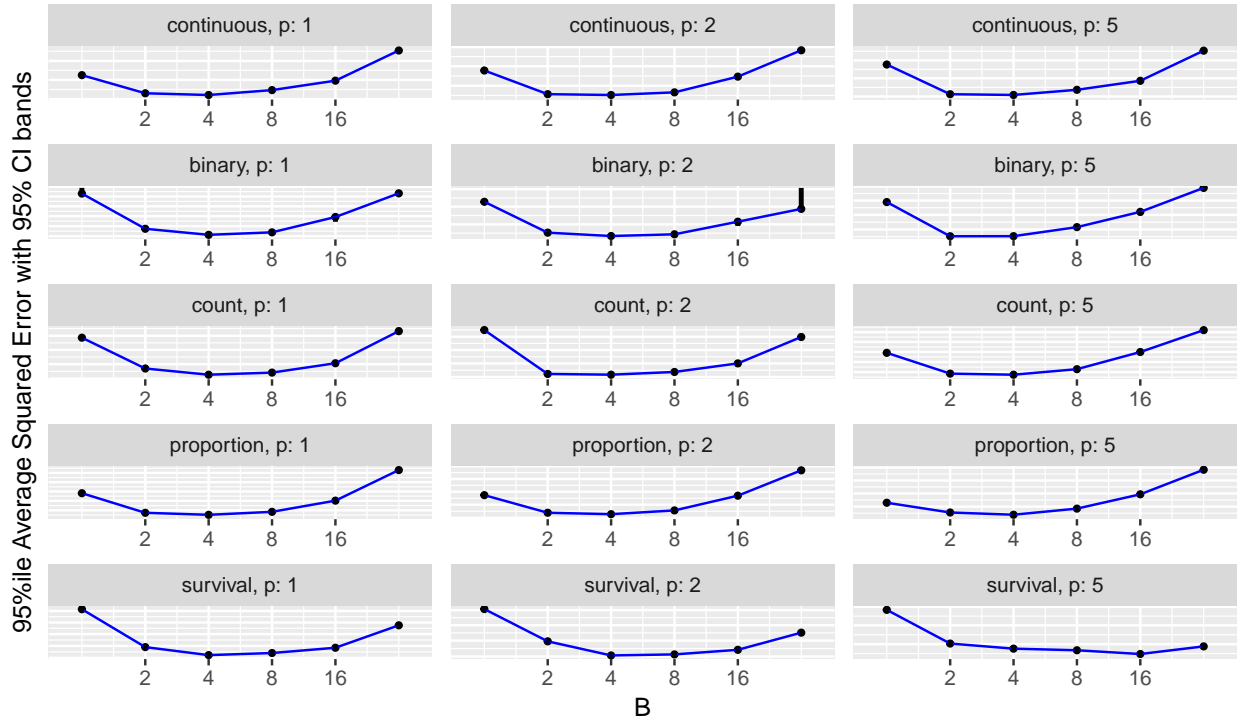

(b) Unequal Allocation ($T:C = 2:1$)

Figure 1: Simulated 95%ile MSE Tails, $n = 96$, $p = 1, 2, 5$, all response types and all appropriate block sizes. The y-axis is relative to simulation and thus its values are unshown.

5 Discussion

Randomized experimentation comes with a choice to the experimenter: how to randomize exactly? Should this choice differ depending on the experimental response metric? One extreme position is full randomization independent of subjects’ covariate imbalance across arms. This is seldom done as imbalance among the arms means a highly visible risk of bias. However, we prove herein that if the experimenter is concerned with the worst possible configuration of unobserved covariates, complete randomization is the optimal design for all response types. Another extreme is to find one perfect assignment that minimizes covariate imbalance across arms. However, we prove herein that *only* if one assumes we can average over the unmeasured covariates, this deterministic allocation would be the optimal design for all response types under equal allocation. But this is still unrealistic in practice; that optimal allocation would be impossible to locate as for the vast majority of covariate-response models, knowing the covariate parameters and functional form is required. Even if the parameters and functional form were to be known, the problem would be NP-hard and thus only able to be approximated. And further, random assignments provide insurance against the effect of unmeasured covariates.

Both extremes are seldom done in practice. Commonly employed designs are in the “middle” of these two extremes; they sacrifice randomness for imbalance reduction. How to harmonize these two considerations for a continuous response and equally allocation to rigorously choose a design was the subject of our previous work where we proposed the “quantile tail criterion”, a metric on designs that reveals how the degree of randomness and degree of imbalance reduction trade off with one another within a design. Herein, we derive the quantile tail criterion for general response types. We then prove that the asymptotically optimal design is achieved with a block design with very few blocks (on the order of more than $n^{1/4}$ and less than n). Blocking with few blocks is an intuitive imbalance-reducing idea proposed by Fisher nearly 100 years ago and is one of the most popular designs employed today in clinical trials. This work vindicates this common practice for all common response types by analyzing its performance from a new angle and demonstrating that blocking is the optimal design harmonizing the degree of randomness and imbalance reduction. Although this work focuses on estimation, these blocking designs should have high power as well as many allocations can be generated which are highly independent (Krieger et al., 2020).

There are many other avenues to explore. First, although we proved that blocking with few blocks are asymptotically optimal, we did not prove it is uniquely optimal. Other designs may also satisfy the lower bound of Equation 14 and offer better finite sample properties. Other optimal designs are additionally of profound importance because blocking suffers from the curse of dimensionality: it can only handle $p \leq 3$ in practice and also requires arbitrary cut-points if the feature is continuous. Further, our definition of the blocking design has strong assumptions (Assumptions 3.4 and 3.5) that are needed to prove its asymptotic optimality. These assumptions appear to be ostensibly realistic as demonstrated by the simulations. However, we can explore proving the results under weaker assumptions. Another area of exploration could be understanding the tail criterion for other designs such as rerandomization and greedy pair switching. Additionally, survival is an important experimental endpoint in clinical trials but this work only considered uncensored survival measurement while the vast majority of survivals collected in real-world experiments are

censored. Also, We did not investigate the distribution of the v_i 's relative to the optimal block size and we believe this can be a source of fruitful future work. In our previous work (Section 2.3), we explored the ordinary least squares estimator. This avenue would be difficult to explore for general response types as the analogous estimators do not have closed form (e.g. if the response is binary, the multivariate logistic regression estimates are the result of computational iteration). It is our intuition the theorems found herein would extend to these commonly used covariate-controlled estimators, but more work is necessary. Finally, our tail criterion is only one metric that combines mean and standard deviation of MSE. Other criteria can be explored e.g. a tail simultaneous in allocation and unmeasured covariates, the ratio of mean to standard deviation (the coefficient of variation), etc. Also, work can be done to find the optimal imbalance design under unequal allocation, the analogue of PB in equal allocation (see discussion below Equation 9).

Acknowledgments

This research was supported by Grant No 2018112 from the United States-Israel Binational Science Foundation (BSF).

References

- Bertsimas, D., Johnson, M., and Kallus, N. (2015). The power of optimization over randomization in designing experiments involving small samples. *Operations Research*, 63(4):868–876.
- Chattopadhyay, A., Morris, C. N., and Zubizarreta, J. R. (2022). Balanced and robust randomized treatment assignments: the finite selection model. *arXiv preprint arXiv:2205.09736*.
- Cornfield, J. (1959). Principles of research. *American journal of mental deficiency*, 64:240–252.
- Dumville, J., Hahn, S., Miles, J., and Torgerson, D. (2006). The use of unequal randomisation ratios in clinical trials: a review. *Contemporary clinical trials*, 27(1):1–12.
- Feng, C. and Hu, F. (2018). Optimal responses-adaptive designs based on efficiency, ethic, and cost. *Statistics and Its Interface*, 11(1):99–107.
- Fisher, R. A. (1925). *Statistical methods for research workers*. Edinburgh Oliver & Boyd.
- Fisher, R. A. (1935). *The Design of Experiments*. Oliver and Boyd, 1 edition.
- Freedman, D. A. (2008). On regression adjustments to experimental data. *Advances in Applied Mathematics*, 40(2):180–193.
- Greevy, R., Lu, B., Silber, J. H., and Rosenbaum, P. (2004). Optimal multivariate matching before randomization. *Biostatistics*, 5(2):263–275.

- Harshaw, C., Sävje, F., Spielman, D., and Zhang, P. (2019). Balancing covariates in randomized experiments with the gram–schmidt walk design. *arXiv preprint arXiv:1911.03071*.
- Harville, D. A. (1975). Experimental randomization: Who needs it? *The American Statistician*, 29(1):27–31.
- Imbens, G. W. and Rubin, D. B. (2015). *Causal inference in statistics, social, and biomedical sciences*. Cambridge University Press.
- Kallus, N. (2018). Optimal a priori balance in the design of controlled experiments. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, 80(1):85–112.
- Kapelner, A., Krieger, A. M., and Azriel, D. (2022). The role of pairwise matching in experimental design for an incidence outcome. *arXiv preprint arXiv:2209.00490*.
- Kapelner, A., Krieger, A. M., Sklar, M., Shalit, U., and Azriel, D. (2021). Harmonizing optimized designs with classic randomization in experiments. *The American Statistician*, 75(2):195–206.
- Kiefer, J. and Wolfowitz, J. (1959). Optimum designs in regression problems. *The Annals of Mathematical Statistics*, pages 271–294.
- Krieger, A. M., Azriel, D., and Kapelner, A. (2019). Nearly random designs with greatly improved balance. *Biometrika*, 106(3):695–701.
- Krieger, A. M., Azriel, D., Sklar, M., and Kapelner, A. (2020). Improving the power of the randomization test. *arXiv preprint arXiv:2008.05980*.
- Lachin, J. M. (1988). Properties of simple randomization in clinical trials. *Controlled clinical trials*, 9(4):312–326.
- Land, A. H. and Doig, A. G. (1960). An automatic method of solving discrete programming problems. *Econometrica: Journal of the Econometric Society*, pages 497–520.
- Li, X., Ding, P., and Rubin, D. B. (2018). Asymptotic theory of rerandomization in treatment–control experiments. *Proceedings of the National Academy of Sciences*, 115(37):9157–9162.
- Lin, W. (2013). Agnostic notes on regression adjustments to experimental data: Reexamining freedman’s critique. *The Annals of Applied Statistics*, 7(1):295–318.
- Morgan, K. L. and Rubin, D. B. (2012). Rerandomization to improve covariate balance in experiments. *The Annals of Statistics*, pages 1263–1282.
- Nam, J.-M. (1973). Optimum sample sizes for the comparison of the control and treatment. *Biometrics*, pages 101–108.
- Nordin, M. and Schultzberg, M. (2022). Properties of restricted randomization with implications for experimental design. *Journal of Causal Inference*, 10(1):227–245.

- Rosenberger, W. F. and Lachin, J. M. (2016). *Randomization in clinical trials: theory and practice*. John Wiley & Sons, second edition.
- Rubin, D. B. (2005). Causal inference using potential outcomes: Design, modeling, decisions. *Journal of the American Statistical Association*, 100(469):322–331.
- Ryeznic, Y. and Sverdlov, O. (2018). A comparative study of restricted randomization procedures for multiarm trials with equal or unequal treatment allocation ratios. *Statistics in Medicine*, 37(21):3056–3077.
- Senn, S. (2013). Seven myths of randomisation in clinical trials. *Statistics in Medicine*, 32(9):1439–1450.
- Smith, K. (1918). On the standard deviations of adjusted and interpolated values of an observed polynomial function and its constants and the guidance they give towards a proper choice of the distribution of observations. *Biometrika*, 12(1/2):1–85.
- Steinberg, D. M. and Hunter, W. G. (1984). Experimental design: review and comment. *Technometrics*, 26(2):71–97.
- Student (1938). Comparison between balanced and random arrangements of field plots. *Biometrika*, pages 363–378.
- Sverdlov, O. and Ryeznic, Y. (2019). Implementing unequal randomization in clinical trials with heterogeneous treatment costs. *Statistics in Medicine*, 38(16):2905–2927.
- Teugels, J. L. (1990). Some representations of the multivariate bernoulli and binomial distributions. *Journal of multivariate analysis*, 32(2):256–268.
- Torgerson, D. and Campbell, M. (1997). Unequal randomisation can improve the economic efficiency of clinical trials. *Journal of Health Services Research & Policy*, 2(2):81–85.
- Tymofeyev, Y., Rosenberger, W. F., and Hu, F. (2007). Implementing optimal allocation in sequential binary response experiments. *Journal of the American Statistical Association*, 102(477):224–234.
- Wong, W. K. and Zhu, W. (2008). Optimum treatment allocation rules under a variance heterogeneity model. *Statistics in Medicine*, 27(22):4581–4595.
- Wu, C. F. (1981). On the robustness and efficiency of some randomized designs. *The Annals of Statistics*, pages 1168–1177.
- Zhu, K. and Liu, H. (2021). Pair-switching rerandomization. *arXiv preprint arXiv:2103.13051*.

Supplementary Information for
 “The Optimality of Blocking Designs in Equally and
 Unequally Allocated Randomized Experiments with
 General Response”

A Technical Proofs

A.1 Estimator Computation

To compute the estimator we begin with:

$$\begin{aligned}\hat{\tau} &:= \bar{Y}_T - \bar{Y}_C \\ &= \frac{1}{n_T} \frac{(\mathbf{1}_n + \mathbf{W})^\top}{2} \mathbf{Y} - \frac{1}{n_C} \frac{(\mathbf{1}_n - \mathbf{W})^\top}{2} \mathbf{Y} \\ &= \frac{1}{2} \left(\frac{(\mathbf{1}_n + \mathbf{W})}{n_T} - \frac{(\mathbf{1}_n - \mathbf{W})}{n_C} \right)^\top \mathbf{Y}\end{aligned}$$

We now substitute for \mathbf{Y} from Equation 1. To simplify the notation, let $\mathbf{v} := \mathbf{y}_T + \mathbf{y}_C$ which is slightly different than the notation in the main text, $v_0 := \mathbf{1}_{2n}^\top \mathbf{v}$, $y_{T,0} := \mathbf{1}_n^\top \mathbf{y}_T$ and $y_{C,0} := \mathbf{1}_{2n}^\top \mathbf{y}_C$.

$$\begin{aligned}\hat{\tau} &= \frac{1}{4} \left(\frac{(\mathbf{1}_n^\top + \mathbf{W}^\top)^\top}{n_T} - \frac{(\mathbf{1}_n^\top - \mathbf{W}^\top)^\top}{n_C} \right) (\mathbf{v} + \text{Diag}[\mathbf{W}] (\mathbf{y}_T - \mathbf{y}_C)) \\ &= \frac{1}{4} \left(\frac{(v_0 + \mathbf{W}^\top \mathbf{v})}{n_T} - \frac{(v_0 - \mathbf{W}^\top \mathbf{v})}{n_C} + \left(\frac{\mathbf{1}_n^\top + \mathbf{W}^\top}{n_T} - \frac{\mathbf{1}_n^\top - \mathbf{W}^\top}{n_C} \right) \text{Diag}[\mathbf{W}] (\mathbf{y}_T - \mathbf{y}_C) \right) \\ &= \frac{1}{4} \left(\frac{(v_0 + \mathbf{W}^\top \mathbf{v})}{n_T} - \frac{(v_0 - \mathbf{W}^\top \mathbf{v})}{n_C} + \left(\frac{\mathbf{W}^\top + \mathbf{1}_n^\top}{n_T} - \frac{\mathbf{W}^\top - \mathbf{1}_n^\top}{n_C} \right) (\mathbf{y}_T - \mathbf{y}_C) \right) \\ &= \frac{1}{4} \left(\frac{(v_0 + \mathbf{W}^\top \mathbf{v})}{n_T} - \frac{(v_0 - \mathbf{W}^\top \mathbf{v})}{n_C} + \frac{\mathbf{W}^\top \mathbf{y}_T + y_{T,0}}{n_T} - \frac{\mathbf{W}^\top \mathbf{y}_T - y_{T,0}}{n_C} - \frac{\mathbf{W}^\top \mathbf{y}_C + y_{C,0}}{n_T} + \frac{\mathbf{W}^\top \mathbf{y}_C - y_{C,0}}{n_C} \right) \\ &= \frac{1}{4} \left(\frac{v_0 + \mathbf{W}^\top \mathbf{v} + \mathbf{W}^\top \mathbf{y}_T + y_{T,0} - \mathbf{W}^\top \mathbf{y}_C - y_{C,0}}{n_T} + \frac{-v_0 + \mathbf{W}^\top \mathbf{v} - \mathbf{W}^\top \mathbf{y}_T + y_{T,0} + \mathbf{W}^\top \mathbf{y}_C - y_{C,0}}{n_C} \right) \\ &= \frac{1}{4} \left(\frac{v_0 + y_{T,0} - y_{C,0}}{n_T} + \frac{-v_0 + y_{T,0} - y_{C,0}}{n_C} + \frac{\mathbf{W}^\top (\mathbf{v} + \mathbf{y}_T - \mathbf{y}_C)}{n_T} + \frac{\mathbf{W}^\top (\mathbf{v} - \mathbf{y}_T + \mathbf{y}_C)}{n_C} \right) \\ &= \frac{1}{4} \left(\frac{2y_{T,0}}{n_T} + \frac{-2y_{C,0}}{n_C} + \mathbf{W}^\top \left(\frac{2\mathbf{y}_T}{n_T} + \frac{2\mathbf{y}_C}{n_C} \right) \right) \\ &= \frac{1}{2} \left(\frac{y_{T,0}}{n_T} - \frac{y_{C,0}}{n_C} + \mathbf{W}^\top \left(\frac{\mathbf{y}_T}{n_T} + \frac{\mathbf{y}_C}{n_C} \right) \right) \\ &= \frac{1}{2} \left(\mathbf{1}_{2n}^\top \left(\frac{\mathbf{y}_T}{n_T} - \frac{\mathbf{y}_C}{n_C} \right) + \mathbf{W}^\top \left(\frac{\mathbf{y}_T}{n_T} + \frac{\mathbf{y}_C}{n_C} \right) \right)\end{aligned}$$

$$= \frac{1}{2n} \left(\mathbf{1}_{2n}^\top \left(\frac{\mathbf{y}_T}{r} - \frac{\mathbf{y}_C}{\tilde{r}} \right) + \mathbf{W}^\top \left(\frac{\mathbf{y}_T}{r} + \frac{\mathbf{y}_C}{\tilde{r}} \right) \right)$$

A.2 Unbiasedness of the Estimator

Under Assumption 2.2,

$$\begin{aligned} \mathbb{E}_{\mathbf{W}} [\hat{\tau}] &= \frac{1}{2} \left(\mathbf{1}_n^\top \left(\frac{\mathbf{y}_T}{n_T} - \frac{\mathbf{y}_C}{n_C} \right) + \frac{n_T - n_C}{2n} \mathbf{1}^\top \left(\frac{\mathbf{y}_T}{n_T} + \frac{\mathbf{y}_C}{n_C} \right) \right) \\ &= \frac{1}{2} \mathbf{1}_n^\top \left(\frac{\mathbf{y}_T}{n_T} - \frac{\mathbf{y}_C}{n_C} + \frac{n_T - n_C}{2n} \left(\frac{\mathbf{y}_T}{n_T} + \frac{\mathbf{y}_C}{n_C} \right) \right) \\ &= \frac{1}{2} \mathbf{1}_n^\top \left(\mathbf{y}_T \left(\frac{1}{n_T} + \frac{n_T - n_C}{2nn_T} \right) + \mathbf{y}_C \left(-\frac{1}{n_C} + \frac{n_T - n_C}{2nn_C} \right) \right) \\ &= \frac{1}{2} \mathbf{1}_n^\top \left(\mathbf{y}_T \frac{n + n_T - n_C}{2nn_T} + \mathbf{y}_C \frac{-n + n_T - n_C}{2nn_C} \right) \\ &= \frac{1}{2} \mathbf{1}_n^\top \left(\mathbf{y}_T \frac{2n_T}{2nn_T} + \mathbf{y}_C \frac{-2n_C}{2nn_C} \right) \\ &= \frac{1}{2n} \mathbf{1}_n^\top (\mathbf{y}_T - \mathbf{y}_C) = \tau \quad \blacksquare \end{aligned}$$

A.3 i/BCRD is Minimax for Continuous Response

The maximum of the quadratic form of Equation 7 is $\lambda_{\max}(\Sigma_W) \|\mathbf{v}\|^2$. The form of Σ_W for the i/BCRD design is crucial to understand thus we compute it now.

For two subjects i and j the joint PMF of their assignments is:

$$\begin{aligned} \mathbb{P}(W_i = +1, W_j = +1) &= \frac{n_T(n_T - 1)}{2n(2n - 1)} \\ \mathbb{P}(W_i = +1, W_j = -1) = \mathbb{P}(W_i = -1, W_j = +1) &= \frac{n_T n_C}{2n(2n - 1)} \\ \mathbb{P}(W_i = -1, W_j = -1) &= \frac{n_C(n_C - 1)}{2n(2n - 1)} \end{aligned}$$

Letting $b := (n_T - n_C)^2 / (2n)^2$ we first compute the diagonal entries of Σ_W :

$$\begin{aligned} \mathbb{E}[W_i] &= \frac{n_T - n_C}{2n} = \frac{r - \tilde{r}}{2} = \sqrt{b} \\ \mathbb{E}[W_i^2] &= \frac{n_T}{2n} + \frac{n_C}{2n} = \frac{r + \tilde{r}}{2} = 1 \\ \mathbb{V}\text{ar}[W_i] &= 1 - b = \frac{n_T n_C}{n^2} = r\tilde{r} \end{aligned} \tag{16}$$

Note that the above is valid for any design that satisfies Assumption 2.2. We then compute the off-diagonal elements of Σ_W for i/BCRD:

$$\begin{aligned}\mathbb{E}[W_i W_j] &= \frac{n_C(n_C - 1) + n_T(n_T - 1) - 2n_T n_C}{2n(2n - 1)} = \frac{2nb - 1}{2n - 1} \\ \text{Cov}[W_i, W_j] &= \frac{2nb - 1}{2n - 1} - b = \frac{b - 1}{2n - 1}.\end{aligned}$$

Thus,

$$\boldsymbol{\Sigma}_W = -(b - 1) \left(\frac{2n}{2n - 1} \mathbf{I}_{2n} - \frac{1}{2n - 1} \mathbf{J}_{2n} \right) = \frac{r\tilde{r}}{2n - 1} (2n \mathbf{I}_{2n} - \mathbf{J}_{2n}).$$

Note that when $n_T = n_C$, then $b = 0$ and the matrix reduces to the variance covariance matrix for the BCRD design. Since the BCRD variance covariance has one zero eigenvalue and $2n - 1$ eigenvalues with value $\frac{2}{2n-1}$, this matrix being a scalar multiple will have one zero eigenvalue and $2n - 1$ eigenvalues with value $\frac{2n(b-1)}{2n-1}$.

Since the sum of the eigenvalues is equal to $\text{tr}[\boldsymbol{\Sigma}_W]$ and since all designs we consider have the same diagonal and $2n - 1$ positive eigenvalues, any other design besides i/BCRD will have different eigenvalues hence a larger maximum eigenvalue. Thus the design that minimizes $\lambda_{\max}(\boldsymbol{\Sigma}_W) \|\mathbf{v}\|^2$ is i/BCRD. ■

A.4 i/BCRD is Minimax for all Response Types

For the continuous response case, the result follows from Theorem 3.1. We now consider the non-continuous response case. Notice that in this case \mathcal{V}_M has the form

$$\{v \in \mathcal{V} : \min(v_1, \dots, v_{2n}) \geq 0, \max(v_1, \dots, v_{2n}) \leq M\}$$

(for the incidence and proportion responses, $M = 1/r + 1/\tilde{r}$). The key idea is to show that for block designs

$$\max_{\mathbf{v} \in \mathcal{V}_M} \mathbf{v}^\top \boldsymbol{\Sigma}_W \mathbf{v} = r\tilde{r}M^2 \frac{Bn_B^2}{4(n_B - 1)} = r\tilde{r}M^2 \frac{n^2}{2n - B}, \quad (17)$$

where the last equality follows from the relation $n_B = 2n/B$. Since $\frac{n^2}{2n-B}$ is monotone in B , it is minimized when B is minimal, i.e., when $B = 1$, which corresponds to i/BCRD.

In order to show Equation 17, let \mathbf{B} be the matrix $\frac{n_B}{n_B-1} \mathbf{I}_{n_B} - \frac{1}{n_B-1} \mathbf{J}_{n_B}$ where \mathbf{J} denotes the matrix of all ones. Recall that under $BL(B)$, $\boldsymbol{\Sigma}_W$ is block diagonal B blocks of the form $(1 - b)\mathbf{B}$; see Appendix A.3. Therefore, for block designs

$$\mathbf{v}^\top \boldsymbol{\Sigma}_W \mathbf{v} = r\tilde{r} \sum_{j=1}^B \mathbf{v}_j^\top \mathbf{B} \mathbf{v}_j,$$

where the \mathbf{v}_j 's are sub-vectors of \mathbf{v} . In order to maximize the quadratic form, one can maximize each term $\mathbf{v}_j^\top \mathbf{B} \mathbf{v}_j$ separately. By Lemma A.0.1, the maximizer of each term contains $n_b/2$ entries with M , and $n_b/2$ entries with 0 (assuming n_B is even). Equation 18 within the lemma implies Equation 17, completing the proof of Theorem 3.2.

Lemma A.0.1. *The vector that maximizes the quadratic form $\boldsymbol{\eta}^\top \mathbf{B} \boldsymbol{\eta}$ for $\boldsymbol{\eta} \in \mathcal{V}^{n_B}$ such that $\min(\eta_1, \dots, \eta_{n_B}) \geq 0$ and $\max(\eta_1, \dots, \eta_{n_B}) \leq M$ when n_B is even, has $n_B/2$ entries with M , and $n_B/2$ entries with 0 .*

Proof. First, since $\boldsymbol{\eta}^\top \mathbf{B} \boldsymbol{\eta}$ is a convex function in $\boldsymbol{\eta}$, every entry of the maximizer must contain either 0 or M . Also, by the definition of \mathbf{B} , $\boldsymbol{\eta}^\top \mathbf{B} \boldsymbol{\eta}$ is invariant under permutations of the entries of the vector $\boldsymbol{\eta}$. Thus, it is enough to consider vectors of the form $\boldsymbol{\eta}_k$, which is defined to be a vector whose first k entries are M and the rest are zero. We have

$$\boldsymbol{\eta}_k^\top \mathbf{B} \boldsymbol{\eta}_k = \boldsymbol{\eta}_k^\top \left(\frac{n_B}{n_B - 1} \mathbf{I}_{n_B} - \frac{1}{n_B - 1} \mathbf{J}_{n_B} \right) \boldsymbol{\eta}_k = \frac{M^2}{n_B - 1} (n_B k - k^2). \quad (18)$$

Therefore,

$$\boldsymbol{\eta}_{k+1}^\top \mathbf{B} \boldsymbol{\eta}_{k+1} - \boldsymbol{\eta}_k^\top \mathbf{B} \boldsymbol{\eta}_k = \frac{M^2}{n_B - 1} [n_B - (2k - 1)].$$

It follows that if $k < n_B/2$, then $\boldsymbol{\eta}_{k+1}^\top \mathbf{B} \boldsymbol{\eta}_{k+1} - \boldsymbol{\eta}_k^\top \mathbf{B} \boldsymbol{\eta}_k$ is non-negative, and if $k > n_B/2$, the difference is non-positive. Therefore, the maximizer is when $k = n_B/2$. \square

A.5 Expectation of the MSE

For this section and following sections, let $\mathbf{Z} := \mathbf{Z}_T/r + \mathbf{Z}_C/\tilde{r}$ and $\boldsymbol{\mu} := \boldsymbol{\mu}_T/r + \boldsymbol{\mu}_C/\tilde{r}$.

$$\begin{aligned} &= \mathbb{E}_{\mathbf{Z}_T, \mathbf{Z}_C} \left[\frac{1}{4} \left(\frac{\boldsymbol{\mu}_T + \mathbf{Z}_T}{n_T} + \frac{\boldsymbol{\mu}_C + \mathbf{Z}_C}{n_C} \right)^\top \boldsymbol{\Sigma}_W \left(\frac{\boldsymbol{\mu}_T + \mathbf{Z}_T}{n_T} + \frac{\boldsymbol{\mu}_C + \mathbf{Z}_C}{n_C} \right) \right] \\ &= \frac{1}{4n^2} \mathbb{E}_{\mathbf{Z}} \left[(\boldsymbol{\mu} + \mathbf{Z})^\top \boldsymbol{\Sigma}_W (\boldsymbol{\mu} + \mathbf{Z}) \right] \\ &= \frac{1}{4n^2} \mathbb{E}_{\mathbf{Z}} \left[\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \boldsymbol{\mu} + 2\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \mathbf{Z} + \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z} \right] \\ &= \frac{1}{4n^2} (\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \boldsymbol{\mu} + \mathbb{E}_{\mathbf{Z}} [\mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}]) \\ &= \frac{1}{4n^2} (\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \boldsymbol{\mu} + \text{tr} [\boldsymbol{\Sigma}_W \boldsymbol{\Sigma}_Z]) \end{aligned}$$

where $\boldsymbol{\Sigma}_Z$ is the diagonal variance-covariance matrix of \mathbf{Z} . To compute the trace, we need to consider only the diagonal entries of $\boldsymbol{\Sigma}_W \boldsymbol{\Sigma}_Z$. The i th diagonal entry of this product is $\boldsymbol{\Sigma}_{W_i} \cdot \boldsymbol{\Sigma}_{Z_i} = \boldsymbol{\Sigma}_{W_{ii}} \boldsymbol{\Sigma}_{Z_{ii}}$ due to $\boldsymbol{\Sigma}_Z$ being diagonal. From Equation 16, we know that all the diagonal entries of $\boldsymbol{\Sigma}_W$ are $r\tilde{r}$ and thus

$$\text{tr} [\boldsymbol{\Sigma}_W \boldsymbol{\Sigma}_Z] = r\tilde{r} \text{tr} [\boldsymbol{\Sigma}_Z]. \quad (19)$$

Upon substitution, the result is

$$\begin{aligned}
\mathbb{E}_{\mathbf{Z}}[\text{MSE}_{\mathbf{W}}[\hat{\tau}]] &= \frac{1}{4} \left(\frac{\boldsymbol{\mu}_T}{n_T} + \frac{\boldsymbol{\mu}_C}{n_C} \right)^\top \boldsymbol{\Sigma}_W \left(\frac{\boldsymbol{\mu}_T}{n_T} + \frac{\boldsymbol{\mu}_C}{n_C} \right) + \underbrace{\frac{1}{4n^2} r \tilde{r} \text{tr}[\boldsymbol{\Sigma}_Z]}_{c_Z} \\
&= \frac{1}{4n^2} \left(\frac{\boldsymbol{\mu}_T}{r} + \frac{\boldsymbol{\mu}_C}{\tilde{r}} \right)^\top \boldsymbol{\Sigma}_W \left(\frac{\boldsymbol{\mu}_T}{r} + \frac{\boldsymbol{\mu}_C}{\tilde{r}} \right) + c_Z.
\end{aligned}$$

where the underbraced term is design-independent and denoted as c_Z .

A.6 Minimal block-size design is optimal for the mean criterion

Since k is the minimal possible block-size, it follows that m is divisible by k . Also, since $\boldsymbol{\Sigma}_W$ is block-diagonal under block-designs, it is enough to consider sub-vectors of size m . Let $\mathbf{v}_m = (v_1, \dots, v_m)^\top$ where $v_1 \leq v_2 \leq \dots \leq v_m$ and define $m_k = m/k$. Let $\vec{\mathbf{v}}_j$ denote the sub-vector of the j -th block, and let $SSE(\vec{\mathbf{v}}_j) = \|\mathbf{v}_j - \mathbf{1}\vec{\mathbf{v}}_j\|^2$. We need to show that

$$\mathbf{v}_m^\top \boldsymbol{\Sigma}_{BL(m_k)} \mathbf{v}_m = (1-b) \sum_{j=1}^{m_k} \vec{\mathbf{v}}_j^\top \left(\frac{k}{k-1} \mathbf{I}_k - \frac{1}{k-1} \mathbf{J}_k \right) \vec{\mathbf{v}}_j = (1-b) \frac{k}{k-1} SSE(\vec{\mathbf{v}}_j),$$

is smaller than

$$\mathbf{v}_m^\top \boldsymbol{\Sigma}_{BL(1)} \mathbf{v}_m = (1-b) \mathbf{v}_m^\top \left(\frac{m}{m-1} \mathbf{I}_m - \frac{1}{m-1} \mathbf{J}_m \right) \mathbf{v}_m = (1-b) \frac{m}{m-1} SSE(\mathbf{v}_m).$$

That is, we need to show that

$$\frac{m}{m-1} SSE(\mathbf{v}_m) - \frac{k}{k-1} \sum_{j=1}^{m_k} SSE(\vec{\mathbf{v}}_j) \geq 0. \quad (20)$$

We prove Inequality 20 by induction on m_k using Lemma A.0.2 below. If $m_k = 2$, Inequality 20 follows immediately from Lemma A.0.2.

Assume that Inequality 20 is true for $m_k = B$. Consider $m_k = B+1$. Assume \mathbf{v}_m is an ordered vector of length $m = k(B+1)$. By the induction assumption,

$$\frac{k}{k-1} \sum_{j=1}^B SSE(\vec{\mathbf{v}}_j) \leq \frac{kB}{kB-1} SSE(\vec{\mathbf{v}}_1 \cup \dots \cup \vec{\mathbf{v}}_B).$$

We now apply Lemma A.0.2 to the $m = k(B+1)$ elements by considering $\ell = Bk$. This implies that

$$\frac{kB}{kB-1} SSE(\vec{\mathbf{v}}_1 \cup \dots \cup \vec{\mathbf{v}}_B) + \frac{k}{k-1} SSE(\vec{\mathbf{v}}_{B+1}) \leq \frac{m}{m-1} SSE(\mathbf{v}_m).$$

Inequality 20 follows immediately by combining these two inequalities.

Lemma A.0.2. For a vector $\boldsymbol{\nu}$ of length l define $f(\boldsymbol{\nu}) = \frac{l}{l-1} SSE(\boldsymbol{\nu})$. Consider a division of \mathbf{v}_m into two sub-vectors $\underline{\mathbf{v}}_1, \underline{\mathbf{v}}_2$ of size ℓ and $m-\ell$, respectively, i.e., $\underline{\mathbf{v}}_1 = (v_1, \dots, v_\ell)$ and $\underline{\mathbf{v}}_2 = (v_{\ell+1}, \dots, v_m)$. Then,

$$f(\mathbf{v}_m) - f(\underline{\mathbf{v}}_1) - f(\underline{\mathbf{v}}_2) \geq 0. \quad (21)$$

Proof. Since we can subtract from the entries v_i a constant without changing the values of $f(\underline{\mathbf{v}}_1)$, $f(\underline{\mathbf{v}}_2)$ and $f(\mathbf{v})$, we can assume without loss of generality that the entries in $\underline{\mathbf{v}}_1$ are non-positive and the entries in $\underline{\mathbf{v}}_2$, non-negative.

Define a vector $\tilde{\mathbf{v}}$ of length m as follows

$$\tilde{v}_i = \begin{cases} 0 & i = \ell + 1 \\ v_m + v_{\ell+1} & i = m \\ v_i & \text{otherwise} \end{cases}.$$

and let $\tilde{\underline{\mathbf{v}}}_1$ and $\tilde{\underline{\mathbf{v}}}_2$ be the corresponding sub-vectors. Notice that $\tilde{\underline{\mathbf{v}}}_1 = \underline{\mathbf{v}}_1$ and $\tilde{\underline{\mathbf{v}}}_2 = \underline{\mathbf{v}}_2$ and $\tilde{\mathbf{v}} = \mathbf{v}$. A trivial calculation shows that

$$SSE(\tilde{\underline{\mathbf{v}}}_2) - SSE(\underline{\mathbf{v}}_2) = SSE(\tilde{\mathbf{v}}) - SSE(\mathbf{v}_m) = 2v_m v_{\ell+1} > 0.$$

Thus, when replacing \mathbf{v}_m with $\tilde{\mathbf{v}}$, $SSE(\mathbf{v}_2)$ goes up by the same amount as $SSE(\mathbf{v}_m)$. But, since $\frac{m-\ell}{m-\ell-1} > \frac{m}{m-1}$,

$$f(\mathbf{v}_m) - f(\underline{\mathbf{v}}_2) > f(\tilde{\mathbf{v}}) - f(\tilde{\underline{\mathbf{v}}}_2).$$

It follows that replacing \mathbf{v}_m with $\tilde{\mathbf{v}}$ reduces the right hand-side of Inequality 21 and therefore we can assume that $v_{\ell+1} = 0$. The same argument shows that we can also assume that $v_{\ell+2} = 0$. Continuing in the same manner implies that we can consider $\underline{\mathbf{v}}_2 = (0, \dots, 0, c)$ for $c \geq 0$ as the worst case. A symmetric argument shows that $\underline{\mathbf{v}}_1 = (a, 0, \dots, 0)$ where $a \leq 0$ is the worst case for $\underline{\mathbf{v}}_1$.

It follows that it is enough to prove Inequality 21 for $\mathbf{v}_m = (a, 0, \dots, 0, c)$ where $a \leq 0$ and $c \geq 0$. First consider $\underline{\mathbf{v}}_2$. Since the average of the $m - \ell$ elements in $\underline{\mathbf{v}}_2$ is $\frac{c}{m-\ell}$, that implies

$$\begin{aligned} SSE(\underline{\mathbf{v}}_2) &= (m - \ell - 1) \frac{c^2}{(m - \ell)^2} + \left(c - \frac{c}{m - \ell} \right)^2 \\ &= \frac{c^2}{(m - \ell)^2} (m - \ell - 1 + (m - \ell - 1)^2) \\ &= c^2 \frac{m - \ell - 1}{m - \ell}. \end{aligned}$$

Therefore, $f(\underline{\mathbf{v}}_2) = c^2$. A parallel argument shows that $f(\underline{\mathbf{v}}_1) = a^2$. We now need $SSE(\mathbf{v}_m)$. We have that $\bar{\mathbf{v}}_m = \frac{a+c}{m}$ and hence

$$\begin{aligned} SSE(\mathbf{v}_m) &= \left(a - \frac{a+c}{m} \right)^2 + (m-2) \left(\frac{a+c}{m} \right)^2 + \left(c - \frac{a+c}{m} \right)^2 \\ &= a^2 + c^2 - m \left(\frac{a+c}{m} \right)^2 = a^2 + c^2 - \frac{a^2 + c^2}{m} - \frac{2ac}{m} \\ &= \frac{m-1}{m} (a^2 + c^2) - \frac{2ac}{m} \geq \frac{m-1}{m} (a^2 + c^2). \end{aligned}$$

The last inequality follows because $c \geq 0$ and $a \leq 0$. Therefore, $f(\mathbf{v}_m) \geq f(\underline{\mathbf{v}}_1) + f(\underline{\mathbf{v}}_2)$ and Inequality 21 follows. \square

A.7 Variance of the MSE

We compute $\mathbb{V}\text{ar}_{\mathbf{Z}} [\text{MSE}_{\mathbf{W}} [\hat{\tau}]]$ below.

$$\begin{aligned}
&= \mathbb{V}\text{ar}_{\mathbf{Z}} \left[\frac{1}{4n^2} (\boldsymbol{\mu} + \mathbf{Z})^\top \boldsymbol{\Sigma}_W (\boldsymbol{\mu} + \mathbf{Z}) \right] \\
&= \frac{1}{16n^4} \mathbb{V}\text{ar}_{\mathbf{Z}} [\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \boldsymbol{\mu} + 2\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \mathbf{Z} + \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}] \\
&= \frac{1}{16n^4} \mathbb{V}\text{ar}_{\mathbf{Z}} [2\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \mathbf{Z} + \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}] \\
&= \frac{1}{16n^4} (4 \mathbb{V}\text{ar}_{\mathbf{Z}} [\mathbf{Z}^\top \boldsymbol{\Sigma}_W \boldsymbol{\mu}] + \mathbb{V}\text{ar}_{\mathbf{Z}} [\mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}] + 4 \text{Cov} [\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \mathbf{Z}, \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}]) \\
&= \frac{1}{16n^4} (4(\boldsymbol{\Sigma}_W \boldsymbol{\mu})^\top \boldsymbol{\Sigma}_Z (\boldsymbol{\Sigma}_W \boldsymbol{\mu}) + \mathbb{V}\text{ar}_{\mathbf{Z}} [\mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}] + 4 \text{Cov} [\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \mathbf{Z}, \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}]) \\
&= \frac{1}{16n^4} (4(\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \boldsymbol{\Sigma}_Z \boldsymbol{\Sigma}_W \boldsymbol{\mu} + \text{Cov} [\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \mathbf{Z}, \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}]) + \mathbb{V}\text{ar}_{\mathbf{Z}} [\mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}]) \quad (22)
\end{aligned}$$

The covariance term is the expectation of the product of the two inputs minus the product of the expectations of the two inputs. Since $\mathbb{E}[\mathbf{Z}] = \mathbf{0}_{2n}$, the product of the expectations becomes zero. Hence,

$$\text{Cov} [\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \mathbf{Z}, \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}] = \boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \mathbb{E}_{\mathbf{Z}} [\mathbf{Z} \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}]$$

The k th element of the expectation of the cubic form above looks like

$$\mathbb{E}_{\mathbf{Z}} [Z_k \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}] = \mathbb{E}_{\mathbf{Z}} \left[Z_k \sum_{i,j} Z_i Z_j \sigma_{i,k} \right]$$

where $\sigma_{i,j}$ denotes the i, j th entry of the $\boldsymbol{\Sigma}_W$ matrix. Due to the independence of the Z_i 's the terms in the above sum are zero except when $i = j = k$ which results in

$$\mathbb{E}_{\mathbf{Z}} [Z_k \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}] = \mathbb{E}_{\mathbf{Z}} [\sigma_{k,k} Z_k^3].$$

Since the diagonal entries of $\boldsymbol{\Sigma}_W$ are identically $r\tilde{r}$ (see Equation 16), then the vector whose k th entry we were looking at is merely

$$\mathbb{E}_{\mathbf{Z}} [\mathbf{Z} \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}] = r\tilde{r} \boldsymbol{\gamma}_Z$$

where $\boldsymbol{\gamma}_Z$ is the vector whose elements are the third moments of \mathbf{Z} . Thus,

$$\text{Cov} [\boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \mathbf{Z}, \mathbf{Z}^\top \boldsymbol{\Sigma}_W \mathbf{Z}] = r\tilde{r} \boldsymbol{\mu}^\top \boldsymbol{\Sigma}_W \boldsymbol{\gamma}_Z. \quad (23)$$

We now focus on the remaining variance term in the overall variance which can be expressed as

$$\begin{aligned}
\mathbb{V}\text{ar}_{\mathbf{Z}} [\mathbf{Z}^\top \Sigma_W \mathbf{Z}] &= \mathbb{E}_{\mathbf{Z}} [(\mathbf{Z}^\top \Sigma_W \mathbf{Z})^2] - (\mathbb{E}_{\mathbf{Z}} [\mathbf{Z}^\top \Sigma_W \mathbf{Z}])^2 \\
&= \mathbb{E}_{\mathbf{Z}} [(\mathbf{Z}^\top \Sigma_W \mathbf{Z})^2] - r^2 \tilde{r}^2 \text{tr} [\Sigma_Z]^2
\end{aligned} \tag{24}$$

where the last equality follows from Equation 19. We now compute $\mathbb{E}_{\mathbf{Z}} [(\mathbf{Z}^\top \Sigma_W \mathbf{Z})^2]$, the quartic form in the above expression. We define $\rho_i := \mathbb{E}[Z_i^2]$ which is also the i , i th entry of the Σ_Z matrix. The quartic form can be expanded in scalar form as follows:

$$\mathbb{E} [(\mathbf{Z}^\top \Sigma_W \mathbf{Z})^2] = \sum_{i,j,k,\ell \in \{1, \dots, 2n\}} \sigma_{i,j} \sigma_{k,\ell} \mathbb{E} [Z_i Z_j Z_k Z_\ell] \tag{25}$$

where the expectation operator is taken over the relevant Z_i 's. Since $\mathbb{E}[Z_i] = 0$ for all subjects, the expectation above simplifies to

$$\mathbb{E} [Z_i Z_j Z_k Z_\ell] = \begin{cases} \mathbb{E}[Z_i^4] & \text{if } i = j = k = \ell \\ \rho_i \rho_k & \text{if } i = j \neq k = \ell \\ \rho_i \rho_j & \text{if } i = k \neq j = \ell \text{ or } i = \ell \neq j = k \\ 0 & \text{otherwise} \end{cases}$$

Using the above result, we write the quartic expansion of Equation 25 as

$$= \sum_{i=1}^n \sigma_{i,i}^2 \mathbb{E} [Z_i^4] + \sum_{i=j \neq k=\ell} \sigma_{i,i} \sigma_{k,k} \rho_i \rho_k + \sum_{i=k \neq j=\ell} \sigma_{i,j} \sigma_{i,j} \rho_i \rho_j + \sum_{i=\ell \neq j=k} \sigma_{i,j} \sigma_{j,i} \rho_i \rho_j.$$

Given that Σ_W is symmetric with a diagonal of entries that are identically $r\tilde{r}$ (see Equation 16), the above simplifies to

$$\begin{aligned}
&= r^2 \tilde{r}^2 \sum_{i=1}^n \mathbb{E} [Z_i^4] + r^2 \tilde{r}^2 \sum_{i=j \neq k=\ell} \rho_i \rho_k + \sum_{i=k \neq j=\ell} \sigma_{i,j}^2 \rho_i \rho_j + \sum_{i=\ell \neq j=k} \sigma_{i,j}^2 \rho_i \rho_j \\
&= r^2 \tilde{r}^2 \left(\sum_{i=1}^n \mathbb{E} [Z_i^4] + \sum_{i \neq j} \rho_i \rho_j \right) + 2 \sum_{i \neq j} \sigma_{i,j}^2 \rho_i \rho_j.
\end{aligned} \tag{26}$$

Consider the following matrix and its entries:

$$(\Sigma_W \Sigma_Z)_{i,j} = \sigma_{i,j} \rho_j$$

We now square this matrix and examine only the result's diagonal entries

$$[(\Sigma_W \Sigma_Z)^2]_{i,i} = [\sigma_{i,1} \rho_1 \dots \sigma_{i,2n} \rho_{2n}] [\sigma_{1,j} \rho_j \dots \sigma_{2n,j} \rho_j]^\top = \sum_{j=1}^n (\sigma_{i,j} \rho_j) (\sigma_{j,i} \rho_i) = \sum_{j=1}^n \sigma_{i,j}^2 \rho_j \rho_i$$

Thus,

$$2 \operatorname{tr} [(\mathbf{\Sigma}_W \mathbf{\Sigma}_Z)^2] = 2 \sum_{i=1}^n \sum_{j=1}^n \sigma_{i,j}^2 \rho_j \rho_i = 2 \sum_{i \neq j} \sigma_{i,j}^2 \rho_j \rho_i + 2 \sum_{i=j} \sigma_{i,j}^2 \rho_j \rho_i = 2 \sum_{i \neq j} \sigma_{i,j}^2 \rho_j \rho_i + 2r^2 \tilde{r}^2 \sum_{i=1}^n \rho_i^2 \quad (27)$$

Since the above shares the first term with the simplified quartic form of Equation 26, we now write the quartic form as a function of this trace,

$$\mathbb{E} [(\mathbf{Z}^\top \mathbf{\Sigma}_W \mathbf{Z})^2] = r^2 \tilde{r}^2 \left(\sum_{i=1}^n \mathbb{E} [Z_i^4] + \sum_{i \neq j} \rho_i \rho_j - 2 \sum_{i=1}^n \rho_i^2 \right) + 2 \operatorname{tr} [(\mathbf{\Sigma}_W \mathbf{\Sigma}_Z)^2].$$

We now substitute this into the variance expression of Equation 24 to obtain

$$\mathbb{V}\text{ar}_{\mathbf{Z}} [\mathbf{Z}^\top \mathbf{\Sigma}_W \mathbf{Z}] = r^2 \tilde{r}^2 \left(\sum_{i=1}^n \mathbb{E} [Z_i^4] + \sum_{i \neq j} \rho_i \rho_j - 2 \sum_{i=1}^n \rho_i^2 - \operatorname{tr} [\mathbf{\Sigma}_Z]^2 \right) + 2 \operatorname{tr} [(\mathbf{\Sigma}_W \mathbf{\Sigma}_Z)^2].$$

Substituting the expansion of $\operatorname{tr} [\mathbf{\Sigma}_Z]^2 = \sum_{i \neq j} \rho_i \rho_j + \sum_{i=1}^n \rho_i^2$ we arrive at

$$\begin{aligned} \mathbb{V}\text{ar}_{\mathbf{Z}} [\mathbf{Z}^\top \mathbf{\Sigma}_W \mathbf{Z}] &= r^2 \tilde{r}^2 \left(\sum_{i=1}^n \mathbb{E} [Z_i^4] - 3 \sum_{i=1}^n \rho_i^2 \right) + 2 \operatorname{tr} [(\mathbf{\Sigma}_W \mathbf{\Sigma}_Z)^2] \\ &= r^2 \tilde{r}^2 \kappa_Z + 2 \operatorname{tr} [(\mathbf{\Sigma}_W \mathbf{\Sigma}_Z)^2]. \end{aligned} \quad (28)$$

The terms $\mathbb{E} [Z_i^4] - 3\rho_i^2$ are a constant with respect to the design and we denote the sum of these terms by κ_Z . We chose this notation as the quantity expressed by the sum of these terms is similar to the sum of the excess kurtosis of the Z_i 's.

Substituting the two intermediate results of Equations 23 and 28 into the overall variance expression of Equation 22, we arrive at the final expression

$$\mathbb{V}\text{ar}_{\mathbf{Z}} [\text{MSE}_{\mathbf{W}} [\hat{\tau}]] = \frac{1}{16n^4} (4 (\boldsymbol{\mu}^\top \mathbf{\Sigma}_W \mathbf{\Sigma}_Z \mathbf{\Sigma}_W \boldsymbol{\mu} + r \tilde{r} \boldsymbol{\mu}^\top \mathbf{\Sigma}_W \boldsymbol{\gamma}_Z) + r^2 \tilde{r}^2 \kappa_Z + 2 \operatorname{tr} [(\mathbf{\Sigma}_W \mathbf{\Sigma}_Z)^2]).$$

A.8 An asymptotic lower bound for the tail criterion (Proof of Theorem 3.4)

If \mathcal{B}_1 does not converge, then the following argument holds for any convergent subsequence of \mathcal{B}_1 .

Recall the definition of \tilde{Q} in Equation 13. If \mathcal{B}_1 is of order n , then $\lim_{n \rightarrow \infty} \frac{1}{\sqrt{n}} \tilde{Q} = \infty$ and the lower bound (Equation 14) clearly holds. So, we now assume that $\mathcal{B}_1 = o(n)$. In this case, by Equation 30 below, $|\mathcal{S}| = o(n)$ and since \mathcal{R} is at-least of order n (see below), then \mathcal{S} is negligible. The terms \mathcal{B}_1 and \mathcal{B}_2 are positive. Therefore,

$$\begin{aligned} \liminf_{n \rightarrow \infty} \frac{1}{\sqrt{n}} \tilde{Q} &= \liminf_{n \rightarrow \infty} \frac{1}{\sqrt{n}} \left(\mathcal{B}_1 + c \times \sqrt{r^2 \tilde{r}^2 \kappa_Z + 4 (\mathcal{B}_2 + \mathcal{S}) + 2\mathcal{R}} \right) \\ &\geq \liminf_{n \rightarrow \infty} c \times \sqrt{r^2 \tilde{r}^2 \kappa_Z / n + 2\mathcal{R} / n}. \end{aligned}$$

Now, by Assumption 3.3, $\kappa_Z/n \rightarrow 2\bar{\kappa}_Z$, and by Equation 27

$$\frac{\mathcal{R}}{n} = \frac{\text{tr}[(\Sigma_W \Sigma_Z)^2]}{n} \geq \frac{r^2 \tilde{r}^2 \sum_{i=1}^{2n} \rho_i^2}{n} = r^2 \tilde{r}^2 2 \frac{1}{2n} \|\boldsymbol{\rho}\|^2 \rightarrow 2r^2 \tilde{r}^2 \bar{\rho},$$

where the last equality is due to Assumption 3.1. This completed the proof of Theorem 3.4.

A.9 Optimal Design is Harmony (Proof of Theorem 3.5)

The arguments of Sections 3.3.3 and 3.3.2 show that under both PB and i/BCRD, \tilde{Q} (Equation 13) is of order n and therefore, $\frac{1}{\sqrt{n}}\tilde{Q} \rightarrow \infty$.

The only thing that is left to show is that under PB and under equal allocation, \mathcal{R} is of order n^2 . Since PB is composed from a single vector \mathbf{w}_* and its mirror $-\mathbf{w}_*$, we have that under PB, $\Sigma_W = \mathbf{w}_* \mathbf{w}_*^\top$. Recall that $\boldsymbol{\rho}$ denotes the diagonal of Σ_Z and let $\boldsymbol{\rho}_{\mathbf{w}_*}$ denote the element-wise product of $\boldsymbol{\rho}$ and \mathbf{w}_* . Therefore, under PB,

$$\begin{aligned} \mathcal{R} &= \text{tr}[(\Sigma_W \Sigma_Z)^2] = \text{tr}[\mathbf{w}_* \mathbf{w}_*^\top \Sigma_Z \mathbf{w}_* \mathbf{w}_*^\top \Sigma_Z] = \text{tr}[\mathbf{w}_* \boldsymbol{\rho}_{\mathbf{w}_*}^\top \mathbf{w}_* \boldsymbol{\rho}_{\mathbf{w}_*}^\top] \\ &= (\boldsymbol{\rho}_{\mathbf{w}_*}^\top \mathbf{w}_*)^2 = \left(\sum_{i=1}^n \mathbf{w}_{*,i}^2 \rho_i \right)^2 = \left(\sum_{i=1}^n \rho_i \right)^2, \end{aligned}$$

which is of order n^2 by Assumption 3.1.

A.10 Asymptotics of the tail criterion (Proof of Theorem 3.6)

We proceed by bounding \mathcal{B}_2 and \mathcal{S} and then computing term \mathcal{R} . By Assumption 3.1,

$$\mathcal{B}_2 = \mathbf{v}^\top \Sigma_W \Sigma_Z \Sigma_W \mathbf{v} \leq \bar{C}_\rho \|\Sigma_W \mathbf{v}\|^2 = \bar{C}_\rho r \tilde{r} \sum_{b=1}^B \|\mathbf{B} \mathbf{v}_b\|^2 = \bar{C}_\rho r \tilde{r} \frac{n_B}{n_B - 1} \mathcal{B}_1 \leq 2\bar{C}_\rho r \tilde{r} \mathcal{B}_1. \quad (29)$$

By the Cauchy-Schwarz inequality,

$$\begin{aligned} |\mathcal{S}| &= |\mathbf{v}^\top \Sigma_W \boldsymbol{\gamma}_Z| \leq \sqrt{\mathbf{v}^\top \Sigma_W \mathbf{v}} \sqrt{\boldsymbol{\gamma}_Z^\top \Sigma_W \boldsymbol{\gamma}_Z} = \sqrt{\mathcal{B}_1} \sqrt{\boldsymbol{\gamma}_Z^\top \Sigma_W \boldsymbol{\gamma}_Z} \\ &\leq \sqrt{\mathcal{B}_1 \lambda_{\max}(\Sigma_W)} \|\boldsymbol{\gamma}_Z\| \leq 2r \tilde{r} \sqrt{C_\gamma n \mathcal{B}_1}, \end{aligned} \quad (30)$$

where the last inequality is true because for block designs $\lambda_{\max}(\Sigma_W) = r \tilde{r} \frac{n_B}{n_B - 1} \leq 2r \tilde{r}$ and due to Assumption 3.2.

Let $\boldsymbol{\rho}_b^2$ be the vector whose entries is the entries of $\boldsymbol{\rho}_b$ squared. We have

$$\begin{aligned} \mathcal{R} &= \text{tr}[(\Sigma_W \Sigma_Z)^2] = r^2 \tilde{r}^2 \sum_{b=1}^B \text{tr}[(\mathbf{B} \text{diag}(\boldsymbol{\rho}_b))^2] \\ &= \frac{r^2 \tilde{r}^2}{(n_B - 1)^2} \sum_{b=1}^B \text{tr}[(n_B \text{diag}(\boldsymbol{\rho}_b) - \mathbf{J}_{n_B} \text{diag}(\boldsymbol{\rho}_b))^2] \end{aligned}$$

$$= \frac{r^2 \tilde{r}^2}{(n_B - 1)^2} \sum_{b=1}^B \left\{ n_B^2 \text{tr} [\text{diag}(\boldsymbol{\rho}_b^2)] - 2n_B \text{tr} [\mathbf{J}_{n_B} \text{diag}(\boldsymbol{\rho}_b^2)] + \text{tr} [(\mathbf{J}_{n_B} \text{diag}(\boldsymbol{\rho}_b))^2] \right\}.$$

We now compute the above traces:

$$\begin{aligned} \text{tr} [\text{diag}(\boldsymbol{\rho}_b^2)] &= \|\boldsymbol{\rho}_b\|^2; \\ \text{tr} [\mathbf{J}_{n_B} \text{diag}(\boldsymbol{\rho}_b^2)] &= \text{tr} [\mathbf{1}_{n_B} \mathbf{1}_{n_B}^T \text{diag}(\boldsymbol{\rho}_b^2)] = \text{tr} [\mathbf{1}_{n_B} (\boldsymbol{\rho}_b^2)^T] = \|\boldsymbol{\rho}_b\|^2; \\ \text{tr} [(\mathbf{J}_{n_B} \text{diag}(\boldsymbol{\rho}_b))^2] &= \text{tr} [\mathbf{1}_{n_B} \mathbf{1}_{n_B}^T \text{diag}(\boldsymbol{\rho}_b) \mathbf{1}_{n_B} \mathbf{1}_{n_B}^T \text{diag}(\boldsymbol{\rho}_b)] \\ &= \text{tr} [\mathbf{1}_{n_B} \boldsymbol{\rho}_b^T \mathbf{1}_{n_B} \boldsymbol{\rho}_b] = \boldsymbol{\rho}_b^T \mathbf{1}_{n_B} \text{tr} [\mathbf{1}_{n_B} \boldsymbol{\rho}_b] = (\boldsymbol{\rho}_b^T \mathbf{1}_{n_B})^2. \end{aligned}$$

Putting all terms together we have

$$\begin{aligned} \mathcal{R} &= \frac{r^2 \tilde{r}^2}{(n_B - 1)^2} \sum_{b=1}^B \left\{ n_B^2 \|\boldsymbol{\rho}_b\|^2 - 2n_B \|\boldsymbol{\rho}_b\|^2 + (\boldsymbol{\rho}_b^T \mathbf{1}_{n_B})^2 \right\} \\ &= \frac{r^2 \tilde{r}^2}{(n_B - 1)^2} \sum_{b=1}^B \left\{ n_B \|\boldsymbol{\rho}_b\|^2 (n_B - 1) + (\boldsymbol{\rho}_b^T \mathbf{1}_{n_B})^2 - n_B \|\boldsymbol{\rho}_b\|^2 \right\} \\ &= \frac{r^2 \tilde{r}^2 n_B \|\boldsymbol{\rho}\|^2}{n_B - 1} + \frac{r^2 \tilde{r}^2}{(n_B - 1)^2} \sum_{b=1}^B \left\{ (\boldsymbol{\rho}_b^T \mathbf{1}_{n_B})^2 - n_B \|\boldsymbol{\rho}_b\|^2 \right\}. \end{aligned}$$

Now notice that

$$\boldsymbol{\rho}_b^T \mathbf{B} \boldsymbol{\rho}_b = \boldsymbol{\rho}_b^T \left(\frac{n_B}{n_B - 1} \mathbf{I}_{n_B} - \frac{1}{n_B - 1} \mathbf{J}_{n_B} \right) \boldsymbol{\rho}_b = \frac{1}{n_B - 1} (n_B \|\boldsymbol{\rho}_b\|^2 - (\boldsymbol{\rho}_b^T \mathbf{1}_{n_B})^2).$$

Therefore,

$$\begin{aligned} \mathcal{R} &= r^2 \tilde{r}^2 \frac{n_B \|\boldsymbol{\rho}\|^2 - \sum_{b=1}^B \boldsymbol{\rho}_b^T \mathbf{B} \boldsymbol{\rho}_b}{n_B - 1} \\ &= r^2 \tilde{r}^2 \frac{4n^2 \frac{1}{2n} \|\boldsymbol{\rho}\|^2 - B \sum_{b=1}^B \boldsymbol{\rho}_b^T \mathbf{B} \boldsymbol{\rho}_b}{2n - B} \\ &= \frac{r^2 \tilde{r}^2 4n^2 \frac{1}{2n} \|\boldsymbol{\rho}\|^2 - r \tilde{r} B \boldsymbol{\rho}^T \boldsymbol{\Sigma}_W \boldsymbol{\rho}}{2n - B}. \end{aligned} \tag{31}$$

We now consider four regimes for B which become the four results of Theorem 3.6.

(i) $\frac{B}{n^{1/4}} \rightarrow 0$

By Assumption 3.4,

$$\frac{1}{\sqrt{n}} \tilde{Q} > \frac{1}{\sqrt{n}} \mathcal{B}_1 \approx \frac{1}{\sqrt{n}} n/B^2 \rightarrow \infty.$$

(ii) $\frac{B}{n^{1/4}} \rightarrow 1$

By Assumption 3.4 that in this case $\frac{1}{\sqrt{n}}\mathcal{B}_1 \rightarrow C_{\mathcal{B}_1}$. By Assumption 3.3, $\frac{\kappa_Z}{n} \rightarrow 2\bar{\kappa}_Z$. The bounds for terms \mathcal{B}_2 and \mathcal{S} (Equations 29 and 30) imply that $\sqrt{\frac{\mathcal{B}_2}{n}} \rightarrow 0$ and $\sqrt{\frac{\mathcal{S}}{n}} \rightarrow 0$ and hence those terms are negligible. For term \mathcal{R} , by Equation 31 and Assumptions 3.1 and 3.5,

$$\frac{\mathcal{R}}{n} = r^2 \tilde{r}^2 \frac{4n \frac{1}{2n} \|\boldsymbol{\rho}\|^2}{2n - B} + o(1) \rightarrow 2r^2 \tilde{r}^2 \bar{\rho}.$$

In conclusion, we have that under this regime

$$\frac{2}{\sqrt{n}} \tilde{Q} \rightarrow C_{\mathcal{B}_1} + cr\tilde{r} \sqrt{2(\bar{\kappa}_Z + \bar{\rho})}.$$

(iii) $\frac{B}{n^{1/4}} \rightarrow \infty$ **and** $B/n \rightarrow \infty$

We have by Assumption 3.4 that in this case $\frac{1}{\sqrt{n}}\mathcal{B}_1 \rightarrow 0$ and similarly to before terms \mathcal{B}_2 and \mathcal{S} are negligible. Also, as in the previous case $\frac{\mathcal{R}}{n} \rightarrow 2r^2 \tilde{r}^2 \bar{\rho}$.

(iv) $B/n \rightarrow \alpha$

As in the previous case, terms \mathcal{B}_1 , \mathcal{B}_2 and \mathcal{S} are negligible and for term \mathcal{R} we have that

$$\frac{\mathcal{R}}{n} = r^2 \tilde{r}^2 \frac{2 \frac{1}{2n} \|\boldsymbol{\rho}\|^2}{1 - B/(2n)} + o(1) \rightarrow 2r^2 \tilde{r}^2 \bar{\rho} \frac{1}{1 - \alpha/2}.$$