SolBench: A Dataset and Benchmark for Evaluating Functional Correctness in Solidity Code Completion and Repair

Zaoyu Chen¹ Haoran Qin¹ Nuo Chen¹ Xiangyu Zhao¹ Lei Xue² Xiapu Luo¹ Xiao-Ming Wu¹ ¹The Hong Kong Polytechnic University ²Sun Yat-sen University zaoyu22.chen@connect.polyu.hk

Abstract

Smart contracts are crucial programs on blockchains, and their immutability post-deployment makes functional correctness vital. Despite progress in code completion models, benchmarks for Solidity, the primary smart contract language, are lacking. Existing metrics like BLEU do not adequately assess the functional correctness of generated smart contracts. To fill this gap, we introduce SolBench, a benchmark for evaluating the functional correctness of Solidity smart contracts generated by code completion models. SolBench includes 4,178 functions from 1,155 Ethereum-deployed contracts. Testing advanced models revealed challenges in generating correct code without context, as Solidity functions rely on context-defined variables and interfaces. To address this, we propose a Retrieval-Augmented Code Repair framework. In this framework, an executor verifies functional correctness, and if necessary, an LLM repairs the code using retrieved snippets informed by executor traces. We conduct a comprehensive evaluation of both closed-source and open-source LLMs across various model sizes and series to assess their performance in smart contract completion. The results show that code repair and retrieval techniques effectively enhance the correctness of smart contract completion while reducing computational costs.

CCS Concepts

• Computing methodologies \rightarrow Language resources; Natural language generation.

Keywords

benchmarking, automatic evaluation of datasets, code completion, smart contract, blockchain, code repair, retrieval-augmented generation

ACM Reference Format:

Zaoyu Chen¹ Haoran Qin¹ Nuo Chen¹ Xiangyu Zhao¹, Lei Xue² Xiapu Luo¹ Xiao-Ming Wu¹, ¹The Hong Kong Polytechnic University ²Sun Yat-sen University, zaoyu22.chen@connect.polyu.hk, . 2018. Sol-Bench: A Dataset and Benchmark for Evaluating Functional Correctness in Solidity Code Completion and Repair . In *Proceedings of Make sure*

Conference acronym 'XX, Woodstock, NY

to enter the correct conference title from your rights confirmation email (Conference acronym 'XX). ACM, New York, NY, USA, 10 pages. https:

1 Introduction

//doi.org/XXXXXXXXXXXXXXXX

Smart contracts, which are special programs that run on blockchains, are crucial for decentralized applications. They automatically enforce agreements without intermediaries and most of them are written in Solidity, running on Ethereum blockchain. In contrast to conventional program development, developing blockchain-based smart contracts is more challenging due to their immutability; once deployed, their code cannot be changed, making any errors or vulnerabilities permanent. This necessitates a greater focus on functional correctness in smart contract development.

Recent breakthroughs in transformer-based Code Large Language Models (LLMs), including Codex [5], CodeGen [32], Star-Coder [24], and so on (e.g., Guo et al. [17], Roziere et al. [38]) have spurred interest in leveraging LLMs for enhancing the smart contract development process such as automatic code generation [8, 41]. However, current evaluation of smart contract generation mainly relies on metrics like BLEU and CrystalBLEU [41], or subjective hand-grading [8], which could hinder smart contract completion methods from optimizing towards improving functional correctness, as functional correctness is more effective than BLEU for Solidity code completion. Figure 1 demonstrates this inconsistency: a correctly completed function is rated correct by functional correctness but receives a low BLEU score; Conversely, an incorrect completion is rated incorrect by functional correctness but gets a high BLEU score. Moreover, existing benchmarks for code LLMs, including HumanEval [5], APPS [18], MBPP [3] and DS-1000 [21] all emphasize the functional correctness of generated code. This highlights a gap in research for systematically evaluating code LLMs for functional correctness in smart contract generation.

We present SolBench, a benchmark designed to assess the Solidity coding capabilities of LLMs. SolBench uses Differential Fuzzing [7] to verify if the completed functions are functionally correct, overcoming current evaluation limitations. The SolBench benchmark consists of a total of 4,178 functions distributed across 1,155 contracts. We extensively evaluate various LLMs, including both closedsource models such as GPT-4o [36], GPT-4o-mini, Claude-3.5-Haiku, and Claude-3.5-Sonnect [2], as well as open-source models like Deepseek-V3 [9], Qwen2.5-Coder-14B-Instruct, Qwen2.5-Coder-7B-Instruct [19], and Llama-3.2-3B-Instruct [26], covering different series and sizes.

The experimental results demonstrate the significant challenges faced by these models, particularly in scenarios lacking sufficient

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

^{© 2018} Copyright held by the owner/author(s). Publication rights licensed to ACM. ACM ISBN 978-1-4503-XXXX-X/2018/06 https://doi.org/XXXXXXXXXXXXXXX

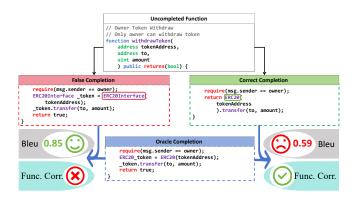


Figure 1: Example comparing functional correctness and BLEU metric in Solidity code completion, highlighting the importance of evaluating functional correctness.

context. As shown in Figure 5, the majority of errors made by models are due to lacking sufficient context. However, using the entire context of the contract as model input results in significant computational costs and high hardware requirements. Therefore, we tested various code repair methods such as Self Edit [48] and Self Debug [6] on SolBench, aiming to achieve a higher pass rate with lower computational costs. A closer look reveals that completing Solidity code often relies on variables and external contract interfaces defined in the context of the smart contract. As illustrated in Figure 4, the model fails to complete because the function comment and signature lacked details. This indicates the importance of using Retrieval-Augmented Generation (RAG) techniques in Solidity code completion. To overcome this limitation, we propose a Retrieval-Augmented Code Repair framework. RAG techniques have been widely adopted in LLM-based code generation to effectively mitigate the issue of LLMs producing outputs that appear plausible but are factually incorrect [25, 40, 47]. Building on this, we investigate the impact of integrating various code repair and retrieval methods on the performance of LLMs in completing Solidity code.

In summary, our primary contributions include:

- We introduce SolBench, a dataset for evaluating the Solidity coding capabilities of LLMs by assessing the functional correctness of completed Solidity functions.
- We propose a Retrieval-Augmented Code Repair framework that is designed to enhance the code completion and repair process for Solidity functions.
- We conduct an in-depth evaluation of both closed-source and open-source LLMs across different model sizes and series to assess their performance in smart contract completion. We also explore the effectiveness of various code repair and retrieval techniques under the retrieval-augmented code repair framework.

2 Related Works

2.1 Language Models for Code Generation

LLMs. In recent years, the rapid advancement of Transformerbased models has led to the emergence of numerous code completion techniques. Closed-source LLMs such as Claude-3.5-Sonnet [2] and GPT-40 [36] have played a pivotal role in this domain. Meanwhile, open-source code LLMs, including the StarCoder series [24, 27], CodeLlama series [38], DeepSeekCoder series [17], Qwen2.5-Coder [19], and CodeStral [30], have also showcased remarkable improvements in code generation tasks. These models, which boast billions of parameters, owe their enhanced performance to being trained on vast and high-quality code datasets. In our study, we assess the effectiveness of popular and latest models, GPT-40, Claude-3.5, Deepseek-V3 [9], Qwen2.5-Coder, and Llama-3.2 [26] in various configurations.

Code Repair Methods. Code repair is a research field focused on fixing errors in code and has recently been used as a post-processing step to enhance automatically synthesized code. Approaches like Self Edit [48] utilize execution traces for code repair, while Self Debug [6] evaluates Codex's code repair capabilities across various tasks. Additionally, methods such as Self Correction [43] and ILF [4] train models to perform effective code repairs.

Retrieval-Augmented Code Generation. Retrieval-augmented generation (RAG) techniques have gained significant attention in recent years for enhancing the performance of LLMs [14, 22, 44, 51]. In code generation, RAG has been effectively employed to mitigate the issue of LLMs producing outputs that appear plausible but are factually incorrect [25, 40, 47]. In this study, we examine the impact of integrating various code repair and retrieval methods on the performance of LLMs in Solidity code completion (see Section 4.3).

2.2 LLM-aided Solidity Smart Contract

Existing Datasets and Benchmarks. Prior evaluations of smart contract generation mainly rely on lexical similarity metrics like BLEU and CrystalBLEU [41] or subjective hand-grading [8]. Our evaluation method is automated functional correctness assessment, which can more effectively evaluate the model's Solidity code capabilities. Storhaug et al. [41] introduced a dataset comprising 186,397 Ethereum smart contracts, while Yu et al. [46] further expanded on this, creating a comprehensive dataset with 286,397 instances. In comparison, the DISL dataset [31] is even more extensive, aggregating 514,506 unique Solidity files deployed on the Ethereum mainnet. However, these datasets have only performed the extraction and deduplication of smart contracts. In order to test functional correctness, we further screened out the testable contracts and validated the correctness of the functions within the extracted contracts. In this work, we propose SolBench, a benchmark that focuses on correctness through automated fuzzing.

Solidity Smart Contract Tasks. In recent years, there has been a growing focus on LLMs for smart contract generation. Storhaug et al. [41] were the first to employ a fine-tuned model for smart contracts completing. Dade et al. [8] presented MazzumaGPT. Smart contract summarization has been advanced by approaches such as SCCLLM [50], MMTrans [45] and evaluations on real-world contracts [29]. For smart contract security, ACFIX [49], LLM4FUZZ [39] and GPTScan [42] leveraged LLMs to address the vulnerabilities. Jiang et al. [20] utilized LLMs to streamline the labor-intensive aspects of the code-smell-finding pipeline.

```
On-chain Storage Requirements
contract Ownable {
   address public owner;
   /**
    * @dev The Ownable constructor sets
    * the original `owner` of the
    * contract to the sender account.
    */
   constructor Ownable() public {
      owner = msg.sender;
   }
```

Figure 2: Smart Contract Example with On-Chain Storage for Owner-Only Function Execution (Dataset Construction Step 3).

3 SolBench: A Dataset for Evaluating the Functional Correctness of Solidity

In this section, we present SolBench, a benchmark for assessing the capabilities of Solidity code completion. Our approach emphasizes automatically checking the functional correctness of Solidity functions, which distinguishes it from earlier testing methods that relied on BLEU, CrystalBLEU scores [41], or manual grading [8] to evaluate the quality of generated smart contracts.

3.1 Dataset Construction

The construction of SolBench consists of four steps:

Step 1: Collection of Smart Contract Data. We utilized XBLOCK-ETH [52] dataset to collect smart contracts addresses. Subsequently, we crawled the source code from these addresses using Etherscan[11], the largest provider of verified smart contracts. Since smart contracts on the blockchain are continuously being updated, our dataset is also extensible.

Step 2: Selection of Active and Unique Smart Contracts. Due to the high rate of duplication, we used the MD5 algorithm [37] to deduplicate identical smart contract codes, ensuring each collected smart contract was unique. To focus on smart contracts that are actively used, we checked their transaction activity on Etherscan, excluding any smart contracts with fewer than ten transactions. Given the nature of our code generation task, we only considered functions that had relevant comments, enabling prompting our models to generate functions and test their functional correctness.

Step 3: Identification of Smart Contracts Suitable for Testing. Unlike traditional stateless applications, which do not retain any information between executions, smart contracts need to maintain a record of their internal state to execute complex logic and maintain data integrity across transactions. This persistent state is stored on the blockchain, enabling the contract to track variables, balances, and other critical information over time. As shown in Figure 2, the smart contract requires on-chain storage, the contract owner's address, to execute certain functions. Therefore, we further filtered contracts that require on-chain storage for testing, such as those with constructors. Finally, we deduplicated function comments and

| Feature | Number |
|----------------------|--------|
| Func Count | 4178 |
| SC Count | 1155 |
| Uniq Func Sigs | 3793 |
| Avg Func Lines | 10.34 |
| Avg Func Body Lines | 7.78 |
| Avg Func Body Tokens | 65.86 |
| Avg Context Lines | 1529 |
| Avg Context Tokens | 13025 |

Table 1: Statistics of SolBench. "Func Count" and "SC Count" show total functions and smart contracts. "Uniq Func Sigs" indicates unique function signatures. "Avg Func Lines" and "Avg Func Body Lines" provide average line counts for functions and bodies. "Avg Func Body Tokens" shows average tokens in function bodies. "Avg Context Lines" and "Avg Context Tokens" represent the average line and token counts of the context associated with SolBench functions.

signatures to construct a benchmark in which functions can be sampled and evaluated.

Step 4: Verification of Oracle Solidity Functions for Functional Correctness. In this step, we need to verify that the Oracle Solidity functions we have extracted can pass functional correctness validation. This is because some functions call other functions within the same contract with the "only owner" modifier, which may require on-chain storage and cause the validation to fail. Additionally, some functions include mint operations, which are not allowed in our validation environment and would also lead to failure. Since we are using differential evaluation (see Section 3.2), we add a statement uint256 this_is_a_test_variable; within the Oracle function body as a verification statement, as can be seen in Figure 3. This creates a difference between the modified function and the original Oracle function, enabling the evaluator to identify the functions and associated variables that need to be verified. We retain the functions that pass the functional correctness validation, and we also keep the functions that produce a "Stack too deep" error after adding the verification statement. This occurs because defining an additional local variable within the function causes the number of local variables to exceed the limit during the validation process.

Implementation details. We extracted smart contracts from Ethereum block numbers 14,500,000 to 17,500,000, using MD5 algorithm to ensure each contract was unique, resulting in 67,918 contracts. After fetching their transaction records from Etherscan, we filtered out contracts lacking at least one commented function or having fewer than 10 transactions. These were then deployed to our private blockchain for on-chain storage testing, leaving us with 51,461 contracts and 326,435 functions to sample from. To avoid data overlap, we removed duplicates based on code comments and function signatures. This process narrowed our pool down to 2,106 smart contracts and 6,653 functions. Next, we verified whether each function could be compiled correctly and deployed normally in our validation environment. The verification passed for 4,178 functions.

Dataset statistics. As illustrated in Table 1, we have systematically examined various data characteristics of the SolBench benchmark, providing a comprehensive overview. In SolBench, there are a total of 4,178 functions for test distributed across 1,155 contracts. After deduplication of all function signatures, there are 3,793 unique

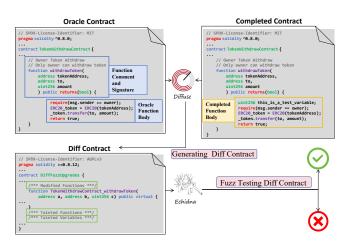


Figure 3: Verification Process for SolBench Functional Correctness: Starting with an Oracle Contract from SolBench, the model completes the withdrawToken function based on the function comments and signature. Diffusc compares the Oracle and Completed Contracts, generating a Diff Contract. Echidna deploys the Diff Contract for fuzz testing on Modified Functions, Tainted Functions, and Variables.

function signatures, indicating that SolBench has a wide range of function coverage. Additionally, statistics were gathered on the average number of code lines for all functions, as well as the number of code lines and tokens required to complete the function bodies. The average number of lines of context for samples in SolBench is 1,529 lines, with a corresponding token count of 13,025 tokens, demonstrating that the context is very long.

3.2 Verification of Functional Correctness

In the following, we explain how to verify the functional correctness of the constructed SolBench dataset. We will first introduce the evaluation tools and methods, followed by a detailed workflow of these tools in the verification process.

Differential fuzzing is an advanced form of fuzz testing, which is a security verification method that involves providing random inputs to software to identify vulnerabilities. In differential fuzzing, identical data is simultaneously input into two similar software implementations to identify any divergent behaviors in their execution. Throughout this process, the *fuzzer*, a tool that injects random inputs, monitors the execution for any anomalies or errors.

Diffusc [7] integrates static analysis with differential fuzz testing to scrutinize two versions of a smart contract prior to their on-chain deployment. Utilizing Slither [12] frameworks, Diffusc employs differential taint analysis to create test contracts in Solidity tailored for differential fuzz testing. These contracts are subsequently subjected to fuzz testing via *Echidna* [15].

Evaluation Protocols. Solidity code completion aims to complete a function based on its comment and signature. After completing a function, we replace the original function in the smart contract. Following prior work [7], we use Diffuse to perform Differential Fuzzing to assess the functional correctness of the completed functions. As shown in Figure 3, for example:

- Step 1. Starting with an Oracle Contract from SolBench, the model completes the withdrawToken function based on the function comments and signature. This completed function is then substituted into the Oracle Contract's withdrawToken function to create a Completed Contract.
- Step 2. Next, Diffusc compares the differences between the Oracle Contract and the Completed Contract, generating a Diff Contract. Since the Oracle Function Body and the Completed Function Body in these two contracts differ, the Diff Contract generates a function called TokenWithdrawContract_withdrawToken under the "Modified Functions" section. This function tests whether the withdrawToken functions in both contracts produce the same output given the same input. Additionally, the "Tainted Functions" and "Tainted Variables" sections generate functions to test any functions or variables directly invoked by withdrawToken, ensuring they also yield identical outputs for the same inputs.
- **Step 3.** Once the Diff Contract is generated, Echidna fuzz-tests all three sections: the modified functions, tainted functions, and tainted variables. If all functions pass the fuzz-testing, it confirms that the model's completion of the withdrawToken function is functionally correct.

We evaluate the functional correctness of these functions in SolBench using the pass@1 metric, following the approach in [5].

4 Benchmarking Approach

In this section, we will introduce the tasks and methods used for benchmarking, including the code completion task, code repair, and retrieval-augmented code repair framework. The task of Solidity code completion is challenging for LLMs because it heavily relies on global variables and external contract interfaces. When this critical contextual information is missing, models often generate plausible but incorrect code due to insufficient context. For example, models might use incorrect variables or call wrong functions, leading to compilation errors (Figure 4). However, including the entire contract as context may exceed the model's maximum supported context length, and the computational cost of doing so can also be prohibitively high. As can be seen from Table 1, when the entire contract is used as context, the average number of tokens reaches 13,025. To address this issue, we introduce a Retrieval-Augmented Code Repair Framework (Figure 4), which aims to achieve excellent code completion performance with lower computational overhead.

4.1 Code Completion

The Solidity code completion task is defined as follows: for a function within a contract, given the function's comments, and signature, along with a certain length of context within the contract that appears before the function as the prompt, the model is tasked with completing the function.

We evaluated the impact of different context lengths on the performance of Solidity code completion, as this task largely depends on contextual information within the contract. As shown in Table 2, in the column with a context length of 0, the best-performing model, GPT-40, achieved a pass rate of only 32.77%. By analyzing the reasons for GPT-40's relatively low pass rate, we found that most errors stemmed from the model incorrectly using undeclared identifiers (Figure 5). Therefore, simply providing context before the

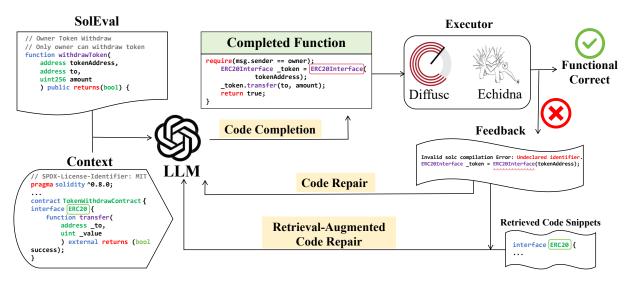


Figure 4: Code Completion and Repair Process for Solidity Functions: The LLM completes a SolBench function with the context (code completion). The executor checks functional correctness. If incorrect, the LLM performs code repair based on feedback, with or without retrieved code snippets (retrieval-augmented code repair).

uncompleted function can test the model's code completion ability based on the given context. We use the Qwen2.5-Coder Tokenizer to calculate the number of tokens for the context length.

We have also tried using the location of the uncompleted function in the contract as the center, concatenating half-length context before the uncompleted function and half-length context after it to form the total given length context. However, the model performs slightly worse in this case, which may be related to the way humans write code, as there is a tendency to implement called functions first. Thus, the context before the uncompleted function tends to contain more useful information.

4.2 Code Repair

Although the accuracy of code completion increases with the length of the context, excessively long contexts result in significant computational costs and high hardware requirements. Therefore, we tested various code repair methods on SolBench, aiming to achieve a higher pass rate with lower computational costs.

Code repair is a prompting strategy widely used in existing work. As shown in Figure 4, first, the LLM completes the test function of SolBench based on the context of a certain length. Then, the executor determines whether the completed function is functionally correct. If not, the LLM repairs the initially completed function based on the feedback. We tested several common code repair methods:

- **Self Edit [48]** directly uses the error information returned by the executor as context to prompt the model for code repair.
- **Self Debug [6]** first asks the model to explain each line of the completed function, then uses the error information returned by the executor as context to prompt the model for code repair.
- Self Refine [28] does not use the error information returned by the executor but instead asks the model to reflect on where the

completed function went wrong, and then performs code repair based on the inferred error.

• Self Repair [34] first asks the model to interpret the meaning of the error information returned by the executor and then performs code repair.

4.3 Retrieval-Augmented Code Repair

Code repair methods have limited impact on improving Solidity code completion performance. The best method, Self Debug, only shows an average improvement of 4.5% as shown in Table 3. This is mainly due to errors arising from missing key contextual information. Even with adjacent context, the model might miss critical details, or these details might be outside the provided context. To tackle this, we introduce the Retrieval-Augmented Code Repair (RACR) framework. RACR enhances function completion by retrieving relevant information from the broader context of the incomplete Solidity function. As illustrated in Figure 4, if the executor finds the completed function incorrect, it returns an error message pinpointing the problematic line. This line is used as a query to extract relevant code snippets from the entire function context, forming Retrieved Code Snippets. If the error message does not specify the problematic code line, we use the initially completed function as the query. We evaluated both sparse and dense retrieval methods, sparse retrieval techniques include:

• LCS (Longest Common Substring) [23]: This algorithm identifies the longest common substring between two given strings. In our approach, we use the undeclared identifier from the error message returned by the executor as the query, and start matching from the longest substring of the query. If a substring matches a certain code line, we return that code line. If the error message does not specify an identifier, we parse all identifiers in the error message or the initially completed function using a Solidity parser as the query.

- **BM25** [10]: A probabilistic ranking function widely used in information retrieval tasks to rank documents based on their relevance to a query. In our experiment, BM25 is used to evaluate the relevance of code lines to the query derived from the error message.
- **TF-IDF (Term Frequency-Inverse Document Frequency)**: A statistical method that assesses the importance of a term within a document or corpus. Here, TF-IDF is employed to weigh the significance of terms in the error message.
- Jaccard Similarity [47]: A measure used to calculate the similarity between two sets. In this scenario, Jaccard Similarity evaluates the overlap between the set of terms in the query (e.g., identifiers from the error message) and the set of terms in each code line. Code lines with higher similarity scores are considered more relevant to the query.

We test the LCS algorithm because the main error in Solidity code completion is the *Undeclared Identifier Error* (Figure 5), where the model generates similar but incorrect identifiers. As shown in Figure 4, the LCS algorithm effectively matches the model-generated identifiers to the correct ones in the context.

Dense retrieval harnesses the power of encoder models to produce code embeddings that capture the underlying meaning of code snippets. We use *cosine similarity* to assess the semantic similarity between a query and candidate code snippets. We select these encoder models:

- UniXCoder [16]: We utilize UnixCoder-base, an encoder-only unified cross-modal pre-trained model that leverages multimodal data (i.e., code comments and AST) to pretrain code representation.
- **CodeBERT** [13]: We use the CodeBERT-base version, a bimodal pre-trained model for programming language and natural language with a total of 125M parameters.

For all retrieval methods other than LCS, we use the erroneous code line from the executor's error message as the query to find the most relevant code snippet in the context.

5 Experiments

In this section, we evaluate the code completion capabilities of several chat or instruction-based large language models using our proposed SolBench benchmark. Additionally, we evaluate various code repair and retrieval-augmented code repair methods to compare their performance.

5.1 Solidity Code Completion

We evaluated code generation models that cover different series and sizes. Among the closed-source models, these include GPT-4o, GPT-4o-mini, Claude-3.5-Haiku, and Claude-3.5-Sonnect. Among the open-source models, these include Deepseek-V3, Qwen2.5-Coder-14B-Instruct, Qwen2.5-Coder-7B-Instruct, and Llama-3.2-3B-Instruct. Inference tasks for GPT-4o and GPT-4o-mini were conducted via the OpenAI API [35], for Claude-3.5-Sonnect and Claude-3.5-Haiku via the Anthropic API [1], and Deepseek-V3 via the OhMyGPT API [33]. Qwen2.5-Coder-14B-Instruct, Qwen2.5-Coder-7B-Instruct, and Llama-3.2-3B-Instruct were run on 4 NVIDIA A100 GPUs (each with 80 GB memory).

- **GPT-40** is a high-intelligence flagship model. It is a multimodal model that can accept and generate text, audio, and images. Its pre-training data is up to October 2023. We are using the gpt-40-2024-08-06 version.
- **GPT-40-mini** is a fast and cost-effective small model designed for focused tasks. It supports both text and image inputs and generates text outputs, including structured outputs. It can replicate the results of larger models like GPT-40 at a lower cost and with less latency. Its knowledge is updated until October 2023, and we are using the gpt-40-mini-2024-07-18 version.
- Claude-3.5-Sonnect and Claude-3.5-Haiku both released in October 2024. The Claude-3.5-Sonnect delivers comprehensive improvements, particularly in the coding domain, where it has further solidified its leading position with significant advancements. In contrast, the Claude-3.5-Haiku stands out for its affordability and fast response times, achieving state-of-the-art performance at an accessible level. The versions we are currently using are claude-3-5-sonnet-20241022 and claude-3-5-haiku-20241022.
- **DeepSeek-V3** is a powerful Mixture-of-Experts (MoE) language model, released in December 2024, with a total of 671 billion parameters, out of which 37 billion are activated for each token.
- Qwen2.5-Coder-7/14B-Instruct released in September 2024, is built upon the Qwen2.5 architecture and further pretrained on a massive corpus of over 5.5 trillion tokens. It supports longcontext understanding and generation with a context length of up to 128K tokens and covers 92 programming languages.
- Llama-3.2-3B-Instruct released in September 2024, is a lightweight model designed specifically for edge and mobile devices. It has been pre-trained on up to 9 trillion public data source tokens, supports a maximum context length of 128K tokens, and incorporates knowledge distillation from the Llama 3.1 large model to ensure efficiency while maintaining high accuracy.

The length of the context significantly affects model performance, with models performing better as the given context increases. Larger models also tend to perform better. However, smaller models (such as Llama-3.2-3B-Instruct and Qwen2.5-Coder-7B-Instruct) struggle with long-context completion tasks, leading to an increased performance gap compared to larger models, which also face higher computational costs. Among closed-source models, GPT-40 achieves the best result of 93.49% under a context length of 4k. However, in terms of the average pass rate across all context lengths, Claude-3.5-Haiku performs the best. Among open-source models, Deepseek-V3 performs the best, achieving performance comparable to the strongest closed-source model, GPT-40. We do not test StarCoder2-15B-Instruct and WizardCoder-15B because these models were fine-tuned for Python instructions and performed poorly in our tests.

We have analyzed the top five error distributions for GPT-40 when the context length is 0 on SolBench (Figure 5). The majority of the errors are "Undeclared Identifier", meaning the model's function completions include identifiers that are not declared. The remaining errors account for a much smaller proportion: "Member" errors occur when the model generates struct types or other structures with non-existent member names; "Identifier not unique" errors arise when there is ambiguity in the definitions of generated identifiers; "Indexed expression" errors happen when the model incorrectly

| Models | Context Length | | | | | | | |
|----------------------------|----------------|----------|----------|-------|-------|-------|---------|--|
| | 0 | 256 | 512 | 1k | 2k | 4k | Average | |
| | Op | en-sourc | e Models | | | | | |
| Llama-3.2-3B-Instruct | 16.97 | 20.27 | 20.08 | 33.25 | 32.98 | 35.71 | 26.54 | |
| Qwen2.5-Coder-7B-Instruct | 30.52 | 53.57 | 59.86 | 66.95 | 72.79 | 76.30 | 60.00 | |
| Qwen2.5-Coder-14B-Instruct | 31.98 | 58.28 | 65.94 | 74.84 | 81.64 | 85.23 | 66.32 | |
| Deepseek-V3-671B (MoE) | 28.34 | 62.85 | 71.73 | 81.55 | 89.01 | 92.17 | 70.94 | |
| | Clo | se-sourc | e Models | | | | | |
| Claude-3.5-Haiku | 36.21 | 66.47 | 75.71 | 84.75 | 90.07 | 92.94 | 74.36 | |
| Claude-3.5-Sonnect | 23.84 | 57.78 | 67.19 | 75.83 | 80.56 | 80.54 | 64.29 | |
| GPT-4o-mini | 30.16 | 62.28 | 71.47 | 82.29 | 88.39 | 91.98 | 71.10 | |
| GPT-40 | 32.77 | 64.15 | 74.32 | 82.98 | 90.07 | 93.49 | 72.96 | |

Table 2: Performance of various LLMs across different context lengths on SolBench. "Average" indicates a model's mean pass rate over these context lengths.

indexes objects that cannot be indexed; and "Implicitly convertible" errors occur when the model uses identifiers of incorrect types.

5.2 Code Repair

| | Context Length | | | | | | |
|--------------|----------------|-------|-------|-------|-------|-------|-------|
| | 0 | 256 | 512 | 1k | 2k | 4k | Avg. |
| No Repair | 30.16 | 62.28 | 71.47 | 82.29 | 88.39 | 91.98 | 71.10 |
| Self Edit | 37.84 | 67.62 | 74.82 | 84.54 | 90.21 | 93.73 | 74.79 |
| Self Debug | 38.66 | 68.43 | 76.14 | 85.62 | 90.81 | 94.35 | 75.67 |
| Self Repair | 36.98 | 66.09 | 74.41 | 84.09 | 90.07 | 93.61 | 74.21 |
| Self Refine | 31.00 | 62.83 | 71.95 | 82.53 | 88.75 | 92.55 | 71.60 |
| Avg. CR | 36.12 | 66.24 | 74.33 | 84.20 | 89.96 | 93.56 | 74.07 |
| Increase (%) | 5.96 | 3.96 | 2.86 | 1.91 | 1.57 | 1.58 | 2.97 |

Table 3: Evaluation of Code Repair Methods on SolBench Using GPT-4o-mini. "No Repair" refers to single generation without repair. "Avg." shows the average pass rate across different context lengths. "Avg. CR" measures average pass rate for repair methods at specific lengths, and "Increase" indicates improvement over "No Repair".

We used GPT-4o-mini as both the code completion model and the code repair model because it is cost-effective and demonstrates performance comparable to the state-of-the-art model, GPT-4o, as shown in Table 2. We tested the extent to which different code repair methods improve the pass rate under varying context lengths.

Under varying context lengths, code repair methods achieve better performance with lower computational costs, especially as the context length decreases. The experimental results (Table 3) show that under different context lengths, the code repair method can effectively achieve better performance with lower computational costs, and the improvement becomes more significant as the context length decreases. When the context length is 0, applying code repair can increase the accuracy by an average of about 6%. Among all tested context lengths, the *Self Debug* method performed the best, achieving an average pass rate increase of about 4.5%. In contrast, the *Self Refine* method showed the poorest performance, with almost no improvement. This is because *Self Refine* does not




Figure 5: Top five error types for code completion with zero context using GPT-40 on SolBench: Most errors are "Undeclared Identifier," indicating the model uses undeclared identifiers in function completions.

utilize error information provided by the executor but instead relies on the model's own reflection of errors, lacking real external feedback. This further highlights the importance of executor feedback for accurate code repair. Additionally, the *Self Edit* and *Self Repair* methods, which also use executor feedback, demonstrated performance very close to that of the *Self Debug* method.

5.3 Retrieval-Augmented Code Repair

5.3.1 Assessing Retrieval Methods. In our experiments with a context length of 1k and 256 tokens, we used GPT-40-mini. The maximum number of generated tokens, the line length of the sliding window, and the sliding step were set to 1024, 1, and 1, respectively. The maximum number of retrieved code snippets was set to 2.

Introducing the retrieval mechanism significantly enhances the performance of various code repair methods. The improvement is more pronounced with a context length of 256 than with 1k. Among these, the LCS method stands out as the most practical, delivering top results for short contexts and near-optimal outcomes for longer contexts at minimal computational cost. As shown in Table 4, the performance of various code repair methods improved after introducing the retrieval mechanism, indicating that incorporating context (obtained through retrieval) can effectively enhance the performance of code repair. It can also be observed that the improvement with a context length of 256 is much greater than that with a context length of 1k. When the context length is set to 1k tokens, the average improvement brought by different retrieval methods was similar. The best-performing method is UniXCoder, which provided an average improvement of approximately 3%. Among the sparse retrieval methods, the best performer was LCS, whose effectiveness was almost on par with the best retrieval method, UniXCoder, while requiring fewer computational resources compared to UniXCoder. When the context length is 256 tokens, the best-performing method is LCS, and it clearly outperforms other retrieval methods. Therefore, the LCS method is the most practical, achieving the best results when the context length is small and almost the best results when the context length is large, with very low computational costs.

| | | Context Length = 256 | | | | | |
|--------------|--------------|----------------------|-------|--------|-------------|-----------|---------------------|
| | No Retrieval | LCS | BM25 | TF-IDF | Jaccard-Sim | UniXCoder | CodeBERT |
| Self Edit | 67.62 | 77.31 | 77.19 | 77.41 | 77.72 | 77.29 | 76.83 |
| Self Debug | 68.43 | 74.06 | 71.78 | 71.76 | 72.07 | 72.74 | 72.02 |
| Self Repair | 66.09 | 71.40 | 69.08 | 69.03 | 68.79 | 69.84 | 68.33 |
| Self Refine | 62.83 | 70.32 | 67.02 | 66.69 | 66.59 | 68.43 | 66.42 |
| Average | 66.24 | 73.27 | 71.27 | 71.22 | 71.29 | 72.08 | 70.90 |
| Increase (%) | - | 7.03 | 5.03 | 4.98 | 5.05 | 5.84 | 4.66 |
| | | | | | | | Context Length = 1K |
| Self Edit | 84.54 | 88.56 | 88.85 | 88.75 | 89.45 | 89.50 | 89.21 |
| Self Debug | 85.62 | 87.58 | 86.36 | 85.93 | 86.55 | 87.22 | 86.77 |
| Self Repair | 84.09 | 86.45 | 85.81 | 85.74 | 85.83 | 86.24 | 85.69 |
| Self Refine | 82.53 | 85.71 | 84.61 | 84.44 | 84.66 | 85.42 | 84.44 |
| Average | 84.20 | 87.08 | 86.41 | 86.22 | 86.62 | 87.10 | 86.53 |
| Increase (%) | - | 2.88 | 2.21 | 2.02 | 2.42 | 2.90 | 2.33 |

| Table 4: Performance of Retrieval-Augmented Code Repair on SolBench Using GPT-4o-mini. Experiments conducted with |
|--|
| context lengths of 256 and 1k. "No Retrieval" refers to using only code repair methods. "Average" indicates the average pass |
| rate across retrieval methods, and "Increase" indicates improvement over "No Retrieval". |

| | | Context Length | | | | | | |
|--------------|-------|----------------|-------|-------|-------|-------|-------|--|
| | 0 | 256 | 512 | 1k | 2k | 4k | Avg. | |
| No Repair | 30.16 | 62.28 | 71.47 | 82.29 | 88.39 | 91.98 | 71.10 | |
| Self Edit | 53.35 | 77.31 | 81.19 | 88.56 | 92.36 | 95.12 | 81.32 | |
| Self Debug | 49.69 | 74.06 | 79.70 | 87.58 | 91.14 | 93.94 | 79.35 | |
| Self Repair | 44.47 | 71.40 | 83.60 | 86.45 | 91.14 | 94.35 | 78.57 | |
| Self Refine | 42.79 | 70.32 | 76.81 | 85.71 | 90.28 | 93.73 | 76.61 | |
| Avg. RACR | 47.58 | 73.27 | 80.33 | 87.08 | 91.23 | 94.29 | 78.96 | |
| Increase (%) | 17.42 | 10.99 | 8.85 | 4.78 | 2.84 | 2.30 | 7.86 | |

Table 5: Performance of Retrieval-Augmented Code Repair (RACR) Methods Using GPT-40-mini with LCS. "No Repair" refers to single generation without RACR. "Avg." shows the average pass rate across context lengths. "Avg. RACR" measures average pass rate at specific lengths, and "Increase" indicates improvement over "No Repair".

5.3.2 Assessing Performance Under Different Context Length. We also tested the effectiveness of the Retrieval-Augmented Code Repair (RACR) framework under different context lengths. In our experiments, we used GPT-40-mini with the Longest Common Subsequence (LCS) as the retrieval method.

RACR method enables the model to achieve code completion capabilities equivalent to doubling the context length. The retrieval mechanism of RACR method significantly benefits code repair methods. As shown in the results (Table 5), the RACR method significantly improves the model's code completion capability. When the context length is 0, the improvement brought by Retrieval-Augmented Self Edit (RACE) reaches up to 23%. Additionally, we observe that using RACR with context lengths of 256, 512, 1k, and 2k achieves comparable performance to models with context lengths of 512, 1k, 2k, and 4k respectively. For example, When the context length is 1k, the average pass rate using the RACR method is 87.08%, which is very close to the pass rate of 88.39% without using RACR at a 2k context length. By selecting the best-performing RACE method, the model achieves 88.56%, even surpassing the pass rate without RACR at 2k context length. This strongly indicates that the RACR method can help the model achieve code completion capabilities equivalent to double the context length. Moreover, since computational overhead increases quadratically with context length, the RACR method significantly reduces the computational requirements when achieving the same code completion capabilities.

The RACR method is particularly suitable for scenarios with limited computational resources. In situations where only a small context length or no context at all is provided for code completion, RACR offers an average improvement of over 17%. Moreover, RACR is also effective in resource-abundant environments. Even after providing a 4k context length for code completion, RACR still brings an average improvement of 2.3%, further enhancing the reliability of the code completed by models. Notably, the outstanding RACE method achieves more than a 3% significant improvement when the model already has a correctness rate of 91.98%.

Additionally, in the "Avg. Ctx Len" column, we find that the Self Refine method, which previously showed little improvement due to the lack of feedback from the executor, now achieves an average improvement of over 5% under the retrieval mechanism. This demonstrates that the retrieval mechanism itself provides substantial positive benefits to code repair methods.

6 Conclusion

We have introduced SolBench, a pioneering benchmark for assessing the Solidity coding capabilities of LLMs through functional correctness. Our assessment of models like GPT-40, Claude-3.5, Deepseek-V3, Qwen2.5-Coder, and Llama-3.2 highlighted performance challenges primarily due to limited context. To address these

issues, we introduced a retrieval-augmented code repair approach, which significantly enhanced both performance and efficiency. Sol-Bench's extensible dataset ensures adaptability to the evolving landscape of smart contracts, and we plan to keep it updated to ensure its continued relevance in assessing Solidity coding skills.

References

- Anthropic. 2023. Getting Started with the Anthropic API. https://docs.anthropic. com/en/api/getting-started. Accessed: 2025-02-25.
- [2] Anthropic. 2024. Claude 3.5 Sonnet. https://www.anthropic.com/news/claude-3-5-sonnet. Accessed: 2025-02-25.
- [3] Jacob Austin, Augustus Odena, Maxwell Nye, Maarten Bosma, Henryk Michalewski, David Dohan, Ellen Jiang, Carrie Cai, Michael Terry, Quoc Le, et al. 2021. Program synthesis with large language models. arXiv preprint arXiv:2108.07732 (2021).
- [4] Angelica Chen, Jérémy Scheurer, Tomasz Korbak, Jon Ander Campos, Jun Shern Chan, Samuel R. Bowman, Kyunghyun Cho, and Ethan Perez. 2024. Improving Code Generation by Training with Natural Language Feedback. arXiv:2303.16749 [cs.SE] https://arxiv.org/abs/2303.16749
- [5] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. 2021. Evaluating large language models trained on code. arXiv preprint arXiv:2107.03374 (2021).
- [6] Xinyun Chen, Maxwell Lin, Nathanael Schärli, and Denny Zhou. 2023. Teaching Large Language Models to Self-Debug. arXiv:2304.05128 [cs.CL] https://arxiv. org/abs/2304.05128
- [7] Crytic. 2024. Crytic/Diffusc. GitHub. Accessed: 2024-06-13, https://github.com/ crytic/diffusc.
- [8] Nii Osae Osae Dade, Margaret Lartey-Quaye, Emmanuel Teye-Kofi Odonkor, and Paul Ammah. 2023. Optimizing Large Language Models to Expedite the Development of Smart Contracts. arXiv preprint arXiv:2310.05178 (2023).
- [9] DeepSeek-AI, Aixin Liu, Bei Feng, Bing Xue, Bingxuan Wang, Bochao Wu, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, Damai Dai, Daya Guo, Dejian Yang, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Han Bao, Hanwei Xu, Haocheng Wang, Haowei Zhang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Li, Hui Qu, J. L. Cai, Jian Liang, Jianzhong Guo, Jiaqi Ni, Jiashi Li, Jiawei Wang, Jin Chen, Jingchang Chen, Jingyang Yuan, Junjie Qiu, Junlong Li, Junxiao Song, Kai Dong, Kai Hu, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Lei Xu, Leyi Xia, Liang Zhao, Litong Wang, Liyue Zhang, Meng Li, Miaojun Wang, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Mingming Li, Ning Tian, Panpan Huang, Peiyi Wang, Peng Zhang, Qiancheng Wang, Qihao Zhu, Qinyu Chen, Qiushi Du, R. J. Chen, R. L. Jin, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, Runxin Xu, Ruoyu Zhang, Ruyi Chen, S. S. Li, Shanghao Lu, Shangyan Zhou, Shanhuang Chen, Shaoqing Wu, Shengfeng Ye, Shengfeng Ye, Shirong Ma, Shiyu Wang, Shuang Zhou, Shuiping Yu, Shunfeng Zhou, Shuting Pan, T. Wang, Tao Yun, Tian Pei, Tianyu Sun, W. L. Xiao, Wangding Zeng, Wanjia Zhao, Wei An, Wen Liu, Wenfeng Liang, Wenjun Gao, Wenqin Yu, Wentao Zhang, X. Q. Li, Xiangyue Jin, Xianzu Wang, Xiao Bi, Xiaodong Liu, Xiaohan Wang, Xiaojin Shen, Xiaokang Chen, Xiaokang Zhang, Xiaosha Chen, Xiaotao Nie, Xiaowen Sun, Xiaoxiang Wang, Xin Cheng, Xin Liu, Xin Xie, Xingchao Liu, Xingkai Yu, Xinnan Song, Xinxia Shan, Xinyi Zhou, Xinyu Yang, Xinyuan Li, Xuecheng Su, Xuheng Lin, Y. K. Li, Y. Q. Wang, Y. X. Wei, Y. X. Zhu, Yang Zhang, Yanhong Xu, Yanhong Xu, Yanping Huang, Yao Li, Yao Zhao, Yaofeng Sun, Yaohui Li, Yaohui Wang, Yi Yu, Yi Zheng, Yichao Zhang, Yifan Shi, Yiliang Xiong, Ying He, Ying Tang, Yishi Piao, Yisong Wang, Yixuan Tan, Yiyang Ma, Yiyuan Liu, Yongqiang Guo, Yu Wu, Yuan Ou, Yuchen Zhu, Yuduan Wang, Yue Gong, Yuheng Zou, Yujia He, Yukun Zha, Yunfan Xiong, Yunxian Ma, Yuting Yan, Yuxiang Luo, Yuxiang You, Yuxuan Liu, Yuyang Zhou, Z. F. Wu, Z. Z. Ren, Zehui Ren, Zhangli Sha, Zhe Fu, Zhean Xu, Zhen Huang, Zhen Zhang, Zhenda Xie, Zhengyan Zhang, Zhewen Hao, Zhibin Gou, Zhicheng Ma, Zhigang Yan, Zhihong Shao, Zhipeng Xu, Zhiyu Wu, Zhongyu Zhang, Zhuoshu Li, Zihui Gu, Zijia Zhu, Zijun Liu, Zilin Li, Ziwei Xie, Ziyang Song, Ziyi Gao, and Zizheng Pan. 2025. DeepSeek-V3 Technical Report. arXiv:2412.19437 [cs.CL] https://arxiv.org/abs/2412.19437
- [10] Yangruibo Ding, Zijian Wang, Wasi Ahmad, Hantian Ding, Ming Tan, Nihal Jain, Murali Krishna Ramanathan, Ramesh Nallapati, Parminder Bhatia, Dan Roth, et al. 2024. Crosscodeeval: A diverse and multilingual benchmark for cross-file code completion. Advances in Neural Information Processing Systems 36 (2024).
- [11] Etherscan. 2024. Etherscan: The Ethereum Blockchain Explorer. Web Page. Accessed: 2024-06-13, https://etherscan.io/.
- [12] Josselin Feist, Gustavo Grieco, and Alex Groce. 2019. Slither: A Static Analysis Framework for Smart Contracts. In 2019 IEEE/ACM 2nd International Workshop on Emerging Trends in Software Engineering for Blockchain (WETSEB). IEEE. doi:10. 1109/wetseb.2019.00008

- [13] Zhangyin Feng, Daya Guo, Duyu Tang, Nan Duan, Xiaocheng Feng, Ming Gong, Linjun Shou, Bing Qin, Ting Liu, Daxin Jiang, et al. 2020. Codebert: A pre-trained model for programming and natural languages. arXiv preprint arXiv:2002.08155 (2020).
- [14] Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, Haofen Wang, and Haofen Wang. 2023. Retrieval-augmented generation for large language models: A survey. arXiv preprint arXiv:2312.10997 2 (2023).
- [15] Gustavo Grieco, Will Song, Artur Cygan, Josselin Feist, and Alex Groce. 2020. Echidna: effective, usable, and fast fuzzing for smart contracts. In Proceedings of the 29th ACM SIGSOFT International Symposium on Software Testing and Analysis (Virtual Event, USA) (ISSTA 2020). Association for Computing Machinery, New York, NY, USA, 557–560. doi:10.1145/3395363.3404366
- [16] Daya Guo, Shuai Lu, Nan Duan, Yanlin Wang, Ming Zhou, and Jian Yin. 2022. Unixcoder: Unified cross-modal pre-training for code representation. arXiv preprint arXiv:2203.03850 (2022).
- [17] Daya Guo, Qihao Zhu, Dejian Yang, Zhenda Xie, Kai Dong, Wentao Zhang, Guanting Chen, Xiao Bi, Y Wu, YK Li, et al. 2024. DeepSeek-Coder: When the Large Language Model Meets Programming-The Rise of Code Intelligence. arXiv preprint arXiv:2401.14196 (2024).
- [18] Dan Hendrycks, Steven Basart, Saurav Kadavath, Mantas Mazeika, Akul Arora, Ethan Guo, Collin Burns, Samir Puranik, Horace He, Dawn Song, et al. 2021. Measuring coding challenge competence with apps. arXiv preprint arXiv:2105.09938 (2021).
- [19] Binyuan Hui, Jian Yang, Zeyu Cui, Jiaxi Yang, Dayiheng Liu, Lei Zhang, Tianyu Liu, Jiajun Zhang, Bowen Yu, Keming Lu, Kai Dang, Yang Fan, Yichang Zhang, An Yang, Rui Men, Fei Huang, Bo Zheng, Yibo Miao, Shanghaoran Quan, Yunlong Feng, Xingzhang Ren, Xuancheng Ren, Jingren Zhou, and Junyang Lin. 2024. Qwen2.5-Coder Technical Report. arXiv:2409.12186 [cs.CL] https://arxiv.org/abs/2409.12186
- [20] Jinan Jiang, Zihao Li, Haoran Qin, Muhui Jiang, Xiapu Luo, Xiaoming Wu, Haoyu Wang, Yutian Tang, Chenxiong Qian, and Ting Chen. 2024. Unearthing Gas-Wasting Code Smells in Smart Contracts with Large Language Models. *IEEE Transactions on Software Engineering* (2024), 1–26. doi:10.1109/TSE.2024.3491578
- [21] Yuhang Lai, Chengxi Li, Yiming Wang, Tianyi Zhang, Ruiqi Zhong, Luke Zettlemoyer, Wen-tau Yih, Daniel Fried, Sida Wang, and Tao Yu. 2023. DS-1000: A natural and reliable benchmark for data science code generation. In *International Conference on Machine Learning*. PMLR, 18319–18345.
- [22] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. Advances in neural information processing systems 33 (2020), 9459–9474.
- [23] Haoyang Li, Jing Zhang, Hanbing Liu, Ju Fan, Xiaokang Zhang, Jun Zhu, Renjie Wei, Hongyan Pan, Cuiping Li, and Hong Chen. 2024. CodeS: Towards Building Open-source Language Models for Text-to-SQL. arXiv:2402.16347 [cs.CL] https: //arxiv.org/abs/2402.16347
- [24] Raymond Li, Loubna Ben Allal, Yangtian Zi, Niklas Muennighoff, Denis Kocetkov, Chenghao Mou, Marc Marone, Christopher Akiki, Jia Li, Jenny Chim, et al. 2023. Starcoder: may the source be with you! arXiv preprint arXiv:2305.06161 (2023).
- [25] Tianyang Liu, Canwen Xu, and Julian McAuley. 2023. Repobench: Benchmarking repository-level code auto-completion systems. arXiv preprint arXiv:2306.03091 (2023).
- [26] LLAMA. 2024. Llama 3.2. https://www.llama.com/docs/model-cards-andprompt-formats/llama3_2/. Accessed: 2025-02-25.
- [27] Anton Lozhkov, Raymond Li, Loubna Ben Allal, Federico Cassano, Joel Lamy-Poirier, Nouamane Tazi, Ao Tang, Dmytro Pykhtar, Jiawei Liu, Yuxiang Wei, Tianyang Liu, Max Tian, Denis Kocetkov, Arthur Zucker, Younes Belkada, Zijian Wang, Qian Liu, Dmitry Abulkhanov, Indraneil Paul, Zhuang Li, Wen-Ding Li, Megan Risdal, Jia Li, Jian Zhu, Terry Yue Zhuo, Evgenii Zheltonozhskii, Nii Osae Osae Dade, Wenhao Yu, Lucas Krauß, Naman Jain, Yixuan Su, Xuanli He, Manan Dey, Edoardo Abati, Yekun Chai, Niklas Muennighoff, Xiangru Tang, Muhtasham Oblokulov, Christopher Akiki, Marc Marone, Chenghao Mou, Mayank Mishra, Alex Gu, Binyuan Hui, Tri Dao, Armel Zebaze, Olivier Dehaene, Nicolas Patry, Canwen Xu, Julian McAuley, Han Hu, Torsten Scholak, Sebastien Paquet, Jennifer Robinson, Carolyn Jane Anderson, Nicolas Chapados, Mostofa Patwary, Nima Tajbakhsh, Yacine Jernite, Carlos Muñoz Ferrandis, Lingming Zhang, Sean Hughes, Thomas Wolf, Arjun Guha, Leandro von Werra, and Harm de Vries. 2024. StarCoder 2 and The Stack v2: The Next Generation. arXiv:2402.19173 [cs.SE] https://arxiv.org/abs/2402.19173
- [28] Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegreffe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, Shashank Gupta, Bodhisattwa Prasad Majumder, Katherine Hermann, Sean Welleck, Amir Yazdanbakhsh, and Peter Clark. 2023. Self-Refine: Iterative Refinement with Self-Feedback. arXiv:2303.17651 [cs.CL] https://arxiv.org/abs/2303.17651
- [29] Yingjie Mao, Xiao Li, Zongwei Li, and Wenkai Li. 2024. Automated Smart Contract Summarization via LLMs. arXiv preprint arXiv:2402.04863 (2024).
- [30] MistralAI. 2024. Codestral. https://mistral.ai/news/codestral. Accessed: 2025-02-25.

- [31] Gabriele Morello, Mojtaba Eshghie, Sofia Bobadilla, and Martin Monperrus. 2024. DISL: Fueling Research with A Large Dataset of Solidity Smart Contracts. arXiv:2403.16861 [cs.SE] https://arxiv.org/abs/2403.16861
- [32] Erik Nijkamp, Bo Pang, Hiroaki Hayashi, Lifu Tu, Huan Wang, Yingbo Zhou, Silvio Savarese, and Caiming Xiong. 2022. Codegen: An open large language model for code with multi-turn program synthesis. arXiv preprint arXiv:2203.13474 (2022).
- [33] OhMyGPT. [n. d.]. OhMyGPT. https://next.ohmygpt.com/. Accessed: 2025-02-25.
 [34] Theo X. Olausson, Jeevana Priya Inala, Chenglong Wang, Jianfeng Gao, and Armando Solar-Lezama. 2024. Is Self-Repair a Silver Bullet for Code Generation?
- arXiv:2306.09896 [cs.CL] https://arxiv.org/abs/2306.09896 [35] OpenAI. 2023. API Reference - Introduction. https://platform.openai.com/docs/
- api-reference/introduction. [36] OpenAI. 2024. GPT-4O. https://openai.com/index/hello-gpt-4o. Accessed:
- 2025-02-25.
- [37] Ronald Rivest. 1992. The MD5 message-digest algorithm. Technical Report.
 [38] Baptiste Roziere, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Tal Remez, Jérémy Rapin, et al. 2023. Code llama: Open foundation models for code. arXiv preprint arXiv:2308.12950 (2023).
- [39] Chaofan Shou, Jing Liu, Doudou Lu, and Koushik Sen. 2024. LLM4Fuzz: Guided Fuzzing of Smart Contracts with Large Language Models. arXiv preprint arXiv:2401.11108 (2024).
- [40] Disha Shrivastava, Hugo Larochelle, and Daniel Tarlow. 2023. Repository-level prompt generation for large language models of code. In *International Conference* on Machine Learning. PMLR, 31693–31715.
- [41] André Storhaug, Jingyue Li, and Tianyuan Hu. 2023. Efficient avoidance of vulnerabilities in auto-completed smart contract code using vulnerability-constrained decoding. In 2023 IEEE 34th International Symposium on Software Reliability Engineering (ISSRE). IEEE, 683–693.
- [42] Yuqiang Sun, Daoyuan Wu, Yue Xue, Han Liu, Haijun Wang, Zhengzi Xu, Xiaofei Xie, and Yang Liu. 2024. Gptscan: Detecting logic vulnerabilities in smart contracts by combining gpt with program analysis. In Proceedings of the IEEE/ACM 46th International Conference on Software Engineering. 1–13.
- [43] Sean Welleck, Ximing Lu, Peter West, Faeze Brahman, Tianxiao Shen, Daniel Khashabi, and Yejin Choi. 2022. Generating Sequences by Learning to Self-Correct. arXiv:2211.00053 [cs.CL] https://arxiv.org/abs/2211.00053
- [44] Xin Xu, Shizhe Diao, Can Yang, and Yang Wang. 2024. Can We Verify Step by Step for Incorrect Answer Detection? arXiv preprint arXiv:2402.10528 (2024).
- [45] Zhen Yang, Jacky Keung, Xiao Yu, Xiaodong Gu, Zhengyuan Wei, Xiaoxue Ma, and Miao Zhang. 2021. A multi-modal transformer-based code summarization approach for smart contracts. In 2021 IEEE/ACM 29th International Conference on Program Comprehension (ICPC). IEEE, 1–12.
- [46] Lei Yu, Shiqi Chen, Hang Yuan, Peng Wang, Zhirong Huang, Jingyuan Zhang, Chenjie Shen, Fengjun Zhang, Li Yang, and Jiajia Ma. 2024. Smart-LLaMA: Two-Stage Post-Training of Large Language Models for Smart Contract Vulnerability Detection and Explanation. arXiv:2411.06221 [cs.CR] https://arxiv.org/abs/2411. 06221
- [47] Fengji Zhang, Bei Chen, Yue Zhang, Jacky Keung, Jin Liu, Daoguang Zan, Yi Mao, Jian-Guang Lou, and Weizhu Chen. 2023. RepoCoder: Repository-Level Code Completion Through Iterative Retrieval and Generation. In Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing. 2471–2484.
- [48] Kechi Zhang, Zhuo Li, Jia Li, Ge Li, and Zhi Jin. 2023. Self-Edit: Fault-Aware Code Editor for Code Generation. arXiv:2305.04087 [cs.SE] https://arxiv.org/abs/ 2305.04087
- [49] Lyuye Zhang, Kaixuan Li, Kairan Sun, Daoyuan Wu, Ye Liu, Haoye Tian, and Yang Liu. 2024. Acfix: Guiding llms with mined common rbac practices for context-aware repair of access control vulnerabilities in smart contracts. arXiv preprint arXiv:2403.06838 (2024).
- [50] Junjie Zhao, Xiang Chen, Guang Yang, and Yiheng Shen. 2024. Automatic smart contract comment generation via large language models and in-context learning. *Information and Software Technology* 168 (2024), 107405.
- [51] Ruochen Zhao, Xingxuan Li, Shafiq Joty, Chengwei Qin, and Lidong Bing. 2023. Verify-and-edit: A knowledge-enhanced chain-of-thought framework. arXiv preprint arXiv:2305.03268 (2023).
- [52] Peilin Zheng, Zibin Zheng, Jiajing Wu, and Hong-Ning Dai. 2020. Xblock-eth: Extracting and exploring blockchain data from ethereum. *IEEE Open Journal of* the Computer Society 1 (2020), 95–106.