

# Generation of solitons and periodic wave trains in birefringent optical fibers

Houria Triki<sup>1</sup> and Vladimir I. Kruglov<sup>2</sup>

<sup>1</sup>*Radiation Physics Laboratory, Department of Physics, Faculty of Sciences,  
Badji Mokhtar University, P. O. Box 12, 23000 Annaba, Algeria*

<sup>2</sup>*Centre for Engineering Quantum Systems, School of Mathematics and Physics,  
The University of Queensland, Brisbane, Queensland 4072, Australia*

We investigate the existence and propagation properties of all possible types of envelope soliton pulses in a birefringent optical fiber wherein the light propagation is governed by two coupled nonlinear Schrödinger equations with coherent and incoherent nonlinear couplings. Especially, we study the existence of optical solitons under the influence of group-velocity dispersion and third-order nonlinearity, which have physical relevance in the context of elliptical core optical fiber. The results show that the waveguiding medium supports the existence of a wide variety of propagating envelope solitons, including dipole-bright, bright-dipole, bright-dark, dark-bright, W-shaped-dipole and dipole-W-shaped pulses which exhibit different characteristics. Interestingly, we find that the obtained soliton pairs are allowable in both the normal and anomalous dispersion regimes. A wide class of exact analytic periodic (elliptic) wave solutions are identified. This illustrates the potentially rich set of localized pulses and nonlinear periodic waves in birefringent optical fiber media.

PACS numbers: 05.45.Yv, 42.65.Tg

## I. INTRODUCTION

Propagation dynamics of envelope solitons in birefringent optical fibers has been the subject of intensive experimental and theoretical studies in recent years [1, 2]. This because of their important potential applications for the design of new kinds of all-optical switches and logic gates [3, 4]. One should note here that no mode is single in realistic nonlinear fibers due to the presence of birefringence phenomenon [5] and single mode fibers are normally bimodal [6]. Interestingly, the study of electromagnetic field dynamics in birefringent optical media showed a multitude of new behaviors not demonstrated in the scalar case, for example, by exploring the concept of a vector soliton. The principal physical processes that are responsible for the soliton formation in such birefringent fibers are the group-velocity dispersion, self-phase modulation and cross-phase modulation. In this situation, the main nonlinear evolution equations governing the light propagation in such transmission systems are the coupled nonlinear Schrödinger (NLS) equations which constitute the well known Manakov system [7, 8]. Such integrable system represents a natural and important extension of the scalar cubic NLS equation, which describe the interaction between distinct field components. It is worthy to note that the relevance of coupled Manakov-type equations for describing vector phenomena is not only restricted to optics [9], but also to Bose-Einstein condensates [10], hydrodynamics [11], and plasma physics [12]. Importantly, Manakov vector solitons in nonlinear systems can take different shapes and forms, including bright-dark, bright-bright, and dark-dark solitons [13–15]. It is of interest to note that Manakov solitons have been demonstrated experimentally in real physical media and natural environments such as photorefractive crystals [16, 17], optical fiber [18], quadratic media [19], semiconductor waveguides [20], and Bose-Einstein condensates [21].

In reality, the simultaneous propagation of multiple light pulses or beams in nonlinear systems is modeled by coupled NLS-like equations which are non-integrable in general [22]. These multicomponent NLS equations can be divided into two categories, namely coherently and incoherently coupled NLS equations [9]. This coupled form of NLS equations plays a crucial role in optics due to their important applications in multichannel bit parallel-wavelength and wavelength-division multiplexing optical fiber networks [23–25].

Presently, considerable interest is still paid to search for new kinds of solitons/solitary waves, uncover the optical transmission and stability properties of them, and understand the mechanism of them. This is not surprising because these localized structures have a broad range of practical applications encompassing engineering and nonlinear science [9, 26]. We should note here that solutions in an exact analytical form are highly desired when one compare experimental findings with theory. Besides, closed form solutions when they exist can enable one to determine some relevant physical quantities analytically and find results of numerical simulations. In this paper, we show that a birefringent optical fiber system can support a different variety of interesting soliton pulses, which have different characteristics (e.g., inverse temporal width, amplitudes, and wave numbers) but propagate with identical group velocities. Importantly, the derived exact soliton solutions contain free parameters, thus implying that one can find families of propagating localized waves in the material.

The paper is organized as follows. In Sec. II, we present the coupled NLS system with coherent and incoherent nonlinear couplings describing the evolution of two field components in a birefringent optical fiber and give a detailed derivation of its exact analytical solitons solutions. In particular, classes of soliton pair solutions in the form of

dipole-bright, bright-dipole, bright-dark, dark-bright, W-shaped-dipole, and dipole-W-shaped solitons solutions are obtained here. The characteristics of these soliton pulses are also discussed. Various periodic wave solutions for this model, which are expressed in terms of the Jacobian elliptic functions are derived in Sec. III. Finally, our conclusions are given in Sec. IV.

## II. COUPLED NLS SYSTEM AND ITS EXACT SOLITON SOLUTIONS

### A. Theoretical model

We consider here the coupled-mode theory for directional couplers. The NLS equations simplify considerably for a symmetric coupler with two identical cores. In this case the coupled-mode equations for symmetric couplers become [24]:

$$i \frac{\partial \psi_1}{\partial z} - \frac{\beta_2}{2} \frac{\partial^2 \psi_1}{\partial \tau^2} + \gamma(|\psi_1|^2 + \sigma |\psi_2|^2) \psi_1 + \alpha \psi_2 = 0, \quad (1)$$

$$i \frac{\partial \psi_2}{\partial z} - \frac{\beta_2}{2} \frac{\partial^2 \psi_2}{\partial \tau^2} + \gamma(|\psi_2|^2 + \sigma |\psi_1|^2) \psi_2 + \alpha \psi_1 = 0, \quad (2)$$

where  $\psi_1$  and  $\psi_2$  represent the slowly varying envelopes of the electromagnetic waves,  $z$  and  $\tau$  are the propagation distance and reduced time  $\tau = t - \beta_1 z$ . Here  $\beta_1$ ,  $\beta_2$ ,  $\gamma$ ,  $\sigma$  and  $\alpha$  are dispersions, self- and cross-phase modulations, and coupling coefficient respectively. We introduce two new variables as

$$U = \frac{1}{\sqrt{2}}(\psi_1 + \psi_2), \quad V = \frac{1}{\sqrt{2}}(\psi_1 - \psi_2), \quad (3)$$

which associated with the even and odd supermodes. In terms of new complex amplitudes  $U$  and  $V$ , Eqs. (1) and (2) have the following form,

$$i \frac{\partial U}{\partial z} - \frac{\beta_2}{2} \frac{\partial^2 U}{\partial \tau^2} + (\gamma_1 |U|^2 + \gamma |V|^2) U + \gamma_2 V^2 U^* + \alpha U = 0, \quad (4)$$

$$i \frac{\partial V}{\partial z} - \frac{\beta_2}{2} \frac{\partial^2 V}{\partial \tau^2} + (\gamma_1 |V|^2 + \gamma |U|^2) V + \gamma_2 U^2 V^* - \alpha V = 0, \quad (5)$$

where  $\gamma_1 = \gamma(1 + \sigma)/2$  and  $\gamma_2 = \gamma(1 - \sigma)/2$ . In the what follows, we are interested by waveform solutions of Eqs. (4) and (5) which exhibit different localized profile of amplitudes. The existence of such nonlinear waves is of practical relevance as they describe the most general forms of traveling waves with different properties. The complex envelope traveling-waves  $U(z, \tau)$  and  $V(z, \tau)$  can be written [27, 28] as

$$U(z, \tau) = u(x) \exp[i(\kappa z - \delta \tau + \theta)], \quad (6)$$

$$V(z, \tau) = v(x) \exp[i(\kappa z - \delta \tau + \theta)], \quad (7)$$

where  $u(x)$  and  $v(x)$  are real amplitude functions depending on the traveling coordinate  $x = \tau - qz$ , and  $q = 1/v$  is the inverse velocity of the waves. Also,  $\kappa$  and  $\delta$  are the respective real parameters describing the wave number and frequency shift, while  $\theta$  represent the phase of pulses at  $z = 0$ .

On substituting the waveform solutions (6) and (7) into Eqs. (4) and (5) and separating the real and imaginary parts, one obtains the two ordinary differential equations:

$$\frac{\beta_2}{2} \frac{d^2 u}{dx^2} - \gamma_1 u^3 - (\gamma + \gamma_2) v^2 u + \left( \kappa - \alpha - \frac{1}{2} \beta_2 \delta^2 \right) u = 0, \quad (8)$$

$$\frac{\beta_2}{2} \frac{d^2 v}{dx^2} - \gamma_1 v^3 - (\gamma + \gamma_2) u^2 v + \left( \kappa + \alpha - \frac{1}{2} \beta_2 \delta^2 \right) v = 0. \quad (9)$$

We have also found the relation  $q = \beta_2 \delta$  showing that the inverse velocity  $q$  is controlled by  $\delta$ . One can express Eqs. (8) and (9) in the form,

$$\frac{d^2 u}{dx^2} + au^3 + bv^2 u + cu = 0, \quad (10)$$

$$\frac{d^2 v}{dx^2} + av^3 + bu^2 v + dv = 0, \quad (11)$$

where the parameters  $a$ ,  $b$ ,  $c$  and  $d$  are given by

$$a = -\frac{\gamma(1+\sigma)}{\beta_2}, \quad b = \frac{\gamma(\sigma-3)}{\beta_2}, \quad c = \frac{2(\kappa-\alpha)}{\beta_2} - \delta^2, \quad d = \frac{2(\kappa+\alpha)}{\beta_2} - \delta^2. \quad (12)$$

In what follows, we consider the case when  $\sigma = 1$ , which corresponds to a strong birefringent effect of the fiber. This leads to  $a = b$  in Eq. (12) and consequently the amplitude Eqs. (10) and (11) become as

$$\frac{d^2 u}{dx^2} + au^3 + av^2 u + cu = 0, \quad (13)$$

$$\frac{d^2 v}{dx^2} + av^3 + au^2 v + dv = 0, \quad (14)$$

where

$$a = -\frac{2\gamma}{\beta_2}, \quad c = \frac{2(\kappa-\alpha)}{\beta_2} - \delta^2, \quad d = \frac{2(\kappa+\alpha)}{\beta_2} - \delta^2. \quad (15)$$

## B. Envelope solitons

Our purpose now is to analyze the existence of exact analytical soliton solutions of the coupled NLS equations (1) and (2) based on solving the amplitudes Eqs. (13) and (14). In what follows, various kinds of localized wave packets with interesting properties are presented, which may have potential applications in birefringent fiber systems.

### 1. Dipole-bright solitons

The first type of localized solutions we obtained here for the amplitude equations (13) and (14) consists of dipole and bright solitons which take the form,

$$u(x) = \lambda \operatorname{sech}[w(x-\eta)] \tanh[w(x-\eta)], \quad (16)$$

$$v(x) = \rho \operatorname{sech}^2[w(x-\eta)], \quad (17)$$

where

$$w^2 = -c, \quad \lambda^2 = -\frac{6c}{a}, \quad \rho^2 = \lambda^2, \quad d = 4c. \quad (18)$$

and  $\eta$  being the position of the nonlinear wavepackets at  $z = 0$ .

Then, using Eqs. (15) and (18), we get following relations for the inverse temporal width  $w$ , amplitudes  $\lambda$  and wave number  $\kappa$ :

$$w = \sqrt{-\frac{4\alpha}{3\beta_2}}, \quad \lambda = \pm \sqrt{\frac{4\alpha}{\gamma}}, \quad \kappa = \frac{5\alpha}{3} + \frac{\beta_2 \delta^2}{2}, \quad (19)$$

where  $\delta$  is free parameter. We have for positive and negative value of parameter  $\lambda$  two different solution for the amplitude  $\rho$  as

$$\rho = \sqrt{\frac{4\alpha}{\gamma}}, \quad \rho = -\sqrt{\frac{4\alpha}{\gamma}}, \quad (20)$$

because of relation  $\rho^2 = \lambda^2$ . Substitution of these results into Eqs. (6) and (7), one gets a class of exact soliton solutions for the coupled NLS system (4) and (5) as

$$U(z, \tau) = \lambda \operatorname{sech}[w(\tau - qz - \eta)] \tanh[w(\tau - qz - \eta)] \exp[i(\kappa z - \delta\tau + \theta)], \quad (21)$$

$$V(z, \tau) = \rho \operatorname{sech}^2[w(\tau - qz - \eta)] \exp[i(\kappa z - \delta\tau + \theta)], \quad (22)$$

which exist for waveguide parameters obeying the physical conditions  $\alpha\beta_2 < 0$  and  $\alpha\gamma > 0$ . The wave number  $\kappa$  in soliton solutions (21) and (22) depends on a free parameter  $\delta$ .

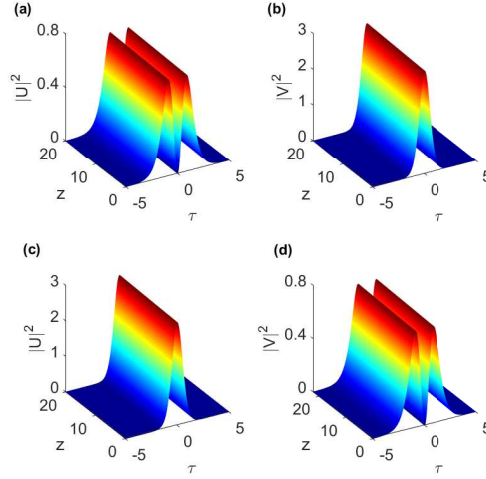


FIG. 1: Intensity profiles of (a) dipole soliton (21) (b) bright soliton (22) (c) bright soliton (28) and (d) dipole soliton (29) for the values mentioned in the text.

An example of the soliton solutions (21) and (22) is presented in Figs. 1(a) and (b), using the parameter values  $\beta_2 = -1$ ,  $\alpha = 0.75$ ,  $\gamma = 1$ ,  $\delta = -0.01$ , and  $\eta = 0$ . It is clear from figures that these localized solutions describe dipole-bright waveforms in the birefringent optical fiber. As seen from the expressions (19) and (20), the widths and amplitudes of solitons depend on the fiber parameters. This allow us to obtain the desired soliton power and width based on an appropriate choice of the fiber characteristic parameters.

## 2. Bright-dipole solitons

We have found the closed form solutions for the amplitude equations (13) and (14) in the form of bright-dipole solitons as

$$u(x) = R \operatorname{sech}^2[\mu(x - \eta)], \quad (23)$$

$$v(x) = P \operatorname{sech}[\mu(x - \eta)] \tanh[\mu(x - \eta)], \quad (24)$$

where

$$\mu^2 = -d, \quad P^2 = -\frac{6d}{a}, \quad R^2 = P^2, \quad d = \frac{c}{4}. \quad (25)$$

Equations (15) and (25) yield the soliton parameters:

$$\mu = \sqrt{\frac{4\alpha}{3\beta_2}}, \quad P = \pm \sqrt{-\frac{4\alpha}{\gamma}}, \quad \kappa = -\frac{5\alpha}{3} + \frac{\beta_2\delta^2}{2}, \quad (26)$$

where  $\delta$  is free parameter. We have for positive and negative value of parameter  $P$  two different solution for the amplitude  $R$  as

$$R = \sqrt{-\frac{4\alpha}{\gamma}}, \quad R = -\sqrt{-\frac{4\alpha}{\gamma}}, \quad (27)$$

because of relation  $R^2 = P^2$ . If we insert these results into Eqs. (6) and (7), one obtains exact analytical soliton solutions for the coupled NLS equations (4) and (5) as

$$U(z, \tau) = R \operatorname{sech}^2[\mu(\tau - qz - \eta)] \exp[i(\kappa z - \delta\tau + \theta)], \quad (28)$$

$$V(z, \tau) = P \operatorname{sech}[\mu(\tau - qz - \eta)] \tanh[\mu(\tau - qz - \eta)] \exp[i(\kappa z - \delta\tau + \theta)]. \quad (29)$$

We observe that the existence conditions of bright-dipole are  $\alpha\beta_2 > 0$  and  $\alpha\gamma < 0$ , which differ from those for dipole-bright solitons. On comparing Eqs. (19) and (20) to (26) and (27), we find that the inverse temporal width, amplitudes and wavenumber of bright-dipole solitons are different from those of dipole-bright solitons.

The intensity profiles of  $\operatorname{sech}^2$ -type bright and dipole solitons (28) and (29) are presented in Figs. 1(c) and (d), respectively. Here we have taken the parameters values  $\beta_2 = -1$ ,  $\alpha = -0.75$ ,  $\gamma = 1$ ,  $\delta = 0.01$ , and  $\eta = 0$ . These solitons have amplitudes and width which are completely determined by the fiber parameters while their wave number is related to the free parameter  $\delta$ .

It is interesting to note that dipole soliton pulses have been obtained in single mode fibers with non-Kerr nonlinearity, for which the formation of this kind of pulse shape requires the compensation of both second- and third-order dispersion effects [30]. For the above dipole pulses no compensation of dispersion is needed for their generation, which may be advantageous in various practical applications. We also note that controllable dipole-mode solitons for generated four-wave mixing have been experimentally demonstrated in an optically induced atomic system [29]. The occurrence of dipole and W-shaped soliton pulses in the birefringent fiber make the current optical system ideal to study the formations of multi-humped solitons and their nonlinear dynamics.

### 3. Bright-dark solitons

We find that Eqs. (13) and (14) admit exact analytical soliton solutions of the form,

$$u(x) = S \operatorname{sech}[\sigma(x - \eta)], \quad (30)$$

$$v(x) = Q \tanh[\sigma(x - \eta)], \quad (31)$$

where

$$\sigma^2 = d - c, \quad S^2 = \frac{d - 2c}{a}, \quad Q^2 = -\frac{d}{a}. \quad (32)$$

As follows from Eqs. (15) and (32), the soliton parameters  $\sigma$  and  $S$  are

$$\sigma = \sqrt{\frac{4\alpha}{\beta_2}}, \quad (33)$$

$$S = \pm \sqrt{\frac{2\kappa - \beta_2\delta^2 - 6\alpha}{2\gamma}}. \quad (34)$$

We have for positive and negative value of parameter  $S$  two different solution for the amplitude  $Q$  as

$$Q = \sqrt{\frac{2\kappa - \beta_2\delta^2 + 2\alpha}{2\gamma}}, \quad Q = -\sqrt{\frac{2\kappa - \beta_2\delta^2 + 2\alpha}{2\gamma}}. \quad (35)$$

Substitution of these waveform solutions into Eqs. (6) and (7) yield the following exact soliton solutions for the coupled NLS system (4) and (5):

$$U(z, \tau) = S \operatorname{sech}[\sigma(\tau - qz - \eta)] \exp[i(\kappa z - \delta\tau + \theta)], \quad (36)$$

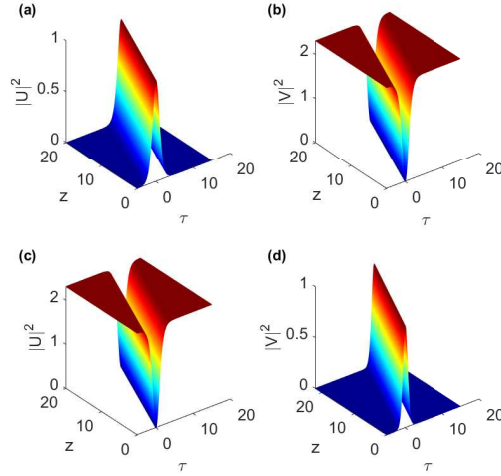


FIG. 2: Intensity profiles of (a) bright soliton (36) (b) dark soliton (37) (c) dark soliton (44) and (d) bright soliton (45) for the values mentioned in the text.

$$V(z, \tau) = Q \tanh[\sigma(\tau - qz - \eta)] \exp[i(\kappa z - \delta\tau + \theta)]. \quad (37)$$

Note that these soliton solutions are dependent on two free parameters  $\kappa$  and  $\delta$  and exist for  $\alpha\beta_2 > 0$ ,  $\gamma(2\kappa - \beta_2\delta^2 - 6\alpha) > 0$  and  $\gamma(2\kappa - \beta_2\delta^2 + 2\alpha) > 0$ . The intensity profiles of these bright- and dark-type solitons are depicted in Figs. 2(a) and (b), respectively, for  $\beta_2 = 1$ ,  $\alpha = \frac{1}{6}$ ,  $\gamma = 0.5$ ,  $\delta = 0.5$ ,  $\kappa = 1, 125$  and  $\eta = 0$ . These solitons have different amplitudes and consequently different powers.

#### 4. Dark-bright solitons

We obtained a class of exact analytical soliton solutions for Eqs. (13) and (14) as

$$u(x) = f \tanh[r(x - \eta)], \quad (38)$$

$$v(x) = g \operatorname{sech}[r(x - \eta)], \quad (39)$$

where

$$r^2 = c - d \quad f^2 = -\frac{c}{a}, \quad g^2 = \frac{c - 2d}{a}. \quad (40)$$

Hence, using Eqs. (15) and (40), we obtain the soliton parameters  $r$  and  $f$  as

$$r = \sqrt{-\frac{4\alpha}{\beta_2}}, \quad (41)$$

$$f = \pm \sqrt{\frac{2\kappa - \beta_2\delta^2 - 2\alpha}{2\gamma}}. \quad (42)$$

We have for positive and negative value of parameter  $f$  two different solution for the amplitude  $g$  as

$$g = \sqrt{\frac{2\kappa - \beta_2\delta^2 + 6\alpha}{2\gamma}}, \quad g = -\sqrt{\frac{2\kappa - \beta_2\delta^2 + 6\alpha}{2\gamma}}. \quad (43)$$

Using these expressions, we can write the exact dark-bright soliton solutions of the coupled NLS equations (4) and (5) as

$$U(z, \tau) = f \tanh[r(\tau - qz - \eta)] \exp[i(\kappa z - \delta\tau + \theta)], \quad (44)$$

$$V(z, \tau) = g \operatorname{sech} [r(\tau - qz - \eta)] \exp[i(\kappa z - \delta\tau + \theta)]. \quad (45)$$

Note that these soliton solutions are dependent on two free parameters  $\kappa$  and  $\delta$ , and they do exist provided that  $\alpha\beta_2 < 0$ ,  $\gamma(2\kappa - \beta_2\delta^2 - 2\alpha) > 0$  and  $\gamma(2\kappa - \beta_2\delta^2 + 6\alpha) > 0$ . It is clear from Eqs. (41), (42) and (43) that the inverse temporal width and amplitudes of dark-bright solitons are different from those obtained for bright-dark solitons in Eqs. (33), (34) and (35). In Figs. 2(c) and (d), we have presented the intensity of these dark and bright solitons for the values  $\beta_2 = 1$ ,  $\alpha = -\frac{1}{6}$ ,  $\gamma = 0.5$ ,  $\delta = 0.5$ ,  $\kappa = 1, 125$ , and  $\eta = 0$ . The above results show that the amplitude and width of both bright-dark and dark-bright solitons are completely determined by two free parameters, the values of wave number  $\kappa$  and the frequency shift parameter  $\delta$ . This means that families of this kind of localized waves can exist in the birefringent optical medium.

### 5. W-shaped-dipole solitons

An interesting class of exact analytical soliton solutions can be obtained for Eqs. (13) and (14) as

$$u(x) = A - B \operatorname{sech}^2[\epsilon(x - \eta)], \quad (46)$$

$$v(x) = F \operatorname{sech}[\epsilon(x - \eta)] \tanh[\epsilon(x - \eta)]. \quad (47)$$

The parameters in these solutions are given by equations:  $A^2 = -c/a$ ,  $B^2 = -9c/4a$ ,  $F^2 = B^2$ ,  $\epsilon^2 = c/8$  and  $d = 7c/8$ . Thus, we have the following equations for the amplitudes as

$$A = \pm\sqrt{-\frac{c}{a}}, \quad B = \pm\frac{3}{2}\sqrt{-\frac{c}{a}}, \quad F = \pm\frac{3}{2}\sqrt{-\frac{c}{a}}. \quad (48)$$

We note that the signs for amplitudes in (48) are independent. Hence, one can choose eight different sequences of signs in (48). This means we have eight different solutions given by Eqs. (46) and (47). We also have the following two equations as

$$\epsilon = \frac{1}{2}\sqrt{\frac{c}{2}}, \quad d = \frac{7}{8}c, \quad (49)$$

where without loss of generality we choose the positive sign for parameter  $\epsilon$ . Using Eqs. (15), (48) and (49), we get the following soliton parameters:

$$A = \pm 4\sqrt{-\frac{\alpha}{\gamma}}, \quad B = \pm 6\sqrt{-\frac{\alpha}{\gamma}}, \quad F = \pm 6\sqrt{-\frac{\alpha}{\gamma}}, \quad (50)$$

$$\epsilon = 2\sqrt{-\frac{\alpha}{\beta_2}}, \quad (51)$$

$$\kappa = -15\alpha + \frac{1}{2}\beta_2\delta^2. \quad (52)$$

Note that relation for the wave number  $\kappa$  in (52) with an arbitrary parameter  $\delta$  follows from equation  $d = 7c/8$ . We can choose eight different sequences of signs in (50) which yields eight different solutions given by Eqs. (46) and (47). The substitution of these results into Eqs. (6) and (7) yields eight soliton pulse solutions for the coupled NLS equations (4) and (5) as

$$U(z, \tau) = \{A - B \operatorname{sech}^2[\epsilon(\tau - qz - \eta)]\} \exp[i(\kappa z - \delta\tau + \theta)], \quad (53)$$

$$V(z, \tau) = F \operatorname{sech}[\epsilon(\tau - qz - \eta)] \tanh[\epsilon(\tau - qz - \eta)] \exp[i(\kappa z - \delta\tau + \theta)], \quad (54)$$

which exist provided that  $\alpha\gamma < 0$  and  $\alpha\beta_2 < 0$ .

The intensity profile for these solutions are shown in Figs. 3(a) and (b) when  $\beta_2 = 0.5$ ,  $\alpha = -0.125$ ,  $\gamma = 2$ ,  $\delta = 0.02$ , and  $\eta = 0$ . These figures demonstrate that the pulse envelopes  $U$  and  $V$  represent W-shaped and dipole solitons respectively. The fact that these soliton structures involve more than one intensity peak (multihump) is very intriguing, as they are very rarely obtainable in the coupled NLS equations framework.

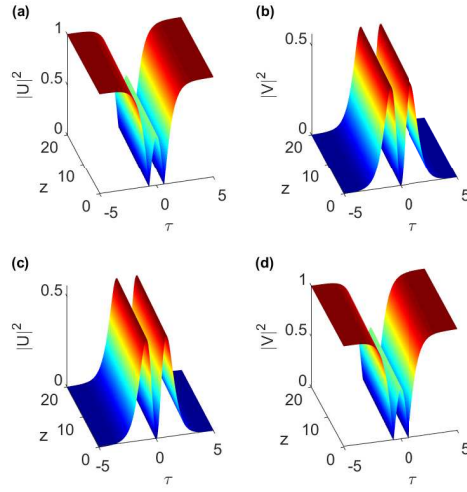


FIG. 3: Intensity profiles of (a) W-shaped soliton (53) (b) dipole soliton (54) (c) dipole soliton (62) and (d) W-shaped soliton (63) for the values mentioned in the text.

### 6. Dipole-W-shaped solitons

We obtained another class of exact analytical soliton solutions for Eqs. (13) and (14) as

$$u(x) = \Lambda \operatorname{sech}[\nu(x - \eta)] \tanh[\nu(x - \eta)], \quad (55)$$

$$v(x) = D - \Gamma \operatorname{sech}^2[\nu(x - \eta)]. \quad (56)$$

The parameters  $D$ ,  $\Gamma$  and  $\Lambda$  are

$$D = \pm \sqrt{-\frac{d}{a}}, \quad \Gamma = \pm \frac{3}{2} \sqrt{-\frac{d}{a}}, \quad \Lambda = \pm \frac{3}{2} \sqrt{-\frac{d}{a}}. \quad (57)$$

We note that the signs for amplitudes in (57) are independent. Hence, one can choose eight different sequences of signs in (57). This means we have eight different solutions given by Eqs. (55) and (56). We also have the following two equations as

$$\nu = \frac{1}{2} \sqrt{\frac{d}{2}}, \quad c = \frac{7}{8} d. \quad (58)$$

Using Eqs. (15), (57) and (58) we get the soliton parameters:

$$D = \pm 4 \sqrt{\frac{\alpha}{\gamma}}, \quad \Gamma = \pm 6 \sqrt{\frac{\alpha}{\gamma}}, \quad \Lambda = \pm 6 \sqrt{\frac{\alpha}{\gamma}}, \quad (59)$$

$$\nu = 2 \sqrt{\frac{\alpha}{\beta_2}}, \quad (60)$$

$$\kappa = 15\alpha + \frac{1}{2} \beta_2 \delta^2. \quad (61)$$

Note that relation for the wave number  $\kappa$  in (61) with an arbitrary parameter  $\delta$  follows from equation  $c = 7d/8$ . We can choose eight different sequences of signs in (59) which yields eight different solutions given by Eqs. (55) and (56). The substitution of these results into Eqs. (6) and (7) yields eight soliton pulse solutions for the coupled NLS equations (4) and (5) as

$$U(z, \tau) = \Lambda \operatorname{sech}[\nu(\tau - qz - \eta)] \tanh[\nu(\tau - qz - \eta)] \exp[i(\kappa z - \delta \tau + \theta)], \quad (62)$$



$$V(z, \tau) = \{D - \Gamma \operatorname{sech}^2[\nu(\tau - qz - \eta)]\} \exp[i(\kappa z - \delta\tau + \theta)], \quad (63)$$

which exist provided that  $\alpha\gamma > 0$  and  $\alpha\beta_2 > 0$ . Figures 3(c) and (d) depict the intensity profiles of such dipole and W-shaped solitons for the values  $\beta_2 = 0.5$ ,  $\alpha = 0.125$ ,  $\gamma = 2$ ,  $\delta = 0.02$ , and  $\eta = 0$ .

Before ending this section, we give a useful remark on the influence of the group-velocity dispersion on soliton properties. We find from the above results that the existence of all the soliton types is related to the sign of the product  $(\alpha\beta_2)$ . Hence, depending on the choice of the value of coupling coefficient  $\alpha$ , these soliton pairs are obtainable in both the normal ( $\beta_2 > 0$ ) and anomalous ( $\beta_2 < 0$ ) dispersion regimes. Now looking closely to the amplitudes and widths of bright-dipole, dipole-bright, dipole-W-shaped, and W-shaped-dipole solitons, we see that they are completely determined by the fiber parameters (e.g., group-velocity dispersion coefficient, cubic nonlinearity coefficient). This indicates that these localized waveforms can be formed in birefringent fibers of different characteristics.

### III. PERIODIC WAVE TRAINS

We present here a broad class of exact analytical periodic wave solutions for the coupled NLS equations (4) and (5) in the strong birefringent case  $\sigma = 1$ . These nonlinear waves are of practical relevance as they serve as a model of pulse train propagation in optics fibers [31].

#### TYPE-I

We find that the amplitude equations (13) and (14) satisfy the periodic solutions,

$$u(x) = \lambda \operatorname{cn}(w(x - \eta), k) \operatorname{sn}(w(x - \eta), k), \quad (64)$$

$$v(x) = \rho \operatorname{dn}(w(x - \eta), k) \operatorname{cn}(w(x - \eta), k), \quad (65)$$

where

$$w^2 = -\frac{c}{5k^2 - 4}, \quad \lambda^2 = -\frac{6ck^4}{a(5k^2 - 4)}, \quad \rho^2 = \frac{\lambda^2}{k^2}, \quad d = \frac{(5k^2 - 1)c}{5k^2 - 4}, \quad (66)$$

and  $\eta$  being the position of the nonlinear wave at  $z = 0$ . Here in the solutions (64) and (65),  $\operatorname{cn}$ ,  $\operatorname{sn}$  and  $\operatorname{dn}$  are Jacobi elliptic functions of modulus  $k$  which is in the range  $0 < k < 1$ .

Then, using Eqs. (15) and (66), one obtains the wave parameters  $w$ ,  $\lambda$  and  $\kappa$  as

$$w = \sqrt{-\frac{4\alpha}{3\beta_2}}, \quad \lambda = \pm k^2 \sqrt{\frac{4\alpha}{\gamma}}, \quad \kappa = \frac{5\alpha(2k^2 - 1)}{3} + \frac{\beta_2\delta^2}{2}, \quad (67)$$

where  $\delta$  is free parameter. Note that we have for positive and negative value of parameter  $\lambda$  two different solution for the amplitude  $\rho$  as

$$\rho = k \sqrt{\frac{4\alpha}{\gamma}}, \quad \rho = -k \sqrt{\frac{4\alpha}{\gamma}}, \quad (68)$$

because of relation  $\rho^2 = \lambda^2/k^2$ . Insertion of these results into Eqs. (6) and (7), we get a class of exact periodic wave solutions for the coupled NLS system (4) and (5) as

$$U(z, \tau) = \lambda \operatorname{cn}(w(\tau - qz - \eta), k) \operatorname{sn}(w(\tau - qz - \eta), k) \exp[i(\kappa z - \delta\tau + \theta)], \quad (69)$$

$$V(z, \tau) = \rho \operatorname{dn}(w(\tau - qz - \eta), k) \operatorname{cn}(w(\tau - qz - \eta), k) \exp[i(\kappa z - \delta\tau + \theta)], \quad (70)$$

which exist for waveguide parameters obeying the physical conditions  $\alpha\beta_2 < 0$  and  $\alpha\gamma > 0$ .

#### TYPE-II

We find a family of exact periodic wave solutions for the amplitude equations (13) and (14) as

$$u(x) = R \operatorname{dn}(\mu(x - \eta), k) \operatorname{cn}(\mu(x - \eta), k), \quad (71)$$

$$v(x) = P \operatorname{cn}(\mu(x - \eta), k) \operatorname{sn}(\mu(x - \eta), k), \quad (72)$$

where

$$\mu^2 = -\frac{d}{5k^2 - 4}, \quad P^2 = -\frac{6dk^4}{a(5k^2 - 4)}, \quad R^2 = \frac{P^2}{k^2}, \quad d = \frac{(5k^2 - 4)c}{5k^2 - 1}. \quad (73)$$

Equations (15) and (73) yield the soliton parameters:

$$\mu = \sqrt{\frac{4\alpha}{3\beta_2}}, \quad P = \pm k^2 \sqrt{-\frac{4\alpha}{\gamma}}, \quad \kappa = -\frac{5\alpha(2k^2 - 1)}{3} + \frac{\beta_2\delta^2}{2}, \quad (74)$$

where  $\delta$  is free parameter. We have for positive and negative value of parameter  $P$  two different solution for the amplitude  $R$  as

$$R = k\sqrt{-\frac{4\alpha}{\gamma}}, \quad R = -k\sqrt{-\frac{4\alpha}{\gamma}}, \quad (75)$$

because of relation  $R^2 = P^2/k^2$ . If we insert these results into Eqs. (6) and (7), one obtains exact analytical soliton solution for the coupled NLS equations (4) and (5) as

$$U(z, \tau) = R \operatorname{dn}(\mu(\tau - qz - \eta), k) \operatorname{cn}(\mu(\tau - qz - \eta), k) \exp[i(\kappa z - \delta\tau + \theta)], \quad (76)$$

$$V(z, \tau) = P \operatorname{cn}(\mu(\tau - qz - \eta), k) \operatorname{sn}(\mu(\tau - qz - \eta), k) \exp[i(\kappa z - \delta\tau + \theta)]. \quad (77)$$

One sees that the existence conditions of these periodic waves are  $\alpha\beta_2 > 0$  and  $\alpha\gamma < 0$ , which differ from those given in Eqs. (69) and (70).

### TYPE-III

We find that Eqs. (13) and (14) admit exact analytical periodic wave solutions of the form,

$$u(x) = S \operatorname{cn}(\sigma(x - \eta), k), \quad (78)$$

$$v(x) = Q \operatorname{sn}(\sigma(x - \eta), k), \quad (79)$$

where

$$\sigma^2 = \frac{d - c}{k^2}, \quad S^2 = \frac{d - c(k^2 + 1)}{ak^2}, \quad Q^2 = \frac{d(1 - 2k^2) + c(k^2 - 1)}{ak^2}. \quad (80)$$

With use of Eqs. (15) and (80), the parameters  $\sigma$  and  $S$  become

$$\sigma = \sqrt{\frac{4\alpha}{\beta_2 k^2}}, \quad (81)$$

$$S = \pm \sqrt{\frac{2\kappa k^2 - \beta_2 \delta^2 k^2 - 2\alpha(k^2 + 2)}{2\gamma k^2}}. \quad (82)$$

We have for positive and negative value of parameter  $S$  two different solution for the amplitude  $Q$  as

$$Q = \sqrt{\frac{2\kappa k^2 - \beta_2 \delta^2 k^2 + 2\alpha(3k^2 - 2)}{2\gamma k^2}}, \quad Q = -\sqrt{\frac{2\kappa k^2 - \beta_2 \delta^2 k^2 + 2\alpha(3k^2 - 2)}{2\gamma k^2}}. \quad (83)$$

Further substitution of these closed form solutions into Eqs. (6) and (7) leads to the following exact periodic solution for the coupled NLS system (4) and (5):

$$U(z, \tau) = S \operatorname{cn}(\sigma(\tau - qz - \eta), k) \exp[i(\kappa z - \delta\tau + \theta)], \quad (84)$$

$$V(z, \tau) = Q \operatorname{sn}(\sigma(\tau - qz - \eta), k) \exp[i(\kappa z - \delta\tau + \theta)]. \quad (85)$$

Note that these nonlinear periodic solutions are dependent on two free parameters  $\kappa$  and  $\delta$  and exist for  $\alpha\beta_2 > 0$ ,  $\gamma [2\kappa k^2 - \beta_2\delta^2 k^2 - 2\alpha(k^2 + 2)] > 0$  and  $\gamma [2\kappa k^2 - \beta_2\delta^2 k^2 + 2\alpha(3k^2 - 2)] > 0$ .

#### TYPE-IV

We can get a class of exact analytical soliton solutions for Eqs. (13) and (14) as

$$u(x) = f \operatorname{sn}(r(x - \eta), k), \quad (86)$$

$$v(x) = g \operatorname{cn}(r(x - \eta), k), \quad (87)$$

where

$$r^2 = \frac{c-d}{k^2}, \quad f^2 = \frac{c(1-2k^2) + d(k^2-1)}{ak^2}, \quad g^2 = \frac{c-d(k^2+1)}{ak^2}. \quad (88)$$

Thus, using Eqs. (15) and (88), we obtain the waver parameters  $r$  and  $f$  as

$$r = \sqrt{-\frac{4\alpha}{\beta_2 k^2}}, \quad (89)$$

$$f = \pm \sqrt{\frac{2\kappa k^2 - \beta_2\delta^2 k^2 - 2\alpha(3k^2 - 2)}{2\gamma k^2}}. \quad (90)$$

We have for positive and negative value of parameter  $f$  two different solution for the amplitude  $g$  as

$$g = \sqrt{\frac{2\kappa k^2 - \beta_2\delta^2 k^2 + 2\alpha(k^2 + 2)}{2\gamma k^2}}, \quad g = -\sqrt{\frac{2\kappa k^2 - \beta_2\delta^2 k^2 + 2\alpha(k^2 + 2)}{2\gamma k^2}}. \quad (91)$$

Hence, the exact periodic wave solutions of the coupled NLS equations (4) and (5) can be written as

$$U(z, \tau) = f \operatorname{sn}(r(\tau - qz - \eta), k) \exp[i(\kappa z - \delta\tau + \theta)], \quad (92)$$

$$V(z, \tau) = g \operatorname{cn}(r(\tau - qz - \eta), k) \exp[i(\kappa z - \delta\tau + \theta)]. \quad (93)$$

Note that these nonlinear periodic solutions are dependent on two free parameters  $\kappa$  and  $\delta$  and these periodic waves do exist provided that  $\alpha\beta_2 < 0$ ,  $\gamma [2\kappa k^2 - \beta_2\delta^2 k^2 - 2\alpha(3k^2 - 2)] > 0$  and  $\gamma [2\kappa k^2 - \beta_2\delta^2 k^2 + 2\alpha(k^2 + 2)] > 0$ .

#### TYPE-V

We obtained another class of exact analytical periodic solutions for Eqs. (13) and (14) as

$$u(x) = A - B \operatorname{cn}^2(\epsilon(x - \eta), k), \quad (94)$$

$$v(x) = F \operatorname{cn}(\epsilon(x - \eta), k) \operatorname{sn}(\epsilon(x - \eta), k). \quad (95)$$

The parameters in these solutions are given by Eqs. (A1)-(A5) presented in Appendix A. We found in this Appendix A the relation  $d = f(k)c$  where the function  $f(k)$  can be found by cubic Eq. (A22). However, this cubic equation has three different solutions for the function  $f(k)$ . We choose the solution for function  $f(k)$  which leads to the value

$f(1) = 7/8$  for  $k = 1$ . This condition follows from Eq. (49) because the Type-V periodic solutions reduce to W-shaped-dipole solitons in the limiting case with  $k = 1$ . Using the relation  $d = f(k)c$  found in Appendix A and the wave number given in (A29) as

$$\kappa = -\frac{\alpha(1+f)}{1-f} + \frac{1}{2}\beta_2\delta^2, \quad (96)$$

where  $\delta$  is free parameter. We have by (15) the parameters  $c$  and  $d$ :

$$c = -\frac{4\alpha}{\beta_2(1-f)}, \quad d = -\frac{4\alpha f}{\beta_2(1-f)}. \quad (97)$$

The parameter  $\epsilon$  follows from Eq. (A18) as

$$\epsilon = \left( \frac{f^2c(24k^2 - 30) + fc(-35k^2 + 40) + c(11k^2 - 10)}{f(-8k^4 + 110k^2 - 80) + (17k^4 - 110k^2 + 80)} \right)^{1/2}. \quad (98)$$

Note that without loss of generality, we defined by Eq. (98) the positive value for parameter  $\epsilon$ . The amplitudes for solutions in Eqs. (94) and (95) follow by (A5) and (A6) as

$$A = \pm \sqrt{\frac{\epsilon^2(4 - 5k^2) - fc}{a}}, \quad B = \pm \sqrt{\frac{8\epsilon^2(2 - k^2) + 2c(1 - 3f)}{a}}, \quad (99)$$

$$F = \pm \sqrt{\frac{8\epsilon^2(2 - k^2) + 2c(1 - 3f)}{a}}. \quad (100)$$

We note that the signs in Eqs. (99) and (100) can be chosen independent on signs of other amplitudes. Hence, one can choose eight different sequences of signs in (99) and (100). This means we have eight different solutions given by Eqs. (94) and (95). The insertion of these results into Eqs. (6) and (7) yields eight soliton pulse solutions for the coupled NLS equations (4) and (5) as

$$U(z, t) = \{A - B \operatorname{cn}^2(\epsilon(\tau - qz - \eta), k)\} \exp[i(\kappa z - \delta\tau + \theta)], \quad (101)$$

$$V(z, t) = F \operatorname{cn}(\epsilon(\tau - qz - \eta), k) \operatorname{sn}(\epsilon(\tau - qz - \eta), k) \exp[i(\kappa z - \delta\tau + \theta)], \quad (102)$$

which exist provided that  $a[\epsilon^2(4 - 5k^2) - fc] > 0$ ,  $a[8\epsilon^2(2 - k^2) + 2c(1 - 3f)] > 0$  and parameter  $\epsilon$  defined in (98) is a real number.

## TYPE-VI

We find another class of exact analytical periodic solutions for Eqs. (13) and (14) as

$$u(x) = \Lambda \operatorname{cn}(\nu(x - \eta), k) \operatorname{sn}(\nu(x - \eta), k), \quad (103)$$

$$v(x) = D - \Gamma \operatorname{cn}^2(\nu(x - \eta), k). \quad (104)$$

The parameters in these solutions are given by Eqs. (A1)-(A5) presented in Appendix A with the change for parameters  $A, B, F, \epsilon$  to  $D, \Gamma, \Lambda$  and  $\nu$  respectively. Moreover, we should make the change  $u, v, c$  and  $d$  to  $v, u, d$  and  $c$  in appropriate equations. This simple principle follows from the symmetry of Eqs. (13) and (14). In this case we have the relation  $c = f(k)d$  where the function  $f(k)$  can be found by cubic Eq. (A22). However, this cubic equation has three different solutions for the function  $f(k)$ . We choose the solution for function  $f(k)$  which leads to the value  $f(1) = 7/8$  for  $k = 1$ . This condition follows from Eq. (58) because the Type-VI periodic solutions reduce to dipole-W-shaped solitons in the limiting case with  $k = 1$ . Using the relation  $c = f(k)d$  we have with Eq. (15) the wave number as

$$\kappa = \frac{\alpha(1+f)}{1-f} + \frac{1}{2}\beta_2\delta^2, \quad (105)$$

where  $\delta$  is free parameter. In this case the parameters  $c$  and  $d$  are

$$c = \frac{4\alpha f}{\beta_2(1-f)}, \quad d = \frac{4\alpha}{\beta_2(1-f)}. \quad (106)$$

The parameter  $\nu$  has the following form,

$$\nu = \left( \frac{f^2 d(24k^2 - 30) + fd(-35k^2 + 40) + d(11k^2 - 10)}{f(-8k^4 + 110k^2 - 80) + (17k^4 - 110k^2 + 80)} \right)^{1/2}. \quad (107)$$

We can define here the positive value for parameter  $\nu$ . The amplitudes for solutions in Eqs. (103) and (104) have the following form,

$$D = \pm \sqrt{\frac{\nu^2(4 - 5k^2) - fd}{a}}, \quad \Gamma = \pm \sqrt{\frac{8\nu^2(2 - k^2) + 2d(1 - 3f)}{a}}, \quad (108)$$

$$\Lambda = \pm \sqrt{\frac{8\nu^2(2 - k^2) + 2d(1 - 3f)}{a}}. \quad (109)$$

We note that the signs in Eqs. (108) and (109) can be chosen independent on signs of other amplitudes. Hence, one can choose eight different sequences of signs in (108) and (109). This means we have eight different solutions given by Eqs. (103) and (104). The insertion of these results into Eqs. (6) and (7) yields eight soliton pulse solutions for the coupled NLS equations (4) and (5) as

$$U(z, \tau) = \Lambda \operatorname{cn}(\nu(\tau - qz - \eta), k) \operatorname{sn}(\nu(\tau - qz - \eta), k) \exp[i(\kappa z - \delta\tau + \theta)], \quad (110)$$

$$V(z, \tau) = \{D - \Gamma \operatorname{cn}^2(\nu(\tau - qz - \eta), k)\} \exp[i(\kappa z - \delta\tau + \theta)], \quad (111)$$

which exist provided that  $a[\nu^2(4 - 5k^2) - fd] > 0$ ,  $a[8\nu^2(2 - k^2) + 2d(1 - 3f)] > 0$  and parameter  $\nu$  defined in (107) is a real number.

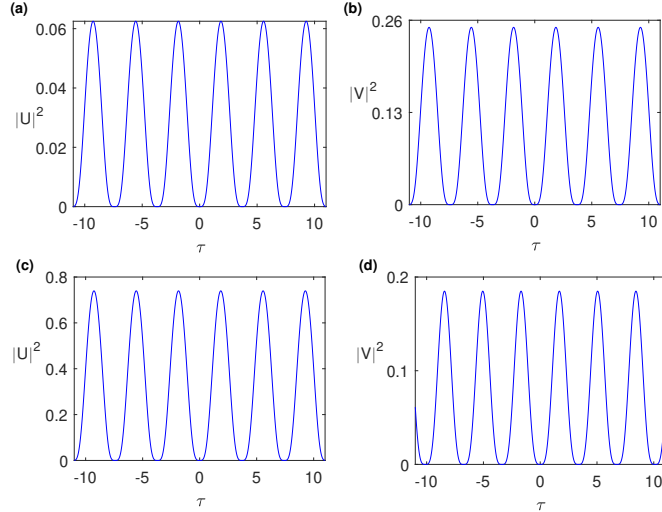


FIG. 4: The intensity versus  $\tau$  for the (a) periodic solution (69) (b) periodic solution (70) (c) periodic solution (76) and (d) periodic solution (69) for the values mentioned in the text.

As the intensity profile of periodic solutions exhibits an oscillating character, we only take the types I and II as examples to present the intensity of above periodic waves. Figures 4(a)-(b) depict the intensity wave profile of periodic waves (69) and (70) for the parameters values:  $\beta_2 = -1$ ,  $\alpha = 0.75$ ,  $\gamma = 1$ , and  $\delta = -0.01$ . The results for the periodic waves (76) and (77) are illustrated in Figs. 4(c)-(d) for the values  $\beta_2 = -1$ ,  $\alpha = -0.75$ ,  $\gamma = 1$ , and  $\delta = 0.01$ . Here the position  $\eta$  of periodic wave solutions at  $z = 0$  is chosen to be equal to zero and the value of the elliptic modulus  $k$  is taken as  $k = 0.5$ . As seen these nonlinear waves present the periodic property, which makes them a setting of light pulse train propagation in nonlinear fiber systems.

Further analysis of the obtained periodic wave solutions indicates that for special case of modulus  $k = 1$  that corresponds to the long wave limit, the various soliton solutions presented above can be readily obtained. We note that depending on the choice of the modulus  $k$  that may take any value from  $0 < k < 1$ , we can obtain periodic wave pairs with different values of amplitudes and widths. These results could offer the possibility to realize rich soliton structures and periodic wave trains experimentally in birefringent nonlinear fiber systems.

#### IV. CONCLUSION

In conclusion, we have analyzed the existence of localized and periodic waves in an homogeneous birefringent optical fiber with Kerr nonlinear response. We have found that the fiber system allows the propagation of a rich variety of envelope solitons including dipole-bright, bright-dipole, bright-dark, dark-bright, W-shaped-dipole and dipole-W-shaped types. These results indicate that in addition to single hump solitons, the transmitting birefringent medium could also display multihump solitons having the form of dipole and W-shaped type solitons. We have found that these solitons can be established in both the normal and anomalous group velocity dispersion regions. We also showed that nonlinear periodic waves of different forms could also exist in the transmitting medium. Thus these results confirm the existence of both single and multiple-humped solitons as well as a diversity of periodic waves in a birefringent fiber media, which could open up novel applications in optical communications.

:

#### Appendix A: Solution of Type-V

In this appendix, we provide the detailed calculations for obtaining all parameters for solution of Type-V. We also found here the function  $f(k)$  in relation  $d = f(k)c$  and explicit form for the wave number  $\kappa$ . We have the following algebraic equations for solutions of Type-V:

$$2B\epsilon^2(k^2 - 1) + aA^3 + cA = 0, \quad (\text{A1})$$

$$4\epsilon^2(1 - 2k^2) - 3aA^2 + aAB - c = 0, \quad (\text{A2})$$

$$6\epsilon^2k^2 + 2aAB - aB^2 = 0, \quad (\text{A3})$$

$$\epsilon^2(5k^2 - 4) + aA^2 + d = 0, \quad (\text{A4})$$

$$B^2 = F^2. \quad (\text{A5})$$

Using Eqs. (A2)-(A4), we obtain

$$aB^2 = 8\epsilon^2(2 - k^2) + 2c - 6d, \quad aA^2 = \epsilon^2(4 - 5k^2) - d. \quad (\text{A6})$$

Moreover, using Eqs. (A1), (A4), we get

$$2aAB\epsilon^2(k^2 - 1) + \epsilon^4(5k^2 - 4)^2 + \epsilon^2[d(10k^2 - 8) - c(5k^2 - 4)] + d^2 - cd = 0. \quad (\text{A7})$$

In addition, from Eqs. (A2) and (A4), we have

$$aAB = \epsilon^2(8 - 7k^2) - 3d + c. \quad (\text{A8})$$

Also, using Eqs. (A7) and (A8), we find

$$\epsilon^4(11k^4 - 10k^2) + [d(4k^2 - 2) + c(2 - 3k^2)]\epsilon^2 + d^2 - cd = 0. \quad (\text{A9})$$

Now using Eq. (A1), we have

$$2aB^2\epsilon^2(k^2 - 1) + aA^2aAB + caAB = 0. \quad (\text{A10})$$

Using Eqs. (A10), (A6) and (A8), one gets

$$\epsilon^4(19k^4 - 20k^2) + [d(10k^2 - 8) + c(8 - 8k^2)]\epsilon^2 + 3d^2 + c^2 - 4cd = 0. \quad (\text{A11})$$

Then, the system of Eqs. (A9) and (A11) can be written as

$$\epsilon^4 + \left( \frac{d(4k^2 - 2) + c(2 - 3k^2)}{11k^4 - 10k^2} \right) \epsilon^2 + \frac{d^2 - cd}{11k^4 - 10k^2} = 0, \quad (\text{A12})$$

$$\epsilon^4 + \left( \frac{d(10k^2 - 8) + c(8 - 8k^2)}{19k^4 - 20k^2} \right) \epsilon^2 + \frac{3d^2 + c^2 - 4cd}{19k^4 - 20k^2} = 0. \quad (\text{A13})$$

Now using Eq. (A8) we have

$$a^2 A^2 B^2 = [\epsilon^2(8 - 7k^2) + (c - 3d)]^2. \quad (\text{A14})$$

Using Eq. (A6) one gets

$$a^2 A^2 B^2 = [\epsilon^2(4 - 5k^2) - d][\epsilon^2(16 - 8k^2) + (2c - 6d)]. \quad (\text{A15})$$

Using Eqs. (A14) and (A15), we find

$$\epsilon^4 + \left( \frac{d(4k^2 - 8) + c(8 - 4k^2)}{9k^4} \right) \epsilon^2 + \frac{3d^2 + c^2 - 4cd}{9k^4} = 0. \quad (\text{A16})$$

Subtraction of Eq. (A16) from Eq. (A12), we have

$$\left( \frac{d(4k^2 - 2) + c(2 - 3k^2)}{11k^2 - 10} - \frac{d(4k^2 - 8) + c(8 - 4k^2)}{9k^2} \right) \epsilon^2 + \frac{d^2 - cd}{11k^2 - 10} - \frac{3d^2 + c^2 - 4cd}{9k^2} = 0. \quad (\text{A17})$$

Thus, Eq. (A17) yields

$$\epsilon^2 = \frac{d^2(24k^2 - 30) + cd(-35k^2 + 40) + c^2(11k^2 - 10)}{d(-8k^4 + 110k^2 - 80) + c(17k^4 - 110k^2 + 80)}. \quad (\text{A18})$$

Subtraction of Eq. (A16) from Eq. (A13) yields

$$\left( \frac{d(10k^2 - 8) + c(8 - 8k^2)}{19k^2 - 20} - \frac{d(4k^2 - 8) + c(8 - 4k^2)}{9k^2} \right) \epsilon^2 + \frac{3d^2 + c^2 - 4cd}{19k^2 - 20} - \frac{3d^2 + c^2 - 4cd}{9k^2} = 0. \quad (\text{A19})$$

Moreover, Eq. (A19) yields

$$\epsilon^2 = \frac{d^2(30k^2 - 60) + cd(-40k^2 + 80) + c^2(10k^2 - 20)}{d(14k^4 + 160k^2 - 160) + c(4k^4 - 160k^2 + 160)}. \quad (\text{A20})$$

Hence Eqs. (A18) and (A20) with  $d = f(k)c$  leads to the cubic equation for  $f(k)$ :

$$\frac{f^2(24k^2 - 30) + f(-35k^2 + 40) + (11k^2 - 10)}{f(-8k^4 + 110k^2 - 80) + (17k^4 - 110k^2 + 80)} = \frac{f^2(30k^2 - 60) + f(-40k^2 + 80) + (10k^2 - 20)}{f(14k^4 + 160k^2 - 160) + (4k^4 - 160k^2 + 160)}. \quad (\text{A21})$$

Equation (A21) can be written in standard cubic form as

$$G_3(k)f^3 + G_2(k)f^2 + G_1(k)f + G_0(k) = 0, \quad (\text{A22})$$

where the polynomial  $G_j(k)$  are

$$G_3(k) = (24k^2 - 30)P_3(k) - (30k^2 - 60)P_1(k), \quad (\text{A23})$$

$$G_2(k) = (-35k^2 + 40)P_3(k) + (24k^2 - 30)P_4(k) - (-40k^2 + 80)P_1(k) - (30k^2 - 60)P_2(k), \quad (\text{A24})$$

$$G_1(k) = (11k^2 - 10)P_3(k) + (-35k^2 + 40)P_4(k) - (10k^2 - 20)P_1(k) - (-40k^2 + 80)P_2(k), \quad (\text{A25})$$

$$G_0(k) = (11k^2 - 10)P_4(k) - (10k^2 - 20)P_2(k). \quad (\text{A26})$$

Here the polynomials  $P_j(k)$  are given as

$$P_1(k) = -8k^4 + 110k^2 - 80, \quad P_2(k) = 17k^4 - 110k^2 + 80, \quad (\text{A27})$$

$$P_3(k) = 14k^4 + 160k^2 - 160, \quad P_4(k) = 4k^4 - 160k^2 + 160. \quad (\text{A28})$$

The relation  $d = f(k)c$  with Eq. (15) yield the wave number  $\kappa$  as

$$\kappa = -\frac{\alpha(1+f)}{1-f} + \frac{1}{2}\beta_2\delta^2. \quad (\text{A29})$$

Let for example  $k = 1$  then Eq. (A21) or cubic Eq. (A22) can be written as

$$(-6f^2 + 5f + 1)(14f + 4) - (-30f^2 + 40f - 10)(22f - 13) = 0. \quad (\text{A30})$$

This equation has the solution  $f = 7/8$ , leading to the relationship  $d = 7c/8$  obtained for the case of W-shaped-dipole solitons. We note that in general case the cubic Eq. (A22) has three different solutions. We choose the solution for function  $f(k)$  which leads to the value  $f(1) = 7/8$  for  $k = 1$ . This condition follows from Eq. (49) because the Type-VI periodic solutions reduce to dipole-W-shaped solitons in the limiting case with  $k = 1$ .

- 
- [1] K. Steiglitz, Phys. Rev. E **63**, 016608 (2000).
  - [2] Y. Jiang, B. Tian, W.J. Liu, K. Sun, M. Li, and P. Wang, Phys. Rev. E **85**, 036605 (2012).
  - [3] M. N. Islam, Ultrafast Fiber Switching Devices and Systems (Cambridge University Press, Cambridge, 1992).
  - [4] C.-J. Chen, P. K. A. Wai, and R. C. Menyuk, Opt. Lett. **15**, 477 (1990).
  - [5] C. R. Menyuk, Opt. Lett. **12**, 614- 616 (1987).
  - [6] H. Triki, A. Biswas, D. Milović, and M. Belić, Acta Phys. Pol. A. **130**, 718 (2016).
  - [7] S. V. Manakov, Zh. Eksp. Teor. Fiz. **65**, 505 (1973) [Sov. Phys. JETP **38**, 248 (1974)].
  - [8] D. J. Kaup and B. A. Malomed, Soliton trapping and daughter waves in the Manakov model, Phys. Rev. A **48**, 599 (1993).
  - [9] Y. S. Kivshar and G. P. Agrawal, Optical Solitons: From Fibers to Photonic Crystals (Academic, New York, 2003).
  - [10] P. Meystre, Atom Optics (Springer-Verlag, New York, 2001).
  - [11] J. L. Hammack et al., J. Fluid Mech. **532**, 1 (2005); M. Onorato et al., Phys. Rev. Lett. **96**, 014503 (2006).
  - [12] A. Uthayakumar, Y. G. Han, and S. B. Lee, Chaos Solitons Fractals **29**, 916 (2006); M. R. Gupta et al., J. Plasma Phys. **25**, 499 (1981); C. J. McKinstrie and D. A. Russell, Phys. Rev. Lett. **61**, 2929 (1988).
  - [13] A. P. Sheppard and Y. S. Kivshar, Phys. Rev. E **55**, 4773 (1997).
  - [14] R. Radhakrishnan, P. T. Dinda, and G. Millot, Phys. Rev. E. **69**, 046607 (2004).
  - [15] R. Radhakrishnan and K. Aravinthan, J. Phys. A: Math. Gen. **40**, 13023 (2007).
  - [16] C. Anastassiou, M. Segev, K. Steiglitz, J. A. Giordmaine, M. Mitchell, M. F. Shih, S. Lan, and J. Martin, Phys. Rev. Lett. **83**, 2332 (1999).
  - [17] C. Anastassiou, J. W. Fleischer, T. Carmon, M. Segev, and K. Steiglitz, Opt. Lett. **26**, 1498 (2001).
  - [18] C. R. Menyuk, IEEE J. Quantum Electron. **25**, 2674 (1989).
  - [19] V. V. Steblina, A. V. Buryak, R. A. Sammut, D. Y. Zhou, M. Segev, and P. Prucnal, J. Opt. Soc. Am. B **17**, 2026 (2000).
  - [20] J. U. Kang, G. I. Stegeman, J. S. Aitchison, and N. Akhmediev, Phys. Rev. Lett. **76**, 3699 (1996).
  - [21] E. P. Bashkin and A. V. Vagov, Phys. Rev. B **56**, 6207 (1997).
  - [22] T. Kanna, M. Vijayajayanthi and M. Lakshmanan, J. Phys. A: Math. Theor. **43**, 434018 (2010).
  - [23] S. Chakravarty, M. J. Ablowitz, J. R. Sauer, and R. B. Jenkins, Opt. Lett. **20**, 136 (1995).
  - [24] G. P. Agrawal, Applications of Nonlinear Fiber Optics (Academic, San Diego, San Francisco, New York, Boston, London, Sydney, Tokyo, 2001).
  - [25] C. Yeh and L. Bergman, Phys. Rev. E **57**, 2398 (1998).
  - [26] N. Akhmediev and A. Ankiewicz, Solitons: Nonlinear Pulses and Beams (London: Chapman and Hall, 1997).
  - [27] V. I. Kruglov and J. D. Harvey, Phys. Rev. A **98**, 063811 (2018).
  - [28] H. Triki and V. I. Kruglov, Phys. Rev. E **101**, 042220 (2020).
  - [29] Y. Zhang, Z. Wang, Z. Nie, C. Li, H. Chen, K. Lu, and M. Xiao, Phys. Rev. Lett. **106**, 093904 (2011).
  - [30] A. Choudhuri, K. Porsezian, Opt. Commun. **285**, 364 (2012).
  - [31] C. Q. Dai, Y. Y. Wang, C. Yan, Opt. Commun. **283**, 1489 (2010).