

ttta: Tools for Temporal Text Analysis

Kai-Robin Lange¹, Niklas Benner², Lars Grönberg¹, Aymane Hachcham³, Imene Kolli³, Jonas Rieger¹, and Carsten Jentsch¹

1 TU Dortmund University 2 RWI - Leibniz Institute for Economic Research 3 University of Zurich

Statement of need

Text data is inherently temporal. The meaning of words and phrases changes over time, and the context in which they are used is constantly evolving. This is not just true for social media data, where the language used is rapidly influenced by current events, memes and trends, but also for journalistic, economic or political text data. Most NLP techniques however consider the corpus at hand to be homogenous in regard to time. This is a simplification that can lead to biased results, as the meaning of words and phrases can change over time. For instance, running a classic Latent Dirichlet Allocation (Blei et al., 2003) on a corpus that spans several years is not enough to capture changes in the topics over time, but only portrays an “average” topic distribution over the whole time span.

Researchers have developed a number of tools for analyzing text data over time. However, these tools are often scattered across different packages and libraries, making it difficult for researchers to use them in a consistent and reproducible way.

The ttta package is supposed to serve as a collection of tools for analyzing text data over time and can be accessed using [its GitHub repository](#).

Summary

In its current state, the ttta package includes diachronic embeddings, dynamic topic modeling, and document scaling. These tools can be used to track changes in language use, identify emerging topics, and explore how the meaning of words and phrases has evolved over time.

Our dynamic topic model approach is based on the model RollingLDA (Rieger et al., 2021), which is a modification of the classic Latent Dirichlet Allocation (Blei et al., 2003), that allows for the estimation of topics over time using a rolling window approach. We additionally implemented the model LDAPrototype (Rieger et al., 2020), serving as a more consistent foundation for RollingLDA than a common LDA. With these models, users can uncover and analyze topics of discussion in temporal data sets and track even rapid changes, which other dynamic topic models struggle with. This ability to track rapid changes in topics is further used in the Topical Changes model put forth by Rieger et al. (2022) and Lange et al. (2022) that identifies change points in the word topic distribution of RollingLDA. [Figure 1](#) visualizes the changes observed by the Topical Changes model in speeches from the German Bundestag (Lange & Jentsch, 2023), which can be analyzed further using leave-one-out word impacts provided by the model or, as Lange et al. (2025) proposed, by asking Large Language Models to interpret the change and relate it to a possible narrative shift.

DOI: [DOIunavailable](#)

Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

Editor: [Pending Editor](#) ↗

Reviewers:

- [@Pending Reviewers](#)

Submitted: N/A

Published: N/A

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

arXiv:2503.02625v1 [cs.CL] 4 Mar 2025

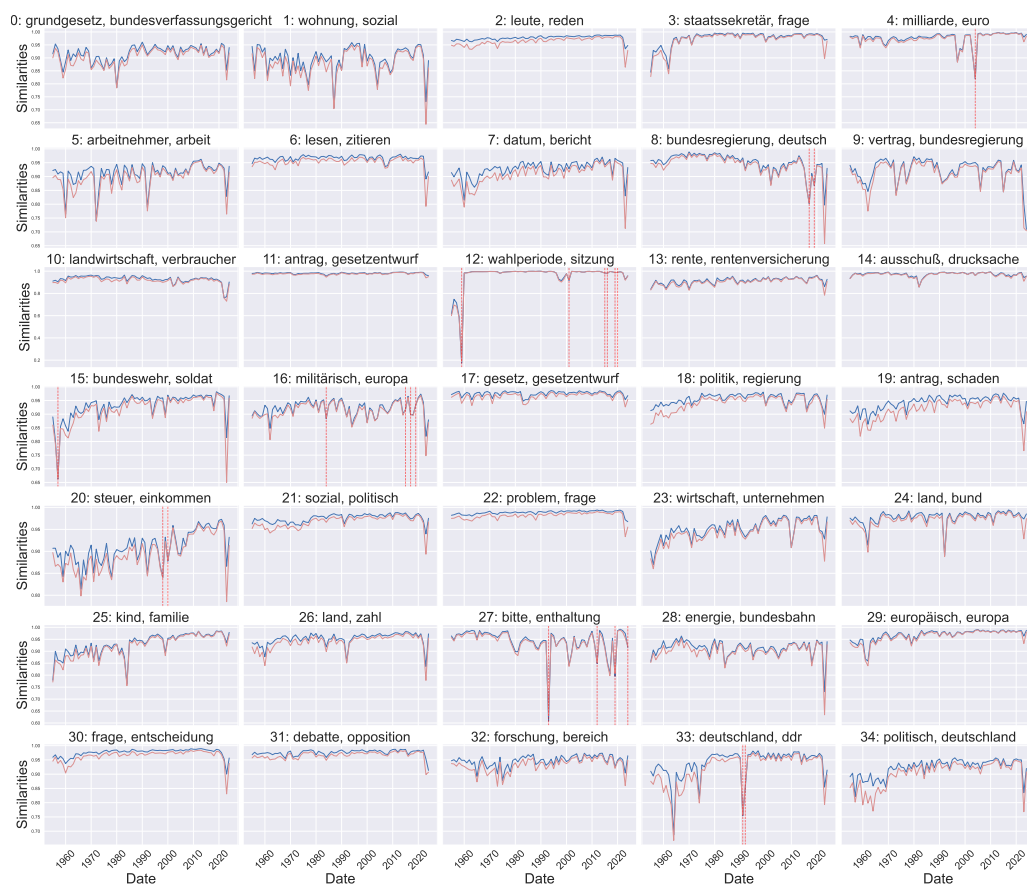


Figure 1: Changes observed by the Topical Changes Model in a corpus of speeches held in the German Bundestag between 1949 and 2023. There is one plot for each topic, with the topic's most defining words over the time frame provided as a title for easier interpretation. Each plot shows the stability of the topic over time (blue line) as well as a threshold calculated with a monitoring procedure (orange line). A change is detected, when the observed stability falls below the threshold, indicated by red vertical lines.

The first diachronic embedding model, originally introduced by Hamilton et al. (2016), builds on the static word embedding model Word2Vec (Mikolov et al., 2013). It enables the estimation of word embeddings over time by aligning Word2Vec vector spaces across different time chunks using a rotation matrix. The second diachronic embedding model is based on the work of Hu et al. (2019), who leveraged BERT's contextual language understanding to associate word usage in a sentence with a specific word sense, thus enabling users to track shifts in word meanings over time.

An example of the evolution of the static diachronic embedding of the word Ukraine in the German Bundestag from 2004 to 2024 is shown in Figure 2. The plot shows the nearest neighbors of Ukraine in the respective embedding spaces, enabling users to observe the trajectory of the target word Ukraine across time chunks in a low-dimensional representation. This visualization highlights the potential of using diachronic embeddings for the interpretation and detection of word context change, as it reflects Ukraine's contextual shift from being closely associated with Russia and China, to aligning more with Europe, and ultimately moving into a different context centered on war.

- Jentsch, C., Lee, E. R., & Mammen, E. (2020). Time-dependent Poisson reduced rank models for political text data analysis. *Computational Statistics & Data Analysis*, 142. <https://doi.org/10.1016/j.csda.2019.106813>
- Jentsch, C., Lee, E. R., & Mammen, E. (2021). Poisson reduced-rank models with an application to political text data. *Biometrika*, 108(2). <https://doi.org/10.1093/biomet/asaa063>
- Lange, K.-R., & Jentsch, C. (2023). SpeakGer: A meta-data enriched speech corpus of German state and federal parliaments. *Proceedings of the 3rd Workshop on Computational Linguistics for the Political and Social Sciences*. <https://aclanthology.org/2023.cpss-1.3/>
- Lange, K.-R., Rieger, J., Benner, N., & Jentsch, C. (2022). Zeitenwenden: Detecting changes in the German political discourse. *Proceedings of the 2nd Workshop on Computational Linguistics for Political Text Analysis*. <https://old.gscl.org/media/pages/arbeitskreise/cpss/cpss-2022/workshop-proceedings-2022/254133848-1662996909/cpss-2022-proceedings.pdf>
- Lange, K.-R., Schmidt, T., Reccius, M., Roos, M., Müller, H., & Jentsch, C. (2025). Narrative shift detection: A hybrid approach of dynamic topic models and large language models. *To appear in Proceedings of the Text2Story'25 Workshop*.
- Mikolov, T., Chen, K., Corrado, G., & Dean, J. (2013). *Efficient Estimation of Word Representations in Vector Space* (No. [arXiv:1301.3781](https://arxiv.org/abs/1301.3781)). <http://arxiv.org/abs/1301.3781>
- Rieger, J., Jentsch, C., & Rahnenführer, J. (2021). RollingLDA: An update algorithm of Latent Dirichlet Allocation to construct consistent time series from textual data. *Findings Proceedings of the 2021 EMNLP-Conference*. <https://doi.org/10.18653/v1/2021.findings-emnlp.201>
- Rieger, J., Lange, K.-R., Flossdorf, J., & Jentsch, C. (2022). Dynamic change detection in topics based on rolling LDAs. *Proceedings of the Text2Story'22 Workshop*. <https://ceur-ws.org/Vol-3117/paper1.pdf>
- Rieger, J., Rahnenführer, J., & Jentsch, C. (2020). Improving Latent Dirichlet Allocation: On Reliability of the Novel Method LDAPrototype. *Natural Language Processing and Information Systems*, 118–125. https://doi.org/10.1007/978-3-030-51310-8_11