

Gradient Deconfliction via Orthogonal Projections onto Subspaces For Multi-task Learning

Shijie Zhu*
Alibaba Group
Beijing, China
yangmu.zsj@alibaba-inc.com

Hui Zhao*
Alibaba Group
Beijing, China
shuqian.zh@alibaba-inc.com

Tianshu Wu
Alibaba Group
Beijing, China
shuke.wts@alibaba-inc.com

Pengjie Wang
Alibaba Group
Beijing, China
pengjie.wpj@alibaba-inc.com

Hongbo Deng
Alibaba Group
Hangzhou, China
dhb167148@alibaba-inc.com

Jian Xu
Bo Zheng
xiyu.xj@alibaba-inc.com
bozheng@alibaba-inc.com
Alibaba Group
Beijing, China

Abstract

Although multi-task learning (MTL) has been a preferred approach and successfully applied in many real-world scenarios, MTL models are not guaranteed to outperform single-task models on all tasks mainly due to the negative effects of conflicting gradients among the tasks. In this paper, we fully examine the influence of conflicting gradients and further emphasize the importance and advantages of achieving non-conflicting gradients which allows simple but effective trade-off strategies among the tasks with stable performance. Based on our findings, we propose the Gradient Deconfliction via Orthogonal Projections onto Subspaces (GradOPS) spanned by other task-specific gradients. Our method not only solves all conflicts among the tasks, but can also effectively search for diverse solutions towards different trade-off preferences among the tasks. Theoretical analysis on convergence is provided, and performance of our algorithm is fully testified on multiple benchmarks in various domains. Results demonstrate that our method can effectively find multiple state-of-the-art solutions with different trade-off strategies among the tasks on multiple datasets.

CCS Concepts

• **Computing methodologies** → **Multi-task learning; Neural networks.**

Keywords

deep learning; multi-task learning

ACM Reference Format:

Shijie Zhu, Hui Zhao, Tianshu Wu, Pengjie Wang, Hongbo Deng, Jian Xu, and Bo Zheng. 2025. Gradient Deconfliction via Orthogonal Projections

*Both authors contributed equally to this research.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

WSDM '25, March 10–14, 2025, Hannover, Germany

© 2025 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 979-8-4007-1329-3/25/03

<https://doi.org/10.1145/3701551.3703503>

onto Subspaces For Multi-task Learning. In *Proceedings of the Eighteenth ACM International Conference on Web Search and Data Mining (WSDM '25)*, March 10–14, 2025, Hannover, Germany. ACM, New York, NY, USA, 12 pages. <https://doi.org/10.1145/3701551.3703503>

1 Introduction

Multi-task Learning (MTL) aims at jointly training one model to master different tasks via shared representations and bottom structures to achieve better and more generalized results. Such positive knowledge transfer is the prominent advantage of MTL and is the key to the successful applications of MTL in various domains, like computer visions [17, 23, 30, 42], natural language processing [8, 29, 33, 37], and recommender systems [25, 26, 36, 38]. Many works also make further improvements via task-relationship modelling [23, 25, 30, 36, 39, 40] to fully exploit the benefit from shared structures. However, while such design allows positive transfer among the tasks, it also introduces the major challenges in MTL, of which the most dominating one is the conflicting gradients problem.

Gradients of two tasks, g_i and g_j , are considered conflicting if their dot product $g_i \cdot g_j < 0$. With conflicting gradients, improvements on some tasks may be achieved at the expense of undermining other tasks. The most representative works that seek to straightly solve conflicts among the tasks are PCGrad [41] and GradVac [37]. For each task \mathcal{T}_i , PCGrad iteratively projects its gradient g_i onto gradient directions of other tasks and abandons the conflicting part; GradVac argues that each task pair $(\mathcal{T}_i, \mathcal{T}_j)$ should have unique gradient similarity, and chooses to modify g_i towards such similarity goals. However, these methods only discussed convergence guarantee and gradient deconfliction under two-task settings [21]. For MTLs with 3 or more tasks, the properties of these algorithms may not hold because the sequential gradient modifications are not guaranteed to produce non-conflicting gradients among any two task pairs. Specifically, as demonstrated in Figure 1(b) and 1(c), the aggregated update direction G' of these methods (e.g. PC-Grad) still randomly conflicts with different original g_i because of the randomly selected processing orders of task pairs, leading to decreasing performance on corresponding tasks.

Another stream of work [19–21, 34] avoids directly dealing with gradient conflicts but casting the MTL problems as multi-objective

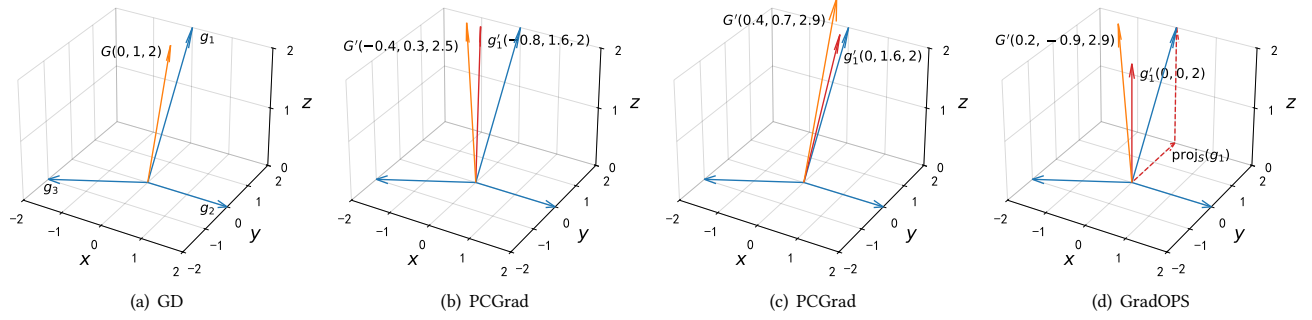


Figure 1: Illustrative example of gradient conflicts in a three-task learning problem using gradient descent (GD), PCGrad and GradOPS. Task-specific gradients are labeled g_1, g_2 and g_3 . The aggregated gradient G or G' in (a),(b) and (c) conflicts with the original gradient g_3, g_2 and g_3 , respectively, resulting in decreasing performance of corresponding tasks. Note that different processing orders in PCGrad ($[1,2,3]$ for (b), $[3,2,1]$ for (c)) lead to conflicts of G with different original g_i . In contrast, the GradOPS-modified g'_1 is orthogonal to $S = \text{span}\{g_2, g_3\}$ with the conflicting part on S removed, similarly for g'_2 and g'_3 (omitted). Thus, neither each g'_i nor G' conflicts with any of $\{g_i\}$.

optimization (MOO) problems. Though practically effective, applications of most MOO methods are greatly limited since these methods have to delicately design complex algorithms for certain trade-off among the tasks based on conflicting gradients. However, solutions toward certain trade-off may not always produce expected performance, especially when the convex loss assumption fails and thus convergence to Pareto optimal fails. In addition, different scenarios may require divergent preferences over the tasks, whereas most MOO methods can only search for one Pareto optimal toward certain trade-off because their algorithms are designed to be binded with certain trade-off strategy. Therefore, it's difficult to provide flexible and different trade-offs given conflicting gradients. Even for Liu et al. [21], Liu et al. [22] and Navon et al. [31] which claim to seek Pareto points with balanced trade-offs among the tasks, their solutions might not necessarily satisfy the MTL practitioners' needs, since it's always better to provide the ability of reaching different Pareto optimals and leave the decision to users [20].

In this paper, we propose a simple yet effective MTL algorithm: Gradient Deconfliction via Orthogonal Projections onto Subspaces spanned by other task-specific gradients (GradOPS). Compared with existing projection-based methods [37, 41], our method not only completely solves all conflicts among the tasks with stable performance invariant to the random processing orders during gradient modifications, but is also guaranteed to converge to Pareto stationary points regardless of the number of tasks to be optimized. Moreover, with gradient conflicts among the tasks completely solved, trade-offs among the tasks are also much easier. With conflicting gradients, most MOO methods have to conceive delicate algorithms to achieve certain trade-off preferences. In comparison, our method can effectively search for diverse solutions toward different trade-off preferences simply via different non-negative linear combinations of the deconflicted gradients, which is controlled by a single hyperparameter (see Figure 2).

The main contributions of this paper can be summarized as follows:

- Focused on the conflicting gradients challenge, we propose a orthogonal projection based gradient modification method that not only completely solves all conflicts among the tasks with stable and invariant results regardless of the number of tasks and their processing orders, the aggregated final update direction is also non-conflicting with all the tasks.
- With non-conflicting gradients obtained, a simple reweighting strategy is designed to offer the ability of searching Pareto stationary points toward different trade-offs. We also empirically testified that, with gradient-conflicts completely solved, such a simple strategy is already effective and flexible enough to achieve similar trade-offs with some MOO methods and even outperform them.
- Theoretical analysis on convergence is provided and comprehensive experiments are presented to demonstrate that our algorithm can effectively find multiple state-of-the-art solutions with different trade-offs among the tasks on MTL benchmarks in various domains.

2 Preliminaries

In this section, we first clarify the formal definition of MTL. Then we discuss the major problems in MTL and state the importance of achieving non-conflicting gradients among the tasks.

Problem Definition. For a multi-task learning (MTL) problem with $T > 1$ tasks $\{\mathcal{T}_1, \dots, \mathcal{T}_T\}$, each task is associated with a loss function $\mathcal{L}_i(\theta)$ for a shared set of parameters θ . Normally, a standard objective for MTL is to minimize the summed loss over all tasks: $\theta^* = \arg \min_{\theta} \sum_i \mathcal{L}_i(\theta)$.

Pareto Stationary Points and Optimals. A solution θ dominates another θ' if $\mathcal{L}_i(\theta) \leq \mathcal{L}_i(\theta')$ for all \mathcal{T}_i and $\mathcal{L}_i(\theta) < \mathcal{L}_i(\theta')$ holds for at least one \mathcal{T}_i . A solution θ^* is called Pareto optimal if no solution dominates θ^* . A solution θ is called Pareto stationary if there exists $\mathbf{w} \in \mathbb{R}^T$ such that $w_i \geq 0$, $\sum_{i=1}^T w_i = 1$ and $\sum_{i=1}^T w_i g_i(\theta) = \mathbf{0}$, where $g_i = \nabla_{\theta} \mathcal{L}_i(\theta)$ denotes the gradient of \mathcal{T}_i . All Pareto optimals

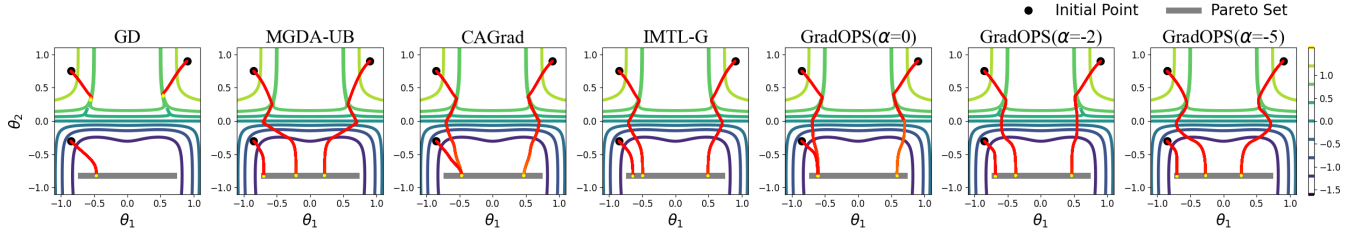


Figure 2: Visualization of trade-offs in a 2D multi-task optimization problem. Shown are trajectories of each method with 3 different initial points (labeled with black \bullet) using Adam optimizer [16]. Gradient descent (GD) is unable to traverse the deep valley on two of the initial points because there are conflicting gradients and the gradient magnitude of one task is much larger than the other. For MGDA-UB [34], CAGrad [21], and IMTL-G [22], the final convergence point is fixed for each initial point. In contrast, GradOPS could converge to multiple points in the Pareto set by setting different α . Experimental details are provided in Appendix B.

are Pareto stationary, the reverse holds when \mathcal{L}_i is convex for all \mathcal{T}_i [6, 9]. Note that MTL methods can only ensure reaching Pareto stationary points, convergence to Pareto optimals may not hold without the convex loss assumption.

Conflicting Gradients. Two gradients g_1 and g_2 are conflicting if the dot product $g_1 \cdot g_2 < 0$. Let G be the aggregated update gradient, i.e. $G = \sum_{i=1}^T g_i$, we define two types of conflicting gradients:

- conflicts among the tasks if there exists any two task \mathcal{T}_i and \mathcal{T}_j with $g_i \cdot g_j < 0$,
- conflicts of the final update direction with the tasks if any task \mathcal{T}_i satisfies that $G \cdot g_i < 0$.

For clarity, we introduce the concept of **strong non-conflicting** if $g_i \cdot g_j \geq 0, \forall i, j$ holds, and **weak non-conflicting** if the aggregated gradient G does not conflict with all original task gradients g_i . Note that strong non-conflicting gradients are always guaranteed to be weak non-conflicting, whereas weak non-conflicting gradients are not necessarily strong non-conflicting. Most existing MOO methods focus on seeking weak non-conflicting G toward certain trade-offs, which is directly responsible for task performance. Current projection based methods [37, 41] can only ensure strong non-conflicting gradients with $T = 2$, and when $T > 2$ even weak non-confliction is not guaranteed.

Advantages of Strong Non-Conflicting Gradients. Without strong non-conflicting gradients, MOO methods are limited to find only one solution toward certain trade-off by delicately balancing the conflicting gradients, which empirically may lead to unsatisfying results if such trade-off is less effective when convex assumption of \mathcal{L}_i fails. In contrast, with strong non-conflicting gradients, we instantly acquire the advantage that it will be much easier to apply different trade-offs on G simply via non-negative linear combinations of the deconflicted gradients, all guaranteed to be non-conflicting with each original g_i . With such ability, stable results with various trade-offs are also ensured since all tasks are always updated toward directions with non-decreasing performance.

Thus, our GradOPS aims to solve MTL problems with the following goals: (1) to obtain stable and better performance on all the tasks

by achieving strong non-conflicting gradients, (2) to provide simple yet effective strategies capable of performing different trade-offs.

3 Method

3.1 Strong Non-conflicting Gradients

Though recent works [37, 41] have already sought to directly deconflict each task specific gradient g_i with all other tasks iteratively, none of these methods manage to solve all conflicts among the tasks as stated in Section 1, let alone to further examine the benefits of strong non-conflicting gradients. As shown in Figure 1(b) and 1(c), both the modified g'_i and the aggregated gradient G' of existing methods may still conflict with some of the original task gradients $\{g_i\}$.

To address the limits of existing methods and to ensure strong non-conflicting gradients, GradOPS deconflicts gradients by projecting each g_i onto the subspace orthogonal to the span of the other task gradients. Formally, GradOPS proceeds as follows: (i) For each g_i in any permutation of the original task gradients, GradOPS first identifies whether g_i conflicts with any of the other tasks by checking the signs of $g_i \cdot g_j$ for all $\{g_j\}_{j \neq i}$. (ii) If no conflict exists, g_i remains unmodified: $g'_i = g_i$. Otherwise, GradOPS projects g_i onto the subspace orthogonal to $S = \text{span}\{g_j\}_{j \neq i}$. The orthogonal basis for S as $\{u_j\}$ is computed using the Gram-Schmidt procedure:

$$\begin{aligned} u_1 &= g_1, \text{ if } i \neq 1 \text{ else } u_2 = g_2, \\ u_j &= g_j - \sum_{k < j, k \neq i} \text{proj}_{u_k}(g_j), j > 1, j \neq i, \end{aligned} \quad (1)$$

where $\text{proj}_u(v) = \frac{u \cdot v}{\|u\|^2} u$. Given the orthogonal basis $\{u_j\}$, the modified g'_i is orthogonal to S :

$$g'_i = g_i - \sum_{j \neq i} \text{proj}_{u_j}(g_i). \quad (2)$$

Eventually, we have $g'_i \cdot g_j \geq 0, \forall i, j$ and thus each g'_i does not conflict with every original g_j . (iii) With strong non-conflicting gradients $\{g'_i\}$, the vanilla aggregated update direction $G' = \sum_i g'_i$ is guaranteed to be non-conflicting with any of the original g_j since $G' \cdot g_j = (\sum_i g'_i) \cdot g_j = \sum_i (g'_i \cdot g_j) \geq 0, \forall j$, the same holds for any non-negative linear combinations of the $\{g'_i\}$. It is worth

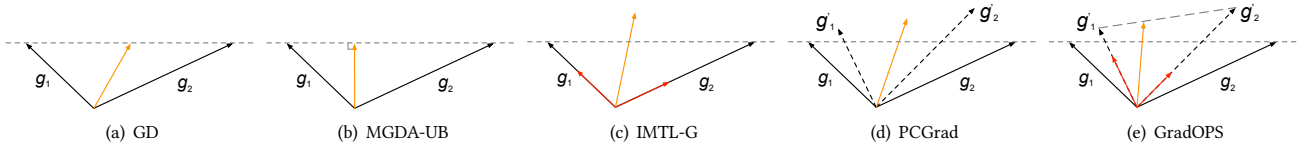


Figure 3: Visualization of the update direction (in yellow) obtained by various methods on a two-task learning problem. We rescaled the update vector to half for better visibility. g_1 and g_2 represent the two task-specific gradients. MGDA-UB proposes to minimize the minimum possible convex combination of task gradients, and the update vector is perpendicular to the dashed line. IMTL-G proposes to make the projections of the update vector onto $\{g_1, g_2\}$ to be equal. PCGrad and GradOPS project each gradient onto the normal plane of the other to obtain g'_1 and g'_2 . For PCGrad, the final update vector is the average of $\{g'_1, g'_2\}$. GradOPS further reweights $\{g'_1, g'_2\}$ to make trade-offs between two tasks. As a result, the final update direction of GradOPS is flexible between g'_1 and g'_2 , covering the directions of MGDA-UB and IMTL-G instead of been fixed as other methods, and always doesn't conflict with each task-specific gradient.

mentioning that when $g'_i = \mathbf{0}$ stands $\forall i$, which rarely occurs in practice, we can degenerate to use existing MOO methods such as multiple gradient descent algorithm [7] to obtain non-conflicting G' .

With this procedure, GradOPS ensures that both each modified task gradient g'_i and the final update gradient G' do not conflict with each original task gradient g_j , thus completely solves the conflicting gradients problem. In addition, unlike [37, 41], our result is stable and invariant to the permutations of tasks during the procedure. Under mild assumptions of neural network and small update step size, the GradOPS procedure is guaranteed to converge to a Pareto stationary point. Theoretical analysis on convergence of GradOPS is provided as **Theorem 1** and proved in Appendix A.1.

THEOREM 1. *Assume individual loss functions $\mathcal{L}_1, \mathcal{L}_2, \dots, \mathcal{L}_T$ are differentiable. Suppose the gradient of \mathcal{L} is L -Lipschitz with $L > 0$. Then with the update step size $t < \frac{2}{TL}$, GradOPS in Section 3.1 will converge to a Pareto stationary point.*

3.2 Trade-offs among Tasks

As shown in Figure 2, most existing methods could only converge to one point in the Pareto set, without the ability of flexibly performing trade-offs among the tasks. Figure 3(a) to 3(d) give a more detailed illustration about the fixed update strategies of different methods, different solutions are achieved only through different initial points. However, note that MTL practitioners may need varying trade-offs among the tasks by demand in real-world applications [20, 32]. In order to converge to points with different trade-offs, the most straightforward idea is to assign tasks different loss weights, i.e. to scale task gradients. However, this is often unsatisfying for two reasons: (1) update strategies of some methods like IMTL-G [22] are invariant to gradients scales, and (2) it is difficult to assign appropriate weights without prior knowledge. Therefore, we further propose to dynamically scale the modified task gradients with strong non-conflicting guarantees obtained by GradOPS to adjust the update direction.

To this end, we first define R_i as the scalar projection of $G' = \sum_i g'_i$ onto the original g_i :

$$R_i = \|G'\| \times \cos(\phi_{(g_i, G')}) = \frac{G' \cdot g_i}{\|g_i\|}. \quad (3)$$

Algorithm 1 GradOPS Update Rule

Require: task number T , a constant α , initial model parameters θ

```

1: while not converged do
2:    $g_i \leftarrow \nabla_{\theta} \mathcal{L}_i(\theta), \forall i$ 
3:   for  $i = 1; i \leq T$  do
4:     if  $\exists k \neq i, g_i \cdot g_k < 0$  then
5:       compute orthogonal basis  $\{u_j\}$  according to Eq. 1
6:        $g'_i = g_i - \sum_{j \neq i} \text{proj}_{u_j}(g_i)$ 
7:     else
8:        $g'_i = g_i$ 
9:     end if
10:  end for
11:  if  $\exists i, g'_i \neq \mathbf{0}$  then
12:     $G' = \sum_i g'_i$ 
13:    compute scaling factors  $\{w_i\}$  according to Eq. 5
14:    update  $\theta$  with gradient  $G'_{\text{new}} = \sum_i w_i g'_i$ 
15:  else
16:    update  $\theta$  with gradient obtained from MGDA [7]
17:  end if
18: end while

```

Note that $R_i \geq 0$ as GradOPS always ensures $g_i \cdot G' \geq 0$. Given the same G' , each R_i can be regarded as a measure of the angle between g_i and G' , or a measure of the real update magnitude on direction of g_i , indicating the dominance and relative update speed of task \mathcal{T}_i among the tasks. A new update direction $G'_{\text{new}} = \sum_i w_i g'_i$ is thus obtained by summing over the reweighted g'_i with:

$$r_i = \frac{R_i}{\sum_i R_i / T}, \quad (4)$$

$$w_i = \frac{r_i^{\alpha}}{\sum_i r_i^{\alpha} / T}, \quad (5)$$

where w_i functions as the scale factor calculated from $\{r_i\}$ and determines trade-offs among the tasks, r_i reveals the relative update magnitude on direction g_i and always splits the tasks into dominating ones $\{\mathcal{T}_i | r_i > 1\}$ and dominated ones with $r_i \leq 1$. Thus, a single hyperparameter $\alpha \in \mathbb{R}$ on r_i^{α} will allow effective trade-offs among the dominating and dominated tasks via non-negative w_i in

Eq. 5, which still ensures that such improved GradOPS procedure will converge to Pareto stationary points. Convergence of GradOPS with different \mathbf{w} is provided in **Theorem 2** and proved in Appendix A.2.

THEOREM 2. *Assume individual loss functions $\mathcal{L}_1, \mathcal{L}_2, \dots, \mathcal{L}_T$ are differentiable. Suppose the gradient of \mathcal{L} is L -Lipschitz with $L > 0$. Then with the update step size $t < \min_{i,j} \frac{2w_i \|g'_i\|^2}{TLw_j^2 \|g'_j\|^2}$, GradOPS in Section 3.2 will converge to a Pareto stationary point.*

The complete GradOPS algorithm is summarized in Algorithm 1. Note that PCGrad is a special case of our method when $T = 2$ and $\alpha = 0$.

Discussion about α . With $\alpha > 0$, performance of the dominating tasks are expected to be improved since higher value of α will enforce G'_{new} toward $\{g'_i\}$ of these tasks and yield greater $\{w_i\}$. While $\alpha < 0$, the dominated tasks are emphasized since lower value of α will ensure greater $\{w_i\}$ for tasks with smaller $\{r_i\}$. Specifically, a proper $\alpha < 0$ will pay more attention to the dominated tasks, and thus obtain more balanced update gradient, which is similar to IMTL-G. Keep decreasing α will further focus on tasks with smaller gradient magnitudes, which coincides with the idea of MGDA-UB. An example is provided in Figure 2, where the top right points in GradOPS($\alpha=-2$) and GradOPS($\alpha=-5$) converge to the similar points to IMTL-G and MGDA-UB, respectively. Note that $G'_{\text{new}} = G'$ when $\alpha = 0$. A pictorial description of this idea is shown in Figure 3(e): Different α will redirect G'_{new} between g'_1 and g'_2 .

3.3 Advantages of GradOPS

Now we discuss the advantages of GradOPS. Both GradOPS and existing MOO methods can converge to Pareto stationary points, which are also Pareto optimals under convex loss assumptions. Thus ideally, there exists no dominating methods but only methods whose trade-off strategy best suited for certain MTL applications. Realizing that the assumptions may fail in practice and convergence to Pareto optimals may not hold, we are interested in achieving robust performance via simplest strategies instead of designing delicate trade-off strategies, which may fail to reach expected performance with violations of the assumptions.

Our Goal of securing robust performance is achieved via ensuring strong non-conflicting gradients. Though [37, 41] are already aware of the importance of solving gradient conflicts (see Section 1), none of them manage to guarantee strong non-conflicting gradients, which is achieved by GradOPS. In addition, we further conclude empirically the benefit of achieving strong non-conflicting gradients, which is all fully exploited in GradOPS:

With all conflicts solved, effective trade-offs among the tasks are much easier. With conflicting gradients, existing methods have to conceive very delicate algorithms to achieve certain trade-off preferences. The trade-off strategy in Liu et al. [21] requires solving the dual problem of maximizing the minimum local improvements, IMTL-G [22] applies complex matrix multiplications only to find G with equal projection onto each g_i . Unlike these methods, GradOPS can provide solutions with different trade-offs simply via non-negative linear combinations of the deconflicted gradients, and achieves similar trade-offs with different MOO methods,

Table 1: Experiment results on UCI Census-income dataset. The best scores are shown in bold and the second-best scores are underlined. Note a slight increase in AUC at 0.001-level is known to be a significant improvement in MTL task [2].

Method	Income	Marital	Education	Average	$\Delta m\%$	MR
Single-task	0.9454	0.9817	<u>0.8875</u>	0.9382	0.00	4.33
Uniform scaling	0.9407	0.9763	<u>0.8829</u>	0.9333	0.52	14.00
GradNorm	0.9435	0.9829	0.8873	0.9379	0.03	6.00
PCGrad	0.9428	0.9812	0.8856	0.9365	0.18	11.67
GradVac	0.9436	0.9798	0.8856	0.9363	0.20	10.67
MGDA-UB	0.9460	0.9833	0.8870	<u>0.9388</u>	<u>-0.06</u>	<u>3.00</u>
CAGrad	0.9444	0.9820	0.8863	0.9376	0.07	7.00
IMTL-G	0.9443	0.9826	0.8864	0.9378	0.05	6.33
RotoGrad-R	0.9430	0.9816	0.8854	0.9367	0.17	11.67
GradOPS($\alpha=0$)	0.9436	0.9817	0.8861	0.9371	0.12	9.33
GradOPS($\alpha=2$)	0.9432	0.9769	0.8864	0.9355	0.28	10.67
GradOPS($\alpha=-1$)	0.9443	0.9832	0.8866	0.9380	0.02	5.67
GradOPS($\alpha=-2$)	0.9453	<u>0.9837</u>	0.8871	0.9387	-0.05	3.33
GradOPS($\alpha=-3$)	<u>0.9459</u>	0.9854	0.8876	0.9396	-0.15	1.33

like MGDA-UB and IMTL-G, or even outperforms them. Moreover, GradOPS, which only requires tuning a single hyperparameter, also outperforms the very expensive and exhaustive grid search procedures. See Appendix C.1 for details on effects of tuning α . Moreover, experiment results in Section 4 imply that a certain trade-off strategy may not always produce promising results on different datasets. Unlike most MOO methods which are bound up with certain fixed trade-offs, GradOPS is also less affected and more stable since it flexibly supports different trade-offs and always ensures that all tasks are updated toward directions with non-decreasing performance.

Lastly, it's worth mentioning that GradNorm [4] can also dynamically adjust gradient norms. However, its target of balancing the training rates of different tasks can be biased since relationship of the gradient directions are ignored, which can be improved by taking real update magnitude on each task into account as we do in Eq. 3.

4 Experiments

In this section, we evaluate our method on diverse multi-task learning datasets including two public benchmarks and one industrial large-scale recommendation dataset. For the two public benchmarks, instead of using the frameworks implemented by different MTL methods with various experimental details, we present fair and reproducible comparisons under the unified training framework [18]. GradOPS inherits the hyperparameters of the respective baseline method in all experiments, except for one additional hyperparameter α . Source codes will be publicly available.

Compared methods. (1) Uniform scaling: minimizing $\sum_i \mathcal{L}_i$; (2) Single-task: solving tasks independently; (3) Existing loss reweighting methods: GradNorm [4]; (4) Projection methods: PCGrad [41] and GradVac [37]; (5) MOO methods: MGDA-UB [34], CAGrad [21], IMTL-G [22], Rotate Only RotoGrad (RotoGrad-R for short) [14]. Note that RotoGrad consists of two parts: Scale Only and Rotate Only, which are independent and can be applied separately, similar to IMTL-L and IMTL-G. Since Scale Only RotoGrad and IMTL-L

Table 2: Experimental results on NYUv2 dataset. Arrows indicate the values are the higher the better (\uparrow) or the lower the better (\downarrow). Best performance for each task is bold, with second-best underlined.

Method	Segmentation		Depth		Surface Normal					$\Delta_m\% \downarrow$	MR \downarrow
	mIoU \uparrow	Pix Acc \uparrow	Abs Err \downarrow	Rel Err \downarrow	Angle Distance		Within $t^\circ \uparrow$				
					Mean \downarrow	Median \downarrow	11.25 \uparrow	22.5 \uparrow	30 \uparrow		
Single-task	28.46	55.78	0.6674	0.2839	30.39	<u>23.68</u>	<u>24.56</u>	<u>47.98</u>	59.76	<u>0.00</u>	<u>4.89</u>
Uniform scaling	27.50	53.31	0.6061	0.2627	32.80	27.61	19.85	41.53	53.68	6.50	12.33
GradNorm	26.54	52.69	0.5902	<u>0.2500</u>	31.40	26.00	21.62	44.02	56.29	3.10	8.00
PCGrad	27.53	53.51	0.5980	0.2606	32.61	27.32	20.10	42.00	54.11	5.72	10.56
Gradvac	28.33	54.66	0.5908	0.2530	32.74	27.50	19.79	41.67	53.87	5.16	9.67
MGDA-UB	18.57	46.99	0.7015	0.2913	29.83	23.27	24.84	48.63	60.58	5.64	7.22
CAGrad	27.07	54.14	0.5999	0.2598	30.93	25.35	22.30	45.09	57.34	1.93	8.00
IMTL-G	<u>28.80</u>	55.14	0.5954	0.2554	30.66	25.12	22.46	45.45	57.76	0.36	5.44
RotoGrad-R	27.97	55.10	0.5932	0.2606	32.17	26.77	20.41	42.74	55.07	4.24	8.78
GradOPS($\alpha=0$)	27.08	54.40	<u>0.5862</u>	0.2545	32.12	26.86	20.69	42.69	54.89	4.32	8.67
GradOPS($\alpha=1$)	26.56	53.26	0.6055	0.2600	34.30	29.39	18.79	39.79	51.67	9.40	13.11
GradOPS($\alpha=-0.5$)	29.05	54.90	0.5819	0.2489	31.75	26.40	20.78	43.31	55.68	2.48	5.89
GradOPS($\alpha=-1$)	28.45	<u>55.67</u>	0.5895	0.2550	30.46	24.85	22.73	45.91	58.20	-0.23	4.44
GradOPS($\alpha=-1.5$)	27.34	54.71	0.6077	0.2509	30.34	24.80	22.75	45.94	58.34	0.43	5.44
GradOPS($\alpha=-3$)	20.75	48.28	0.6905	0.2782	<u>29.87</u>	23.75	24.10	47.79	<u>59.94</u>	4.73	7.56

focus on loss weights and can also be combined with many methods including GradOPS by demand, we choose to compare with Rotate Only RotoGrad and IMTL-G instead of introducing additional functions like Scale Only RotoGrad or IMTL-L to both GradOPS and all other methods for fair comparison.

Evaluation. In addition to common evaluation metrics in each experiment, we follow [21, 28, 31] and report two metrics to capture the overall performance: (1) Mean Rank (MR): The average rank of each method across the different tasks (lower is better). A method receives the best value, MR = 1, if it ranks first in all tasks. (2) Δ_m : The average per-task performance drop of method m with respect to the single-tasking baseline b : $\Delta_m = \frac{1}{T} \sum_{i=1}^T (-1)^{l_i} (M_{m,i} - M_{b,i}) / M_{b,i}$ where $l_i = 1$ if a higher value is better for a criterion M_i on task i and 0 otherwise.

4.1 Multi-Task Classification

The UCI Census-income dataset [10] is a commonly used benchmark for multi-task learning, which contains 299,285 samples including 199,523 training examples and 99,762 test examples, and 40 features extracted from the 1994 census database. Referring to the experimental settings in Ma et al. [25], we further randomly split test examples into a validation dataset and a test dataset by the fraction of 1:1, and construct three multi-task learning problems from this dataset by setting some of the features as prediction targets. In detail, task Income aims to predict whether the income exceeds 50K, task Marital aims to predict whether this person’s marital status is never married, and task Education aims to predict whether the education level is at least college. We apply a 2-layer fully-connected ReLU-activated neural network with 192 hidden units of each layer for all methods. We also place one dropout layer [13] with $p = 0.3$ for regularization. For GradNorm [4] and CAGrad

[21] baselines which have additional hyperparameters, we follow the original papers and search $\alpha \in \{0.5, 1.5, 2.0\}$ for GradNorm and $c \in \{0.1, 0.2, \dots, 0.9\}$ for CAGrad with the best average performance of the three tasks on validation dataset ($\alpha = 1.5$ for GradNorm and $c = 0.5$ for CAGrad). We train each method for 200 epochs with batch-size of 1024, and the Adam optimizer with a learning rate of $1e - 4$. Since all tasks are binary classification problems, we use the Area Under Curve (AUC) scores as the evaluation metrics.

Experimental results for all methods are summarized in Table 1. The reported results are the average performance of 10 repeated experiments with random parameter initialization. As shown, GradOPS($\alpha=0$) outperforms the projection-based method PCGrad in all tasks, indicating the benefit of our proposed strategy which projects each task-specified gradient onto the subspace orthogonal to the span of the other gradients to deconflict gradients. Then, we compare the performance of GradOPS with different α and the other MOO methods. We note that GradOPS($\alpha=-1$) recovers CAGrad and IMTL-G, and GradOPS($\alpha=-2$) approximates MGDA-UB. These results show that GradOPS with a proper $\alpha < 0$ can roughly recover the final performance of CAGrad, IMTL-G and MGDA-UB. The reason why RotoGrad-R does not perform as well as the other MOO methods may be that RotoGrad-R is applied to the gradients with respect to the feature space instead of the shared parameters as the other methods do. GradOPS($\alpha=-3$) achieves the best performance in terms of Marital, Education and Average. Although GradOPS($\alpha=2$) doesn’t achieve as good experimental results as GradOPS with $\alpha = \{-1, -2, -3\}$ do, it outperforms Uniform scaling baseline. And we find that for this dataset, almost any value of $-10 \leq \alpha \leq 5$ will improve Average performance over Uniform scaling baseline (see Appendix C.2 for details). It suggests that the way to deconflict gradients proposed by us is beneficial for MTL.

Table 3: Experiment Results on the real large-scale recommendation system. The best and runner up results in each column are bold and underlined, respectively.

Method	Purchase	Cart	Wish	Average	$\Delta m\%$	MR
Single-task	0.8149	0.7616	0.8095	0.7953	0.00	7.33
Uniform scaling	0.8178	0.7606	0.8087	0.7957	-0.04	9.00
GradNorm	0.8188	0.7609	0.8084	0.7960	-0.08	6.67
PCGrad	0.8175	0.7609	0.8089	0.7958	-0.05	8.67
GradVac	0.8182	0.7609	0.8087	0.7959	-0.07	8.33
IMTL-G	0.8181	0.7602	0.8097	0.7960	-0.08	8.00
GradOPS($\alpha=0$)	<u>0.8190</u>	<u>0.7620</u>	0.8095	0.7968	-0.19	3.33
GradOPS($\alpha=1$)	0.8186	<u>0.7620</u>	0.8067	0.7958	-0.05	6.67
GradOPS($\alpha=2$)	0.8199	0.7625	0.8073	0.7966	-0.15	4.33
GradOPS($\alpha=-0.5$)	0.8185	0.7618	<u>0.8101</u>	0.7968	-0.18	4.00
GradOPS($\alpha=-1$)	0.8187	0.7616	0.8099	<u>0.7967</u>	-0.17	4.33
GradOPS($\alpha=-2$)	0.8178	0.7604	0.8117	0.7966	-0.16	7.33


4.2 Scene Understanding

NYUv2 [35] is an indoor scene dataset which contains 3 tasks: 13 class semantic segmentation, depth estimation, and surface normal prediction. We follow the training and evaluation procedure used in previous work on MTL [23, 41] and apply SegNet [1] as the network structure for all methods. For GradNorm [4] and CAGrad [21] baselines, we follow the hyperparameters settings in the original papers with $\alpha = 1.5$ for GradNorm and $c = 0.4$ for CAGrad. Each method is trained for 200 epochs with a batch size of 2, using the Adam optimizer with a learning rate of $1e - 4$. The learning-rate is halved to $5e - 5$ after 100 epochs.

The results are presented in Table 2. Each experiment is repeated 3 times over different random parameter initialization and the mean performance is reported. Our methods GradOPS($\alpha=-1.5$) achieves comparable performance with IMTL-G. GradOPS($\alpha=-0.5$) and GradOPS($\alpha=-1$) achieve the best Δ_m and MR respectively. As surface normal estimation owns the smallest gradient magnitude, MGDA-UB focuses on learning to predict surface normals and achieves poor performance on the other two tasks, which is similar to GradOPS with a lower $\alpha = -3$. It is worth noting that although MGDA-UB has overall good results on UCI Census-income dataset, yet it has not as good Δ_m on this dataset, which suggesting that it is hard to generalize to different domains.

4.3 Large-scale Recommendation

In this subsection, we conduct offline experiments on a large-scale recommendation system in Taobao Inc. to evaluate the performance of proposed methods. We collect an industrial dataset through sampling user logs from the recommendation system during consecutive 7 days. There are 46 features, more than 300 million users, 10 millions items and about 1.7 billions samples in the dataset. We consider predicting three post-click actions: purchase, add to shopping cart (Cart) and add to wish list (Wish). We implement the network as a feedforward neural network with 4 fully-connected layers with ReLU activation. The hidden units are fixed for all models with hidden size {1024,512,256,128}. All methods are trained with Adam optimizer with a learning rate of $1e - 3$, and we adopt AUC scores as the evaluation metrics.

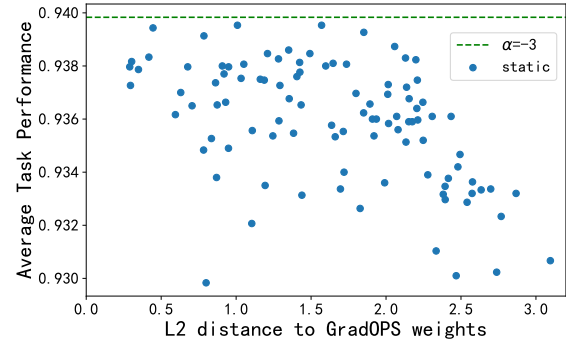**Figure 4: Performance comparison between GradOPS($\alpha=-3$) and GradOPS-static with grid search weights w_i^{static} . The x-axis denotes the L2 distance between w_i^{static} and the average weights of GradOPS($\alpha=-3$) over training steps.**

Results are shown in Table 3. As wish prediction is the dominated task in this dataset, GradOPS with a negative $\alpha = \{-0.5, -1, -2\}$ show better performance than GradOPS($\alpha=0$) in wish task, and GradOPS with a positive $\alpha = \{1, 2\}$ achieve better performance in the other two tasks. Our proposed GradOPS can successfully find a set of well-distributed solutions with different trade-offs, and it outperforms the single-task baseline where each task is trained with a separate model. This experiment also shows that our method remains effective in real world large-scale applications.

4.4 Effectiveness of Trade-offs in GradOPS

To further verify the effectiveness of the strategy introduced in Section 3.2 for obtaining w_i , we conduct a comparative experiment where we train GradOPS with static w_i^{static} (referred to as GradOPS-static) on UCI Census-income dataset. $\{w_i^{\text{static}}\}$ are considered as hyperparameters, and are sampled from candidates generated by grid search. The sum of $\{w_i^{\text{static}}\}$ is guaranteed to equal $T = 3$, and $G'_{\text{static}} = \sum_i w_i^{\text{static}} g'_i$ is used as the final update gradient. Then, we compare the performance of GradOPS-static to our GradOPS($\alpha=-3$).

The results are shown in Figure 4. We train GradOPS-static 100 times with different combinations of $\{w_i^{\text{static}}\}$. Even after this exhaustive grid search, GradOPS-static still falls short of GradOPS($\alpha=-3$). Therefore, GradOPS can find the optimal grid search weights in one single training run.

4.5 Importance of Ensuring Strong-nonconflicting Gradients

Section 4.4 already indicated that our method can effectively perform trade-offs among the tasks simply via non-negative linear combinations of task gradients, here we will further demonstrated that such simple and flexible re-weighting strategy is more efficient when given strong non-conflicting gradients, which makes it one of the major advantages of GradOPS. For this purpose, similar dynamic weighting (DW) strategy is also applied to both the original gradients and PCGrad-modified gradients on the UCI dataset for comparison, with minor adjustment by replacing R_i in Eq.(4) with $\exp(R_i)$ for non-negative requirement in Eq.(5). Results are provided in

Table 4: Performance of applying similar trade-off strategies used in GradOPS to both the original gradients and PCGrad are compared to demonstrate the importance of ensuring strong non-conflicting gradients in making trade-offs among the tasks. For each method, best result with the highest Average AUC is marked in gray and improvements over the same method without re-weighting (i.e., $\alpha=0$) are presented in brackets.

Method	Income	Marital	Education	Average
Single-task	0.9454	0.9817	0.8875	0.9382
Uniform scaling	0.9407	0.9763	0.8829	0.9333
DW($\alpha=-1$)	0.9433(0.0026)	0.9796(0.0032)	0.8830(0.0001)	0.9353(0.0020)
DW($\alpha=-2$)	0.9432(0.0026)	0.9779(0.0015)	0.8814(-0.0015)	0.9342(0.0009)
DW($\alpha=-3$)	0.9423(0.0016)	0.9783(0.0019)	0.8804(-0.0025)	0.9337(0.0004)
PCGrad	0.9428	0.9812	0.8856	0.9365
PCGrad-DW($\alpha=-1$)	0.9451(0.0023)	0.9849(0.0037)	0.8852(-0.0004)	0.9384(0.0019)
PCGrad-DW($\alpha=-2$)	0.9449(0.0021)	0.9838(0.0026)	0.8846(-0.0010)	0.9378(0.0012)
PCGrad-DW($\alpha=-3$)	0.9446(0.0018)	0.9839(0.0028)	0.8830(-0.0026)	0.9372(0.0007)
GradOPS($\alpha=0$)	0.9436	0.9817	0.8861	0.9371
GradOPS($\alpha=-1$)	0.9443(0.0007)	0.9832(0.0015)	0.8866(0.0004)	0.9380(0.0009)
GradOPS($\alpha=-2$)	0.9453(0.0018)	0.9837(0.0020)	0.8871(0.0010)	0.9387(0.0016)
GradOPS($\alpha=-3$)	0.9459(0.0023)	0.9854(0.0037)	0.8876(0.0015)	0.9396(0.0025)

Table 4. Firstly, best average AUCs achieved by GradOPS($\alpha=-3$) outperforms than that achieved by similar re-weightings on original gradient DW($\alpha=-1$) and PCGrad-DW($\alpha=-1$), indicating such trade-offs are much more effective when given strong non-conflicting gradients. Secondly, PCGrad with negative dynamic weight (DW) α (-1, -2, -3) achieved improvement on Income, Marital and Average AUCs over the vanilla PCGrad-DW($\alpha=0$) (i.e., the original PCGrad) at the expense of undermining Task Education, such results are expected since PCGrad fails to guarantee strong non-conflicting gradients. In comparison, no tasks are sacrificed by GradOPS($\alpha=-3$) with similar strategy. Note that with increasing task numbers, without strong non-conflicting guarantees, the conflicts between PCGrad-modified gradients and the original gradients is expected to be more and more frequent, which will eventually result in increasing improvement in performance for GradOPS over PCGrad.

5 Related Work

Ever since the successful applications of multi-task learning in various domains, many methods have been released in pursuit of fully exploiting the benefits of MTL. Early branches of popular approaches heuristically explore shared experts and task-relationship modelling via gating networks [23, 25, 30, 36, 39, 40], loss reweighting methods to ensure equal gradient norm for each tasks [4] or to uplift losses toward harder tasks [12, 15]. GradOPS is agnostic to model architectures and loss manipulations, thus can be combined with these methods by demands.

Recent trends in MTL focus on gradient manipulations toward certain objectives. Chen et al. [5] simply drops out task gradients randomly according to conflicting ratios among tasks. Javaloy and Valera [14] focuses on reducing negative transfer by scaling and rotating task gradients. Existing projection based methods explicitly study the conflicting gradients problem and relationships among task gradients. Some methods precisely alter each task gradient toward non-negative inner product [41] or certain values of gradient

similarity [37] with other tasks, iteratively. GradOPS makes further improvements over these methods, as stated in Section 3.1.

Originated from [7], some methods seek to find Pareto optimals of MTL as solutions of multi-objective optimization (MOO) problems. Sener and Koltun [34] apply the Frank-Wolfe algorithm to solve the MOO problem defined in Désidéri [7]; Lin et al. [19] choose to project the closed-form solutions of a relaxed quadratic programming to the feasible space, hoping to achieve paretion-efficiency. More recent methods seek to find Pareto optimals with certain trade-off among the tasks instead of finding an arbitrary one. Liu et al. [21] seeks to maximize the worst local improvement of individual tasks to achieve Pareto points with minimum average loss. IMTL-G [22] seeks solutions with balanced performance among all tasks by searching for an update vector that has equal projections on each task gradient. Note that some methods have already been proposed to provide Pareto solutions with different trade-offs. Lin et al. [20] explicitly splits the loss space into independent cones and applies constrained MOO methods to search single solution for each cone; Mahapatra and Rajan [27] provides the ability of searching solutions toward certain desired directions determined by the input preference ray r ; Navon et al. [32] trains a hypernetwork, with preference vector r as input, to directly predict weights of a certain MTL model with losses in desired ray r . Comparison of GradOPS and MOO methods are discussed in Section 3.3.

Finally, as discussed in Yu et al. [41], we also state the difference of GradOPS with gradient projection methods [3, 11, 24] applied in continual learning, which mainly solve the catastrophic forgetting problem in sequential lifelong learning. GradOPS is distinct from these methods in two aspects: (1) instead of concentrate only on conflicts of current task with historical ones, GradOPS focus on gradient deconfliction among all tasks within the same batch simultaneously to allow mutually positive transfer among tasks, (2) GradOPS aims to provide effective trade-offs among tasks with the non-conflicting gradients.

6 Conclusion

In this work, focusing on the conflicting gradients challenge in MTL, we introduce the idea of strong non-conflicting gradients, and further emphasize the advantages of acquiring such gradients: it will be much easier to apply varying trade-offs among the tasks simply via different non-negative linear combinations of the deconflicted gradients, which are all guaranteed to be non-conflicting with each original tasks. Thus, solutions toward different trade-offs with stable performance can also be achieved since all tasks are updated toward directions with non-decreasing performance in each training step for all trade-off preferences. To fully exploit such advantages, we propose a simple algorithm (GradOPS) that ensures strong non-conflicting gradients, based on which a simple reweighting strategy is implemented to provides effective trade-offs among the tasks. Comprehensive experiments show that GradOPS achieves state-of-the-art results and is also flexible enough to achieve similar trade-offs with some of the existing MOO methods and even outperforms them. Based on our works and findings, we believe that ensuring strong non-conflicting gradients and studying more delicate and efficient trade-off strategies shall be an interesting and promising future research direction in MTL.

References

- [1] Vijay Badrinarayanan, Alex Kendall, and Roberto Cipolla. 2017. Segnet: A deep convolutional encoder-decoder architecture for image segmentation. *IEEE transactions on pattern analysis and machine intelligence* 39, 12 (2017), 2481–2495.
- [2] Ting Bai, Yudong Xiao, Bin Wu, Guojun Yang, Hongyong Yu, and Jian-Yun Nie. 2022. A Contrastive Sharing Model for Multi-Task Recommendation. In *Proceedings of the ACM Web Conference 2022*. 3239–3247.
- [3] Arslan Chaudhry, Marc’Aurelio Ranzato, Marcus Rohrbach, and Mohamed Elhoseiny. 2018. Efficient lifelong learning with a-gem. *arXiv preprint arXiv:1812.00420* (2018).
- [4] Zhao Chen, Vijay Badrinarayanan, Chen-Yu Lee, and Andrew Rabinovich. 2018. Gradnorm: Gradient normalization for adaptive loss balancing in deep multitask networks. In *International conference on machine learning*. PMLR, 794–803.
- [5] Zhao Chen, Jiquan Ngiam, Yanping Huang, Thang Luong, Henrik Kretzschmar, Yuning Chai, and Dragomir Anguelov. 2020. Just pick a sign: Optimizing deep multitask models with gradient sign dropout. *Advances in Neural Information Processing Systems* 33 (2020), 2039–2050.
- [6] JY Bello Cruz, LR Lucambio Pérez, and JG Melo. 2011. Convergence of the projected gradient method for quasiconvex multiobjective optimization. *Nonlinear Analysis: Theory, Methods & Applications* 74, 16 (2011), 5268–5273.
- [7] Jean-Antoine Désidéri. 2012. Multiple-gradient descent algorithm (MGDA) for multiobjective optimization. *Comptes Rendus Mathématique* 350, 5–6 (2012), 313–318.
- [8] Daxiang Dong, Hua Wu, Wei He, Dianhai Yu, and Haifeng Wang. 2015. Multi-task learning for multiple language translation. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*. 1723–1732.
- [9] LM Drummond and Alfredo N Iusem. 2004. A projected gradient method for vector optimization problems. *Computational Optimization and applications* 28, 1 (2004), 5–29.
- [10] Dheeru Dua and Casey Graff. 2017. UCI Machine Learning Repository. <http://archive.ics.uci.edu/ml>
- [11] Mehrdad Farajtabar, Navid Azizan, Alex Mott, and Ang Li. 2020. Orthogonal gradient descent for continual learning. In *International Conference on Artificial Intelligence and Statistics*. PMLR, 3762–3773.
- [12] Michelle Guo, Albert Haque, De-An Huang, Serena Yeung, and Li Fei-Fei. 2018. Dynamic task prioritization for multitask learning. In *Proceedings of the European conference on computer vision (ECCV)*. 270–287.
- [13] Geoffrey E Hinton, Nitish Srivastava, Alex Krizhevsky, Ilya Sutskever, and Ruslan R Salakhutdinov. 2012. Improving neural networks by preventing co-adaptation of feature detectors. *arXiv preprint arXiv:1207.0580* (2012).
- [14] Adrián Javaloy and Isabel Valera. 2022. RotoGrad: Gradient Homogenization in Multitask Learning. *International Conference on Learning Representations* (2022).
- [15] Alex Kendall, Yarin Gal, and Roberto Cipolla. 2018. Multi-task learning using uncertainty to weigh losses for scene geometry and semantics. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 7482–7491.
- [16] Diederik P Kingma and Jimmy Ba. 2014. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980* (2014).
- [17] Iasonas Kokkinos. 2017. Ubertnet: Training a universal convolutional neural network for low-, mid-, and high-level vision using diverse datasets and limited memory. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 6129–6138.
- [18] Baijiong Lin and Yu Zhang. 2022. LibMTL: A Python Library for Multi-Task Learning. *arXiv preprint arXiv:2203.14338* (2022).
- [19] Xiao Lin, Hongjie Chen, Changhua Pei, Fei Sun, Xuanji Xiao, Hanxiao Sun, Yongfeng Zhang, Wenwu Ou, and Peng Jiang. 2019. A pareto-efficient algorithm for multiple objective optimization in e-commerce recommendation. In *Proceedings of the 13th ACM Conference on recommender systems*. 20–28.
- [20] Xi Lin, Hui-Ling Zhen, Zhenhua Li, Qing-Fu Zhang, and Sam Kwong. 2019. Pareto multi-task learning. *Advances in neural information processing systems* 32 (2019).
- [21] Bo Liu, Xingchao Liu, Xiaojie Jin, Peter Stone, and Qiang Liu. 2021. Conflict-averse gradient descent for multi-task learning. *Advances in Neural Information Processing Systems* 34 (2021), 18878–18890.
- [22] Liyang Liu, Yi Li, Zhanghui Kuang, J Xue, Yimin Chen, Wenming Yang, Qingmin Liao, and Wayne Zhang. 2021. Towards impartial multi-task learning. In *International Conference on Learning Representations*.
- [23] Shikun Liu, Edward Johns, and Andrew J Davison. 2019. End-to-end multi-task learning with attention. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 1871–1880.
- [24] David Lopez-Paz and Marc’Aurelio Ranzato. 2017. Gradient episodic memory for continual learning. *Advances in neural information processing systems* 30 (2017).
- [25] Jiaqi Ma, Zhe Zhao, Xinyang Yi, Jilin Chen, Lichan Hong, and Ed H Chi. 2018. Modeling task relationships in multi-task learning with multi-gate mixture-of-experts. In *Proceedings of the 24th ACM SIGKDD international conference on knowledge discovery & data mining*. 1930–1939.
- [26] Xiao Ma, Liqin Zhao, Guan Huang, Zhi Wang, Zelin Hu, Xiaoqiang Zhu, and Kun Gai. 2018. Entire space multi-task model: An effective approach for estimating post-click conversion rate. In *The 41st International ACM SIGIR Conference on Research & Development in Information Retrieval*. 1137–1140.
- [27] Debabrata Mahapatra and Vaibhav Rajan. 2020. Multi-task learning with user preferences: Gradient descent with controlled ascent in pareto optimization. In *International Conference on Machine Learning*. PMLR, 6597–6607.
- [28] Kevis-Kokitsi Maninis, Ilija Radosavovic, and Iasonas Kokkinos. 2019. Attentive single-tasking of multiple tasks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 1851–1860.
- [29] Bryan McCann, Nitish Shirish Keskar, Caiming Xiong, and Richard Socher. 2018. The natural language decathlon: Multitask learning as question answering. *arXiv preprint arXiv:1806.08730* (2018).
- [30] Ishan Misra, Abhinav Shrivastava, Abhinav Gupta, and Martial Hebert. 2016. Cross-stitch networks for multi-task learning. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 3994–4003.
- [31] Aviv Navon, Aviv Shamsian, Idan Achitue, Haggai Maron, Kenji Kawaguchi, Gal Chechik, and Ethan Fetaya. 2022. Multi-task learning as a bargaining game. *International Conference on Machine Learning* (2022).
- [32] Aviv Navon, Aviv Shamsian, Ethan Fetaya, and Gal Chechik. 2021. Learning the Pareto Front with Hypernetworks. In *International Conference on Learning Representations*.
- [33] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog* 1, 8 (2019), 9.
- [34] Ozan Sener and Vladlen Koltun. 2018. Multi-task learning as multi-objective optimization. *Advances in neural information processing systems* 31 (2018).
- [35] Nathan Silberman, Derek Hoiem, Pushmeet Kohli, and Rob Fergus. 2012. Indoor segmentation and support inference from rgbd images. In *European conference on computer vision*. Springer, 746–760.
- [36] Hongyan Tang, Junning Liu, Ming Zhao, and Xudong Gong. 2020. Progressive layered extraction (ple): A novel multi-task learning (mtl) model for personalized recommendations. In *Fourteenth ACM Conference on Recommender Systems*. 269–278.
- [37] Zirui Wang, Yulia Tsvetkov, Orhan Firat, and Yuan Cao. 2020. Gradient Vaccine: Investigating and Improving Multi-task Optimization in Massively Multilingual Models. In *International Conference on Learning Representations*.
- [38] Hong Wen, Jing Zhang, Yuan Wang, Fuyi Lv, Wentian Bao, Quan Lin, and Keping Yang. 2020. Entire space multi-task modeling via post-click behavior decomposition for conversion rate prediction. In *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*. 2377–2386.
- [39] Dongbo Xi, Zhen Chen, Peng Yan, Yinger Zhang, Yongchun Zhu, Fuzhen Zhuang, and Yu Chen. 2021. Modeling the sequential dependence among audience multi-step conversions with multi-task learning in targeted display advertising. In *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery & Data Mining*. 3745–3755.
- [40] Qiaolin Xia, Peng Jiang, Fei Sun, Yi Zhang, Xiaobo Wang, and Zhifang Sui. 2018. Modeling consumer buying decision for recommendation based on multi-task deep learning. In *Proceedings of the 27th ACM International Conference on Information and Knowledge Management*. 1703–1706.
- [41] Tianhe Yu, Saurabh Kumar, Abhishek Gupta, Sergey Levine, Karol Hausman, and Chelsea Finn. 2020. Gradient surgery for multi-task learning. *Advances in Neural Information Processing Systems* 33 (2020), 5824–5836.
- [42] Amir R Zamir, Alexander Sax, William Shen, Leonidas J Guibas, Jitendra Malik, and Silvio Savarese. 2018. Taskonomy: Disentangling task transfer learning. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 3712–3722.

A Detailed Derivation

A.1 Proof of Theorem 1

THEOREM 3. Assume individual loss functions $\mathcal{L}_1, \mathcal{L}_2, \dots, \mathcal{L}_T$ are differentiable. Suppose the gradient of \mathcal{L} is L -Lipschitz with $L > 0$. Then with the update step size $t < \frac{2}{TL}$, GradOPS in Section 3.1 will converge to a Pareto stationary point.

PROOF. As \mathcal{L} is differential and L -smooth, we can obtain the following inequality:

$$\begin{aligned} \mathcal{L}(\theta') &\leq \mathcal{L}(\theta) + \nabla \mathcal{L}(\theta)^T (\theta' - \theta) + \frac{1}{2} \nabla^2 \mathcal{L}(\theta) \|\theta' - \theta\|^2 \\ &\leq \mathcal{L}(\theta) + \nabla \mathcal{L}(\theta)^T (\theta' - \theta) + \frac{1}{2} L \|\theta' - \theta\|^2 \end{aligned} \quad (6)$$

Plugging in the GradOPS update by letting $\theta' = \theta - tG'$, we can conclude the following:

$$\begin{aligned} \mathcal{L}(\theta') &\leq \mathcal{L}(\theta) - \left(tG \cdot G' - \frac{1}{2} Lt^2 \|G'\|^2 \right) \\ &\quad (\text{Expanding, using the identity } G = \sum_i g_i, G' = \sum_i g'_i) \\ &= \mathcal{L}(\theta) - t \left(\sum_i g_i \cdot \sum_i g'_i - \frac{1}{2} Lt \sum_i \|g'_i\|^2 \right) \\ &= \mathcal{L}(\theta) - t \left(\sum_{i,j} (g_i \cdot g'_j) - \frac{1}{2} Lt \sum_{i,j} (g'_i \cdot g'_j) \right) \\ &\quad (\text{Using the inequality } g_i \cdot g'_j \geq 0, \forall i, j \text{ from Section 3.1}) \\ &\leq \mathcal{L}(\theta) - t \left(\sum_i (g_i \cdot g'_i) - \frac{1}{2} Lt \sum_{i,j} (g'_i \cdot g'_j) \right) \\ &\quad (\text{Using the inequality } g'_i \cdot g'_j \leq \|g'_i\| \cdot \|g'_j\| \leq \frac{1}{2} (\|g'_i\|^2 + \|g'_j\|^2)) \\ &\leq \mathcal{L}(\theta) - t \left(\sum_i (g_i \cdot g'_i) - \frac{1}{2} Lt \sum_{i,j} \frac{1}{2} (\|g'_i\|^2 + \|g'_j\|^2) \right) \\ &= \mathcal{L}(\theta) - t \left(\sum_i (g_i \cdot g'_i) - \frac{1}{2} TLt \sum_i \|g'_i\|^2 \right) \\ &\quad (\text{Using the identity } g_i \cdot g'_i = \|g'_i\|^2, \forall i) \\ &= \mathcal{L}(\theta) - t \left(\sum_i \|g'_i\|^2 - \frac{1}{2} TLt \sum_i \|g'_i\|^2 \right) \\ &= \mathcal{L}(\theta) - t \left(1 - \frac{1}{2} TLt \right) \sum_i \|g'_i\|^2. \end{aligned} \quad (7)$$

Note that $t(1 - \frac{1}{2}TLt) \sum_i \|g'_i\|^2 \geq 0$ when $t \leq \frac{2}{TL}$. Further, when $t < \frac{2}{TL}$, $t(1 - \frac{1}{2}TLt) \sum_i \|g'_i\|^2 = 0$ if and only if $\|g'_i\|^2 = 0, \forall i$, i.e., $g'_i = \mathbf{0}, \forall i$.

Hence repeatedly applying GradOPS process with $t < \frac{2}{TL}$ can reach some point θ^* in the optimization landscape where $g'_i = \mathbf{0}, \forall i$. According to Section 3.1, we have $g_i = \mathbf{0}$ or g_i belongs to subspace $S = \text{span}\{g_j\}_{j \neq i}$. This means that there exists a non-zero linear combination of the gradients $\{g_i\}$ at this point θ^* that equals zero, which can be divided into two cases: (1) There exists a convex

combination of $\{g_i\}$ that equals zero and therefore θ^* is Pareto stationary under the definitions in Section 2. (2) Otherwise, we can degenerate to use existing MOO methods such as multiple gradient descent algorithm [7] to obtain the non-conflicting G' to converge to certain Pareto stationary point. \square

A.2 Proof of Theorem 2

THEOREM 4. Assume individual loss functions $\mathcal{L}_1, \mathcal{L}_2, \dots, \mathcal{L}_T$ are differentiable. Suppose the gradient of \mathcal{L} is L -Lipschitz with $L > 0$. Then with the update step size $t < \min_{i,j} \frac{2w_i \|g'_i\|^2}{TLw_j^2 \|g'_j\|^2}$, GradOPS in Section 3.2 will converge to a Pareto stationary point.

PROOF. Similar to Section A.1, plugging in Inequality 6 by letting $\theta' = \theta - tG'_{\text{new}}$, we can conclude the following:

$$\begin{aligned} \mathcal{L}(\theta') &\leq \mathcal{L}(\theta) - \left(tG \cdot G'_{\text{new}} - \frac{1}{2} Lt^2 \|G'_{\text{new}}\|^2 \right) \\ &\quad (\text{Expanding, using the identity } G = \sum_i g_i, G'_{\text{new}} = \sum_i w_i g'_i) \\ &= \mathcal{L}(\theta) - t \left(\sum_i g_i \cdot \sum_i w_i g'_i - \frac{1}{2} Lt \sum_i w_i \|g'_i\|^2 \right) \\ &\leq \mathcal{L}(\theta) - t \left(\sum_i w_i \|g'_i\|^2 - \frac{1}{2} TLt \sum_i w_i^2 \|g'_i\|^2 \right). \end{aligned} \quad (8)$$

If $g'_i = \mathbf{0}, \forall i$, GradOPS reaches the Pareto stationary point. Otherwise, we denote \mathcal{T}^+ as the tasks set where $\|g'_i\|^2 > 0, i \in \mathcal{T}^+$. Therefore, $w_i > 0, \forall i \in \mathcal{T}^+$ according to Section 3.2. In this case, with $t < \min_{i \in \mathcal{T}^+, j} \frac{2w_i \|g'_i\|^2}{TLw_j^2 \|g'_j\|^2}$, GradOPS can reach some point θ^* where $g'_i = \mathbf{0}, \forall i$, i.e., the Pareto stationary point. \square

B Implementation Details

We provide here the details for the illustrative example of Figure 2. We modify the illustrative example in [21] and consider $\theta = (\theta_1 + \theta_2) \in \mathbb{R}^2$ with the following individual loss functions:

$$\begin{aligned} \mathcal{L}_1(\theta) &= c_1 f_1(\theta) + c_2 f_1(\theta) \text{ and } \mathcal{L}_2(\theta) = c_1 f_2(\theta) + c_2 f_2(\theta), \text{ where} \\ f_1(\theta) &= \log(\max(|5(-\theta_1 - 0.7) - \tanh(-3 * \theta_2)|, 0.0005)) + 1 \\ f_2(\theta) &= \log(\max(|5(-\theta_1 + 0.7) - \tanh(-3 * \theta_2)|, 0.0005)) + 1 \\ g_1(\theta) &= (1.5 * \tanh(2 * (-\theta_1 + 0.7)^2) * (\theta_1^2 + 1) + (-\theta_2 - 0.8)^2) - 2.5 \\ g_2(\theta) &= (1.5 * \tanh(2 * (-\theta_1 - 0.7)^2) * (\theta_1^2 + 1) + (-\theta_2 - 0.8)^2) - 2.5 \\ c_1(\theta) &= \max(\tanh(5 * \theta_2), 0) \text{ and } c_2(\theta) = \max(\tanh(-5 * \theta_2), 0). \end{aligned}$$

The multi-task objective is $\mathcal{L}(\theta) = \mathcal{L}_1(\theta) + \mathcal{L}_2(\theta)$. The three-dimensional loss surfaces and the corresponding two-dimensional contour graphs are shown in Figure 5 and 6, respectively. We pick 3 initial parameter vectors $\theta \in \{(-0.85, 0.75), (-0.85, -0.3), (0.9, 0.9)\}$ and performed 20,000 gradient updates to minimize \mathcal{L} using the Adam optimizer with learning rate 0.001. The corresponding optimization trajectories with different methods is shown in Figure 2.

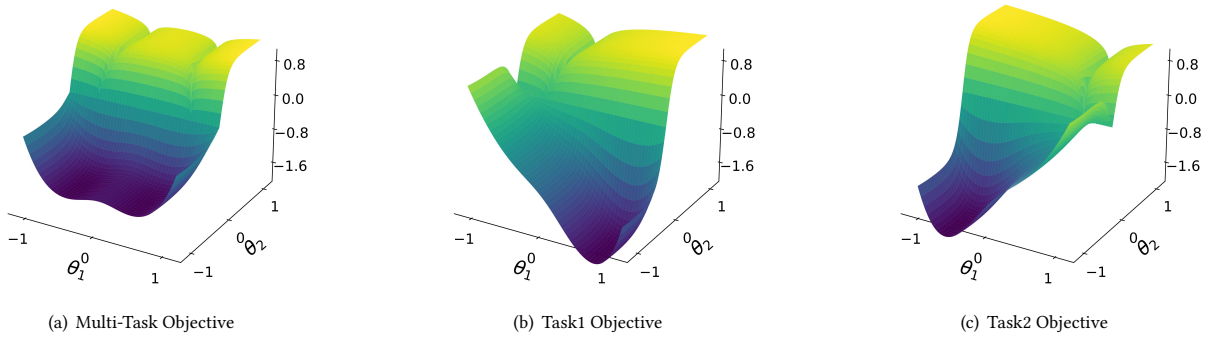


Figure 5: Visualization of the loss surfaces of Figure 2.

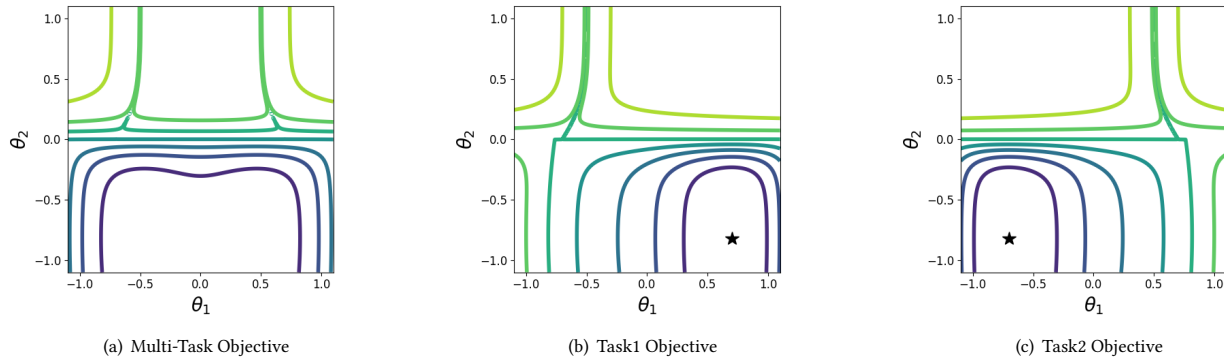


Figure 6: Two-dimensional contour graphs of the three-dimensional surfaces in Figure 5. ★ denotes the point with lowest single-task loss.

C Additional Experiments

C.1 Effects of Tuning α .

To better understand how α affects the $\{w_i\}$, we show the traces of w_i during training for different values of α on UCI Census-income dataset in Figure 7. The positive and negative α have opposite effects on w_i of tasks Income and Marital compared to the zero α . And the α with larger absolute values further widen the gap.

C.2 Training and Test Performance Gains with Different α .

To test whether the performance of GradOPS are robust against the hyperparameter α changes, we show both the training and test performance gains with different α on UCI Census-income dataset in Figure 8. We note that the training performance gain of dominating

task Marital rises as the value of α gets larger, while the gain of the dominated task Income goes down. This again proves the ability of GradOPS to obtain solutions with different trade-offs. It should be mentioned that higher training performance does not necessarily guarantee higher test performance. And the test performance of task Marital with $\alpha > 0$ is worse than the performance with $\alpha \leq 0$, which is inconsistent with the observation of corresponding training performance. The reason may be that the model overfits on task Marital, which suggesting a better regularization scheme for this domain. Note that we achieve Average performance gains on both training and test for almost all values of $-10 \leq \alpha \leq 5$, which indicating that GradOPS is numerically stable. Moreover, the consistently positive performance gains across all these values of α suggest that the way to deconflict gradients introduced by GradOPS can improve MTL performance.

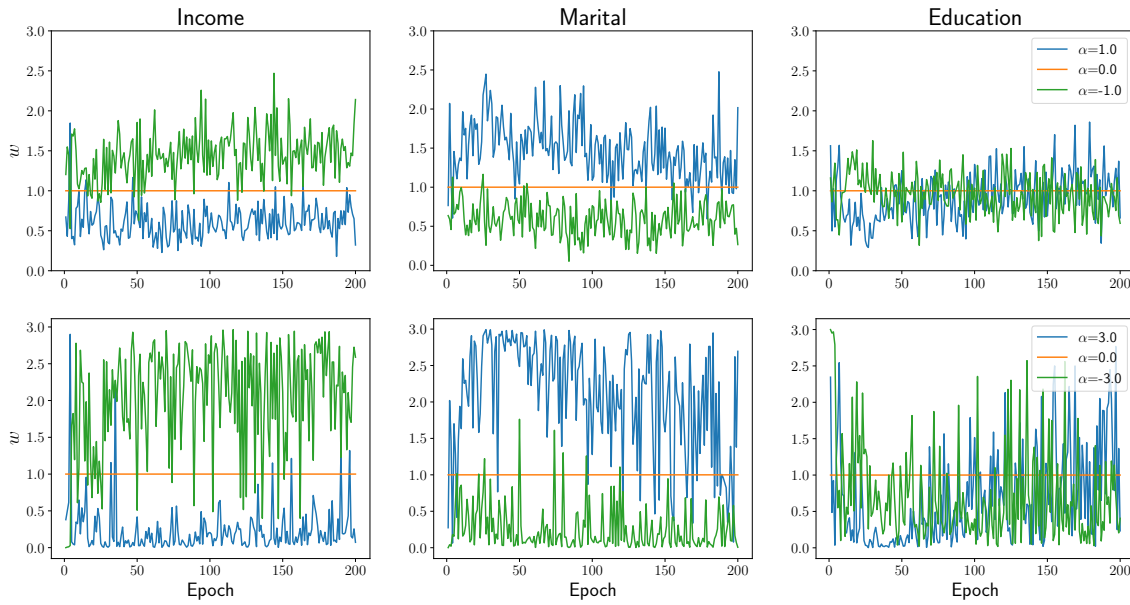


Figure 7: Traces of how w_i change during training for different values of α on UCI Census-income dataset. On the top row, we show the comparison between $\alpha \in \{1, 0, -1\}$ and on the bottom row, we show the comparison between $\alpha \in \{3, 0, -3\}$. For $\alpha = 0$, w_i remains at 1 for all three tasks. The positive $\alpha = 1.0$ assigns the dominated task Income a greater $w_i > 1$, and dominating task Marital a lower $w_i < 1$. And a larger value of α pushes weights farther apart. While, a negative α has the opposite effect.

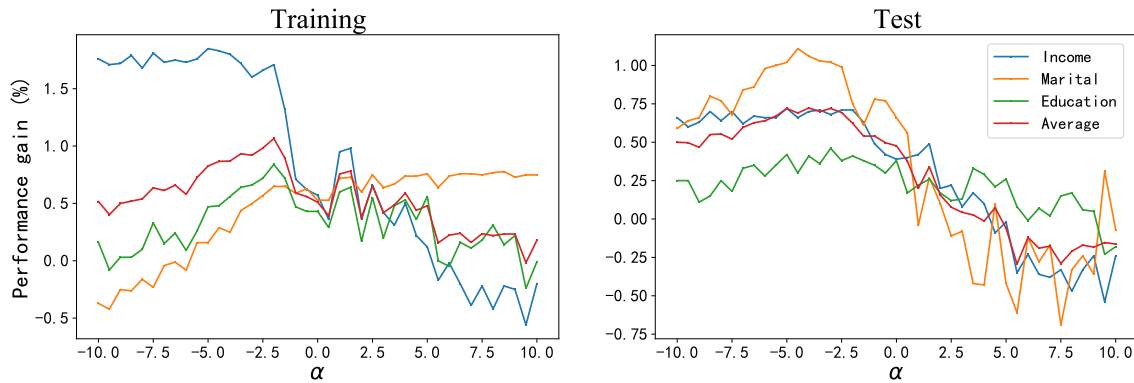


Figure 8: Performance gains with different α on UCI Census-income dataset. We show both the training and test performance gains compared to Uniform scaling baseline across all three tasks and the Average performance metrics. We enumerate $\alpha \in [-10, 10]$ in steps of 0.5.