

ELECTRICAL NETWORKS AND DATA ANALYSIS IN PHYLOGENETICS

V. GORBOUNOV AND A. KAZAKOV

ABSTRACT. A classic problem in data analysis is studying the systems of subsets defined by either a similarity or a dissimilarity function on X which is either observed directly or derived from a data set.

For an electrical network there are two functions on the set of the nodes defined by the resistance matrix and the response matrix either of which defines the network completely. We argue that these functions should be viewed as a similarity and a dissimilarity function on the set of the nodes moreover they are related via the covariance mapping also known as the Farris transform or the Gromov product. We will explore the properties of electrical networks from this point of view.

It has been known for a while that the resistance matrix defines a metric on the nodes of the electrical networks. Moreover for a circular electrical network this metric obeys the Kalmanson property as it was shown recently. We will call such a metric an electrical Kalmanson metric. The main results of this paper is a complete description of the electrical Kalmanson metrics in the set of all Kalmanson metrics in terms of the geometry of the positive Isotropic Grassmannian whose connection to the theory of electrical networks was discovered earlier.

One important area of applications where Kalmanson metrics are actively used is the theory of phylogenetic networks which are a generalization of phylogenetic trees. Our results allow us to use in phylogenetics the powerful methods of reconstruction of the minimal graphs of electrical networks and possibly open the door into data analysis for the methods of the theory of cluster algebras.

CONTENTS

1. Introduction	2
2. The space of electrical networks and the positive Isotropic Grassmannian	4
2.1. The space of electrical networks	4
2.2. Cactus electrical networks	6
2.3. Lam embedding	6
3. Characterization of resistance distance	8
3.1. Resistance metric	8
3.2. Circular split systems and electrical networks	12
4. Reconstruction of network topology	17

MSC2020: 14M15, 82B20, 05E10, 05C50, 05C10, 92D15, 94C15, 90C05, 90C59, 05C12.

Key words: Electrical networks, circular split metrics, Kalmanson metrics

1. INTRODUCTION

The theory of electrical networks goes back to the work of Gustav Kirchhoff around mid 1800 and since then it has been a source of remarkable achievements in combinatorics, algebra, geometry, mathematical physics, and electrical engineering.

An electrical network is a graph with positive weights, conductances attached to the edges, and a chosen subset of the set of vertices which are called the boundary vertices or nodes. An important characteristic of an electrical network with only two nodes i and j is the effective resistance R_{ij} , that is the voltage at node i which, when node j is held at zero volts, causes a unit current to flow through the circuit from node i to node j . The effective resistance defines a metric on the set of nodes that is widely used in chemistry, for example, [21]. For convenience, we will organize the effective resistance R_{ij} in a matrix R setting $R_{ii} = 0$ for all i .

In the case where there are more than two nodes, there is an important generalization of R_{ij} . Given an electrical network with n nodes, there is a linear endomorphism of the vector space of functions defined on the nodes, constructed as follows: for each such a function, there is a unique extension off to all the vertices which satisfies Kirchhoff's current law at each interior vertex. This function then gives the current I in the network at the boundary vertices defining a linear map which is called the Dirichlet-to-Neumann map or the network response. The matrix of this map is called the response matrix. It plays a key role in the theory and applications of the electrical network [9].

The above two matrices define each other and moreover it is possible to reconstruct a planar circular electrical network if these matrices are known [9].

A classic problem in data analysis is studying the systems of subsets defined by either a similarity or a dissimilarity function on X which is either observed directly or derived from a data set. While the latter makes use of splits and split metrics, the key ingredients of the former are systems of clusters, subsets of X , and elementary similarity functions. One can interpret splits as distinctive features and clusters as common features, see [1], [2] for an introduction to these ideas.

We argue that the response and the resistance matrices should be viewed as a similarity and a dissimilarity function on the set of nodes of an electrical network and as such they are related via the covariance mapping also known as the Farris transform or the Gromov product.

We will explore the properties of electrical networks from this point of view. In this paper we will work with the resistance matrix. The connection of the response matrix to data analysis will be presented in a future publication.

In computational biology one can construct a distance between two species (such as Hamming distance) which records the proportion of characters where the two species differ. Such a record can be encoded by a real symmetric, nonnegative matrix called a dissimilarity matrix. An important problem in phylogenetics is to reconstruct a weighted tree which represents this matrix. In most cases, a tree structure is too constraining. The notion of a split network is a generalization of a tree in which multiple parallel edges signify divergence. A geometric space of such networks was introduced [14], forming a natural extension of the work by Billera, Holmes, and Vogtmann on tree space. It has been studied from different points of view since it is related to a number of objects in mathematics: the compactification of the real moduli space of curves, to the Balanced Minimal Evolution polytopes and Symmetric Traveling Salesman polytopes to name a few.

The appropriate metric on the set of species defined by a split network has a very special property called the Kalmanson property which distinguishes it completely in the set of all metrics [1].

It has been discovered recently that the resistance metric defined by a circular planar electric network obeys the Kalmanson property [15]. We will call such a split metric an *electrical Kalmanson metric*. The main results of this paper is a complete description of the set of the electrical Kalmanson metrics inside the set of the Kalmanson metrics. For this we exploit the connection between the space of electrical networks and the positive Isotropic Grassmannian $IG_{\geq 0}(n-1, 2n)$ investigated in [24], [5], [4], [7]. It turns out that the Kalmanson property itself is a consequence of this connection and the description of the electrical Kalmanson metrics we provide is given entirely in terms of geometry of the positive part of this projective variety. It is remarkable that the theory of positivity might play a role in studying phylogenetic networks since it would allow us to apply the powerful machinery of the theory of cluster algebras developed for describing positivity in mathematical objects [27].

All this story should be extended to the compactifications of the respective spaces, taking cactus networks, the known strata in the compactification of electrical networks, to the newly defined compactified split systems as it was started in [13]. In this picture the cactus networks should correspond to the pseudometrics playing the role of dissimilarity functions.

The connection of the tropical geometry of the Grassmannians and the space of trees and tree metrics found in [26] is another interesting direction for developing our work.

Acknowledgments. For V. G. this article is an output of a research project implemented as part of the Basic Research Program at the National Research University Higher School of Economics (HSE University). Working on this project V. G. also visited the Max Plank Institute of Mathematics in the Sciences

in Leipzig, Germany in the Fall of 2024 and BIMSA in Beijing, China in the Summer 2024. Research of A. K. on Sections 3 was supported by the Russian Science Foundation project No. 20-71-10110 (<https://rscf.ru/en/project/23-71-50012>) which finances the work of A.K. at P. G. Demidov Yaroslavl State University. Research of A.K. on Section 4 was supported by the state assignment of MIPT (project FSMG-2023-0013).

The authors are grateful to Borya Shapiro, Misha Shapiro, Anton Petrunin and Lazar Guterman for useful discussions and suggestions.

2. THE SPACE OF ELECTRICAL NETWORKS AND THE POSITIVE ISOTROPIC GRASSMANNIAN

2.1. The space of electrical networks.

Definition 2.1. A connected electrical network \mathcal{E} is a connected graph with positive weights (conductances) attached to the edges and a chosen subset of the set of vertices which are called the boundary vertices or the nodes.

In this paper we will denote by n the number of the nodes.

As explained in the introduction the key result in the theory of electrical networks says the boundary voltages and the currents are related to each other linearly via a matrix $M_R(\mathcal{E}) = (x_{ij})$ called the *response matrix* of a network. $M_R(\mathcal{E})$ has the following properties:

- $M_R(\mathcal{E})$ is a $n \times n$ symmetric matrix;
- All the non-diagonal entries x_{ij} of $M_R(\mathcal{E})$ are non-positive;
- For each row the sum of all its entries is equal to 0.

Given an electrical network \mathcal{E} the response matrix $M_R(\mathcal{E})$ can be calculated as the Schur complement of a submatrix in the Laplacian matrix of the graph of \mathcal{E} [9]. Suppose that M is a square matrix and D is a non-singular square lower right-hand corner submatrix of M , so that M has the block structure.

$$\begin{pmatrix} A & B \\ C & D \end{pmatrix}$$

The Schur complement of D in M is the matrix $M/D = A - BD^{-1}C$. The Schur complement satisfies the following identity

$$\det M = \det(M/D)\det D$$

Labeling the vertices starting from the nodes we get the Laplacian matrix of the graph representing \mathcal{E} in a two by two block form as above. The submatrix D corresponds to the connections between the internal vertices and is known to be non degenerate. Then $M_R(\mathcal{E}) = L/D$.

There are many electrical networks which have the same response matrix, we will describe them now. The following five local network transformations given below are called the *electrical transformations*. Two electrical networks are said to be equivalent if they can be obtained from each other by a sequence of the electrical transformations. This is an equivalence relation of course, so the set of electrical networks is split in the equivalences classes.

Theorem 2.2 ([9]). The electrical transformations preserve the response matrix of an electrical network.

Any two circular electrical networks which have the same response matrix are equivalent.

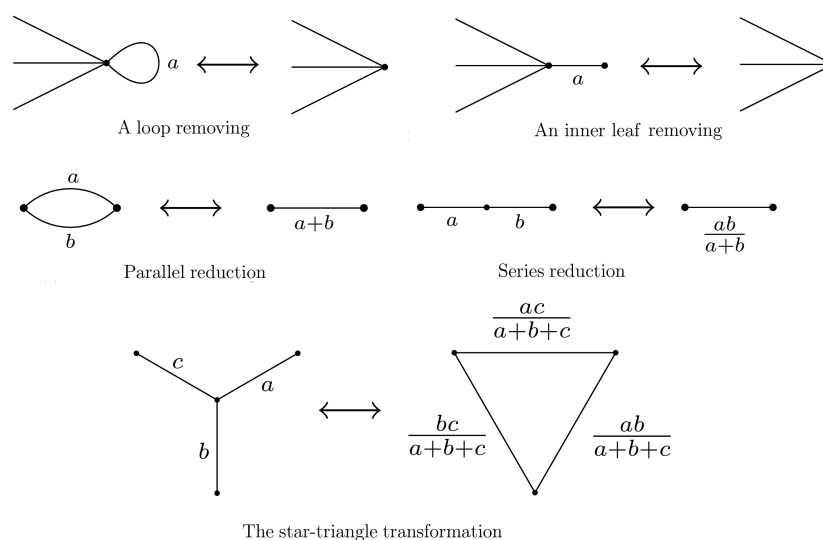


FIGURE 1. Electrical transformations

In this paper we will deal mostly with a particular type of connected electrical networks, the *connected circular electrical networks*. For these we require in addition the graph of \mathcal{E} to be planar and such that the nodes are located on a circle and enumerated clockwise while the rest of the vertices are situated inside of this circle.

We will denote by E_n the set of equivalence classes of the connected circular electrical networks.

The set E_n allows the following elegant description.

Definition 2.3. Let $P = (p_1, \dots, p_k)$ and $Q = (q_1, \dots, q_k)$ be disjoint ordered subsets of the nodes arranged on a circle, then $(P; Q) = (p_1, \dots, p_k; q_1, \dots, q_k)$ is a *circular pair* if $p_1, \dots, p_k, q_k, \dots, q_1$ are in circular order around the boundary circle. Let $(P; Q)$ be a circular pair then the determinant of the submatrix $M(P; Q)$ whose rows are labeled by (p_1, \dots, p_k) and the columns labeled by (q_1, \dots, q_k) is called the *circular minor* associated with a circular pair $(P; Q)$.

Theorem 2.4. [9], [12] The set of response matrices of the elements of E_n is precisely the set of the matrices M such that

- M is a symmetric matrix;
- All the non-diagonal entries of M are non-positive;
- For each row the sum of all its entries is equal to 0.
- For any $k \times k$ circular minor $(-1)^k \det M(P; Q) \geq 0$.

- The kernel of M is generated by the vector $(1, 1, \dots, 1)$;

We will need the following notion later.

Definition 2.5. Let \mathcal{E} be a connected circular electrical network on a graph Γ . The *dual electrical network* \mathcal{E}^* is defined in the following way

- the graph Γ^* of \mathcal{E}^* is the dual graph to Γ ;
- for any pair of dual edges of Γ and Γ^* their conductances are reciprocal to each other;
- the labeling of the nodes of \mathcal{E}^* is determined by the requirement that the first node of \mathcal{E}^* lies between the first and second node of \mathcal{E} .

2.2. Cactus electrical networks. Setting an edge conductance to zero or infinity in \mathcal{E} makes sense. According to the Ohm law it means that we delete or contract this edge. Doing it we either get isolated nodes or some nodes get glued together. We will consider the resulting network as a network with n nodes, remembering how nodes get identified. Such a network is called a *cactus electrical network* with n nodes. One can think of it as a collection of ordinary circular electrical networks with the total number of the nodes equal to n , glued along some of these nodes. Note, that the graph of such a network is planar, but it does not have to be connected.

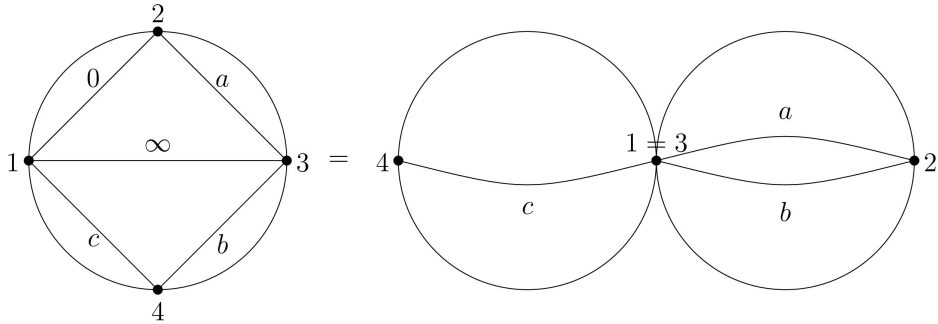


FIGURE 2. A cactus electrical network with 4 nodes

The electrical transformations can be applied to the cactus electrical networks. We denote by \overline{E}_n the set of equivalence classes with respect to the electrical transformations of the cactus electrical networks with n nodes.

The definition of a cactus network was introduced in [24] where it was proved that the set \overline{E}_n is a compactification of E_n in the appropriate sense.

2.3. Lam embedding. Recall that the real Grassmannian $\text{Gr}(k, n)$ is a differentiable manifold that parameterizes the set of all k -dimensional linear subspaces of a vector space \mathbb{R}^n . In fact it has a structure of a projective algebraic variety. The Pluecker embedding is an embedding of the Grassmannian $\text{Gr}(k, n)$ into the projectivization of the k -th exterior power of the vector space \mathbb{R}^n

$$\iota : \text{Gr}(k, n) \rightarrow \text{P}(\Lambda^k \mathbb{R}^n)$$

Suppose $W \subset \mathbb{R}^n$ is a k -dimensional subspace. To define $\iota(W)$, choose a basis (w_1, \dots, w_k) for W , and let $\iota(W)$ be the projectivization of the wedge product of these basis elements: $\iota(W) = [w_1 \wedge \dots \wedge w_k]$, where $[\cdot]$ denotes the projective equivalence class.

For practical calculations one can view the matrix whose rows are the coordinates of the basis vectors (w_1, \dots, w_k) as a representative of this equivalence class. For any ordered sequence I of k positive integers $1 \leq i_1 < \dots < i_k \leq n$ denote by Δ_I the determinant of a $k \times k$ submatrix of the above matrix with columns labeled by the numbers from I . The numbers Δ_I are called the Pluecker coordinates of the point W of $Gr(k, n)$. They are defined up to a common non zero factor.

Definition 2.6. The totally non-negative Grassmannian $Gr_{\geq 0}(k, m)$ is the subset of the points of the Grassmannian $Gr(k, n)$ whose Pluecker coordinates Δ_I have the same sign.

The following theorem of T. Lam [24] is one of the key results about the space of electrical networks.

Theorem 2.7. There is a bijection

$$\overline{E}_n \cong Gr_{\geq 0}(n-1, 2n) \cap \mathbb{P}H$$

where H is a certain subspace of $\bigwedge^{n-1} \mathbb{R}^{2n}$ of dimension equal the Catalan number C_n .

Moreover the image of the set E_n under this bijection is exactly the set of points with the Pluecker coordinates $\Delta_{24\dots 2n-2}$ and $\Delta_{13\dots 2n-3}$ not equal to zero.

Notice that because $M_R(\mathcal{E})$ has the rank equal to $n-1$ by 2.4, the dimension of the row space of $\Omega(\mathcal{E})$ is equal to $n-1$, hence it defines a point in $Gr(n-1, 2n)$. The Pluecker coordinates of the point associated with $\Omega(\mathcal{E})$ can be calculated as the maximal size minors of the matrix $\Omega'(\mathcal{E})$ obtained from $\Omega(\mathcal{E})$ by deleting, for example, the first row.

We will recall the construction of the embedding of E_n obtained in [5], which is induced by the above bijection. Let \mathcal{E} be a circular electrical network with the response matrix $M_R(\mathcal{E}) = (x_{ij})$. The following $n \times 2n$ matrix

$$\Omega(\mathcal{E}) = \begin{pmatrix} x_{11} & 1 & -x_{12} & 0 & x_{13} & 0 & \dots & (-1)^n \\ -x_{21} & 1 & x_{22} & 1 & -x_{23} & 0 & \dots & 0 \\ x_{31} & 0 & -x_{32} & 1 & x_{33} & 1 & \dots & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \ddots & \vdots \end{pmatrix} \quad (2.1)$$

gives the point in $Gr_{\geq 0}(n-1, 2n) \cap \mathbb{P}H$ which corresponds to \mathcal{E} under the Lam bijection.

Theorem 2.8. [6] Let $A = (a_{ij})$ be a matrix with satisfies the first three conditions of Theorem 2.4 and $\Omega(A)$ be a matrix constructed out of according to the formular (2.1). If $\Omega(A)$ defines a point in $Gr_{\geq 0}(n-1, 2n)$ and the Pluecker coordinate $\Delta_{13\dots 2n-3}(\Omega(A))$ is not equal to zero, then there is a connected electrical network $\mathcal{E} \in E_n$ such that $A = M_R(\mathcal{E})$.

Example 2.9. For the network \mathcal{E} in E_4 on the Figure 6 the matrix $\Omega(\mathcal{E})$ has the following form:

$$\Omega(\mathcal{E}) = \begin{pmatrix} \frac{5}{8} & 1 & \frac{1}{8} & 0 & -\frac{1}{8} & 0 & \frac{3}{8} & 1 \\ \frac{1}{8} & 1 & \frac{5}{8} & 1 & \frac{3}{8} & 0 & -\frac{1}{8} & 0 \\ -\frac{1}{8} & 0 & \frac{3}{8} & 1 & \frac{5}{8} & 1 & \frac{1}{8} & 0 \\ \frac{3}{8} & 0 & -\frac{1}{8} & 0 & \frac{1}{8} & 1 & \frac{5}{8} & 1 \end{pmatrix}.$$

In fact the row space of $\Omega(\mathcal{E})$ is isotropic with respect to a particular symplectic form. This refines the above embedding to a submanifold

$$\text{IG}_{\geq 0}(n-1, 2n) \subset \text{Gr}_{\geq 0}(n-1, 2n)$$

made out of isotropic subspaces of \mathbb{R}^{2n} [7], [5].

3. CHARACTERIZATION OF RESISTANCE DISTANCE

3.1. Resistance metric.

Definition 3.1. Let Γ, ω be a connected graph with a weight function ω on the edges and $n, m \in \Gamma$ be two of its vertices. Consider it as an electrical network $\mathcal{E}_{nm}(\Gamma, \omega)$ on a graph Γ with a conductivity function ω by declaring the vertices n and m to be the nodes while the remaining vertices to be internal vertices.

Apply the voltages $U = (U_n, U_m)$ to the nodes of $\mathcal{E}_{nm}(\Gamma, \omega)$ such that they induce the boundary currents $I = (1, -1)$. Then the *effective resistance* between the nodes n and m is defined as

$$R_{nm} = |U_n - U_m|$$

Obviously $R_{nm} = R_{mn}$.

The following lemma relates the effective resistances and the response matrix entries is well known.

Lemma 3.2. [20] Let \mathcal{E} be a connected electrical network with n nodes, and let the boundary voltages $U = (U_1, \dots, U_n)$ be such that

$$M_R(\mathcal{E})U = -e_i + e_j, \quad (3.2)$$

where $e_k, k \in \{1, \dots, n\}$ is the standard basis of \mathbb{R}^n . Then

$$|U_i - U_j| = R_{ij}$$

Proof. Indeed, if the boundary voltages U are such as in (3.2) we can consider all the vertices apart from i and of j as the inner vertices and then $|U_i - U_j|$ is precisely as in Definition 3.1. \square

For convenience, we will organize the effective resistances R_{ij} between the nodes of \mathcal{E} in a symmetric matrix $R_{\mathcal{E}}$ setting $R_{ii} = 0$ for all i . We call this matrix the *resistance matrix* of \mathcal{E} and denote it by $R_{\mathcal{E}}$.

From Lemma 3.2 it follows that

$$R_{ij} = (-e_i + e_j)^t (M_R(\mathcal{E}))^{-1} (-e_i + e_j),$$

where $(M_R(\mathcal{E}))^{-1}(-e_i + e_j)$ means a vector U which satisfies (3.2). Notice that such a vector always exists.

Proposition 3.3. [20] Let \mathcal{E} be a connected electrical network. Denote by $M'_R(\mathcal{E})$ the matrix obtained from $M_R(\mathcal{E})$ by deleting the last row and the last column, then $M'_R(\mathcal{E})$ is invertible. The matrix elements of its inverse are given by the formula

$$M'_R(\mathcal{E})_{ij}^{-1} = \begin{cases} R_{in}, & \text{if } i = j \\ \frac{1}{2}(R_{in} + R_{jn} - R_{ij}), & \text{if } i \neq j, \end{cases}$$

The proposition 3.3 and the lemma 3.2 show that the resistance and the response matrices define each other therefore the theorem 2.2 would hold if we replace the response matrix with the resistance matrix in its statement.

Remark 3.4. The formula from Proposition 3.3 is well known in different areas of mathematics. It appeared in the literature under the names the Gromov product, the Farris transform, the Covariance mapping between the Cut and the Covariance cones, see [11] for more information. We are planning to explore the properties of the resistance matrix from these points of view in the future publications.

Proposition 3.3 provides a simple proof that the effective resistances R_{ij} satisfy the triangle inequality.

Theorem 3.5. Let \mathcal{E} be an electrical network on a connected network Γ then for any of three nodes k_1, k_2 and k_3 the triangle inequality holds:

$$R_{k_1 k_3} + R_{k_2 k_3} - R_{k_1 k_2} \geq 0.$$

Hence the set of all R_{vw} define a metric on the nodes of Γ .

Proof. Let $\mathcal{E}_{k_1 k_2 k_3}$ be a connected electrical network obtained from \mathcal{E} by declaring the vertices k_1, k_2, k_3 to be the boundary nodes, while remaining vertices are declared to be inner and $M_R(\mathcal{E}_{k_1 k_2 k_3})$ be its response matrix, then according to Proposition 3.3 we have that:

$$M'_R(\mathcal{E}_{k_1 k_2 k_3})_{k_1 k_2}^{-1} = \frac{1}{2}(R_{k_1 k_3} + R_{k_2 k_3} - R_{k_1 k_2}),$$

therefore to get the statement it is enough to verify that $M'_R(\mathcal{E}_{k_1 k_2 k_3})_{k_1 k_2}^{-1} \geq 0$. Indeed, the matrix $M'_R(\mathcal{E}_{k_1 k_2 k_3})$ has the following form:

$$M'_R(\mathcal{E}_{k_1 k_2 k_3}) = \begin{pmatrix} x_{k_1 k_1} & x_{k_1 k_2} \\ x_{k_1 k_2} & x_{k_2 k_2} \end{pmatrix} = \begin{pmatrix} -x_{k_1 k_2} - x_{k_1 k_3} & x_{k_1 k_2} \\ x_{k_1 k_2} & -x_{k_1 k_2} - x_{k_2 k_3} \end{pmatrix}.$$

By the direct computation we obtain that

$$M'_R(\mathcal{E}_{k_1 k_2 k_3})_{k_1 k_2}^{-1} = \frac{-x_{k_1 k_2}}{\det M'_R(\mathcal{E}_{k_1 k_2 k_3})} = \frac{-x_{k_1 k_2}}{x_{k_1 k_2} x_{k_2 k_3} + x_{k_1 k_3} x_{k_1 k_2} + x_{k_1 k_3} x_{k_2 k_3}},$$

By the definition of the response matrix all $x_{k_i k_j} \leq 0, i \neq j$ which implies the statement of the theorem. \square

To describe the properties of the resistance metric associated with a connected circular electrical network we will provide a formula for the embedding of E_n into $Gr_{\geq 0}(n-1, 2n)$ described in 2.7 which uses the effective resistances matrix instead of the response matrix.

Let \mathcal{E} be a connected network with the resistance matrix $R_{\mathcal{E}}$, define a point in $Gr(n-1, 2n)$ associated to it as the row space of the matrix:

$$\Omega_R(\mathcal{E}) = \begin{pmatrix} 1 & m_{11} & 1 & -m_{12} & 0 & m_{13} & 0 & \dots \\ 0 & -m_{21} & 1 & m_{22} & 1 & -m_{23} & 0 & \dots \\ 0 & m_{31} & 0 & -m_{32} & 1 & m_{33} & 1 & \dots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \ddots \end{pmatrix}, \quad (3.3)$$

where

$$m_{ij} = -\frac{1}{2}(R_{i,j} + R_{i+1,j+1} - R_{i,j+1} - R_{i+1,j}).$$

Notice that the matrix $M(R_{\mathcal{E}}) = (m_{ij})$ is symmetric and the sum of the matrix entries in each row is zero, in other words it looks like a response matrix of an electrical network. There is a reason for this as it was discovered by R. Kenyon and D. Wilson.

Theorem 3.6. [20] Let \mathcal{E} be a connected circular electrical network and \mathcal{E}^* be its dual, then the following holds:

$$x_{ij}^* = -\frac{1}{2}(R_{i,j} + R_{i+1,j+1} - R_{i,j+1} - R_{i+1,j}) \quad (3.4)$$

$$R_{ij}^* = - \sum_{i' < j': D_{S_{ij}}(i', j') \neq 0} x_{i' j'}, \quad (3.5)$$

where x_{ij}^* are the matrix elements of the response matrix of the dual network \mathcal{E}^* .

Since $M(R_{\mathcal{E}})$ is degenerated matrix the Pluecker coordinates of a point $Gr(n-1, 2n)$ associated with $\Omega_R(\mathcal{E})$ can be calculated as the maximal size minors of the matrix $\Omega'_R(\mathcal{E})$ obtained from $\Omega_R(\mathcal{E})$ by deleting, for example, the last row.

Theorem 3.7. [4], [7] The row space of $\Omega_R(\mathcal{E})$ defines the same point in the $Gr_{\geq 0}(n-1, 2n)$ as the point $\Omega(\mathcal{E})$ defined by the Lam embedding 2.7. In particular the Pluecker coordinate $\Delta_{24\dots 2n-2}(\Omega_R(\mathcal{E}))$ is not 0 if and only if \mathcal{E} is a connected circular electrical network.

Putting it together

$$\Omega_R(\mathcal{E}) = \Omega(\mathcal{E}^*)s = \Omega(\mathcal{E})$$

where s is the shift operator

$$s = \begin{pmatrix} 0 & 1 & 0 & 0 & \cdots & 0 \\ 0 & 0 & 1 & 0 & \cdots & 0 \\ 0 & 0 & 0 & 1 & \cdots & 0 \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & 0 & \cdots & 1 \\ (-1)^n & 0 & 0 & 0 & \cdots & 0 \end{pmatrix},$$

See the proof of [4, Theorem 5.6] for more details.

Many interesting inequalities involving R_{ij} follow from positivity of the Pluecker coordinates of the point represented by $\Omega_R(\mathcal{E})$. For some of them we have found an explicit combinatorial meaning, others are still waiting to be interpreted.

Below we will deduce the Kalmanson property for the metric $R_{\mathcal{E}}$ as a consequence of the positivity described above. This fact was established in [15] earlier using different methods.

Theorem 3.8. Let \mathcal{E} be a connected circular electrical network and let i_1, i_2, i_3, i_4 be any four nodes in the circular order as it is shown in Figure 3. Then the Kalmanson inequalities hold:

$$R_{i_1 i_3} + R_{i_2 i_4} \geq R_{i_2 i_3} + R_{i_1 i_4}, \quad (3.6)$$

$$R_{i_1 i_3} + R_{i_2 i_4} \geq R_{i_1 i_2} + R_{i_3 i_4}. \quad (3.7)$$

Proof. Let $\mathcal{E}_{i_1 i_2 i_3 i_4}$ be an electrical network obtained from \mathcal{E} by declaring the vertices i_1, i_2, i_3, i_4 the boundary nodes, and the rest of the vertices are internal. Obviously $\mathcal{E}_{i_1 i_2 i_3 i_4}$ is a connected circular electrical network in E_4 and let $\Omega'_R(\mathcal{E}_{i_1 i_2 i_3 i_4})$ be its matrix defined by 3.3. By direct computations we conclude that

$$\Delta_{567}(\Omega'_R(\mathcal{E}_{i_1 i_2 i_3 i_4})) = \frac{1}{2}(R_{i_1 i_3} + R_{i_2 i_4} - R_{i_1 i_2} - R_{i_3 i_4}),$$

$$\Delta_{123}(\Omega'_R(\mathcal{E}_{i_1 i_2 i_3 i_4})) = \frac{1}{2}(R_{i_1 i_3} + R_{i_2 i_4} - R_{i_2 i_3} - R_{i_1 i_4}).$$

Taking into account that all the minors $\Delta_I(\Omega'_R(\mathcal{E}_{i_1 i_2 i_3 i_4}))$ are non-negative we obtain that the Kalmanson inequalities hold for the metric defined by the resistances. \square

Definition 3.9. Let X be a finite set and D is a metric on it. If there is a circular order on X such that the inequalities from the theorem above hold for any four points of X in this circular order we call this metric the *Kalmanson metric*.

Therefore the resistance metric $R_{\mathcal{E}}$ defined by a circular electrical network \mathcal{E} is a Kalmanson metric.

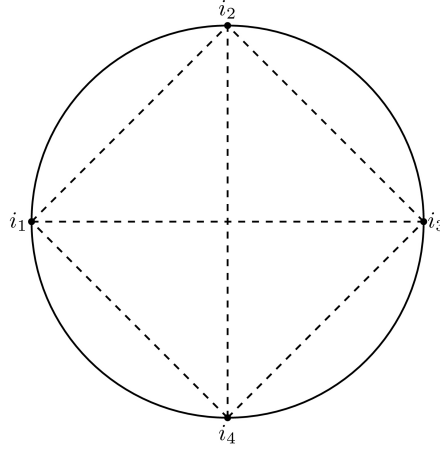


FIGURE 3. 4-point Kalmanson property

3.2. Circular split systems and electrical networks.

Definition 3.10. A *split* S of a set $X = \{1, \dots, n\}$ is a partition of X into two non-empty, disjoint subsets A and B , $A \sqcup B = X$. A split is called trivial if either A or B has cardinality 1. A collection of splits \mathcal{S} is called a *split system*.

The pseudo metric associated to a split S is defined by the following matrix D :

$$D_S(k, l) = \begin{cases} 1, & \text{if } |A \cap \{k, l\}| = 1, \\ 0, & \text{otherwise.} \end{cases}$$

A circular order of X can be drawn as a polygon with the elements of X labeling the sides. A *circular split system* is a split system for which a circular order exists such that all the splits can be simultaneously drawn as sides or diagonals of the labeled polygon. Trivial splits are sides of the polygon, separating the label of that side from the rest, while a non-trivial split $A|B$ is a diagonal separating the sides labeled by A and B . For any circular split system we can visualize it by such a polygonal representation, or instead choose a visual representation using sets of parallel edges for each split; these representations are called *circular split networks*. A set of parallel edges displays a split $A|B$ if the removal of those edges leaves two connected components with respective sets of terminals A and B , see the Figure 4.

Definition 3.11. We call a *weighted circular split system* a circular split system with a positive weight attached to each set of parallel edges which display the splits. Such a weighted circular split system defines a metric on the set X by the formula

$$D_S = \sum_{A|B \in \mathcal{S}} \alpha_{A|B} D_{A|B}, \quad (3.8)$$

where $\alpha_{A|B}$ is the weight of the set of parallel edges which defines the split $A|B$.

The split $(\{1, 2, 3, 4\}|\{5, 6, 7, 8\})$ in the Figure 4 corresponds to the set of edges with the weight α_1 .

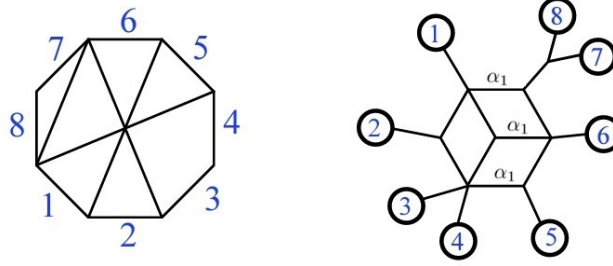


FIGURE 4. Circular split system and their polygon representations

The following theorem gives a beautiful characterization of the set of Kalmanson metrics [1].

Theorem 3.12. A metric d is a Kalmanson metric with respect to a circular order c if and only if $d = D_S$ for a unique weighted circular split system S , (not necessarily containing all trivial splits) with each split $A|B$ of S having both parts contiguous in that circular order c .

Since the resistance metric defined by a planar circular electrical network satisfies the Kalmanson condition it corresponds to a unique weighted circular split system, which we call an *electrical circular split system* following [15] or, given the theorem 3.8, an *electrical Kalmanson metric*.

We will introduce a slightly different way of labeling the splits, it will be useful for us later.

Definition 3.13. Let X be a set of nodes on a circle labeled clockwise by the symbols 1 to n . Define the dual set X^d consisting of nodes labeled by the symbols $\bar{1}$ to \bar{n} in such a way that each \bar{j} lies between j and $j + 1$. Then each chord connecting \bar{i} and \bar{j} defines a split of X which we will denote by S_{ij} .

It is obvious that the set S_{ij} forms a circular split system which we will denote by \mathcal{S}_c .

The following theorem gives the formula for the weights of a weighted circular split systems 3.12.

Theorem 3.14. [11], [23] Let X be a set as in Definition 3.13 and let $D = (d_{ij})$ be a Kalmanson metric defined on X . Then the following split decomposition holds:

$$D = \sum_{S_{ij} \in \mathcal{S}_c} \omega_{ij} D_{S_{ij}}, \quad (3.9)$$

where the coefficients ω_{ij} are defined by the formula

$$\omega_{ij} = \frac{1}{2}(d_{i,j} + d_{i+1,j+1} - d_{i,j+1} - d_{i+1,j})$$

Definition 3.15. Define a matrix $M(D)$

$$M(D)_{ij} = \begin{cases} \sum_{k \neq i} \omega_{ik}, & \text{if } i = j, \\ -\omega_{ij}, & \text{if } i \neq j, \end{cases} \quad (3.10)$$

Notice that $\sum_{k \neq i} \omega_{ik} = -\omega_{ii} = d_{i+1}$.

Here are our main results, they give a complete characterization of the Kalmanson metrics which are the resistance metrics of a circular electrical networks.

Theorem 3.16. Let D be a Kalmanson metric matrix, then D is the effective resistance matrix of a connected circular electrical network \mathcal{E} if and only if the matrix Ω_D constructed from D according to the formula (3.3) defines a point X in $\text{Gr}_{\geq 0}(n-1, 2n)$ and the Pluecker coordinate $\Delta_{24\dots 2n-2}(X)$ does not vanish.

Proof. Necessity follows from Theorem 3.7.

To prove sufficiency, assume that Ω_D defines a point X in $\text{Gr}_{\geq 0}(n-1, 2n)$ and $\Delta_{24\dots 2n-2}(\Omega'_D) \neq 0$. By direct computations we conclude that the matrix $\Omega_D s^{-1}$ has the form (2.1) and $\Delta_{13\dots 2n-3}((\Omega_D s^{-1})') \neq 0$. Since the action of s preserves the non-negativity according to [25], the matrix $\Omega_D s^{-1}$ defines a point of $\text{Gr}_{\geq 0}(n-1, 2n)$. Using the surjectivity of Lam's embedding (see Theorem 2.8) and Theorem 3.7, we obtain that both Ω_D and $\Omega_D s^{-1}$ are associated with connected networks.

Finally, due to Theorem 3.7 and Theorem 3.6 we have that the matrix $M(D) = (m_{ij})$, where

$$m_{ij} = -\frac{1}{2}(d_{i,j} + d_{i+1,j+1} - d_{i,j+1} - d_{i+1,j})$$

can be identified with the response matrix of a network \mathcal{E}^* , associated with $\Omega_D s^{-1}$.

It remains to prove that d_{ij} are equal to the effective resistances R_{ij} of the network \mathcal{E} , associated with Ω_D . Since the metrics d_{ij} and R_{ij} are both Kalmanson and the weights in their split decomposition are equal, $\omega_{ij} = -m_{ij}$ (see Formula (3.9)), we conclude that:

$$d_{ij} = - \sum_{i'(i,j)j'(i,j)} m_{i'j'} = R_{ij}.$$

□

Theorem 3.17. Let D be a Kalmanson metric on X , then D is an Electric Kalmanson metric of a connected circular electrical network \mathcal{E} if and only if the rank of $M(D)$ is equal to $n-1$ and the circular minors of the matrix $M(D)$ are non-negative after multiplying by $(-1)^k$ where k is the size of the minor.

Given this, the matrix $M(D)$ is the response matrix of the dual to the electrical network \mathcal{E} .

Proof. If any $k \times k$ circular minors of the matrix $M(D)$ is positive after multiplying by $(-1)^k$ then $M(D)$ defines a response matrix of a network \mathcal{E}' due to Theorem 2.4. Hence we conclude that \mathcal{E}' is connected 2.4 given the condition on the rank of $M(D)$.

The matrix $\Omega(\mathcal{E}')$ defines a point in $Gr_{\geq 0}(n-1, 2n)$ hence $\Omega(\mathcal{E}')_s$ does as well. According to Theorem 3.3

$$\Omega(\mathcal{E}')_s = \Omega(\mathcal{E}) = \Omega_R(\mathcal{E})$$

for a connected network \mathcal{E} with the resistance matrix $R_{\mathcal{E}} = M(D)$, moreover $\mathcal{E}' = \mathcal{E}^*$. It remains to prove that $R_{ij} = d_{ij}$, it can be done as it has been explained in the proof of Theorem 3.16.

Suppose now that D comes from a circular electrical split system associated with a connected circular electrical network \mathcal{E} , then due to Theorem 3.3 we conclude that $\Omega_R(\mathcal{E})_s^{-1}$ defines a point in $Gr_{\geq 0}(n-1, 2n)$ associated with a connected network \mathcal{E}^* and $M(D) = M_R(\mathcal{E}^*)$. The properties of $M(D)$ in the statement of the theorem follow from Theorem 2.4. \square

A few remarks are in order.

Remark 3.18. The resistance metric has the following important property its square root $\sqrt{D(i, j)}$ is L_2 embeddable [22], hence the electric Kalmanson metrics have that property. There is a well known condition for L_2 embeddability stated in terms of the minors of the Caley-Menger matrix [11]. It is interesting to see if this condition along describes the electric Kalmanson metrics in the set of all Kalmanson metrics.

Remark 3.19. The formula (3.9) for R_{ij} can be obtained from Theorem 3.6 since $\mathcal{E}^{**} = \mathcal{E}'$, where \mathcal{E}' is obtained from \mathcal{E} by shifting the numeration of the nodes of \mathcal{E} by 1 clockwise:

$$\begin{aligned} R_{ij} = R_{i-1, j-1}^{**} &= - \sum_{\bar{i}' < \bar{j}': D_{S_{i-1, j-1}}(\bar{i}', \bar{j}') \neq 0} x_{\bar{i}' \bar{j}'}^* = - \sum_{i' < j': D_{S_{ij}}(i', j') \neq 0} x_{i' j'}^* = \\ & \sum_{i' < j': D_{S_{ij}}(i', j') \neq 0} \frac{1}{2} (R_{i, j} + R_{i+1, j+1} - R_{i, j+1} - R_{i+1, j}), \end{aligned} \quad (3.11)$$

where $\{1, \dots, n\}$ and $\{\bar{1}, \dots, \bar{n}\}$ are the labels of the nodes of \mathcal{E} and \mathcal{E}^* respectively.

Remark 3.20. Many statements in this paper can be extended to the connected cactus networks. In particular, one can obtain that the effective resistances of a connected cactus network give rise to a Kalmanson pseudometric and a Kalmanson pseudometric matrix D can be identified with the resistance matrix

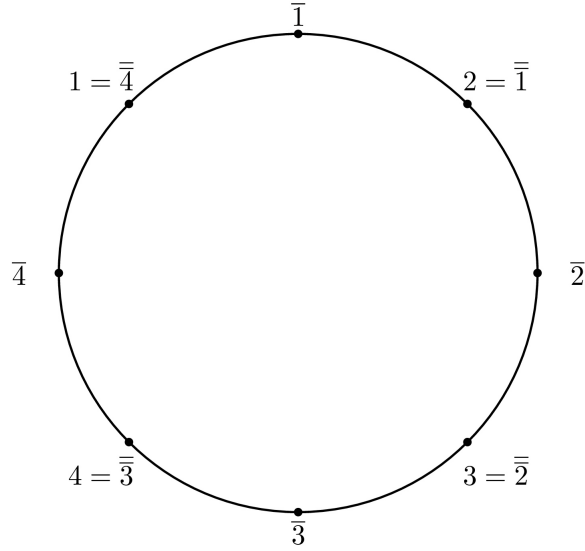


FIGURE 5. Labeling in the formula (3.11)

of a connected cactus networks if and only if the conditions similar to the conditions in Theorem 3.16 hold.

It would allow to conclude that for a Kalmanson metric the non vanishing of a certain Pluecker coordinate condition in Theorem 3.16 and the rank condition in Theorem 3.17 are automatically satisfied.

Remark 3.21. Let X and D be as in Theorem 3.14, then the matrix $M(D)$ defined above is the response matrix of a connected electrical network, not necessarily circular. Namely it is symmetric, all non diagonal elements are negative and the sum of the elements in any row is zero. The connection of the resistance matrix of this network to the original metric D is an interesting question.

Moreover such a matrix defines a point

$$\text{IG}(n-1, 2n) \subset \text{Gr}(n-1, 2n)$$

according to 3.7. Its Pluecker coordinates are interesting invariants of the metric D . We are planning to address these questions in a future publication.

We will provide an example to illustrate the theorem above.

Example 3.22. Let T be a tree with four leafs as in the Figure 6 with the weights of edges all equal to one. The resistance metric matrix of the tree is

$$D = \begin{pmatrix} 0 & 3 & 3 & 2 \\ 3 & 0 & 2 & 3 \\ 3 & 2 & 0 & 3 \\ 2 & 3 & 3 & 0 \end{pmatrix}$$

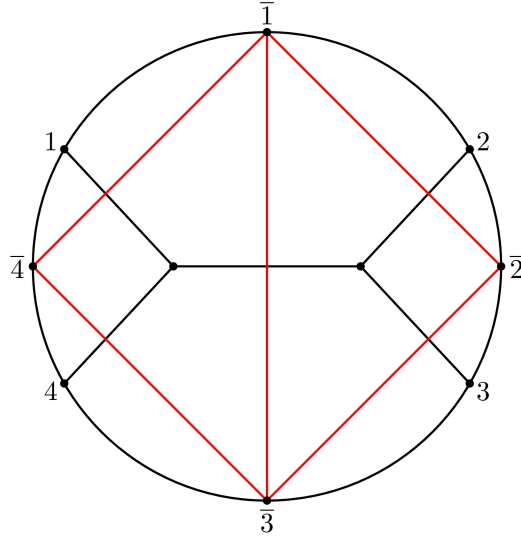


FIGURE 6. A tree network \mathcal{E} and its dual network \mathcal{E}^* , all conductances are equal to 1

It coincides with the matrix of the geodesic distance for trees. Its split decomposition is as follows as one sees easily

$$D = D_{S_{12}} + D_{S_{13}} + D_{S_{14}} + D_{S_{23}} + D_{S_{34}} + D_{S_{43}} = D_{2|134} + D_{23|14} + D_{1|234} + D_{3|124} + D_{4|123}$$

The response matrix of the dual network multiplied by -1 is

$$\begin{pmatrix} -3 & 1 & 1 & 1 \\ 1 & -2 & 1 & 0 \\ 1 & 1 & -3 & 1 \\ 1 & 0 & 1 & -2 \end{pmatrix}$$

It coincides with the incidence matrix of the dual graph since there are no internal vertices. Our correspondence between the splits and pairs of numbers is given in the table

$(\bar{1}\bar{2})$	$(\bar{1}\bar{3})$	$(\bar{1}\bar{4})$	$(\bar{2}\bar{3})$	$(\bar{3}\bar{4})$
$(2 134)$	$(14 23)$	$(1 234)$	$(3 124)$	$(4 123)$

matching the coefficients in the split decomposition of D and the coefficients of the response matrix of the dual network.

4. RECONSTRUCTION OF NETWORK TOPOLOGY

As we mentioned in the introduction one of the important problems in applied mathematics can be formulated as follows:

Problem 4.1. Suppose we are given a matrix $D = (d_{ij})$, whose entries are the distances between n terminal nodes of an unknown weighted graph G . It is

required to recover the graph G and the edge weights which are consistent with the given matrix.

If the terminal nodes are the boundary vertices of a circular electrical networks \mathcal{E} and $D = R_{\mathcal{E}}$, then due to Proposition 3.3 we conclude that Problem 4.1 can be identified with the *black box problem*, see [10]. It is also known as the discrete Calderon problem or the discrete inverse electro impedance tomography problem.

If a graph G is an unknown tree T and the entries of $D_T = (d_{ij})$ are equal to the weights of the paths between vertices of T , then Problem 4.1 can be identified with the minimal tree reconstruction problem, which plays an important role in phylogenetics [18].

Definition 4.2. We will call a matrix $D = (d_{ij})$ a *tree realizable*, if there is a tree T such that

- $D = D_T$ i.e. d_{ij} are equal to the weights of the paths between terminal nodes of T ;
- a set of terminal nodes contains all leafs of T ;
- there are no vertices of degree 2.

Theorem 4.3. [8], [17] If a matrix D is tree realizable, then there is an unique minimal tree T_{min} such that $D = D_{T_{min}}$, where the minimality of T_{min} means that for any other T with the property $D = D_T$, $|E(T_{min})| < |E(T)|$.

It is not difficult to see that if the graph of a circular electrical network \mathcal{E} is a tree T and its boundary nodes contain all tree leafs, then $R_{\mathcal{E}} = D_{\bar{T}}$ where \bar{T} and T are identical as unweighted trees and the weights of the corresponded edges are reciprocal. This observation allows us to use in phylogenetics the algorithm for reconstruction of electrical networks [24] from a given resistance matrix. Our reconstruction method is different from the methods suggested in [15], [16].

Definition 4.4. The median graph of a circular network \mathcal{E} with the graph Γ is the graph Γ_M whose internal vertices are the midpoints of the edges of Γ and two internal vertices are connected by an edge if the edges of the original graph Γ are adjacent. The boundary vertices of Γ_M are defined as the intersection of the natural extensions of the edges of Γ_M with the boundary circle. Since the interior vertices of the median graph have degree four, we can define the strands of the median graph as the paths which always go straight through any degree four vertex.

The strands naturally define a permutation $\tau(\mathcal{E})$ on the set of points $\{1, \dots, 2n\}$.

Theorem 4.5. [10] A circular electrical network is defined uniquely up to electrical transformations by its strand permutation.

Denote by A_i the columns of the matrix $\Omega_R(\mathcal{E})$ and define the column permutation $g(\mathcal{E})$ as follows: $g(\mathcal{E})(i) = j$, if j is the minimal number such that $A_i \in \text{span}(A_{i+1}, \dots, A_j)$, where the indexes are taking modulo $2n$.

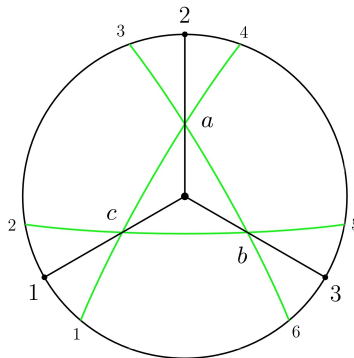


FIGURE 7. Star-shape network, its median graph and the strand permutation $\tau(\mathcal{E}) = (14)(36)(25)$

Theorem 4.6. The following holds

$$g(\mathcal{E}) + 1 = \tau(\mathcal{E}).$$

Proof. This result follows from the fact that $\Omega_R(\mathcal{E})$ is an explicit parametrization of the Lam embedding, see Section 4.6 [24]. \square

Definition 4.7. A circular electrical network is called minimal if the strands of its median graph do not have self-intersections; any two strands intersect at most one point and the median graph has no loops or lenses, see the Figure 8.




FIGURE 8. A lens obtained by the intersection of strands α_1 and α_2

Based on Theorem 4.6 we suggest the following reconstruction algorithm:

- For a given matrix $R_{\mathcal{E}}$ construct the matrix $\Omega_R(\mathcal{E})$;
- Using $\Omega_R(\mathcal{E})$ calculate a strand permutation $\tau(\mathcal{E})$;
- The permutation $\tau(\mathcal{E})$ defines a strand diagram, which can be transformed to a median graph of a *minimal* circular electrical network \mathcal{E} using the procedure described in [10].
- From the median graph we recover the network \mathcal{E} as in [10] or [15].

Theorem 4.8. [10] Any circular electrical network is equivalent to a minimal network.

Any two minimal circular electrical networks which share the same response matrix, and hence the same effective resistance matrix, can be converted to each other only by the star-triangle transformation. As a consequence we obtain that

any two equivalent minimal circular electrical networks have the same number of edges which is less or equal than $\frac{n(n-1)}{2}$.

If two minimal circular electrical networks are equivalent, they have the same strand permutation.

Informally, the theorem says that removing all the loops, the internal vertices of degree 1 and reduction of all the parallels and the series any network can be converted into a minimal network.

Let us compare the last result with Theorem 4.3.

Theorem 4.9. If there is a tree T among the graphs representing a minimal circular electrical network $\mathcal{E} \in E_n$ then it is unique.

Proof. Indeed, it is easy to see that R_T is a tree realizable by both \bar{T} and T_{min} , therefore $|E(T)| \geq |E(T_{min})|$. Since T and \bar{T}_{min} have the same effective resistant matrix, they are equivalent. Therefore due to Theorem 4.8 \bar{T}_{min} can be transform to T which implies $|E(T_{min})| \geq |E(T)|$ which contradicts to the uniqueness of the minimal tree. \square

We propose the following algorithm for reconstruction of the minimal tree for a given tree metric D_T based on Theorem 4.9 :

- Do all steps of the algorithm described above to obtain a minimal network \mathcal{E} such that $R_{\mathcal{E}} = D_T$;
- Transform \mathcal{E} to a minimal tree by a sequence of the star-triangle transformation. By Theorem 1 from [3] we suppose that heuristically this converting can be done monotonically by changing all the triangles to the stars.

Remark 4.10. A more advanced technique called the chamber ansatz when applied to $\Omega_R(\mathcal{E})$ gives an algorithm for recovering not only the topology of the network but the weights of the edges as well. We will describe this method in a coming work [19].

We will illustrate our algorithm by an example.

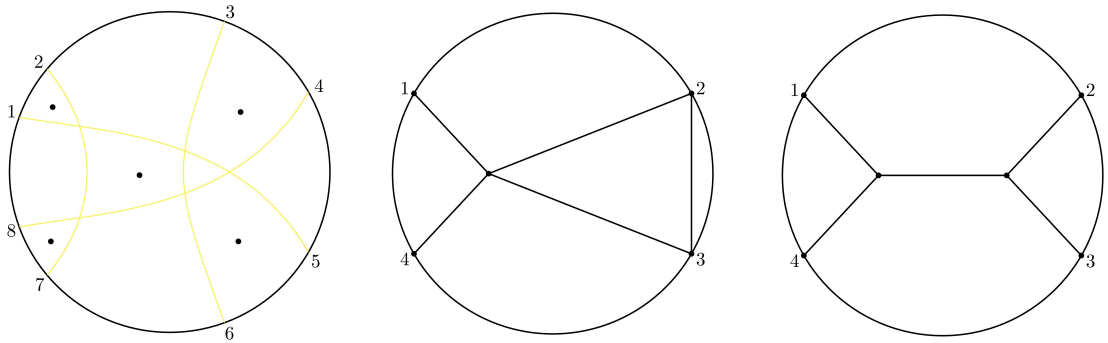


FIGURE 9. An example of a reconstruction of a network topology

Example 4.11. Consider a dissimilarity matrix

$$D = \begin{pmatrix} 0 & 3 & 3 & 2 \\ 3 & 0 & 2 & 3 \\ 3 & 2 & 0 & 3 \\ 2 & 3 & 3 & 0 \end{pmatrix}$$

Then the matrix $\Omega'_R(\mathcal{E}) \in Gr_{\geq 0}(n-1, 2n)$ has the form

$$\Omega'_R(\mathcal{E}) = \begin{pmatrix} 1 & 3 & 1 & 1 & 0 & -1 & 0 & 1 \\ 0 & 1 & 1 & 2 & 1 & 1 & 0 & 0 \\ 0 & -1 & 0 & 1 & 1 & 3 & 1 & 1 \end{pmatrix}$$

By direct computations we verify that $g(\mathcal{E}) = [46578213]$ in the one window notation as it is used in [24], therefore the strand permutation $\tau(\mathcal{E})$ is $\tau(\mathcal{E}) = (15)(27)(36)(48)$. This strand permutation defines a minimal network as it is shown in the Figure 9, which can be transformed to a tree by applying one star-triangle transformation.

REFERENCES

- [1] H-J. Bandelt and A. Dress, Split decomposition: a new and useful approach to phylogenetic analysis of distance data, *Molecular Phylogenetics and Evolution* 1 (1992) 242–252.
- [2] H-J. Bandelt and A. Dress, A canonical decomposition theory for metrics on a finite set, *Advances in Mathematics* Volume 92, Issue 1, March (1992) Pages 47-105.
- [3] P. Buneman, A note on the metric properties of trees. *J. Combin. Theory Ser. B.*, Vol. 17, No. 1, pp. 48-50 (1974).
- [4] B. Bychkov, V. Gorbounov, L. Guterman, A. Kazakov, Symplectic geometry of electrical networks, *Journal of Geometry and Physics* Volume 207, January 2025, 105323.
- [5] B. Bychkov, V. Gorbounov, A. Kazakov, D. Talalaev, Electrical Networks, Lagrangian Grassmannians, and Symplectic Groups, *Moscow Mathematical Journal*, Vol.23, No.2, pp.133-167 (2023).
- [6] B. Bychkov, L. Guterman, A. Kazakov, Electrical networks via circular minors, in preparation.
- [7] S. Chepuri, T. George and D. E. Speyer, Electrical networks and Lagrangian Grassmannians, <https://arxiv.org/abs/2106.15418> (2021).
- [8] J. C. Culberson, P. Rudnicki, A fast algorithm for constructing trees from distance matrices. *Information Processing Letters*, Vol. 30, No. 4, pp. 215-220 (1989).
- [9] E. B. Curtis, D. Ingerman, J. A. Morrow, Circular planar graphs and resistor networks. *Linear algebra and its applications*, Vol.283, No. 1-3, pp.115-150 (1998).
- [10] B. Curtis, J. A. Morrow, Inverse problems for electrical networks. *World Scientific*. Vol.13 (2000).
- [11] M. Deza, M. Laurent, *Geometry of Cuts and Metrics*, Springer Berlin, DOI <https://doi.org/10.1007/978-3-642-04295-9>.
- [12] Colin de Verdière, Yves R´eseaux ´electriques planaires. I. *Comment. Math. Helv.* 69 (1994), no. 3, 351374.
- [13] S. Devadoss, S. Forcey, Compactifications of phylogenetic systems and electrical networks, <https://doi.org/10.48550/arXiv.2408.03431>.
- [14] S. Devadoss, S. Petti, A Space of Phylogenetic Networks, <https://doi.org/10.48550/arXiv.1607.06978>.

- [15] S. Forcey, Circular planar electrical networks, split systems, and phylogenetic networks, <https://doi.org/10.48550/arXiv.2108.00550>.
- [16] Forcey S, Scalzo D. Phylogenetic Networks as Circuits With Resistance Distance. *Front Genet.* 2020 Oct 15;11:586664. doi: 10.3389/fgene.2020.586664. PMID: 33193721; PMCID: PMC7593533.
- [17] S. L. Hakimi, S. S. Yau, Distance matrix of a graph and its realizability. *Quarterly of applied mathematics*, Vol. 22, No. 4, pp. 305-317 (1965).
- [18] D. H. Huson, R. Rupp, C. Scornavacca, *Phylogenetic networks: concepts, algorithms and applications*. Cambridge University Press (2010).
- [19] A. Kazakov, Inverse problems related to electrical networks and the geometry of non-negative Grassmannians, in preparation.
- [20] R. W. Kenyon and D. B. Wilson, Boundary partitions in trees and dimers, *Trans. Amer. Math. Soc.*, 363, pp. 1325–1364
- [21] Klein, D.J., Randić, M. Resistance distance. *J Math Chem* 12, 81–95 (1993). <https://doi.org/10.1007/BF01164627>.
- [22] Klein, D., Zhu, H. Distances and volumina for graphs. *Journal of Mathematical Chemistry* 23, 179–195 (1998). <https://doi.org/10.1023/A:1019108905697>
- [23] A. Kleinman, M. Harel, L. Pachter, Affine and Projective Tree Metric Theorems. *Ann. Comb.* 17, 205–228 (2013). <https://doi.org/10.1007/s00026-012-0173-2>.
- [24] T. Lam, Electroid varieties and a compactification of the space of electrical networks, *Adv. Math.* 338, pp. 549–600 (2018).
- [25] T. Lam, Totally nonnegative Grassmannian and Grassmann polytopes, *Current developments in mathematics, V.2014* (
- [26] D. Speyer, B. Sturmfels, The tropical Grassmannian. *Adv. Geom.* 4 (2004), 389-411.
- [27] A. Zelevinsky, "What Is . . . a Cluster Algebra?", *AMS Notices*, 54 (11): 1494–1495, 2007.

V. G.: FACULTY OF MATHEMATICS, NATIONAL RESEARCH UNIVERSITY HIGHER SCHOOL OF ECONOMICS, USACHEVA 6, 119048 MOSCOW, RUSSIA

Email address: vgorb10@gmail.com

A. K.: LOMONOSOV MOSCOW STATE UNIVERSITY, FACULTY OF MECHANICS AND MATHEMATICS, RUSSIA, 119991, MOSCOW, GSP-1, 1 LENINSKIYE GORY, MAIN BUILDING; CENTRE OF INTEGRABLE SYSTEMS, P. G. DEMIDOV YAROSLAVL STATE UNIVERSITY, SOVETSKAYA 14, 150003, YAROSLAVL, RUSSIA; CENTER OF PURE MATHEMATICS, MOSCOW INSTITUTE OF PHYSICS AND TECHNOLOGY, 9 INSTITUTSKIY PER., DOLGOPRUDNY, MOSCOW REGION, 141701, RUSSIAN FEDERATION; KAZAN FEDERAL UNIVERSITY, N.I. LOBACHEVSKY INSTITUTE OF MATHEMATICS AND MECHANICS, KAZAN, 420008, RUSSIA

Email address: anton.kazakov.4@mail.ru