

Calculation of resonances in the Coulomb three-body system with two disintegration channels in the adiabatic hyperspherical approach

D.I. Abramov^a, V.V. Gusev^b

^aSt. Petersburg State University

^bInstitute for High Energy Physics

Abstract. The method of calculation of the resonance characteristics is developed for the metastable states of the Coulomb three-body (CTB) system with two disintegration channels. It is based on the numerical solution of the scattering problem in the framework of the adiabatic hyperspherical (AHS) approach. The energy dependence of K -matrix in the resonance region is calculated with the use of the stabilization method. Resonance position E_0 , partial widths Γ_1, Γ_2 , and three additional parameters are obtained by fitting of the numerically calculated $K_{ij}(E)$ with the help of the generalized Breit-Wigner formula which takes into account the non-zero background inelastic scattering. The method developed is applied to the calculation of the parameters of three lowest metastable states of the mesic molecular ion $dt\mu$.

Introduction

The goal of the present paper is the extension onto the two-channel case of the numerical method developed previously for the resonances in the CTB systems with one open channel [1], [2]. In particular, the special attention is devoted to the proper calculation of the partial widths Γ_i which are interesting for applications together with the total width $\Gamma = \sum \Gamma_i$.

The method developed is applied to three lowest resonances in the $dt\mu$ system with zero angular momentum ($J = 0$) and two disintegration channels: (1) $(t\mu)_{n=1} + d$ and (2) $(d\mu)_{n=1} + t$. They represent the quasistationary states in the potential well formed by the third AHS term (fig.1).

The resonances pointed out are interesting for many mesic atomic processes and were investigated repeatedly. The total widths $\Gamma = \Gamma_1 + \Gamma_2$ were calculated in papers [3] [4] (complex rotation method), [5] (analysis of elastic and inelastic scattering), [6] (Siegert pseudo-states method), [7] (R -matrix method). The results of [3] [4] differ significantly (3÷5 orders) from those of [5], [6], [7]. The results for the partial widths which play an important role in the theory of the muon-catalyzed fusion were presented up to now only in paper [5] where the non-adiabatic coupled rearrangement channel method [8] had been used for the calculation of the elastic and inelastic cross sections.

Our method is based on the AHS approach which is widely used in the calculations of mesic atomic systems starting from paper [9] (see for references [10]). The three-body wave function is represented as a series over AHS basis, and the determination of the reaction matrix K_{ij} is reduced to the numerical solution of the system of radial equations

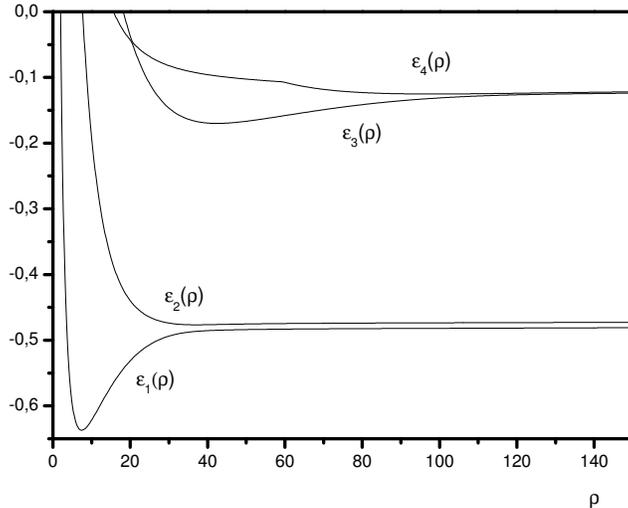


Figure 1: AHS terms $\varepsilon_j(\rho)$ for the $dt\mu$ molecule. The resonances under consideration are connected with the potential well in the third term.

(sec.1). It is calculated as a function of the energy E in the resonance region by the methods described in paper [1]. In particular, the stabilization method [11] is used.

The resonance parameters are obtained by the fitting numerical results for $K_{ij}(E)$ with the help of the extended Breit-Wigner formula presented in section 2. It takes into account the nonzero background inelastic scattering and therefore contains $(n+1)(n+2)/2$ independent parameters (n is the number of open channels) instead of $(2n+1)$ parameters in the well-known traditional expression [12], [13]. Moreover, this formula imposes the non-trivial restrictions on the values of Γ_i . As it is seen from the results for the lowest resonance in $dt\mu$ presented sec.4 the use of the extended formula in this case is necessary for an adequate representation of $K_{ij}(E)$ and for a proper calculation of partial widths.

The method developed relates to ones based on the numerical solution of the scattering problem. The typical feature of these methods is the possibility to obtain the high accuracy for Γ while E_0 is calculated not so precisely [1]. Indeed, in the scattering problem E_0 and Γ appear as the values of the entirely different nature: E_0 is the position of the resonance peak while Γ^{-1} is its height, the errors of Γ and E_0 are the independent values in a sense. On the other hand in the complex rotation method the resonance position E_0 and the half-width $\Gamma/2$ appear as the Cartesian coordinates of the pole in the complex E -plane, they are considered usually as the values having the same rights and are calculated with the same absolute error.

1 Determination of K -matrix in AHSA

We use the mesic atomic units ($\hbar = e = m_\mu = 1$) and Jacobi coordinates

$$\mathbf{R} = \mathbf{r}_d - \mathbf{r}_t, \quad \mathbf{r} = \mathbf{r}_\mu - \frac{m_t \mathbf{r}_t + m_d \mathbf{r}_d}{m_t + m_d}. \quad (1)$$

The hyperspherical coordinates $\rho \in [0, \infty)$, $\chi \in [0, \pi]$, $\vartheta \in [0, \pi]$ are defined by formulae

$$\begin{aligned} \rho^2 &= 2\mu r^2 + 2MR^2, \\ \tan \frac{\chi}{2} &= \left(\frac{\mu}{M}\right)^{1/2} \frac{r}{R}, \quad \cos \vartheta = \frac{\mathbf{r}\mathbf{R}}{rR}, \\ \mu^{-1} &= 1 + (m_t + m_d)^{-1}, \quad M^{-1} = m_t^{-1} + m_d^{-1}. \end{aligned} \quad (2)$$

The three-body Hamiltonian H in the case $J = 0$ has the form [9]

$$H = -\frac{1}{\rho^5} \frac{\partial}{\partial \rho} \rho^5 \frac{\partial}{\partial \rho} + h, \quad (3)$$

where the adiabatic Hamiltonian h is given by the expression

$$h = -\frac{4}{\rho^2 \sin^2 \chi} \left(\frac{\partial}{\partial \chi} \sin^2 \chi \frac{\partial}{\partial \chi} + \frac{1}{\sin \vartheta} \frac{\partial}{\partial \vartheta} \sin \vartheta \frac{\partial}{\partial \vartheta} \right) + V(\rho, \chi, \vartheta), \quad (4)$$

and V is the sum of the Coulomb interactions between t , d and μ .

The three-body wave function $\Psi_E(\mathbf{R}, \mathbf{r})$ in the case $J = 0$ depends only on ρ , χ , ϑ . It is presented in the form of the AHS expansion

$$\Psi_E(\mathbf{R}, \mathbf{r}) = \rho^{-5/2} \sum_{j=1}^{\infty} f_j(\rho) \varphi_j(\rho|\chi, \vartheta), \quad (5)$$

where the AHS basis functions $\varphi_j(\rho|\chi, \vartheta)$, $j = 1, 2, \dots, \infty$ are the eigenfunctions of the AHS Hamiltonian h (4):

$$h\varphi_j(\rho|\chi, \vartheta) = \varepsilon_j(\rho)\varphi_j(\rho|\chi, \vartheta). \quad (6)$$

Their normalization is defined by the relation

$$\langle \varphi_i | \varphi_j \rangle \equiv \int_0^\pi \int_0^\pi \varphi_i(\rho|\chi, \vartheta) \varphi_j(\rho|\chi, \vartheta) \sin^2 \chi \sin \vartheta d\chi d\vartheta = \delta_{ij}. \quad (7)$$

Three lowest AHS energy terms $\varepsilon_j(\rho)$, ($j = 1, 2, 3, 4$) are presented in fig.1, where their limiting values at $\rho \rightarrow \infty$, i.e. the energies of bound states of corresponding atoms, are pointed out:

$$\varepsilon_{1,3}(\infty) = E_{t\mu}(n = 1, 2), \quad \varepsilon_{2,4}(\infty) = E_{d\mu}(n = 1, 2). \quad (8)$$

Radial functions $f_j(E|\rho)$ satisfy the infinite system of coupled ordinary differential equations

$$\left[-\frac{\partial^2}{\partial \rho^2} + \varepsilon_j(\rho) - E + \frac{15}{4\rho^2} \right] f_j +$$

$$+ \sum_{j'=1}^{\infty} \left[H_{jj'} f_{j'} + Q_{jj'} \frac{\partial}{\partial \rho} f_{j'} + \frac{\partial}{\partial \rho} (Q_{jj'} f_{j'}) \right] = 0, \quad (9)$$

$$H_{jj'}(\rho) = \left\langle \frac{\partial}{\partial \rho} \varphi_j \left| \frac{\partial}{\partial \rho} \varphi_{j'} \right. \right\rangle, \quad Q_{jj'}(\rho) = - \left\langle \varphi_j \left| \frac{\partial}{\partial \rho} \varphi_{j'} \right. \right\rangle. \quad (10)$$

To calculate the two-channel reaction matrix $K_{ij}(E) = K_{ji}(E)$, ($i, j = 1, 2$) corresponding to channels (1) $t\mu + d$ and (2) $d\mu + t$ with thresholds $E = \varepsilon_1(\infty)$ and $E = \varepsilon_2(\infty)$ one has to obtain two linearly independent solutions of system (9) (we label them with upper index $i = 1, 2$) with boundary conditions ($q_i^2 = E - \varepsilon_i(\infty)$) [10]:

$$f_j^i(\rho) \underset{\rho \rightarrow 0}{=} 0, \quad j = 1, 2, \dots, \infty; \quad f_j^i(\rho) \underset{\rho \rightarrow \infty}{=} 0, \quad j = n+1, n+2, \dots, \infty;$$

$$f_j^i(\rho) \underset{\rho \rightarrow \infty}{=} \delta_{ij} \sin(q_j \rho - \pi J/2) + (q_i/q_j)^{1/2} K_{ij} \cos(q_j \rho - \pi J/2), \quad j = 1, 2. \quad (11)$$

The partial cross sections of elastic ($i = j$) and inelastic ($i \neq j$) s -scattering ($J = 0$) is expressed in terms of K_{ij} (left index corresponds to input channel)[10]:

$$\sigma_{ij}^{J=0} = \frac{4\pi}{k_i^2} \frac{\delta_{ij} D^2 + K_{ij}^2}{(1-D)^2 + F^2}, \quad i, j = 1, 2, \quad (12)$$

$$D = K_{11}K_{22} - K_{12}K_{21}, \quad F = K_{11} + K_{22},$$

$$k_i = (2\mu_i)^{1/2} q_i, \quad \mu_1^{-1} = (m_t + 1)^{-1} + m_d^{-1}, \quad \mu_2^{-1} = (m_d + 1)^{-1} + m_t^{-1}.$$

2 Generalized Breit-Wigner formula

The general formula describing the n -channel scattering matrix as a function of energy E in the vicinity of isolated complex pole $E_0 - i\Gamma/2$ with small imaginary part ($\Gamma/E_0 \ll 1$) can be derived from the unitary property, the symmetry and the supposition that the residue of S -matrix in this pole has an order $O(\Gamma)$. In the special case when the non-resonant inelastic scattering is absent and the background term has a diagonal form (we use the symbols with tilde for this special case) this formula (the Breit-Wigner formula) reads [12], [13]:

$$\tilde{S}(E) = \tilde{S}^b - \frac{i\Gamma \tilde{B}}{E - E_0 + i\Gamma/2}, \quad (13)$$

where the background S -matrix \tilde{S}^b and the residue matrix \tilde{B} do not depend on E and are defined by the expressions

$$\tilde{S}_{ij}^b = \delta_{ij} e^{2i\Delta_i}, \quad \tilde{B}_{ij} = \tilde{\beta}_i \tilde{\beta}_j e^{i(\Delta_i + \Delta_j)}. \quad (14)$$

Here $\tilde{\beta}_i$ ($i = 1, 2, \dots, n$) are the real parameters (positive and negative) satisfying the condition

$$\sum_{i=1}^n \tilde{\beta}_i^2 = 1. \quad (15)$$

Thus, in the absence of the background inelastic scattering the Breit-Wigner formula contains $(2n + 1)$ independent real parameters: E_0 , Γ , independent phaseshifts Δ_j ($j = 1, 2, \dots, n$), and parameters $\tilde{\beta}_j$ ($j = 1, 2, \dots, n$) connected by relation (13). The value

$$\tilde{\Gamma}_j \equiv \Gamma \tilde{\beta}_j^2, \quad j = 1, \dots, n, \quad \left(\sum_{j=1}^n \tilde{\Gamma}_j = \Gamma \right) \quad (16)$$

is the partial width corresponding to channel j .

In the general case, when the background inelastic amplitude is not a negligibly small value, it is necessary to modify formula (13). One has to find the general expression for matrix B in the formula

$$S(E) = S^b - \frac{i\Gamma B}{E - E_0 + i\Gamma/2}, \quad (17)$$

where S^b is the symmetric unitary matrix which may be the nondiagonal one. This derivation can be easily done with the use of the orthogonal matrix R reducing S^b to the diagonal form:

$$S^b = R^{-1} \tilde{S}^b R. \quad (18)$$

Here the diagonal matrix \tilde{S}^b is given by the first of eqs.(12), so Δ_k ($k = 1, \dots, n$) are the eigenphases of matrix S^b . Now the orthogonal transformation $S(E) = R^{-1} \tilde{S}(E) R$ reduces the problem of the search for the general form of $S(E)$ to the special case (13), and as a result we obtain the general expression for $S(E)$ in the resonance range in the form:

$$S(E) = S^b - \frac{i\Gamma B}{E - E_0 + i\Gamma/2} = R^{-1} \left[\tilde{S}^b - \frac{i\Gamma \tilde{B}}{E - E_0 + i\Gamma/2} \right] R, \quad (19)$$

where \tilde{S}^b and \tilde{B} are given by eqs. (14),(15).

The general expression for $S(E)$ (19) thus contains $(n + 1)(n + 2)/2$ real independent parameters: E_0 , Γ , independent phaseshifts Δ_j , parameters $\tilde{\beta}_j$ connected by eq.(15), and $n(n - 1)/2$ parameters of an orthogonal matrix R .

The matrix elements of B in eqs.(17),(19) have the form

$$B_{jk} = \sum_{l,m} R_{lj} \tilde{B}_{lm} R_{mk} = \sum_{l=1}^n R_{lj} \tilde{\beta}_l e^{i\Delta_l} \sum_{m=1}^n R_{mk} \tilde{\beta}_m e^{i\Delta_m} = \beta_j \beta_k e^{i(\Delta_j + \Delta_k)}, \quad (20)$$

where β_j ($j = 1, \dots, n$) are the complex values connected with parameters $\tilde{\beta}$ by the relation

$$\beta_j = \sum_{l=1}^n R_{lj} \tilde{\beta}_l e^{i(\Delta_l - \Delta_j)}, \quad \left(\sum_{i=1}^n |\beta_i|^2 = 1 \right). \quad (21)$$

The probability of the disintegration to the channel i (partial width Γ_i) is equal to

$$\Gamma_i = \Gamma |\beta_i|^2, \quad i = 1, \dots, n, \quad \left(\sum_{i=1}^n \Gamma_i = \Gamma \right). \quad (22)$$

It coincides with "eigenwidth" $\tilde{\Gamma}_i$ only if R is an identity matrix.

The essential difference between the set $\{\Gamma_i\}$ and the set $\{\tilde{\Gamma}_i\}$ is that at fixed background scattering matrix and complex pole (i.e. at given R , Δ_j , E_0 and Γ) one can define the positive parameters $\tilde{\Gamma}_1$ arbitrary (with only restriction $\sum_{i=1}^n \tilde{\Gamma}_i = \Gamma$), while the domain of definition of the parameters Γ_i depends on R . For example, in the case $n = 2$ the transformation matrix has the form

$$R = \begin{pmatrix} \cos \nu & \sin \nu \\ -\sin \nu & \cos \nu \end{pmatrix}, \quad (23)$$

where ν is the mixing parameter. The analysis of the expression for β_i (21) in this case leads to the following restriction for $\Gamma_i/\Gamma = |\beta_i|^2$:

$$2\Gamma_i/\Gamma \geq 1 - \sqrt{\cos^2(\Delta_1 - \Delta_2) \sin^2 2\nu + \cos^2 2\nu} \geq 0. \quad (24)$$

This inequality means that in the presence of the background inelastic scattering ($\nu \neq 0$) the probability of the disintegration certainly differs from zero for every open channel.

The complex pole ($E_0 - i\Gamma/2$) of S -matrix corresponds to the real pole E_1 of the reaction matrix

$$K = i(1 + S)^{-1}(1 - S) = K^b - \frac{C}{E - E_1}. \quad (25)$$

It is easy to obtain the expressions of E_1 , background reaction matrix K^b , and matrix C in terms of parameters E_0 , Γ , $\tilde{\beta}_j$, Δ_j and transformation matrix R :

$$E_1 = E_0 - \frac{\Gamma}{2} \sum_{j=1}^n \tilde{\beta}_j^2 \tan \Delta_j, \quad (26)$$

$$K^b = R^{-1} \tilde{K}^b R, \quad \tilde{K}_{jk}^b = \tan \Delta_j \delta_{jk}, \quad (27)$$

$$C = R^{-1} \tilde{C} R, \quad \tilde{C}_{jk} = \frac{\Gamma}{2} \cdot \frac{\tilde{\beta}_j \tilde{\beta}_k}{\cos \Delta_j \cos \Delta_k}. \quad (28)$$

If we have to calculate E_0 , Γ_i , Γ using the numerically obtained $K(E)$ we have to fit $K(E)$ with the help of $(n+1)(n+2)/2$ real parameters in accordance with eqs.(25)-(28). In the case $n = 2$ it is necessary to determine six such parameters. We can use also six alternative parameters, namely, the pole of K -matrix E_1 and the independent matrix elements $K_{11}^b \equiv a_1$, $K_{12}^b \equiv a$, $K_{22}^b \equiv a_2$, $C_{11} \equiv b_1$, $C_{22} \equiv b_2$:

$$K = \begin{pmatrix} a_1 & a \\ a & a_2 \end{pmatrix} - \frac{1}{(E - E_1)} \begin{pmatrix} b_1 & b \\ b & b_2 \end{pmatrix}, \quad (29)$$

where $b_1 \geq 0$, $b_2 \geq 0$, $b_1 b_2 - b^2 = 0$.

The case of the zero background inelastic scattering corresponds to $a = 0$.

Resonance position E_0 and widths Γ_i , Γ can be expressed in the explicit form in terms of E_1 , a_i , b_i with the help of eqs.(14)-(16), (26)-(28):

$$E_0 = E_1 - \frac{h(1-d) - fg}{(1-d)^2 + f^2}, \quad (30)$$

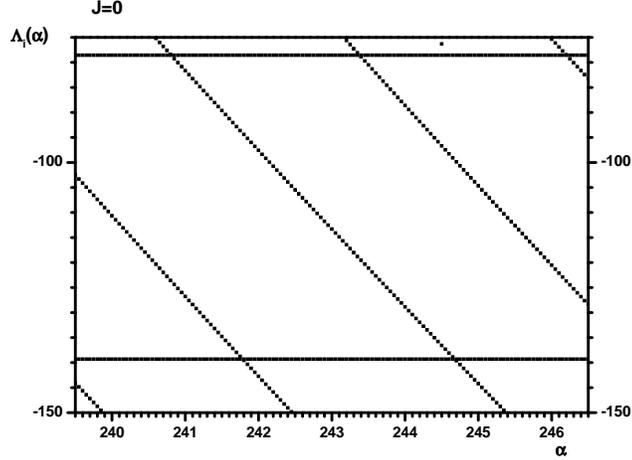


Figure 2: Eigenvalues of the auxiliary boundary problem Λ_j for $J = 0$ as a function of right boundary α . The avoided crossings at $\Lambda_j = E_0$ appear as exact crossings on the scale of the figure.

$$\Gamma_1 = 2 \frac{ha_2 + b_1 - db_2}{(1-d)^2 + f^2}, \quad \Gamma_2 = 2 \frac{ha_1 + b_2 - db_1}{(1-d)^2 + f^2}, \quad (31)$$

$$\Gamma = \Gamma_1 + \Gamma_2 = 2 \frac{fh + g(1-d)}{(1-d)^2 + f^2}. \quad (32)$$

Here

$$\begin{aligned} d &= a_1 a_2 - a^2, & f &= a_1 + a_2, \\ g &= b_1 + b_2, & h &= a_1 b_2 + a_2 b_1 - 2ab. \end{aligned} \quad (33)$$

3 Numerical method

Basis functions $\varphi_j(\rho|\chi, \vartheta)$ (6),(8) and matrix elements (10) were calculated in accordance with algorithms described in papers [9], [14]. The calculations were performed on the orthogonal finite-element grid $[N_\chi \times N_\vartheta]$ with using the second order Lagrange elements. The number of nodes in χ and ϑ was taken equal to $N_\chi = 131$ and $N_\vartheta = 61$. This provided the accuracy of calculation $\sim 10^{-5}$ of all matrix elements.

The final results have been obtained with the number $N = 6$ of AHS basis functions.

The energy dependence of K -matrix (11) in the resonance range was obtained with the use of stabilization method [11] in the same way as in papers [1], [2]. We investigate the discrete spectrum of the auxiliary eigenvalue problem for radial system (9) on the finite interval $0 \leq \rho \leq \alpha$; its eigenvalues $\Lambda_j(\alpha)$ have the avoided crossings at $\Lambda_j(\alpha) \approx E_0$ (see fig.2); we solve the scattering problem for radial system (9) and calculate $K(E)$ at $E = \Lambda_j(\alpha)$ in the neighbourhood of the resonance; the scanning along α instead of along E allows to study in details the behavior of $K(E)$ near $E = E_0$ (see fig.3).

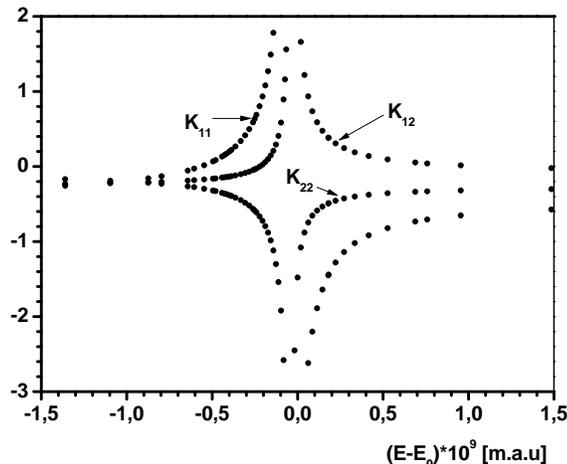


Figure 3: Matrix elements of K -matrix as functions of E ($J = 0, v = 0$).

The system of radial equations (9) was solved at $\rho \in [0.05, \rho^* = 500]$ with adapted step [14]. This provides the results with the relative accuracy $\sim 10^{-4}$.

Parameters $E_1, a_1, a_2, a, b_1, b_2, b$ of K -matrix (11),(29) were obtained by fitting numerical results for $K(E)$ with the help of the generalized Breit-Wigner formula (sec.2). The relation $b_1 b_2 b^{-2} = 1$ was valid in this case with accuracy 10^{-4} . Parameters $E_0, \Gamma, \Gamma_1,$ and Γ_2 were calculated by formulae (30)-(33).

As a whole we estimate the relative accuracy of calculation of Γ and Γ_i as $20 \div 20\%$.

4 Results and discussion

The main results for three lowest resonances ($J = 0, v = 1, 2, 3$) are presented in figs. 3-5 and in tables 1, 2.

The numerically calculated matrix element K_{11} ($v = 0$) as function of $(E - E_0)$ is presented in fig. 3. Dots correspond to the scanning with fixed step along α (sec.3). The step along E in this case becomes very small near resonance. The use of the scanning along α allows to trace the E -dependence of K_{11} in details.

Fig.4 presents the numerical data for $(K_{11} - a_1)^{-1}, (K_{12} - a)^{-1},$ and $(K_{22} - a_2)^{-1}$ as functions of $(E - E_0)$ for $v = 0$. It is seen, in particular, that all matrix elements of K -matrix have the pole in the same point E_0 .

The numerically obtained elastic σ_{11}, σ_{22} and inelastic σ_{12} cross sections (12) are presented on fig.5 as functions of the energy. All curves have a typical Fano form. The parameters of these three profiles can be expressed in terms of $E_1, a_1, a_2, a, b_1,$ and b_2 . The numerical data for σ_{12} show clearly that it can not be presented without taking into account the nonzero background scattering. Indeed, at $a = 0$ the profile $\sigma_{12}(E)$ should be the symmetric one with respect to $E = E_0$.

The data presented in tables 1 show that for three lowest resonances in the $dt\mu$ system

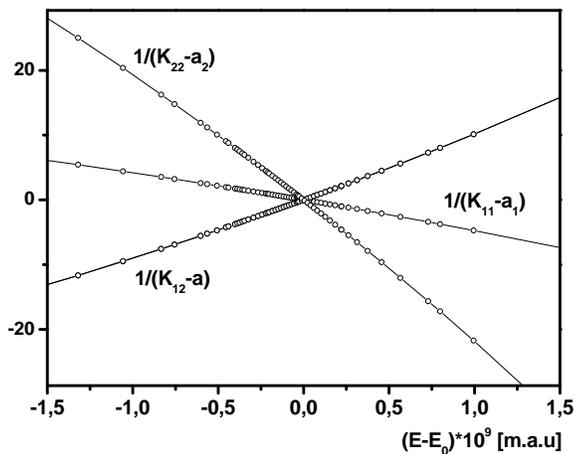


Figure 4: The inverse values of matrix elements of the resonant part of K -matrix ($J = 0$, $v = 0$).

the use of $N = 6$ AHS basis functions gives for E_0 the accuracy 0.01%. To improve the accuracy and to perform the calculations for large J and v it is necessary to increase N and ρ^* .

Our results for Γ (table 2) coincide with those of papers [6], [7] with an accuracy 10÷50%. Independently of the precision of the numerical calculation of reaction matrix $K(E)$ the results for branching ratio can change essentially (about 10% in our case) if one uses for data processing the Breit-Wigner formula without taking into account an inelastic background scattering, i.e. if one assumes $a = 0$ in eqs.(3)-(33).

Acknowledgements

This work was supported by the grant "Universities of Russia" UR.01.01.064.

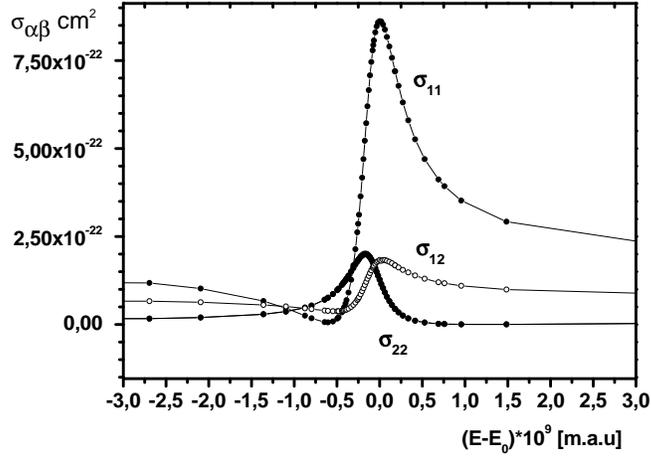


Figure 5: Elastic and inelastic cross sections in the resonance range ($J = 0$, $v = 0$).

Table 1. Resonance position $-E_0$ relative to $n = 2$ level of $t\mu$ (in $\mu\text{a.u.}$) for lowest resonances ($J = 0$, $v = 0, 1, 2$) in $dt\mu$.

v	[5]	[6] N=40	[7] N=30÷50	Present N=6
0	0.159194	0.1591938	0.1591939	0.15917
1	0.145302	0.1453015	0.1453019	0.14524
2	0.134530	0.1345291	0.134529	0.13445

Table 2. Total width Γ ($10^{-9}\mu\text{a.u.}$) and the ratio Γ_2/Γ (in parenthesis) for lowest resonances ($J = 0$, $v = 0, 1, 2$) in $dt\mu$

v	[3]	[4]	[5]	[6] N=40	[7] N=30÷50	Present N=6
0	0.64×10^4	0.36×10^3	0.640 (0.1)	0.354	0.341	0.47 (0.22)
1	0.14×10^5	0.50×10^4	5.56 (0.9)	0.839	0.829	0.53 (0.38)
2	0.20×10^6	0.12×10^5	37 (0.9)	1.15	1.14	1.02 (0.55)

References

- [1] D.I.Abramov and V.V.Gusev, J.Phys. B **33**, 891 (2000).
- [2] D.I.Abramov and V.V.Gusev, Nucl.Phys. A **689**, 533c (2001).
- [3] C.Y.Hu and A.K.Bhatia, Phys.Rev. A **43**, 1229 (1991).
- [4] P.Froelich and A.Flores-Riveros, Phys.Rev.Lett., **70**, 1595 (1993).
- [5] Y.Kino and M.Kamimura, Hyperfine Interactions, **101/102**, 191 (1996)
- [6] O.I.Tolstikhin, V.N.Ostrovsky, and H.Nakamura,Phys.Rev.Let.,**79**, 2026 (1997)
- [7] G.Mil'nikov and H.Nakamura, Phys.Rev. A **67**, 034501 (2003)
- [8] Y.Kino and M.Kamimura, Hyperfine Interactions, **82**, 45 (1993)
- [9] V.V.Gusev, V.I.Puzynin, V.V.Kostykin, A.A.Kvitsinsky, S.P.Merkuriev, L.I.Ponomarev, Few Body Systems **9**, 137 (1990).
- [10] D.I.Abramov, V.V.Gusev, and L.I.Ponomarev, Yad.Phys. **64**, 1442 (2001); [Phys.At.Nucl.**64**, 1364 (2001)].
- [11] A.U.Hazi and H.S.Taylor, Phys.Rev. A **1**, 1109 (1970).
- [12] Landau L D and Lifshitz E M 1965 *Quantum mechanics* (Reading, MA: Addison-Wesley) 514
- [13] Taylor J R 1972 *The quantum theory of nonrelativistic collisions* (New York: John Wiley)
- [14] D.I.Abramov, L.N.Bogdanova, V.V.Gusev, and L.I.Ponomarev, Yad.Phys. **61**, 520 (1998); [Phys.At.Nucl.**61**, 457 (1998)].