

Schrödinger Cat States for Quantum Information Processing

H. Jeong and T.C. Ralph

Department of Physics, University of Queensland, St Lucia, Qld 4072, Australia

(Dated: February 1, 2008)

We extensively discuss how Schrödinger cat states (superpositions of well-separated coherent states) in optical systems can be used for quantum information processing.

I. INTRODUCTION

In the early days of quantum mechanics many of its founders became very worried by some of the paradoxical predictions that emerged from thought experiments based on the new theory. Now, eighty years on, some of these early thought experiments are being experimentally realized, and more than just confirming the fundamentals of the theory they are also being recognized as the basis of 21st century technologies [14]. An example is the EPR paradox, proposed by Einstein, Podolsky and Rosen in 1935 [15], which discussed the strange properties of quantum entanglement. Today, entanglement has been observed in optical [1, 28] and ion [48] systems and is recognized as a resource for many quantum information processing tasks [36].

About the same time as the EPR discussion, Schrödinger proposed his famous cat paradox [52] that highlighted the unusual consequences of extending the concept of superposition to macroscopically distinguishable objects. From a quantum optics view point, the usual paradigm is to consider superpositions of coherent states with amplitudes sufficiently different that they can be resolved using homodyne detection [29, 46]. In this chapter we discuss how, beyond their fundamental interest, these types of states can be used in quantum information processing. We then look at the problem of producing such states with the required properties

II. QUANTUM INFORMATION PROCESSING WITH SCHRÖDINGER CAT STATES

A. Coherent-state qubits

We now introduce qubit systems using coherent states. A coherent state can be defined as [8, 53]

$$|\alpha\rangle = e^{-|\alpha|^2/2} \sum_{n=0}^{\infty} \frac{\alpha^n}{\sqrt{n!}} |n\rangle, \quad (1)$$

where $|n\rangle$ is a number state and α is the complex amplitude of the coherent state. The coherent state is a very useful tool in quantum optics and a laser field is considered a good approximation of it. Let us consider two coherent states $|\alpha\rangle$ and $|\alpha\rangle$. The two coherent states are not orthogonal to each other but their overlap $|\langle\alpha|\alpha\rangle|^2 = e^{-4|\alpha|^2}$ decreases exponentially with $|\alpha|$. For example, when $|\alpha|$ is as small as 2, the overlap is $\approx 10^{-7}$,

i.e., $|\langle\alpha|\alpha\rangle|^2 \approx 0$. We identify the two coherent states of $\pm\alpha$ as basis states for a logical qubit as $|\alpha\rangle \rightarrow |0_L\rangle$ and $|\alpha\rangle \rightarrow |1_L\rangle$, so that a qubit state is represented by

$$|\phi\rangle = \mathcal{A}|0_L\rangle + \mathcal{B}|1_L\rangle = \mathcal{A}|\alpha\rangle + \mathcal{B}|\alpha\rangle. \quad (2)$$

The basis states, $|\alpha\rangle$ and $|\alpha\rangle$, can be unambiguously discriminated by a simple measurement scheme with a 50-50 beam splitter, an auxiliary coherent field of amplitude α and two photodetectors [22]. At the beam splitter, the qubit state $|\phi\rangle_1$ is mixed with the auxiliary state $|\alpha\rangle_2$ and results in the output

$$|\phi_R\rangle_{ab} = \mathcal{A}|\sqrt{2}\alpha\rangle_a|0\rangle_b + \mathcal{B}|0\rangle_a|\sqrt{2}\alpha\rangle_b. \quad (3)$$

The two photodetector are set for modes a and b respectively. If detector A registers any photon(s) while detector B does not, we know that $|\alpha\rangle$ was measured. On the contrary, if A does not click while B does, the measurement outcome was $|\alpha\rangle$. Even though there is non-zero probability of failure $P_f(\phi_R) = |\langle 00|\phi_R\rangle|^2 = |\mathcal{A} + \mathcal{B}|^2 e^{-2\alpha^2}$ in which both of the detectors do not register a photon, the failure is known from the result whenever it occurs, and P_f approaches to zero exponentially as α increases. Note that the detectors do *not* have to be highly efficient for unambiguous discrimination. Alternatively, homodyne detection can also be very efficient for the qubit readout because the overlap between the coherent states $|\alpha\rangle$ and $|\alpha\rangle$ would be extremely small for an appropriate value of α .

Alternatively, it is possible to construct an exactly orthogonal qubit basis with the equal superposition of two linear independent coherent states $|\alpha\rangle$ and $|\alpha\rangle$. Consider the basis states

$$|e\rangle = \mathcal{N}_+(|\alpha\rangle + |\alpha\rangle) \rightarrow |0_L\rangle, \quad (4)$$

$$|d\rangle = \mathcal{N}_-(|\alpha\rangle - |\alpha\rangle) \rightarrow |1_L\rangle, \quad (5)$$

where $\mathcal{N}_{\pm} = 1/\sqrt{2(1 \pm \exp[-2|\alpha|^2])}$. It can be simply shown that they form an orthonormal basis as $\langle e|d\rangle = \langle d|e\rangle = 0$ and $\langle e|e\rangle = \langle d|d\rangle = 1$. The basis state $|e\rangle$ ($|d\rangle$) is called “even cat state” (“odd cat state”) because it contains only even (odd) number of photons as

$$|e\rangle = 2\mathcal{N}_+ e^{-\frac{|\alpha|^2}{2}} \sum_{n=0}^{\infty} \frac{\alpha^{2n}}{\sqrt{(2n)!}} |2n\rangle, \quad (6)$$

$$|d\rangle = 2\mathcal{N}_- e^{-\frac{|\alpha|^2}{2}} \sum_{n=0}^{\infty} \frac{\alpha^{(2n+1)}}{\sqrt{(2n+1)!}} |2n+1\rangle. \quad (7)$$

The even and odd cat states can thus be discriminated by a photon parity measurement which can be represented by $O_{\Pi} = \sum_{n=0}^{\infty} (|2n\rangle\langle 2n| - |2n+1\rangle\langle 2n+1|)$. As α goes to zero, the odd cat state $|d\rangle$ approaches a single photon state $|1\rangle$ while the even cat state $|e\rangle$ approaches $|0\rangle$. No matter how small α is, there is no possibility that no photon will be detected from the state $|d\rangle$ at an ideal photodetector.

B. Quantum teleportation

Quantum teleportation is an interesting phenomenon for demonstrating quantum theory and a useful tool in quantum information processing [2]. By quantum teleportation, an unknown quantum state is disentangled in a sending place and its perfect replica appears at a distant place via dual quantum and classical channels. The key ingredients of quantum teleportation are an entangled channel, a Bell-state measurement and appropriate unitary transformations. In what follows we shall explain how teleportation can be performed for a coherent-state qubit [16, 24].

Let us assume that Alice wants to teleport an unknown coherent-state qubit $|\phi\rangle_a$ via a pure entangled coherent channel

$$|\Psi_{-}\rangle_{bc} = N_{-}(|\alpha\rangle_b|-\alpha\rangle_c - |-\alpha\rangle_b|\alpha\rangle_c), \quad (8)$$

where N_{-} is the normalization factor. After sharing the quantum channel $|\Psi_{-}\rangle$, Alice should perform a Bell-state measurement on her part of the quantum channel and the unknown qubit $|\phi\rangle$ and send the outcome to Bob. The Bell-state measurement is to discriminate between the four Bell-cat states which can be defined with coherent states as [20, 21, 49, 50]

$$|\Phi_{\pm}\rangle = N_{\pm}(|\alpha\rangle|\alpha\rangle \pm |-\alpha\rangle|-\alpha\rangle), \quad (9)$$

$$|\Psi_{\pm}\rangle = N_{\pm}(|\alpha\rangle|-\alpha\rangle \pm |-\alpha\rangle|\alpha\rangle), \quad (10)$$

where N_{\pm} are normalization factors. The four Bell-cat states defined in our framework are a very good approximation of the Bell basis. These states are orthogonal to each other except $\langle\Psi_{+}|\Phi_{+}\rangle = 1/\cosh 2|\alpha|^2$, and $|\Psi_{+}\rangle$ and $|\Phi_{+}\rangle$ rapidly become orthogonal as $|\alpha|$ grows.

A Bell-state measurement, or simply Bell measurement, is very useful in quantum information processing. It was shown that a complete Bell-state measurement on a product Hilbert space of two two-level systems is not possible using linear elements [33]. A Bell measurement scheme using linear optical elements [6] has been used to distinguish only up to two of the Bell states for teleportation [5] and dense coding [34]. However, a remarkable feature of the Bell-cat states is that each one of them can be unambiguously discriminated using only a beam splitter and photon-parity measurements [23, 24]. Suppose that the modes, a and b , of the entangled state are incident on a 50-50 beam splitter. After passing the beam

splitter, the Bell-cat states become

$$\begin{aligned} |\Phi_{+}\rangle_{ab} &\longrightarrow |E\rangle_f|0\rangle_g, \\ |\Phi_{-}\rangle_{ab} &\longrightarrow |D\rangle_f|0\rangle_g, \\ |\Psi_{+}\rangle_{ab} &\longrightarrow |0\rangle_f|E\rangle_g, \\ |\Psi_{-}\rangle_{ab} &\longrightarrow |0\rangle_f|D\rangle_g, \end{aligned} \quad (11)$$

where the even cat state $|E\rangle \propto |\sqrt{2}\alpha\rangle + |-\sqrt{2}\alpha\rangle$ definitely contains an even number of photons, while the odd cat state $|D\rangle \propto |\sqrt{2}\alpha\rangle - |-\sqrt{2}\alpha\rangle$ definitely contains an odd number of photons. By setting two photodetectors for the output modes f and g respectively to perform number parity measurement, the Bell-cat measurement can be simply achieved. For example, if an odd number of photons is detected for mode f , the state $|\Phi_{-}\rangle$ is measured, and if an odd number of photons is detected for mode g , then $|\Psi_{-}\rangle$ is measured. Even though there is non-zero probability of failure in which both of the detectors do not register a photon due to the non-zero overlap of $|\langle 0|E\rangle|^2 = 2e^{-2|\alpha|^2}/(1+e^{-4|\alpha|^2})$, it is small for an appropriate choice of α and the failure is known from the result whenever it occurs.

To complete the teleportation process, Bob performs a unitary transformation on his part of the quantum channel according to the measurement result sent from Alice via a classical channel. The required transformations are σ_x and σ_z on the coherent-state qubit basis, where σ 's are Pauli operators. When the measurement outcome is $|B_4\rangle$, Bob obtains a perfect replica of the original unknown qubit without any operation. When the measurement outcome is $|B_2\rangle$, Bob should perform $|\alpha\rangle \leftrightarrow |-\alpha\rangle$ on his qubit. Such a phase shift by π can be done using a phase shifter whose action is described by $P(\varphi) = e^{i\varphi a^\dagger a}$, where a and a^\dagger are the annihilation and creation operators. When the outcome is $|B_3\rangle$, the transformation should be performed as $|\alpha\rangle \rightarrow |\alpha\rangle$ and $|-\alpha\rangle \rightarrow -|-\alpha\rangle$. This transformation is more difficult but can be achieved most straightforwardly by simply teleporting the state again (locally) and repeating until the required phase shift is obtained. Therefore, both of the required unitary transformation, σ_x and σ_z , can be performed by linear optics elements. When the outcome is $|B_1\rangle$, σ_x and σ_z should be successively applied.

C. Quantum computation

We now describe how a universal set of quantum gates can be implemented on coherent state qubits using only linear optics and photon detection, provided a supply of cat states is available as a resource. The idea was originally due to Ralph, Munro and Milburn [44] and was later expanded on by Ralph *et al* [45].

A universal single qubit quantum gate element can be constructed from the following sequence of gates: Hadamard (H); rotation about the Z-axis by angle θ ($R(\theta)$); Hadamard (H) and; rotation about the Z-axis by angle ϕ ($R(\phi)$). If the two qubit gate, control sign

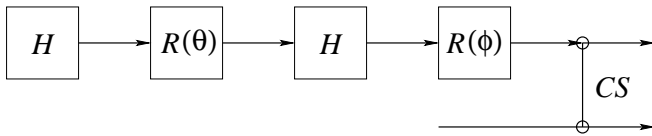


FIG. 1: A set of Hadamard (H) gates, rotations (R) about the Z-axis and control sign (CS) gates can provide universal gate operations.

(CS), is also available then universal processing is possible (See Fig. 1). We now describe how these gates can be implemented. We will assume that deterministic single qubit measurements can be made in the computational basis, $|\alpha\rangle, |-\alpha\rangle$ and the phase superposition basis $|\alpha\rangle \pm \exp[i\epsilon] |-\alpha\rangle$. As described in the previous section, computational basis measurements can be achieved using either homodyne or photon counting techniques. The phase superposition basis can be measured using photon counting in a Dolinar receiver type arrangement [13, 55]. The simplest case is for $\epsilon = 0$ where we need to differentiate only between odd or even photon numbers in direct detection. We also assume we can make two qubit Bell-measurements and, more generally, perform teleportation, as described in the previous section.

Hadamard Gate: The Hadamard gate (H) can be defined by its effect on the computational states: $H|\alpha\rangle = |\alpha\rangle + |-\alpha\rangle$ and $H|-\alpha\rangle = |\alpha\rangle - |-\alpha\rangle$ where for convenience we have dropped normalization factors. One way to achieve this gate is to use the resource state $|HR\rangle = |\alpha, \alpha\rangle + |\alpha, -\alpha\rangle + |-\alpha, \alpha\rangle - |-\alpha, -\alpha\rangle$. This state can be produced non-deterministically from cat state resources, as will be described shortly. It is straight forward to show that if a Bell-state measurement is made between an arbitrary qubit state $|\sigma\rangle$ and one of the modes of $|HR\rangle$ then the remaining mode is projected into the state $H|\sigma\rangle$, where dependent on the outcome of the Bell-measurement a bit-flip correction, a phase-flip correction, or both may be necessary.

Phase Rotation Gate: The phase rotation gate ($R(\theta)$) can be defined by its effect on the computational states: $R(\theta)|\alpha\rangle = \exp[i\theta]|\alpha\rangle$ and $R(\theta)|-\alpha\rangle = \exp[-i\theta]|-\alpha\rangle$. One way to achieve this gate is the following: The arbitrary qubit, $\mu|\alpha\rangle + \nu|-\alpha\rangle$ is split on a 50:50 beamsplitter giving the two mode state: $\mu|\alpha/\sqrt{2}\rangle|\alpha/\sqrt{2}\rangle + \nu|-\alpha/\sqrt{2}\rangle|-\alpha/\sqrt{2}\rangle$. One of the modes is then measured in the phase superposition basis $|\alpha/\sqrt{2}\rangle \pm \exp[-2i\theta]|-\alpha/\sqrt{2}\rangle$, thus projecting the other mode into the state $\mu\exp[i\theta]|\alpha/\sqrt{2}\rangle \pm \nu\exp[-i\theta]|-\alpha/\sqrt{2}\rangle$. The amplitude decrease can be corrected by teleportation in the following way [45]. The asymmetric Bell state entanglement, $|\alpha/\sqrt{2}\rangle|\alpha\rangle + |-\alpha/\sqrt{2}\rangle|-\alpha\rangle$ is produced by splitting the cat state $|\sqrt{3/2}\alpha\rangle + |-\sqrt{3/2}\alpha\rangle$ on a 1/3 : 2/3 beamsplitter. Teleportation is then carried out with the Bell state measurement being performed between the matching “ $\alpha/\sqrt{2}$ ” modes and the teleported state ending up on the “ α ” mode. Dependent on the

outcome of the phase basis measurement and the Bell-measurement a bit-flip correction, a phase-flip correction, or both may be necessary.

Control Sign Gate: The control-sign gate (CS) can be defined by its effect on the two qubit computational states: $CS|\alpha\rangle|\alpha\rangle = |\alpha\rangle|\alpha\rangle$; $CS|\alpha\rangle|-\alpha\rangle = |\alpha\rangle|-\alpha\rangle$; $CS|-\alpha\rangle|\alpha\rangle = |-\alpha\rangle|\alpha\rangle$ and; $CS|-\alpha\rangle|-\alpha\rangle = -|-\alpha\rangle|-\alpha\rangle$. One way to achieve this gate is the following: The two arbitrary qubits, $\mu|\alpha\rangle + \nu|-\alpha\rangle$ and $\gamma|\alpha\rangle + \delta|-\alpha\rangle$ are both split on 50:50 beamsplitters giving the two mode states: $\mu|\alpha/\sqrt{2}\rangle|\alpha/\sqrt{2}\rangle + \nu|-\alpha/\sqrt{2}\rangle|-\alpha/\sqrt{2}\rangle$ and $\gamma|\alpha/\sqrt{2}\rangle|\alpha/\sqrt{2}\rangle + \delta|-\alpha/\sqrt{2}\rangle|-\alpha/\sqrt{2}\rangle$. A Hadamard gate is then performed on the second mode of the first qubit giving the state $\mu|\alpha/\sqrt{2}\rangle(|\alpha/\sqrt{2}\rangle + |-\alpha/\sqrt{2}\rangle) + \nu|-\alpha/\sqrt{2}\rangle(|\alpha/\sqrt{2}\rangle - |-\alpha/\sqrt{2}\rangle)$. If a Bell-measurement is then carried out between the second mode of the first qubit and one of the modes of the second qubit a CS gate will be achieved. The amplitude reduction can be corrected as before using teleportation. Dependent on the outcome of the various Bell-measurements, bit-flip corrections, phase-flip corrections, or both may be necessary.

Resource State: The resource state $|HR\rangle$ can be produced in the following way. Consider the beamsplitter interaction given by the unitary transformation

$$U_{ab} = \exp[i\frac{\theta}{2}(ab^\dagger + a^\dagger b)] \quad (12)$$

where a and b are the annihilation operators corresponding to two coherent state qubits $|\gamma\rangle_a$ and $|\beta\rangle_b$, with γ and β taking values of $-\alpha$ or α . It is well known that the output state produced by such an interaction is

$$U_{ab}|\gamma\rangle_a|\beta\rangle_b = |\cos\frac{\theta}{2}\gamma + i\sin\frac{\theta}{2}\beta\rangle_a |\cos\frac{\theta}{2}\beta + i\sin\frac{\theta}{2}\gamma\rangle_b \quad (13)$$

where $\cos^2\frac{\theta}{2}$ ($\sin^2\frac{\theta}{2}$) is the reflectivity (transmissivity) of the beamsplitter. Suppose two cat states are fed into the beamsplitter and both output beams are then teleported, the output state will be:

$$e^{-\theta^2\alpha^2/4}(e^{i\theta\alpha^2}|-\alpha\rangle_a|-\alpha\rangle_b \pm e^{-i\theta\alpha^2}|\alpha\rangle_a|-\alpha\rangle_b \pm e^{-i\theta\alpha^2}|-\alpha\rangle_a|\alpha\rangle_b + e^{i\theta\alpha^2}|\alpha\rangle_a|\alpha\rangle_b) \quad (14)$$

where the \pm signs depend on the outcome of the Bell measurements. If we choose $\phi = 2\theta\alpha^2 = \pi/2$ then the resulting state is easily shown to be locally equivalent to $|HR\rangle$ (related by phase rotations). Preparation of this state is non-deterministic because of non-unit overlap between the state of Eq. (13) and the Bell states used in the teleporter. As a result the teleporter can fail by recording photons at both outputs in the Bell-measurement. The probability of success is $e^{-\theta^2\alpha^2/2}$. For $\alpha = 2$ this is about 92% probability of success.

Correction of Phase-flips: After each gate we have noted that bit flip and/or phase flip corrections may be

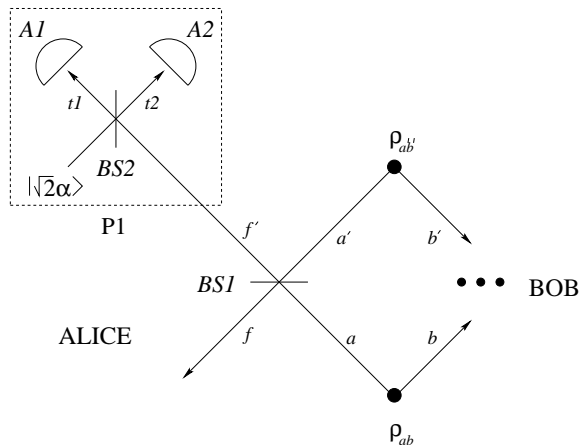


FIG. 2: A schematic of the entanglement purification scheme for mixed entangled coherent states. P1 tests if the incident fields a and a' were in the same state by simultaneous clicks at A1 and A2.

necessary since our gate operations are based on the teleportation protocol. As discussed in the previous section, bit flips can be easily implemented using a phase shifter, $P(\pi)$, while phase-flips are more expensive. We now argue that in fact only active correction of bit-flips is necessary. This is because phase-flips commute with the phase rotation gate and the control sign gate but are converted into bit flips by the Hadamard gate. This suggests the following strategy: After each gate operation any bit-flips are corrected whilst phase-flips are noted. After the next Hadamard gate the phase flips are converted to bit-flips which are then corrected and any new phase-flips are noted. By following this strategy only bit-flips need to be corrected actively, with, at worst, some final phase-flips needing to be corrected in the final step of the circuit.

D. Entanglement purification for Bell-cat states

It is not possible to perfectly isolate a quantum state from its environment. A quantum state inevitably loses

its quantum coherence in a dissipative environment. This process is called decoherence and has been known as the main obstacle to the physical implementation of quantum information processing. Quantum error correction [11, 18, 45] and entanglement purification [9, 23] have been studied for quantum information processing using cat states to overcome this problem. Here we discuss an entanglement purification technique.

An entanglement purification for entangled coherent states (Bell-cat states) have been studied by several authors [9, 23]. It has been found that certain types of mixed states including the Werner-type mixed states composed of the Bell-cat states can be purified by simple linear optics elements and inefficient detectors [23]. The other types of mixed states need to be transformed to the Werner type states by local operations. This scheme performs amplification of the Bell-cat states simultaneously with entanglement purification. This is an important observation because Bell-cat states of large amplitudes are preferred for quantum information processing while their generation is hard. A similar technique is employed to generate single-mode large cat states [32].

We first explain the purification-amplification protocol for entangled coherent states by a simple example and then apply it to a realistic situation [23]. Let us suppose that Alice and Bob want to distill entangled coherent states $|\Phi_+\rangle$ from a type of ensemble

$$\rho_{ab} = F|\Phi_+\rangle\langle\Phi_+| + G|\Psi_+\rangle\langle\Psi_+|, \quad (15)$$

where $F + G \approx 1$ for $|\alpha| \gg 1$. We shall assume this condition, $|\alpha| \gg 1$, for simplicity. The purification-amplification process can be simply accomplished by performing the process shown in Fig. 2. Alice and Bob choose two pairs from the ensemble which are represented by the following density operator

$$\begin{aligned} \rho_{ab}\rho_{a'b'} = & F^2|\Phi_+\rangle\langle\Phi_+| \otimes |\Phi_+\rangle\langle\Phi_+| + F(1-F)|\Phi_+\rangle\langle\Phi_+| \otimes |\Psi_+\rangle\langle\Psi_+| \\ & + F(1-F)|\Psi_+\rangle\langle\Psi_+| \otimes |\Phi_+\rangle\langle\Phi_+| + (1-F)^2|\Psi_+\rangle\langle\Psi_+| \otimes |\Psi_+\rangle\langle\Psi_+|. \end{aligned} \quad (16)$$

The fields of modes a and a' are in Alice's possession while b and b' in Bob's. In Fig. 2(a), we show that Alice's action to purify the mixed entangled state. The same is conducted by Bob on his fields of b and b' .

There are four possibilities for the fields of a and a' incident onto the beam splitter (BS1), which gives the

output (In the following, only the cat part for a component of the mixed state is shown to describe the action

of the apparatuses)

$$|\alpha\rangle_a|\alpha\rangle_{a'} \longrightarrow |\sqrt{2}\alpha\rangle_f|0\rangle_{f'}, \quad (17)$$

$$|\alpha\rangle_a|-\alpha\rangle_{a'} \longrightarrow |0\rangle_f|\sqrt{2}\alpha\rangle_{f'}, \quad (18)$$

$$|-\alpha\rangle_a|\alpha\rangle_{a'} \longrightarrow |0\rangle_f|-\sqrt{2}\alpha\rangle_{f'}, \quad (19)$$

$$|-\alpha\rangle_a|-\alpha\rangle_{a'} \longrightarrow |-\sqrt{2}\alpha\rangle_f|0\rangle_{f'}. \quad (20)$$

In the boxed apparatus P1, Alice checks if modes a and a' were in the same state by counting photons at the photodetectors $A1$ and $A2$. If both modes a and a' are in $|\alpha\rangle$ or $|-\alpha\rangle$, f' is in the vacuum, in which case the output field of the beam splitter $BS2$ is $|\alpha, -\alpha\rangle_{t1,t2}$. Otherwise, the output field is either $|2\alpha, 0\rangle_{t1,t2}$ or $|0, 2\alpha\rangle_{t1,t2}$. When both the photodetectors $A1$ and $A2$ register any photon(s), Alice and Bob are sure that the two modes a and

a' were in the same state but when either $A1$ or $A2$ does not register a photon, a and a' were likely in different states. The remaining pair is selected only when Alice and Bob's all four detectors click together. Of course, there is a probability not to register a photon even though the two modes were in the same state, which is due to the nonzero overlap of $|\langle 0|\sqrt{2}\alpha\rangle|^2$. Note that inefficiency of the detectors does not degrade the the quality of the distilled entangled coherent states but decreases the success probability.

It can be simply shown that the second and third terms of Eq. (16) are always discarded by the action of P1 and Bob's apparatus same as P1. For example, at the output ports of $BS1$ and Bob's beam splitter corresponding to $BS1$, $|\Phi_+\rangle_{ab}|\Psi_+\rangle_{a'b'}$ becomes

$$|\Phi_+\rangle_{ab}|\Psi_+\rangle_{a'b'} \longrightarrow N_+^2(|\sqrt{2}\alpha, 0, 0, \sqrt{2}\alpha\rangle + |0, \sqrt{2}\alpha, \sqrt{2}\alpha, 0\rangle + |0, -\sqrt{2}\alpha, -\sqrt{2}\alpha, 0\rangle + |-\sqrt{2}\alpha, 0, 0, -\sqrt{2}\alpha\rangle)_{fgf'g'}, \quad (21)$$

where g and g' are the output field modes from Bob's beam splitter corresponding to $BS1$. The fields of modes f' and g' can never be in $|0\rangle$ at the same time; at least, one of the four detectors of Alice and Bob must not click. The third term of Eq. (16) can be shown to lead to the same result by the same analysis.

For the cases of the first and fourth terms in Eq. (16), all four detectors may register photon(s). After the beam splitter $BS1$, the ket of $(|\Phi_-\rangle\langle\Phi_-\rangle)_{ab} \otimes (|\Phi_-\rangle\langle\Phi_-\rangle)_{a'b'}$ of Eq. (16) becomes

$$|\Phi_-\rangle_{ab}|\Phi_-\rangle_{a'b'} \longrightarrow |\Phi'_+\rangle_{fg}|0, 0\rangle_{f'g'} - |0, 0\rangle_{fg}|\Phi'_+\rangle_{f'g'}, \quad (22)$$

where $|\Phi'_+\rangle = N'_+(|\sqrt{2}\alpha, \sqrt{2}\alpha\rangle + |-\sqrt{2}\alpha, -\sqrt{2}\alpha\rangle)$ with the normalization factor N'_+ . The normalization factor in the right hand side of Eq. (22) is omitted. The first term is reduced to $(|\Phi'_+\rangle\langle\Phi'_+|)_{fg}$ after $(|0, 0\rangle\langle 0, 0|)_{f'g'}$ is measured out by Alice and Bob's P1's. Similarly, the fourth term of Eq. (16) yields $(|\Psi'_+\rangle\langle\Psi'_+|)_{fg}$, where $|\Psi'_+\rangle$ is defined in the same way as $|\Phi'_+\rangle$, after $(|0, 0\rangle\langle 0, 0|)_{f'g'}$ is measured. Thus the density matrix for the field of modes f and g conditioned on simultaneous measurement of photons at all four photodetectors is

$$\rho_{fg} = F'|\Phi'_+\rangle\langle\Phi'_+| + (1 - F')|\Psi'_+\rangle\langle\Psi'_+|, \quad (23)$$

where $F' = F^2/\{F^2 + (1 - F)^2\}$, and F' is always larger than F for any $F > 1/2$. By reiterating this process, Alice and Bob can distill some maximally entangled states $|\Phi_+\rangle$ of a large amplitude asymptotically. Of course, a sufficiently large ensemble and initial fidelity $F > 1/2$ are required for successful purification [3].

We now apply our scheme to a realistic example in a dissipative environment. When the entangled coherent channel $|\Phi_-\rangle$ is embedded in a vacuum, the channel

decoheres and becomes a mixed state of its density operator $\rho_{ab}(\tau)$, where τ stands for the decoherence time. By solving the master equation [42]

$$\begin{aligned} \frac{\partial \rho}{\partial \tau} &= \hat{J}\rho + \hat{L}\rho; \\ \hat{J}\rho &= \gamma \sum_i a_i \rho a_i^\dagger, \quad \hat{L}\rho = -\frac{\gamma}{2} \sum_i (a_i^\dagger a_i \rho + \rho a_i^\dagger a_i) \end{aligned} \quad (24)$$

where γ is the energy decay rate, the mixed state $\rho_{ab}(\tau)$ can be straightforwardly obtained as

$$\begin{aligned} \rho_{ab}(\tau) &= \tilde{N}(\tau) \left\{ |t\alpha, t\alpha\rangle\langle t\alpha, t\alpha| + | -t\alpha, -t\alpha\rangle\langle -t\alpha, -t\alpha| \right. \\ &\quad \left. - \Gamma(|t\alpha, t\alpha\rangle\langle -t\alpha, -t\alpha| + | -t\alpha, -t\alpha\rangle\langle t\alpha, t\alpha|) \right\}, \end{aligned} \quad (25)$$

where $|\pm t\alpha, \pm t\alpha\rangle = |\pm t\alpha\rangle_a |\pm t\alpha\rangle_b$, $t = e^{-\gamma\tau/2}$, $\Gamma = \exp[-4(1-t^2)|\alpha|^2]$, and $\tilde{N}(\tau)$ is the normalization factor. The decohered state $\rho_{ab}(\tau)$ may be represented by the dynamic Bell-cat states defined as follows:

$$|\tilde{\Phi}_\pm\rangle_{ab} = \tilde{N}_\pm(|t\alpha\rangle_a |t\alpha\rangle_b \pm | -t\alpha\rangle_a | -t\alpha\rangle_b), \quad (26)$$

$$|\tilde{\Psi}_\pm\rangle_{ab} = \tilde{N}_\pm(|t\alpha\rangle_a | -t\alpha\rangle_b \pm | -t\alpha\rangle_a |t\alpha\rangle_b), \quad (27)$$

where $\tilde{N}_\pm = \{2(1 \pm e^{-4t^2|\alpha|^2})\}^{-1/2}$. The decohered state is then

$$\begin{aligned} \rho_{ab}(\tau) &= \tilde{N}(\tau) \left\{ \frac{(1+\Gamma)}{\tilde{N}_-^2} |\tilde{\Phi}_-\rangle\langle\tilde{\Phi}_-| + \frac{(1-\Gamma)}{\tilde{N}_+^2} |\tilde{\Phi}_+\rangle\langle\tilde{\Phi}_+| \right\} \\ &\equiv F(\tau) |\tilde{\Phi}_-\rangle\langle\tilde{\Phi}_-| + (1 - F(\tau)) |\tilde{\Phi}_+\rangle\langle\tilde{\Phi}_+| \end{aligned} \quad (28)$$

where, regardless of the decay time τ , $|\tilde{\Phi}_-\rangle$ is maximally entangled and $|\tilde{\Phi}_-\rangle$ and $|\tilde{\Phi}_+\rangle$ are orthogonal to each

other. The decohered state (28) is not in the same form as Eq. (15) so that we need some bilateral unitary transformations before the purification scheme is applied. A Hadamard gate H for coherent-state qubits can be used to transform the state (28) into a distillable form

$$H_a H_b \rho_{ab}(\tau) H_b^\dagger H_a^\dagger = F(\tau) |\tilde{\Psi}_+\rangle \langle \tilde{\Psi}_+| + (1-F(\tau)) |\tilde{\Phi}_+\rangle \langle \tilde{\Phi}_+|,$$

which is now in the same form as Eq. (15).

The ensemble of state (28) can be purified successfully only when $F(\tau)$ is larger than 1/2. Because $F(\tau)$ is obtained as

$$F(\tau) = \frac{N_+^2(1+\Gamma)}{N_+^2(1+\Gamma) - N_-^2(1-\Gamma)}, \quad (29)$$

it is found that purification is successful when the decoherence time $\gamma\tau < \ln 2$ regardless of α . This result is in agreement with the decay time until which teleportation can be successfully performed via an entangled coherent state shown in Ref. [24].

III. PRODUCTION OF SCHRÖDINGER CAT STATES

A key requirement of quantum information processing with cat states is the generation of cat states in free-propagating optical fields. This has been known to be extremely demanding using current technology because strong nonlinearity [60] or precise photon counting measurements [12, 54] are necessarily required. However, very recently, there has been remarkable progress which may enable one to generate free propagating cat states without strong nonlinearity or photon counting measurements. For example, it was shown that cat states of reasonably large amplitudes can be produced with simple linear optics elements and single photons [32]. Relatively small nonlinearity was shown to be still useful with conditioning homodyne detection [25] or with a single photon interacting with a coherent state [37] to generate cat states. It was shown that a deterministic cat-state source can be obtained using a single-atom cavity [58]. A recent experimental progress [59] could be directly improved by the cat-amplification scheme in Ref. [32] to generate a cat state of a larger amplitude and higher fidelity. The above proposals have now brought the generation of free-propagating cat states of $\alpha \approx 2$ within reach of current technology. Electromagnetically induced transparency (EIT) has also been studied as a method to obtain a giant Kerr nonlinearity [19, 31, 51], and there has been an improved suggestion to generate cat states with it [41]. In what follows, some of these suggestions will be briefly covered.

A. Schemes using linear optics elements

Since it is extremely hard to generate cat states using $\chi^{(3)}$ nonlinearity, some alternative methods have been

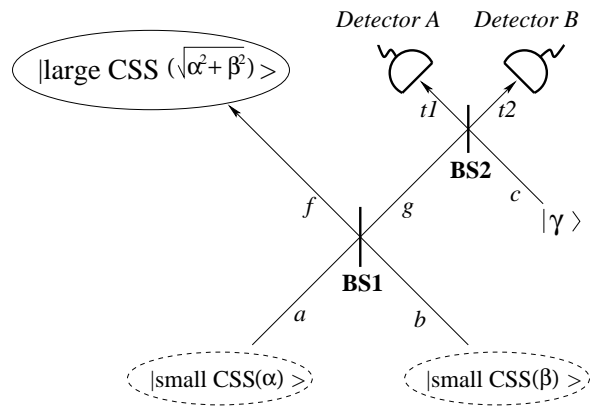


FIG. 3: A schematic of the non-deterministic cat-amplification process. See text for details.

studied based upon conditional measurements [12, 54]. A crucial drawback of these schemes is that a highly efficient photon counting measurement, which is extremely demanding in current technology, is necessary. However, it was shown recently that a free-propagating optical cat state can be generated with a single photon source and simple optical operations without efficient photon detection [32]. This suggestion contains two main points:

- An arbitrarily large cat state can be produced out of arbitrarily small cat states using the simple experimental set-up depicted in Fig. 3.
- A small odd cat state with $\alpha \leq 1.2$ is very well approximated by a squeezed single photon, $S(s)|1\rangle$, where $S(s)$ is the squeezing operator with the squeezing parameter s and $|1\rangle$ is the single-photon state.

Firstly, the cat-amplification process summarized as follows. Suppose two small cat states, $|\text{cat}_\varphi(\alpha)\rangle$ and $|\text{cat}_\phi(\beta)\rangle$, with amplitudes α and β . The reflectivity r and transmissivity t of BS1 are set to $r = \beta/\sqrt{\alpha^2 + \beta^2}$ and $t = \alpha/\sqrt{\alpha^2 + \beta^2}$, where the action of the beam splitter is represented by $\hat{B}_{a,b}(r,t)|\alpha\rangle_a|\beta\rangle_b = |t\alpha+r\beta\rangle_f|-r\alpha+t\beta\rangle_g$. The other beam splitter BS2 is a 50:50 beam splitter ($r = t = 1/\sqrt{2}$) regardless of the conditions and the amplitude γ of the auxiliary coherent field is determined as $\gamma = 2\alpha\beta/\sqrt{\alpha^2 + \beta^2}$. The resulting state for mode f then becomes $|\text{cat}_{\varphi+\phi}(\mathcal{A})\rangle \propto |\mathcal{A}\rangle + e^{i(\varphi+\phi)}|-\mathcal{A}\rangle$, whose coherent amplitude $\mathcal{A} = \sqrt{\alpha^2 + \beta^2}$ is larger than both α and β . The relative phase of the resulting cat state is the sum of the relative phases of the input cat states. The success probability $P_{\varphi,\phi}(\alpha,\beta)$ for a single iteration is

$$P_{\varphi,\phi}(\alpha,\beta) = \frac{(1 - e^{-\frac{2\alpha^2\beta^2}{\alpha^2+\beta^2}})^2 [1 + \cos(\varphi + \phi)e^{-2(\alpha^2+\beta^2)}]}{2(1 + \cos\varphi e^{-2\alpha^2})(1 + \cos\phi e^{-2\beta^2})},$$

which approaches 1/2 as the amplitudes of initial cat states becomes large. Note that the probabilities depend

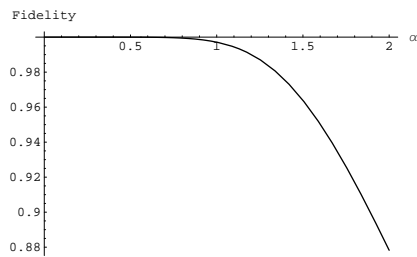


FIG. 4: The fidelity between an odd cat state and squeezed single photon. The odd cat state is extremely well approximated by the squeezed single photon for a small coherent amplitude, $\alpha \leq 1.2$.

on the type of cat states (odd or even) used. The effect of detector inefficiency is just to decrease this success probability.

Secondly, the fidelity between the squeezed single photon and the cat state is

$$F(s, \alpha) = \frac{2\alpha^2 \exp[\alpha^2(\tanh s - 1)]}{(\cosh s)^3(1 - \exp[-2\alpha^2])},$$

where α is the amplitude of the cat state. Fig. 4 shows the maximized fidelity on the y-axis plotted against a range of possible values for α for the desired odd cat state. Some example values are: $F = 0.99999$ for amplitude $\alpha = 1/2$, $F = 0.9998$ for $\alpha = 1/\sqrt{2}$, and $F = 0.997$ for $\alpha = 1$, where the maximizing squeezing parameters are $s = 0.083$, $s = 0.164$, and $s = 0.313$ respectively. The fidelity approaches unity for α very close to zero while the fidelity tends to zero as α increases.

The two points explained above can be efficiently combined. If one uses squeezed single photons as small cat states, a cat state of high fidelity ($F > 0.99$) can be obtained up to $\alpha = 2.5$. Another interesting aspect of this process is that it is somewhat resilient to the photon production inefficiency because its first iteration purifies the mixed cat states while amplifying them. For example, if the inefficiency of the single photon source is about 40%, the fidelity of the initial cat, which is a mixture with a squeezed vacuum, is $F \approx 0.60$ but it will become $F \approx 0.89$ by the first iteration.

It is also important to note that there is an alternative method to obtain a squeezed single photon even without a single photon source. An interesting observation is that a squeezed single photon can be obtained by subtracting a photon from a squeezed vacuum. This can be shown by applying the annihilation operator to a squeezed single photon as $\hat{a}S(s)|0\rangle = \cosh sS(s)|1\rangle$. In a recent experiment [59], the single photon subtraction was approximated by a beam splitter of low reflectivity and a single photon detector. Such an experiment could be immediately linked to our suggestion to experimentally generate a larger cat state. One can then generate a cat state of $\alpha > 2$ using our scheme without a single photon source.

Since this scheme uses at least two beam splitters to mix propagating fields, good mode matching is required

to obtain a cat state of high quality. Highly efficient mode matching of a single photon from parametric down conversion and a weak coherent state from an attenuated laser beam at a beam splitter has been experimentally demonstrated using optical fibers [43]. Such techniques could be employed for the implementation of our scheme. The success probability will rapidly drop down and the required resources will exponentially increase as the number of steps increases. However, if quantum optical memory is available, one can considerably boost up the success probability by holding the resulting states for every step [26].

B. Schemes using cavity quantum electrodynamics

Cavity quantum electrodynamics (QED) has been studied to enhance nonlinear effects to generate macroscopic superpositions [56]. Some success has been reported in creating such superposition states within high Q cavities in the microwave [7] and optical [35] domains. Simplified versions of cavity QED schemes have been developed for deterministic generation of cat states in a cavity [47]. While this method is relatively effective to generate cat states in cavity, most of the schemes suggested for quantum information processing with coherent states require *free propagating* cat states.

Recently, a method was proposed to generate free propagating cat states by using cavity-assisted interactions of coherent optical pulses [58]. This suggestion employs an atom of three relevant levels trapped in an optical cavity with a coherent-state pulse $|\alpha\rangle$ incident onto the cavity. One of the atomic level, $|e\rangle$, is its excited state, and the other two levels, $|g_0\rangle$ and $|g_1\rangle$, are levels in the ground state with different hyperfine spins. The transition from $|g_1\rangle$ to $|e\rangle$ is resonantly coupled to a cavity mode while $|g_0\rangle$ is decoupled from the cavity mode. In such a preparation, if the trapped atom was prepared in state $|g_0\rangle$, the input field becomes $|\alpha\rangle$ after a resonant reflection as the input pulse is resonant with the bare cavity mode. On the other hand, if the atom was prepared in state $|g_1\rangle$, it remains $|\alpha\rangle$ due to a strong atom-cavity coupling. Therefore, if the trapped atom was prepared in a superposition state such as $(|g_0\rangle + |g_1\rangle)/\sqrt{2}$, the reflected field becomes an entangled state $(|g_0\rangle|\alpha\rangle + |g_1\rangle|\alpha\rangle)/\sqrt{2}$, which can be projected to a single mode cat state by a measurement on a superposed basis $|g_0\rangle \pm |g_1\rangle$. An advantage of this scheme is weak dependence on dipole coupling, but wave front distortion due to difference between resonant and non-resonant interactions could be a problem in a real experiment. This work [58] concludes that a cat state with a quite large amplitude ($\alpha \approx 3.4$) could be generated in this way with a 90% fidelity using current technology.

C. Schemes using weak nonlinearity

There has been a suggestion to use relatively weak nonlinearity with beam splitting with a vacuum and conditioning by homodyne detection to generate cat states [25]. As beam splitting with a vacuum and homodyne measurement can be highly efficient in quantum optics laboratories, this shows that relatively weak nonlinearity can still be useful to generate cat states.

The Hamiltonian of a single-mode Kerr nonlinear medium is $\mathcal{H}_{NL} = \omega a^\dagger a + \lambda (a^\dagger a)^2$, where a and a^\dagger are annihilation and creation operators, ω is the energy level splitting for the harmonic-oscillator part of the Hamiltonian and λ is the strength of the Kerr nonlinearity [60]. Under the influence of the nonlinear interaction the initial coherent state $|\alpha\rangle$ evolves to the following state at time $\tau = \pi/\lambda N$ [30]:

$$|\psi_N\rangle = \sum_{n=1}^N C_{n,N} |-\alpha e^{2in\pi/N}\rangle, \quad (30)$$

where

$$C_{n,N} = \frac{1}{N} \sum_{k=0}^{N-1} (-1)^k \exp\left[-\frac{i\pi k}{N}(2n-k)\right]. \quad (31)$$

The length L of the nonlinear cell corresponding to τ is $L = v\pi/2\lambda N$, where v is the velocity of light. For $N = 2$, we obtain a desired cat state of relative phase $\varphi = \pi/2$. We again emphasize the nonlinear coupling λ is typically very small such that $N = 2$ cannot be obtained in a length limit where the decoherence effect can be neglected.

If λ is not as large as required to generate the cat state, the state (30) with $N > 2$ may be obtained by choosing an appropriate interaction time. From the state (30), it is required to remove all the other coherent component states except two coherent states of a π phase difference. First, it is assumed that the state (30) is incident on a 50-50 beam splitter with the vacuum onto the other input of the beam splitter. The initial coherent amplitude α_i is taken to be real for simplicity. The state (30) with initial amplitude α_i after passing through the beam splitter becomes

$$|\psi_N\rangle = \sum_{n=1}^N C_{n,N} |-\alpha_i e^{2in\pi/N}/\sqrt{2}\rangle |-\alpha_i e^{2in\pi/N}/\sqrt{2}\rangle, \quad (32)$$

where all $|C_{n,N}|$'s have the same value. The real part of the coherent amplitude in the state (32) is then measured by homodyne detection in order to produce the cat state in the other path. By the measurement result, the state is reduced to

$$|\psi_N^{(1)}\rangle = \sum_{n=1}^N C_{n,N}^{(1)}(\alpha_i) |-\alpha_i e^{2in\pi/N}/\sqrt{2}\rangle, \quad (33)$$

where $C_{n,N}^{(1)}(\alpha_i) = \mathcal{N}_\psi \sum_{n=1}^N C_{n,N} \langle X | -\alpha_i e^{2in\pi/N}/\sqrt{2} \rangle$ with \mathcal{N}_ψ the normalization factor and $|X\rangle$ the eigenstate of $\hat{X} = (a + a^\dagger)/\sqrt{2}$. After the homodyne measurement, the state is selected when the measurement result is in certain values. If coefficients $|C_{N/2,N}^{(1)}(\alpha_i)|$ and $|C_{N,N}^{(1)}(\alpha_i)|$ in Eq. (33) have the same nonzero value and all the other $|C_{n,N}^{(1)}(\alpha_i)|$'s are zero, then the state becomes a desired cat state. Suppose $N = 4k$ where k is a positive integer number. If $X = 0$ is measured in this case, the coefficients $|C_{n,N}^{(1)}(\alpha_i)|$'s will be the largest when $n = N/4$ and $n = 3N/4$, and become smaller as n is far from these two points. The coefficients can be close to zero for all the other n 's for an appropriately large α_i so that the resulting state may become a cat state of high fidelity. Using this technique, one may observe a conspicuous signature of a cat state even with a 1/100 times weaker nonlinearity compared with the currently required level [25]. In particular, this approach can be useful to produce a cat state with a significantly large amplitude such as $\alpha \geq 10$.

Another scheme [37] proposed for linear optics quantum computation [27] uses weak cross-Kerr nonlinearity of the interaction Hamiltonian $H = \hbar\chi a_1^\dagger a_1 a_2^\dagger a_2$ to generate a cat state. The interaction between a coherent state, $|\alpha\rangle_2$, and a single-photon qubit, e.g., $|\psi\rangle_1 = (|0\rangle_1 + |1\rangle_1)/\sqrt{2}$, is described as

$$\begin{aligned} U_K |\psi\rangle_1 |\alpha\rangle_2 &= e^{iH\kappa t/\hbar} \frac{1}{\sqrt{2}} (|0\rangle_1 + |1\rangle_1) |\alpha\rangle_2 \quad (34) \\ &= \frac{1}{\sqrt{2}} (|0\rangle_1 |\alpha\rangle_2 + |1\rangle_1 |\alpha e^{i\theta}\rangle_2), \quad (35) \end{aligned}$$

where $|0\rangle$ ($|1\rangle$) is the vacuum (single-photon) state, α is the amplitude of the coherent state, and $\theta = \chi t$ with the interaction time t . If θ is π and one measures out mode 1 on a superposed basis $(|0\rangle \pm |1\rangle)/\sqrt{2}$, a macroscopic superposition state (so-called Schrödinger cat state), $(|\alpha\rangle \pm |-\alpha\rangle)/\sqrt{2}$. Using dual rail logic instead of the superposition between the single photon and the vacuum, the measurement on the superposed basis can be simply realized with a beam splitter and two photodetectors [17]. It is again extremely difficult to obtain $\theta = \pi$ using currently available nonlinear media. However, simply by increasing the amplitude α , one can gain an arbitrarily large separation between α and $\alpha e^{i\theta}$ within an arbitrarily short interaction time. It is possible to transform the state of the form of $|\alpha\rangle \pm |\alpha e^{i\theta}\rangle$ to the symmetric form of $|\alpha'\rangle \pm |-\alpha'\rangle$ by the displacement operation which can be simply performed using a beam splitter with the transmission coefficient close to one and a strong coherent state being injected into the other input port. Therefore, weak cross-Kerr nonlinearity can also be useful to generate a cat state with a single photon, strong coherent states, beam splitters and two photodetectors. Remarkably, it can be shown that this approach can also reduce decoherence effects by increasing the initial amplitude α , which is also true for Ref. [25]. It should also

be noted that the detectors and the single photon source in Ref. [17] which can be directly combined with Ref. [37] do not have to be efficient for a conditional generation of a cat state because these factors only degrade the success probability to be less than unity.

IV. CONCLUSION

We have discussed quantum processing tasks using qubits based on coherent states and Schrödinger cat states as resources. We have shown that a universal set of processing tasks can be achieved using only linear optics, feedforward and photon counting. This is a similar

result to that of Knill Laflamme and Milburn for single photon qubits [27]. However, far fewer operations per gate are needed in the coherent state scheme and shortcuts are available for certain tasks. On the other hand these advantages are not useful unless a good way of producing cat states can be found. Thus we have spent some time discussing various proposals, both linear and non-linear, for producing cat states. We believe the near term prospects for demonstrating small travelling-wave cat states and basic processing tasks based on them are good. Whether coherent state qubits or single photon qubits will prove better for larger scale quantum optical processing in the long run remains an open question.

-
- [1] A. Aspect, P. Grangier and G. Roger (1981). Experimental tests of realistic local theories via Bell's theorem, *Phys. Rev. Lett.* **47**, pp. 460–.
- [2] C. H. Bennett, G. Brassard, C. Crépeau, R. Jozsa, A. Peres, and W. K. Wootters (1993). Teleporting an unknown quantum state via dual classical and Einstein-Podolsky-Rosen channels, *Phys. Rev. Lett.* **70**, pp. 1895–1899 (1993).
- [3] C. H. Bennett, D.P. DiVincenzo, J.A. Smolin, and W.K. Wootters (1996). Mixed-state entanglement and quantum error correction, *Phys. Rev. A* **54**, pp. 3824–3851.
- [4] C. H. Bennett, H. J. Bernstein, S. Popescu, and B. Schumacher (1996). Concentrating partial entanglement by local operations, *Phys. Rev. A* **53**, pp. 2046–2052.
- [5] D. Bouwmeester, J. W. Pan, K. Mattle, M. Eibl, H. Weinfurter, and A. Zeilinger (1997). Experimental quantum teleportation, *Nature* **390**, pp. 575–579.
- [6] S. L. Braunstein and A. Mann (1995). Measurement of the Bell operator and quantum teleportation, *Phys. Rev. A* **51**, pp. R1727–R1730.
- [7] M. Brune, E. Hagley, J. Dreyer, X. Maître, A. Maali, C. Wunderlich, J.M. Raimond, and S. Haroche (1996). Observing the progressive decoherence of the “meter” in a quantum measurement, *Phys. Rev. Lett.* **77**, pp. 4887–4890.
- [8] K. E. Cahill and R. J. Glauber (1969). Ordered Expansions in Boson Amplitude Operators, *Phys. Rev.* **177**, pp. 1857–1881.
- [9] J. Clausen, M. Dakna, L. Knöll and D.-G. Welsch (2000). Measuring quantum state overlaps of traveling optical fields, *Optics Communications* **179**, pp. 189–196.
- [10] J. Clausen, L. Knöll, and D. -G. Welsch (2002). Lossy purification and detection of entangled coherent states, *Phys. Rev. A* **66**, pp. 062303-1–062303-12.
- [11] P. T. Cochrane, G. J. Milburn, and W. J. Munro (1999). Macroscopically distinct quantum-superposition states as a bosonic code for amplitude damping, *Phys. Rev. A* **59**, pp. 2631–2634.
- [12] M. Dakna, T. Opatrny, L. Knöll and D. -G. Welsh (1997). Generating Schrödinger-cat-like states by means of conditional measurements on a beam splitter *Phys. Rev. A* **55**, pp. 3184–3194.
- [13] S. J. Dolinar (1973). An Optimum Receiver for the Binary Coherent State Quantum Channel, *Research Laboratory of Electronics, MIT, Quarterly Progress Report* No. 111, unpublished, pp. 115–120.
- [14] J. P. Dowling and G. J. Milburn (2003). Quantum technology: the second quantum revolution, *Phil. Trans. Roy. Soc. Lond.* **A 361**, pp. 1655–1674.
- [15] A. Einstein, B. Podolsky and N. Rosen (1935) Can quantum-mechanical description of physical reality be considered complete?, *Phys. Rev.* **47**, pp. 777–780.
- [16] S. J. van Enk and O. Hirota (2001). Entangled coherent states: Teleportation and decoherence, *Phys. Rev. A* **64**, pp. 022313-1–022313-6.
- [17] C. C. Gerry (1999). Generation of optical macroscopic quantum superposition states via state reduction with a Mach-Zehnder interferometer containing a Kerr medium *Phys. Rev. A* **59**, pp. 4095–4098 (1999).
- [18] S. Glancy, H. M. Vasconcelos, and T. C. Ralph (2004). Transmission of optical coherent-state qubits, *Phys. Rev. A* **70**, pp. 022317-1–022317-7.
- [19] L.V. Hau, S.E. Harris, Z. Dutton, and C.H. Behroozi (1999), Light speed reduction to 17 metres per second in an ultracold atomic gas, *Nature* **397**, pp. 594–598.
- [20] O. Hirota and M. Sasaki (2001). Entangled state based on nonorthogonal state, quant-ph/0101018.
- [21] O. Hirota, S. J. van Enk, K. Nakamura, M. Sohma and K. Kato (2001). Entangled Nonorthogonal States and Their Decoherence Properties, quant-ph/0101096.
- [22] H. Jeong and M.S. Kim (2002). Efficient quantum computation using coherent states, *Phys. Rev. A* **65**, pp. 042305–042310.
- [23] H. Jeong and M. S. Kim (2002). Purification of entangled coherent states, *Quantum Information and Computation* **2**, pp. 208–221.
- [24] H. Jeong, M. S. Kim and J. Lee (2001). Quantum-information processing for a coherent superposition state via a mixed entangled coherent channel, *Phys. Rev. A* **64**, pp. 052308–052314.
- [25] H. Jeong, M. S. Kim, T. C. Ralph, and B. S. Ham (2004). Conditional production of superpositions of coherent states with inefficient photon detection, *Phys. Rev. A* **70**, pp. 020101(R)-1–020101(R)-4 (2004).
- [26] A. P. Lund, H. Jeong, T. C. Ralph (2004), to be published in *Phys. Rev. A*, quant-ph/0410022.
- [27] E. Knill, R. Laflamme, and G. J. Milburn (2001), Efficient linear optics quantum computation, *Nature* **409**,

- pp. 46–52 (2001).
- [28] P.G.Kwiat, K.Mattle, H.Weinfurter, A.Zeilinger, A.V.Sergienko, Y.Shih (1995). New high-intensity source of polarization-entangled photon pairs, *Phys. Rev. Lett.* **75**, pp. 4337–4341.
- [29] A.J. Leggett and A. Garg, (1985). Quantum mechanics versus macroscopic realism: Is the flux there when nobody looks?, *Phys. Rev. Lett.* **54**, pp. 857–860.
- [30] K. S. Lee, M. S. Kim, S. -D. Lee and V. Buzěk (1993). Squeezed properties of multicomponent superposition state of light, *J. Kor. Phys. Soc.* **26**, pp. 197–204.
- [31] M.D. Lukin and A. Imamoglu (2000). Nonlinear Optics and Quantum Entanglement of Ultraslow Single Photons, *Phys. Rev. Lett.* **84**, pp. 1419–1422.
- [32] A. P. Lund, H. Jeong, T. C. Ralph, and M. S. Kim (2004). Conditional production of superpositions of coherent states with inefficient photon detection, *Phys. Rev. A* **70**, pp. 020101(R)-1–020101(R)-4 (2004).
- [33] N. Lütkenhaus, J. Calsamiglia, and K. -A. Suominen (1999). Bell measurements for teleportation, *Phys. Rev. A* **59**, pp. 3295–3300.
- [34] K. Mattle, H. Weinfurter, P. G. Kwiat, and A. Zeilinger (1996). Dense Coding in Experimental Quantum Communication, *Phys. Rev. Lett.* **76**, pp. 4656–4659.
- [35] C. Monroe, D. M. Meekhof, B. E. King, and D. J. Wineland (1996). A “Schrödinger Cat” Superposition state of an atom, *Science* **272**, pp. 1131–1135.
- [36] M.Nielsen and I.Chuang (2000). *Quantum computation and quantum information* (Cambridge University Press, Cambridge, UK).
- [37] K. Nemoto and W. J. Munro (2004), *Phys. Rev. Lett.* **93**, Nearly Deterministic Linear Optical Controlled-NOT Gate, pp. 250502-1–250502-4.
- [38] Nguyen Ba An (2003). Teleportation of coherent-state superpositions within a network, *Phys. Rev. A* **68**, pp. 022321-1–022321-6.
- [39] Nguyen Ba An (2004). Optimal processing of quantum information via W-type entangled coherent states, *Phys. Rev. A* **69**, pp. 022315-1–022315-9.
- [40] J. Pan, C. Simon, Č. Brukner, and A. Zeilinger (2001). Entanglement purification for quantum communication, *Nature* **410**, pp. 1067–1070.
- [41] M. Paternostro, M. S. Kim, and G. M. Palma (2003), Generation of entangled coherent states via cross-phase-modulation in a double electromagnetically induced transparency regime, *Phys. Rev. A* **67**, pp. 023811-1–023811-15.
- [42] S. J. D. Phoenix (1990), Wave packet evolution in the damped oscillator, *Phys. Rev. A* **41**, pp. 5132–5138.
- [43] T. B. Pittman and J. D. Franson (2003), *Phys. Rev. Lett.* **90**, pp. 240401-1–240401.
- [44] T. C. Ralph, W. J. Munro, and G. J. Milburn (2002). Quantum computation with coherent states, linear interactions and superposed resources, quant-ph/0110115 *Proceedings of SPIE* **4917**, pp. 1–12.
- [45] T. C. Ralph, A. Gilchrist, G. J. Milburn, W. J. Munro, and S. Glancy (2003). Quantum computation with optical coherent states, *Phys. Rev. A* **68**, pp. 042319-1–042319-11.
- [46] M. D. Reid, (1997). Macroscopic elements of reality and the Einstein-Podolsky-Rosen paradox, *Quantum Semiclass. Opt.* **9**, pp 489–499.
- [47] H. Ritsch, G. J. Milburn and T. C. Ralph (2004). Deterministic generation of tailored-optical-coherent-state superpositions, *Phys. Rev. A* **70**, pp. 033804-1–033804-4.
- [48] C. A.Sackett, D. Kielpinski, B. E. King, C. Langer, V. Meyer, C. J. Myatt, M. Rowe, Q. A. Turchette, W. M. Itano, D. J. Wineland, C. Monroe (2000). Experimental entanglement of four particles, *Nature* **404**, pp. 256–259.
- [49] B. C. Sanders (1992). Entangled coherent states, *Phys. Rev. A* **45**, pp. 6811–6815.
- [50] B. C. Sanders, K. S. Lee and M. S. Kim (1995). Optical homodyne measurements and entangled coherent states, *Phys. Rev. A* **52**, pp. 735–741.
- [51] H. Schmidt and A. Imamoglu (1996). Giant Kerr nonlinearities using electromagnetically induced transparency, *Opt. Lett.* **21**, pp. 1936–1938.
- [52] E. Schrödinger (1935). Die gegenwertige Situation in der Quantenmechanik, *Naturwissenschaften*. 23, pp. 807-812; 823-828; 844-849.
- [53] E. Schrödinger (1926). Le passage continu de la micro-mecanique a la mecanique macroscopique, *Naturwissenschaften* **14**, pp. 664-666.
- [54] S. Song, C. M. Caves and B. Yurke (1990). Generation of superpositions of classically distinguishable quantum states from optical back-action evasion, *Phys. Rev. A* **41**, pp. R5261–R5264.
- [55] M.Takeoka and M.Sasaki (2005). Implementation of projective measurements with linear optics and continuous photon counting, *Phys. Rev. A* **71**, p.p. 022318.
- [56] Q. A. Turchette, C. J. Hood, W. Lange, H. Mabuchi, and H. J. Kimble (1995). Measurement of conditional phase shifts for quantum logic, *Phys. Rev. Lett.* **75**, pp. 4710–4713.
- [57] X. Wang (2001). Quantum teleportation of entangled coherent states, *Phys. Rev. A* **64**, pp. 022302–022305.
- [58] B. Wang, L. -M. Duan (2004). Engineering Schrödinger cat states through cavity-assisted interaction of coherent optical pulses, quant-ph/0411139.
- [59] J. Wenger, R. Tualle-Brouri, P. Grangier (2004). Non-Gaussian Statistics from Individual Pulses of Squeezed Light, *Phys. Rev. Lett.* **92**, pp. 153601-1–153601-4.
- [60] B. Yurke and D. Stoler (1986). Generating quantum mechanical superpositions of macroscopically distinguishable states via amplitude dispersion, *Phys. Rev. Lett.* **57**, pp. 13–16.