

ExGes: Expressive Human Motion Retrieval and Modulation for Audio-Driven Gesture Synthesis

Xukun Zhou
Renmin University
xukun.zhou@ruc.edu.cn

Yan Zhou
Kuaishou Technology
zhouyan03@ruc.edu.cn

Jun He
Renmin University
hejun@ruc.edu.cn

Fengxin Li
Renmin University
lifengxin@ruc.edu.cn

Pengfei Wan
Kuaishou Technology
wanpengfei@ruc.edu.cn

Hongyan Liu
Tsinghua University
hyliu@tsinghua.edu.cn

Ming Chen
Kuaishou Technology
chenming09@ruc.edu.cn

Di Zhang
Kuaishou Technology
zhangdi08@ruc.edu.cn

Zhaoxin Fan
BUAA
zhaoxinf@buaa.edu.cn

Abstract

Audio-driven human gesture synthesis is a crucial task with broad applications in virtual avatars, human-computer interaction, and creative content generation. Despite notable progress, existing methods often produce gestures that are coarse, lack expressiveness, and fail to fully align with audio semantics. To address these challenges, we propose ExGes, a novel retrieval-enhanced diffusion framework with three key designs: (1) a Motion Base Construction, which builds a gesture library using training dataset; (2) a Motion Retrieval Module, employing contrastive learning and momentum distillation for fine-grained reference poses retrieving; and (3) a Precision Control Module, integrating partial masking and stochastic masking to enable flexible and fine-grained control. Experimental evaluations on BEAT2 demonstrate that ExGes reduces Fréchet Gesture Distance by 6.2% and improves motion diversity by 5.3% over EMAGE, with user studies revealing a 71.3% preference for its naturalness and semantic relevance. Code will be released upon acceptance.

1. Introduction

Digital human animation has become a foundational technology across various domains, including virtual avatars [32], human-computer interaction [42], and creative content generation [37]. Among these, audio-driven gesture synthesis—the generation of human-like gestures synchronized with input audio—plays a vital role in creating immersive and realistic virtual characters. This technology is essential

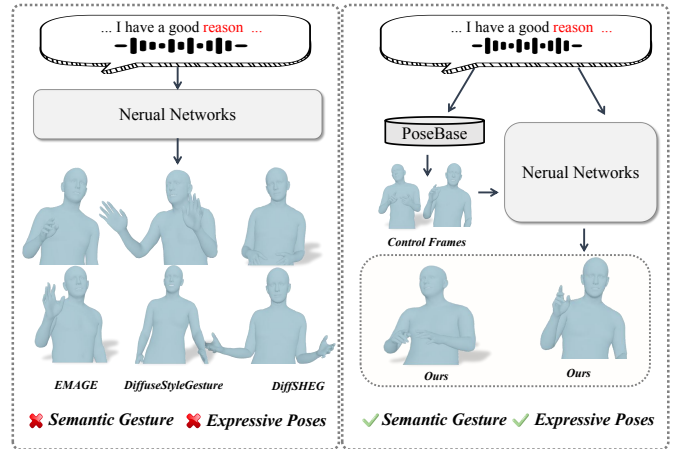


Figure 1. Difference between ExGes and existing methods. ExGes aims at generating gestures that are more expressive and semantic aligning with the audio.

for developing lifelike and expressive avatars, enabling diverse applications in entertainment, virtual communication, and interactive media [1, 30, 51, 54].

With the rapid advancement of audio-driven human pose animation, existing methods have made significant progress in generating realistic and synchronized gestures. VQ-VAE-based approaches [9, 26, 30, 43] quantize human poses using codebooks [14], enabling the generation of plausible motions but often losing fine-grained gesture details. Diffusion-based methods [3, 9, 45], on the other hand, produce more vivid and natural poses by leveraging regression-based strategies [18]. However, as shown in

Fig. 1, these approaches fail to generate expressive gestures that fully align with audio semantics. This limitation arises from the quantization-induced detail loss in VQ-VAE models[31] and the tendency of diffusion-based methods to favor commonly used gestures, restricting diversity and expressiveness. Consequently, the synthesized gestures struggle to precisely reflect speech semantics and lack the diversity needed to capture emotional states, personalized styles, and contextual adaptability.

Indeed, generating expressive and semantically aligned gestures from audio alone is inherently challenging due to the ambiguity of mapping audio features to fine-grained motion details. Given this difficulty, in this paper, we propose that instead of relying solely on audio, external auxiliary guidance could be utilized to enhance the generation process. By incorporating such guidance through conditional control, we believe it is possible to produce gestures that are both expressive and well-aligned with speech.

To this end, we introduce ExGes, a novel retrieval-based audio-driven gesture generation framework designed to enhance expressive gestures by incorporating semantic information. The core idea behind ExGes is to address the limitation by leveraging a retrieval mechanism to provide auxiliary guidance. This approach not only enriches the expressiveness of generated gestures but also ensures their semantic alignment with the input audio. The ExGes framework is composed of three key modules: the Motion Base Construction Module, the Motion Retrieval Module, and the Precise Control Module. The Motion Base Construction Module builds a comprehensive repository of expressive gestures, serving as a rich source of diverse and fine-grained motion patterns. Then The Motion Retrieval Module acts as a bridge between the input audio and the motion base, retrieving gestures that are semantically relevant and contextually appropriate for the given speech. Finally, the Precise Control Module integrates the retrieved gestures as conditional control signals, enabling the generation of refined and expressive motions that align naturally with the audio input. By combining these components, ExGes introduces a novel perspective on gesture generation, emphasizing the importance of auxiliary guidance and precise control to overcome the challenges of expressiveness and semantic alignment.

Extensive experiments demonstrate that the proposed method achieves significant improvements in expressive gesture generation compared to existing approaches. The results show that the model outperforms strong baselines, such as EMAGE [30], in overall performance, with only a negligible trade-off in certain aspects. Our contributions can be summarized as:

- We propose ExGes, a retrieval-based framework that leverages auxiliary guidance to improve expressive and semantically aligned human gesture generation.
- We design three key modules: Motion Base Construction,

Motion Retrieval, and Precise Control, forming an effective and scalable generation pipeline.

- We conduct extensive experiments, showing that ExGes significantly outperforms strong baselines, such as EMAGE [30], with only a negligible trade-off.

2. Related Work

2.1. Direct-regression based Audio Driven Gesture Synchronization

Direct-regression based methods for audio-driven gesture generation aim to directly map speech inputs to gesture outputs, addressing the complex many-to-many relationship between audio features and gestures [16]. Early rule-based approaches [5, 6] were limited in diversity and control. With advancements in deep learning, neural network-based models [2, 16] have improved expressiveness by learning direct mappings, though most operate in 2D, restricting their realism in practical use. To address these limitations, the introduction of 3D gesture datasets [15, 30, 48] has enabled more lifelike gesture generation. Incorporating multi-modal information [3] and emotion-driven disentanglement [10] further enhances gesture diversity and contextual relevance. Recent models focus on improved control, with text-driven approaches [8] and pose-guided methods [30] offering finer adjustments. Diffusion-based models [7, 53] have also shown superior performance in generating realistic 3D gestures directly from audio. Despite these advances, challenges in fine-grained control and realism remain, especially in complex 3D environments.

While direct-regression methods outperform rule-based systems, they struggle to generate expressive and fine-grained gestures due to the unnatural “averaging” effect caused by the many-to-many mapping between audio and gestures. To address this, we propose a retrieval-enhanced approach that incorporates example-based gesture retrieval to enhance expressiveness.

2.2. Retrieval based Audio Driven Gesture Generation

In contrast to direct gesture generation approaches [44, 45], retrieval-based models [13, 18, 46] encode motion data into latent embedding spaces and retrieve similar embeddings for decoding. These models often use an encoder-decoder architecture, such as VQ-VAE [43], to map retrieved embeddings to target gestures. Recent advancements focus on improving retrieval accuracy, with Yang et al. [46] retrieving motion sequences from hidden spaces, and Habibi et al. [18] leveraging k-NN to extract latent similarities. Research also shows that standard motion embeddings enhance control and flexibility. For instance, Ao et al. [3] align motion embeddings with control information for more adaptable gesture control, while Zhang et al. [50] im-

prove semantic gesture generation by using predefined gesture candidates. Additionally, generative retrieval models like Yao et al. [47] extend language models to generate more expressive, contextually appropriate gestures.

Different from previous works, we didn't use any extra dataset or predefined candidates. Instead, we propose a precisely control signs based method that enrich the model's expressive performance through frame-level control in this paper to improve expressiveness.

2.3. Controllable Human Motion Generation

Controllable human motion generation focuses on synthesizing movements guided by control signals such as text descriptions [27], action styles [19], or trajectories [20]. Early methods primarily employ Variational Autoencoders (VQ-VAE) [22, 48, 52] and Generative Adversarial Networks (GAN) [4, 35, 41], which, while effective, have limitations in generating diverse and realistic motions. Recent advances with diffusion-based models [7, 53] demonstrate superior performance, significantly improving motion realism and diversity. The introduction of CLIP [38] further advances text-to-motion synthesis by aligning textual inputs with corresponding motion outputs. However, these methods still struggle to provide fine-grained control over specific motion attributes such as trajectories, keyframes, and individual joints. To address these limitations, techniques such as classifier-free guidance [40] and motion inpainting [11] have been proposed, offering more precise control over motion generation. Additionally, Karunratanakul et al. [21] introduce trajectory-based control to improve motion accuracy, while Cohan et al. [12] expand this control to full-body movements. Keyframe-based methods also gain traction, with Li et al. [26] and Ng et al. [36] demonstrating how keyframes enhance both expressiveness and the synthesis of gesture sequences.

In this paper, we build on these advancements by introducing a framework that enhances the generation of more expressive gestures with flexible control.

3. Method

Given an audio signal ($a \in \mathbb{R}^{T \times Q}$) and observed kinematic constraints ($c \in \mathbb{R}^{N \times J \times Q}$), our goal is to synthesize temporally coherent human motion sequences ($x \in \mathbb{R}^{N \times J \times Q}$). Here, N represents the number of frames, J denotes the number of joints, and Q indicates the dimensionality of joint features. To enhance the expressiveness of the generated motions, we introduce an additional biomechanical constraint, c^* , which encapsulates expressive poses retrieved from a pre-built audio-motion database. The objective can be formulated as:

$$x = \mathcal{F}(a, c, c^*) = \mathcal{G}(\mathcal{H}(a), \Phi(c), \Psi(c^*)), \quad (1)$$

where \mathcal{F} is the overall generative function synthesizing human motion sequences, \mathcal{G} is the fusion function that combines the embeddings, $\mathcal{H}(a)$ extracts meaningful temporal and semantic audio features from the input audio a , $\Phi(c)$ captures spatial and temporal dependencies from the kinematic constraints c , and $\Psi(c^*)$ embeds the expressive biomechanical constraint c^* , which is obtained through a semantic-aware retrieval process. This formulation ensures the generated motion x is both temporally coherent and expressive.

To build the model following the above definition, as shown in Fig. 2, we propose ExGes, a retrieval-based controllable audio-driven human gesture generation method designed to enhance the expressiveness of generated gestures. ExGes adopts a diffusion-based architecture, where given an input audio, human gestures are synthesized through a step-by-step denoising process. Additionally, we incorporate conditional control mechanisms to ensure that the generated poses are more expressive. To achieve this, we design three key modules to obtain the conditional latent variables: (1) Motion Base Construction, (2) Motion Retrieval Module, and (3) Precise Control Module. The details of these modules are introduced as follows: Section 3.1 explains how we construct the motion base; Section 3.2 introduces the retrieval-based method for generating expressive frames; finally, we present the precise control strategy that enables flexible control.

3.1. Motion Base Construction

As shown in Fig. 2, to address the intricate many-to-many mapping between speech and motion for expressive gesture generation, we construct a comprehensive motion base designed to provide rich and diverse motion as auxiliary guidance. This library is meticulously crafted to capture the nuanced interplay among linguistic, prosodic, and kinematic features, thereby enabling the generation of robust, expressive gestures. However, a critical challenge in building such a motion base lies in effectively harnessing contextual information while preserving the intricate correspondence between expressive gestures and their associated audio cues.

To overcome this challenge, we introduce a temporally aligned segmentation framework that synchronizes audio and motion data into coherent, second-level sequences. This framework integrates advanced semantic processing with adaptive temporal constraints, ensuring a highly accurate and meaningful segmentation of speech signals. Specifically, we leverage a cutting-edge automatic speech recognition (ASR) model [39] to detect linguistic boundaries at the token level, enabling precise alignment between speech segments and their corresponding motion sequences. This alignment ensures that the temporal and semantic dynamics of both modalities are faithfully preserved. To further refine the segmentation process, we also design dy-

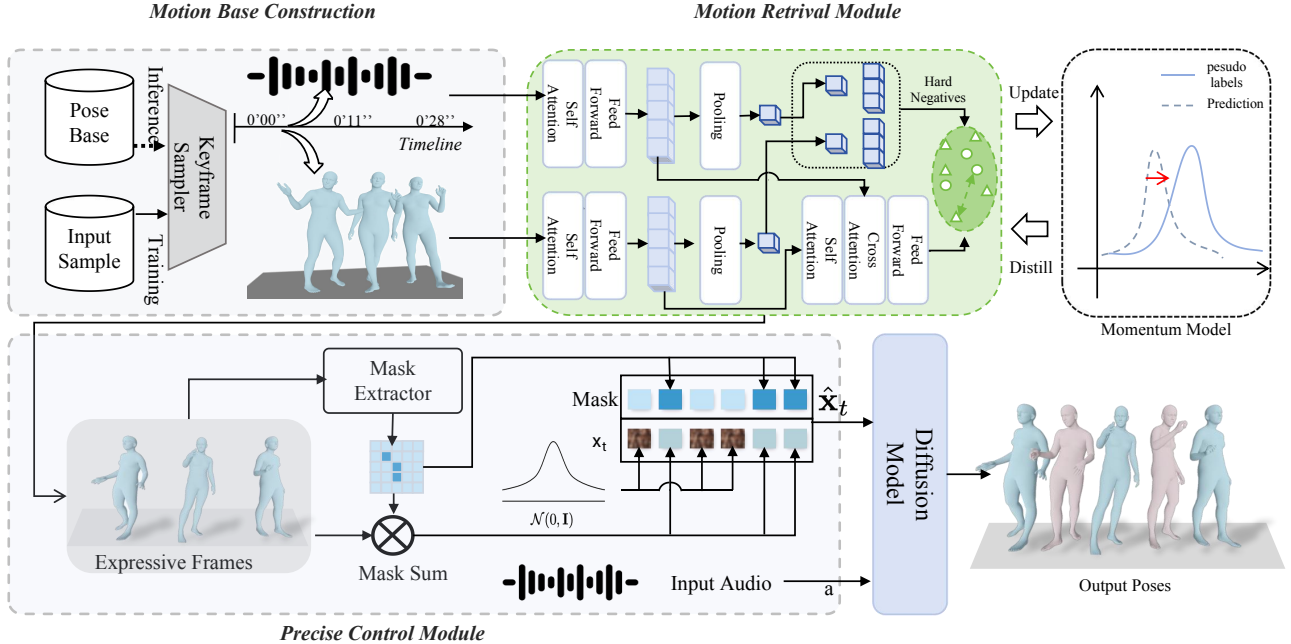


Figure 2. Overview our method. The audio is first used to retrieval to get expressive gestures. The the retrieval frames are served as the control signs that insert into the Precise Control Module, enhancing the expressiveness of generated gestures.

dynamic temporal constraints that regulate segment durations to fall between 1 and 2 seconds. This design ensures that each segment encapsulates 4–8 complete words, achieving an optimal balance between preserving linguistic granularity and maintaining the continuity of motion dynamics. By avoiding excessive segmentation of single tokens, our method minimizes the risk of introducing irrelevant or misleading audio features while preserving the semantic coherence of speech and gesture sequences.

3.2. Motion Retrieval Module

After constructing the expressive gesture database, the next critical step is to retrieve the most semantically and contextually appropriate gestures from this database to serve as conditional control signals. These retrieved gestures provide crucial guidance for the subsequent generation process, ensuring that the final output aligns with the intended expressive and semantic requirements. To achieve this, we propose a novel motion retrieval module that leverages a contrastive learning framework designed specifically to capture nuanced audio-motion correlations. To train this module effectively, we incorporate two key components: (1) Hard Negative Contrastive Learning and (2) Momentum Distillation. Below, we detail these components and their contributions to the retrieval process.

Hard Negative Contrastive Learning. To align audio and motion in a shared feature space, we employ dedicated audio and motion encoders that map the respective inputs into feature representations a and m . To extract a global representation for both modalities, we apply a max-pooling

mechanism. This approach assumes that the most expressive gestures and audio features can be represented by their maximum activations, resulting in pooled global embeddings $\hat{a} = P(a)$ and $\hat{m} = P(m)$. Inspired by the AL-BEF framework [24], we maintain two separate queues to store the most recent O audio and motion representations produced by the momentum unimodal encoders. These representations are then compared using a similarity function s , defined as $s(\hat{a}, \hat{m}) = \hat{a}^T \cdot \hat{m}$.

To compute the dual softmax similarity scores, we define the audio-to-motion and motion-to-audio similarities as follows:

$$\rho_j^{a2m} = \frac{\exp(s(\hat{m}, \hat{a}_j)/\tau)}{\sum_{j=1}^O \exp(s(\hat{m}, \hat{a}_j)/\tau)}, \quad (2)$$

$$\rho_j^{m2a} = \frac{\exp(s(\hat{m}, \hat{a}_j)/\tau)}{\sum_{j=1}^K \exp(s(\hat{m}, \hat{a}_j)/\tau)}, \quad (3)$$

where τ is a temperature hyperparameter. The ground truth one-hot similarity labels are denoted as y^{a2m} and y^{m2a} . The contrastive learning loss function ζ_c is then formulated as:

$$\zeta_c = \frac{1}{2} \mathbb{E}_{(a,m) \sim D} [H(y^{a2m}(a), \rho^{a2m}(a)) + H(y^{m2a}(m), \rho^{m2a}(m))], \quad (4)$$

where H is the cross-entropy loss function.

To further enhance the discriminative power of the learned representations, we incorporate a binary classification task during contrastive learning. A fully connected

layer predicts whether an audio-motion pair is semantically aligned, with the binary classification loss defined as:

$$\zeta_m = \mathbb{E}_{(a,m) \sim D} H(y^{\text{itm}}, p^{\text{itm}}(a, m)), \quad (5)$$

where $y^{\text{itm}} = 1$ if the audio a and motion m are aligned, and $y^{\text{itm}} = 0$ otherwise.

Given the many-to-many mapping relationship between audio and motion, conventional negative sampling strategies often fail to capture the diversity of potential matches, which can hinder the effectiveness of contrastive learning. To address this, we propose a hard negative sampling strategy based on the contrastive similarity defined in Equations 2 and 3. For each audio instance in a mini-batch, we sample a negative motion sequence with high similarity from the same batch as a hard negative. Similarly, for each motion sequence, we sample a hard negative audio instance. This bidirectional sampling strategy ensures diversity while strengthening the discriminative capacity of the model.

Momentum Distillation. Despite the use of exactly matched audio-motion pairs in our dataset, the inherent many-to-many mapping relationship can degrade the reliability of the learned representations. To mitigate this issue, we employ momentum distillation [24], a teacher-student framework, where a momentum-based teacher model generates pseudo-labels to guide the training of the base model. During training, the teacher model computes audio-motion similarity scores using features \hat{a}' and \hat{m}' from the momentum unimodal encoders. These scores are used to derive soft pseudo-targets y^{a2m} and y^{m2a} , which replace the original hard labels in Equations 2 and 3. The momentum distillation loss is defined as:

$$\zeta_{\text{ITM}} = \mathbb{E}_{(a,m) \sim D} \left[\text{KL}(\mathbf{y}^{a2m}(a) \parallel \rho^{a2m}(a)) + \text{KL}(\mathbf{y}^{m2a}(m) \parallel \rho^{m2a}(m)) \right], \quad (6)$$

where KL denotes the Kullback-Leibler divergence.

The total loss function for training the motion retrieval module is then defined as:

$$\zeta = \alpha \zeta_{\text{ITM}} + (1 - \alpha) \zeta_m, \quad (7)$$

where α is a hyperparameter controlling the trade-off between the two loss components.

Expressive Gesture Retrieval. Once the retrieval model is trained, it allows us to identify expressive keyframes/gestures and their temporal locations from the motion database. By leveraging the max-pooling mechanism used in feature extraction, the most expressive keyframe can be directly identified by finding the frame with the maximum similarity score, formulated as $l = \arg \max(s(a, m))$. The corresponding pose at location l serves as the keyframe c , which acts as a critical control signal for guiding the generation of semantically aligned and expressive gestures.

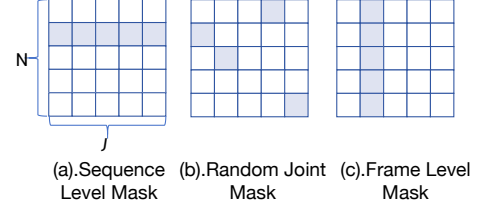


Figure 3. Different mask type in our work. The blue squares indicates the control information and the white information indicates the noise location.

3.3. Precision Control Module

After retrieving the expressive keyframes/gestures, another critical challenge lies in effectively incorporating the control gestures into the generation process. Unlike traditional image-based inpainting methods [34], integrating single-frame gestures poses unique difficulties, as they may become indistinguishable from noise within the same distribution. Conversely, incorporating multiple frames risks disrupting the temporal beat alignment, which is crucial for maintaining natural motion dynamics. To tackle this problem, we propose a novel approach for seamlessly applying frame-level conditions during the diffusion-based generation process.

Motion Control with Partial Feature Masking. To explicitly decouple the expressive pose (c) from the noise-corrupted input (\mathbf{x}_t), we propose a binary mask $m \in \mathbb{R}^{N \times W \times Q}$ where N , W , and Q respectively denote the batch size, joint count, and pose feature dimension. This mask serves as a selection mechanism to distinguish noise components from valid pose features. The denoised input $\hat{\mathbf{x}}_t$ is computed through element-wise composition:

$$\hat{\mathbf{x}}_t = m \odot \mathbf{x}_0 + (1 - m) \odot \mathbf{x}_t \quad (8)$$

where $m \odot \mathbf{x}_0$ preserves observed pose information while $(1 - m) \odot \mathbf{x}_t$ retains noise components. Unlike EMAGE[30] that applies masking to entire features, our partial masking strategy preserves partial structural information while enabling three distinct control mechanisms: 1) *Trajectory-based* control for global motion paths, 2) *Joint-level* control for anatomical precision, and 3) *Frame-wise* control for temporal dynamics (see Fig.3). This hierarchical design enhances both motion controllability and generation accuracy.

Modality Balancing via Stochastic Masking. We empirically observe the model’s tendency to overfit to audio cues while underutilizing numerical pose data. To address this imbalance, we implement stochastic masking: during training, we randomly discard key frames and audio inputs with probability ϕ . In addition, we use curriculum learning during training of our model. We decrease the mask rate from 90% to 3% during training process to make it easy for the Precision Control Module to learn the control information.

4. Experiments

5. Implementation Details

Our model is built upon the DiffuseStyleGesture framework [45] and is trained for 200,000 steps on a single A6000 GPU, with the entire process taking approximately 24 hours. During training, we apply both masking and noise control to 70% of the input samples to improve robustness. Specifically, random keypoint masks are applied to 40% of the samples, frame-level masks to 30%, and keypoint sequence-level masks to the remaining 30%. To prevent overfitting to specific control signals, we randomly set either the audio or control signals to null for 10% of the inputs. Furthermore, we adopt a curriculum learning strategy, gradually decreasing the mask rate from 90% to 3% over the course of training. Our experiments are conducted on the BEAT2 dataset, a large-scale dataset containing 27 hours of speech data from 30 speakers. We follow the standard protocol used in previous works [30], splitting the dataset into 85% for training, 7.5% for validation, and 7.5% for testing.

5.1. Metrics

To evaluate the effectiveness of our method, we assess the model’s ability to generate expressive gestures from two key aspects: overall generation quality and the performance of the Precision Control Module. For generation quality, we utilize the following metrics: Fréchet Gesture Distance (FGD) [28], Beat Consistency (BC) [25], and Diversity (Div) [23]. These metrics respectively measure the accuracy, audio alignment, and variability of the generated gestures. For control quality, we employ human pose estimation metrics, including Mean Per Joint Position Error (MPJPE) and Procrustes Aligned MPJPE (PA-MPJPE), to evaluate the fidelity and precision of the gestures. As it is challenging to quantitatively evaluate the Motion Retrieval Module, we provide qualitative results instead to demonstrate its effectiveness.

5.2. Quantitative Results Analysis

This section presents the experimental results on the BEAT2 dataset, where our proposed model, ExGes, achieves strong performance in both generation quality and control precision, both of which contribute to the evaluation of its expressive fine-grained gesture generation capabilities.

Performance on Generation Related Metrics. As shown in Table 1, our method achieves the lowest Fréchet Gesture Distance (FGD) (5.261), surpassing all existing approaches, including DiffuseStyleGesture and Talkshow, with reductions of 2.69 and 0.088, respectively. This indicates that our model generates gestures that are more closely aligned with the ground truth, reflecting superior accuracy in motion generation. Additionally, ExGes leads in Diversity, achieving a score of 13.75, which is not only the highest

Method	FGD↓	BC↑	Diversity↑	Fine-Grained Control
S2G[16]	28.15	4.83	5.971	✗
Trimodal[49]	12.41	5.933	7.724	✗
HA2G[33]	12.32	6.779	8.626	✗
DisCo[28]	9.417	6.439	9.912	✗
CaMN[29]	6.644	6.769	10.86	✗
DiffuseStyleGesture[45]	8.811	7.241	11.49	✗
Habibie[17]	9.04	7.716	8.231	✗
Talkshow[48]	6.209	6.947	<u>13.47</u>	✗
EMAGE[30]	<u>5.512</u>	7.724	13.06	✗
DiffSHEG[9]	10.51	5.55	10.91	✗
ExGes	5.261	<u>6.97</u>	13.75	✓

Table 1. Performance comparison of different methods on gesture synchronization task. The **bolded** is the best result and the underlined result is the second best.

Method	Frame	PAMPJPE (mm) ↓	MPJPE (mm) ↓
DiffuseStyle-Gesture	1	84.3	119.2
	2	86.4	114.4
	3	85.76	114.1
EMAGE	1	83.9	108.6
	2	80.8	114.0
	3	71.7	112.8
ExGes	1	66.1	103.5
	2	47.2	86.5
	3	39.4	75.1

Table 2. Control Effectiveness Evaluation for Full-Body Human Motion. This table shows the PAMPJPE and MPJPE values (in mm) for different methods when inserting 1, 2, or 3 control frames. Lower values indicate better control accuracy and higher quality of the generated gestures.

among all compared methods but also a 0.26 improvement over EMAGE, demonstrating the model’s capability to produce a wide range of varied and natural gestures. While our model shows a slight decrease in Beat Consistency compared to DiffuseStyleGesture (6.97 vs. 7.241), it remains highly competitive, ranking second-best in this metric. This suggests that our model maintains strong synchronization with the audio, even as it excels in other critical areas such as gesture accuracy and diversity.

Performance on Control Related Metrics. To evaluate our model’s precision control capability, we conduct a systematic comparison with state-of-the-art controllable gesture synthesis methods: DiffuseStyleGesture[45] using its proposed inpainting-based control mechanism, and EMAGE[30] utilizing its skeletal conditioning strategy. We quantitatively assess control precision through progressively challenging scenarios with 1- to 3-frame control inputs. As evidenced by Table 2, our method achieves

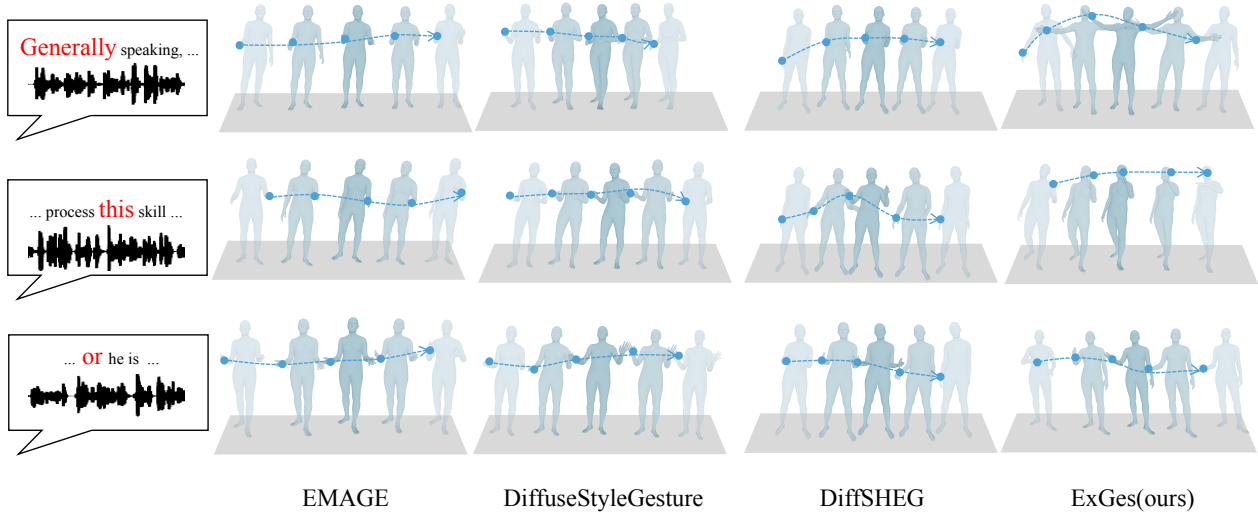


Figure 4. Comparison results between EX-Ges with existing methods. We compare the outputs generated by different models under the same speech input and plotted the hand motion sequences with the richest semantic information.

substantial improvements in pose accuracy across all settings - reducing MPJPE by 21.2% (83.9→66.1mm) under single-frame control compared to EMAGE, and delivering 46.3mm lower PA-MPJPE than DiffuseStyleGesture in tri-frame control scenarios. These results demonstrate our framework’s superior ability to propagate sparse control signals while maintaining motion naturalness, particularly in challenging multi-frame coordination tasks.

5.3. Qualitative Results Analysis

We evaluate the performance of our model across three key aspects: speech generation quality, action control effectiveness, and action retrieval performance, comparing our approach against three baseline methods—EMAGE, DiffSHEG, and DiffuseStyleGesture. Specifically, we compare the outputs generated by different models under the same speech input to emphasize the higher quality and richer semantics of the gestures produced by our model. To evaluate retrieval performance, we present the top three results for speech retrieval from the test set. For action control, we demonstrate the effectiveness of our model in controlling different body parts. Detailed comparison results and ablation studies for the control module are provided in the appendix.

As shown in Fig.4, our model demonstrates a clear advantage in capturing expressive human motion details that naturally align with the spoken content. Compared to DiffuseStyleGesture, DiffSHEG, and EMAGE, our approach generates gestures that are more semantically relevant to the speech. For instance, in the first row, when generating a gesture for the word “generally,” our model effectively retrieves and controls a gesture where the hands spread open,

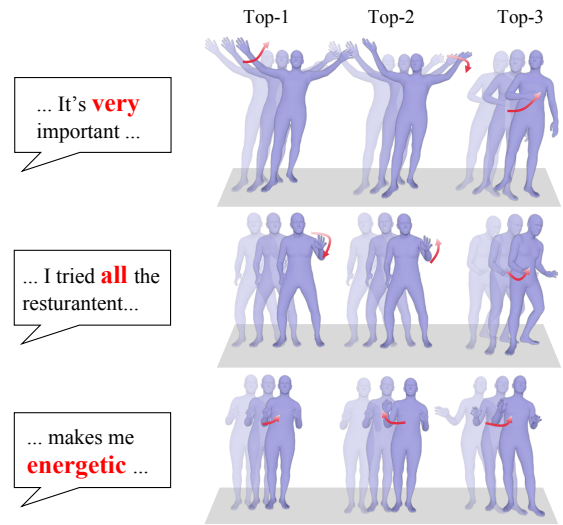


Figure 5. Visualization results of of the searched keyframes.

emphasizing the speech’s intent. Likewise, for demonstrative words like “this,” our method accurately produces a pointing gesture with the index finger, highlighting emphasis. Additionally, for the word “or,” the generated gesture extends outward in a circular motion, underscoring the semantic weight of the word.

Next, we examine the performance of our action retrieval module, which plays a crucial role in generating contextually appropriate gestures based on the input speech. As illustrated in Fig.5, our model leverages contrastive learning between short speech segments and their corresponding gestures, effectively capturing the intricate relationship between speech and motion. This strong coupling enables the model to retrieve gestures that align closely with the con-

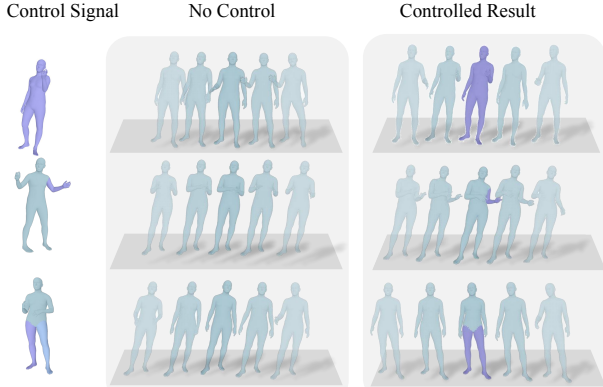


Figure 6. Controllability comparison results.

tent and intent of the speech. For example, when the word “very” is spoken, our model retrieves a gesture where the speaker raises their hands slightly, emphasizing the intensity of the adjective. Similarly, when describing something as “energetic,” the retrieved gestures are dynamic and expressive, effectively reflecting the sentiment of the speech.

We further evaluate the action controllability of our model through pose manipulation, as illustrated in Fig. 6. The results demonstrate three distinct control capabilities: (1) full-body pose control using single-frame reference poses, (2) directional adjustment of arm movements, and (3) modification of standing postures. Specifically, the model effectively reproduces emphasized gestures when guided by similar keyframe references, while arm trajectories and stance configurations can be precisely adjusted based on corresponding single-frame instructions. These findings underscore the model’s flexibility in generating controlled and contextually accurate gestures.

5.4. Ablation Study

This section presents the ablation study to evaluate the contributions of the Motion Retrieval Module and the Precise Control Module (PCM) to the overall performance of our model. As summarized in Table 3, removing either module results in a noticeable decline in performance, underscoring their critical importance.

Impact of the Motion Retrieval Module: As shown in Table 3, when this module is removed, the model maintains a comparable level of diversity (13.22); however, it suffers a significant loss in precision, as indicated by an increase in Fréchet Gesture Distance from 5.22 to 6.50. This suggests that while this module is not integral to maintaining diversity, it plays a crucial role in enhancing the precision and accuracy of the generated gestures.

Impact of the Precise Control Module: As shown in Table 3, the absence of this module leads to a sharp performance decline across all metrics. FGD increases substantially to 7.80, while Beat Consistency and Diversity drop to 6.70 and 11.49, respectively. This highlights the PCM’s vital role in capturing expressive motion details and ensuring

robust alignment between audio and gesture. Furthermore, the ablation study on part mask removal reveals consistent performance degradation: Diversity decreases from 13.75 to 13.48, BC drops from 6.97 to 6.89, and FGD rises from 5.22 to 5.40. These results demonstrate that part masks are essential for improving the model’s ability.

Full Model Integration: As shown in Table 3, the complete integration of all modules in the ExGes framework achieves the best results, with an FGD of 5.22, BC of 6.97, and Diversity of 13.75. These findings confirm that the combination of EGRM, PCM, and the diffusion module significantly enhances both the precision and diversity of the generated gestures, leading to superior performance over strong baselines across all key metrics.

Method	FGD↓	BC↑	Diversity↑
w/o Motion Retrieval	6.5	6.90	13.22
w/o Precision Control	7.80	6.70	11.49
w/o Part Mask	5.4	6.89	13.48
ExGes	5.22	6.97	13.75

Table 3. Ablation study result of our model.

5.5. User Study

To further evaluate the effectiveness of our method, we perform a two-alternative forced choice (2AFC) test with 51 randomly selected participants. Each participant views 10 sets of results generated by ExGes, DiffuseStyleGesture, and EMAGE from the BEAT2 dataset and selects the segment that best aligns with the given speech. The results, presented in Table 4, show that our method achieves state-of-the-art performance compared to previous approaches, particularly excelling in both Liveness and Beat Consistency metrics. Compared to EMAGE, our method increases realism by 71.3%, beat consistency by 55%, and expressiveness by 65%, demonstrating significantly improved perceptual quality. Against the diffusion-based DiffuseStyleGesture, our approach achieves a 29% increase in realism, a 59.8% improvement in beat consistency, and a 51.4% boost in expressiveness. Furthermore, when compared to DiffSHEG,

Comparison	Metric	Baseline (%)	Ours (%)
Ours vs. EMAGE	Liveness	14.30%	85.60%
	BC	22.50%	77.50%
	Expressiveness	17.5%	82.5%
Ours vs. DiffuseStyleGesture	Liveness	25.50%	74.50%
	BC	19.60%	80.40%
	Expressiveness	24.3%	75.7%
Ours vs. DiffSHEG	Liveness	9.20%	90.80%
	BC	21.70%	78.30%
	Expressiveness	4.3%	95.7%

Table 4. User Study Results

our method substantially improves liveness from 9.2% to 90.8% and enhances expressiveness by 91.4%.

6. Conclusion

In this paper, we tackle the challenge of expressive audio-driven human gesture synthesis. To address the limitations of existing methods, which often generate coarse, inexpressive, and semantically misaligned gestures, we introduce ExGes, a novel retrieval-enhanced diffusion framework. ExGes integrates three key components: Motion Base Construction, a Motion Retrieval Module, and a Precision Control Module, enabling the generation of high-quality, expressive, and contextually aligned gestures. Experimental results consistently demonstrate the superiority of ExGes over existing approaches.

References

- [1] Simon Alexanderson, Rajmund Nagy, Jonas Beskow, and Gustav Eje Henter. Listen, denoise, action! audio-driven motion synthesis with diffusion models. *TOG*, 42(4):1–20, 2023. 1
- [2] Tenglong Ao, Qingzhe Gao, Yuke Lou, Baoquan Chen, and Libin Liu. Rhythmic gesticulator: Rhythm-aware co-speech gesture synthesis with hierarchical neural embeddings. *TOG*, page 1–19, 2022. 2
- [3] Tenglong Ao, Zeyi Zhang, and Libin Liu. Gesturediffuclip: Gesture diffusion model with clip latents. *TOG*, 42(4):1–18, 2023. 1, 2
- [4] Emad Barsoum, John Kender, and Zicheng Liu. Hp-gan: Probabilistic 3d human motion prediction via gan. In *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*, pages 1418–1427, 2018. 3
- [5] J Cassell, C Pelachaud, N Badler, M Steedman, B Achorn, T Becket, B Douville, S Prevost, and M Stone. Rule-based generation of facial expression, gesture & spoken intonation for multiple conversational agents. In *SIGGRAPH'94*, 1994. 2
- [6] Justine Cassell, Hannes Högni Vilhjálmsson, and Timothy Bickmore. Beat. In *Proceedings of the 28th annual conference on Computer graphics and interactive techniques*, 2001. 2
- [7] Ankur Chemburkar, Shuhong Lu, and Andrew Feng. Moddm: Text-to-motion synthesis using discrete diffusion model. 2022. 2, 3
- [8] Bohong Chen, Yumeng Li, Yao-Xiang Ding, Tianjia Shao, and Kun Zhou. Enabling synergistic full-body control in prompt-based co-speech motion generation. In *ACM Multimedia 2024*, 2024. 2
- [9] Junming Chen, Yunfei Liu, Jianan Wang, Ailing Zeng, Yu Li, and Qifeng Chen. Diffshg: A diffusion-based approach for real-time speech-driven holistic 3d expression and gesture generation. In *CVPR*, 2024. 1, 6
- [10] Kiran Chhatre, Radek Daněček, Nikos Athanasiou, Giorgio Becherini, Christopher Peters, Michael J. Black, and Timo Bolkart. Emotional speech-driven 3d body animation via disentangled latent diffusion, 2024. 2
- [11] Hyungjin Chung, Byeongsu Sim, Dohoon Ryu, and JongChul Ye. Improving diffusion models for inverse problems using manifold constraints. 2022. 3
- [12] Setareh Cohan, Guy Tevet, Daniele Reda, Xue Bin Peng, and Michiel van de Panne. Flexible motion in-betweening with diffusion models. In *ACM SIGGRAPH 2024 Conference Papers*, pages 1–9, 2024. 3
- [13] Ylva Ferstl, Michael Neff, and Rachel McDonnell. Express-gesture: Expressive gesture generation from speech through database matching. *Computer Animation and Virtual Worlds*, 32(3-4):e2016, 2021. 2
- [14] Zigang Geng, Chunyu Wang, Yixuan Wei, Ze Liu, Houqiang Li, and Han Hu. Human pose as compositional tokens. In *CVPR*, pages 660–671, 2023. 1
- [15] Saeed Ghorbani, Ylva Ferstl, Daniel Holden, Nikolaus F. Troje, and Marc-André Carbonneau. Zeroeggs: Zero-shot example-based gesture generation from speech, 2022. 2
- [16] Shiry Ginosar, Amir Bar, Gefen Kohavi, Caroline Chan, Andrew Owens, and Jitendra Malik. Learning individual styles of conversational gesture. In *CVPR*, pages 3497–3506, 2019. 2, 6
- [17] Ikhsanul Habibie, Weipeng Xu, Dushyant Mehta, Lingjie Liu, Hans-Peter Seidel, Gerard Pons-Moll, Mohamed Elgharib, and Christian Theobalt. Learning speech-driven 3d conversational gestures from video. In *Proceedings of the 21st ACM International Conference on Intelligent Virtual Agents*, pages 101–108, 2021. 6
- [18] Ikhsanul Habibie, Mohamed Elgharib, Kripasindhu Sarkar, Ahsan Abdullah, Simbarashe Nyatsanga, Michael Neff, and Christian Theobalt. A motion matching-based framework for controllable gesture synthesis from speech. In *ACM SIGGRAPH 2022 Conference Proceedings*, New York, NY, USA, 2022. Association for Computing Machinery. 1, 2
- [19] Shu Jiang, Zikang Xiong, Weiman Lin, Yu Cao, Zhongpu Xia, Jinghao Miao, and Qi Luo. An efficient framework for reliable and personalized motion planner in autonomous driving. *IEEE Robotics and Automation Letters*, page 8, 2022. 3
- [20] Kacper Kania, Marek Kowalski, and Tomasz Trzcinski. Trajevae: Controllable human motion generation from trajectories. *arXiv preprint arXiv:2104.00351*, 2021. 3
- [21] Korrawe Karunratanakul, Konpat Preechakul, Supasorn Suwajanakorn, and Siyu Tang. Guided motion diffusion for controllable human motion synthesis. In *ICCV*, pages 2151–2162, 2023. 3
- [22] Hanyang Kong, Kehong Gong, Dongze Lian, Michael Bi Mi, and Xinchao Wang. Priority-centric human motion generation in discrete latent space. In *ICCV*, pages 14806–14816, 2023. 3
- [23] Jing Li, Di Kang, Wenjie Pei, Xuefei Zhe, Ying Zhang, Zhenyu He, and Linchao Bao. Audio2gestures: Generating diverse gestures from speech audio with conditional variational autoencoders. In *ICCV*, pages 11293–11302, 2021. 6
- [24] Junnan Li, Ramprasaath Selvaraju, Akhilesh Gotmare, Shafiq Joty, Caiming Xiong, and Steven Chu Hong Hoi.

- Align before fuse: Vision and language representation learning with momentum distillation. *Advances in neural information processing systems*, 34:9694–9705, 2021. 4, 5
- [25] Ruilong Li, Shan Yang, David A Ross, and Angjoo Kanazawa. Ai choreographer: Music conditioned 3d dance generation with aist++. In *ICCV*, pages 13401–13412, 2021. 6
- [26] Ronghui Li, YuXiang Zhang, Yachao Zhang, Hongwen Zhang, Jie Guo, Yan Zhang, Yebin Liu, and Xiu Li. Lodge: A coarse to fine diffusion network for long dance generation guided by the characteristic dance primitives. In *CVPR*, pages 1524–1534, 2024. 1, 3
- [27] Kevin Lin, Christopher Agia, Toki Migimatsu, Marco Pavone, and Jeannette Bohg. Text2motion: From natural language instructions to feasible plans. *Autonomous Robots*, 47(8):1345–1365, 2023. 3
- [28] Haiyang Liu, Naoya Iwamoto, Zihao Zhu, Zhengqing Li, You Zhou, Elif Bozkurt, and Bo Zheng. Disco: Disentangled implicit content and rhythm learning for diverse co-speech gestures synthesis. In *Proceedings of the 30th ACM international conference on multimedia*, pages 3764–3773, 2022. 6
- [29] Haiyang Liu, Zihao Zhu, Naoya Iwamoto, Yichen Peng, Zhengqing Li, You Zhou, Elif Bozkurt, and Bo Zheng. Beat: A large-scale semantic and emotional multi-modal dataset for conversational gestures synthesis. *arXiv preprint arXiv:2203.05297*, 2022. 6
- [30] Haiyang Liu, Zihao Zhu, Giorgio Becherini, Yichen Peng, Mingyang Su, You Zhou, Naoya Iwamoto, Bo Zheng, and Michael J Black. Emage: Towards unified holistic co-speech gesture generation via masked audio gesture modeling. *arXiv preprint arXiv:2401.00374*, 2023. 1, 2, 5, 6
- [31] Qiankun Liu, Zhentao Tan, Dongdong Chen, Qi Chu, Xiyang Dai, Yinpeng Chen, Mengchen Liu, Lu Yuan, and Nenghai Yu. Reduce information loss in transformers for pluralistic image inpainting, 2022. 2
- [32] Tong Liu, Yi Xiao, Mingwei Hu, Hao Sha, Shining Ma, Boyu Gao, Shihui Guo, Yue Liu, and Weitao Song. Audiogest: Gesture-based interaction for virtual reality using audio devices. *IEEE Transactions on Visualization and Computer Graphics*, 31(2):1569–1581, 2025. 1
- [33] Xian Liu, Qianyi Wu, Hang Zhou, Yinghao Xu, Rui Qian, Xinyi Lin, Xiaowei Zhou, Wayne Wu, Bo Dai, and Bolei Zhou. Learning hierarchical cross-modal association for co-speech gesture generation. In *CVPR*, pages 10462–10472, 2022. 6
- [34] Andreas Lugmayr, Martin Danelljan, Andres Romero, Fisher Yu, Radu Timofte, and Luc Van Gool. Repaint: Inpainting using denoising diffusion probabilistic models, 2022. 5
- [35] Qianhui Men, Hubert PH Shum, Edmond SL Ho, and Howard Leung. Gan-based reactive motion synthesis with class-aware discriminators for human–human interaction. *Computers & Graphics*, 102:634–645, 2022. 3
- [36] Evonne Ng, Javier Romero, Timur Bagautdinov, Shaojie Bai, Trevor Darrell, Angjoo Kanazawa, and Alexander Richard. From audio to photoreal embodiment: Synthesizing humans in conversations. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2024. 3
- [37] S. Nyatsanga, T. Kucherenko, C. Ahuja, G. E. Henter, and M. Neff. A comprehensive review of data-driven co-speech gesture generation. *Computer Graphics Forum*, 42(2):569–596, 2023. 1
- [38] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision, 2021. 3
- [39] Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. Robust speech recognition via large-scale weak supervision, 2022. 3
- [40] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *CVPR*, pages 10684–10695, 2022. 3
- [41] Ayumi Shiobara and Makoto Murakami. Human motion generation using wasserstein gan. In *Proceedings of the 2021 5th International Conference on Digital Signal Processing*, pages 278–282, 2021. 3
- [42] A SPEAKER and B SPEAKER. Co 3gesture: Towards coherent concurrent co-speech 3d gesture generation with inter-active diffusion. 1
- [43] Aaron Van Den Oord, Oriol Vinyals, et al. Neural discrete representation learning. *Advances in neural information processing systems*, 30, 2017. 1, 2
- [44] Zunnan Xu, Yukang Lin, Haonan Han, Sicheng Yang, Ronghui Li, Yachao Zhang, and Xiu Li. Mambataalk: Efficient holistic gesture synthesis with selective state space models. *arXiv preprint arXiv:2403.09471*, 2024. 2
- [45] Sicheng Yang, Zhiyong Wu, Minglei Li, Zhen-song Zhang, Lei Hao, Weihong Bao, Ming Cheng, and Long Xiao. Diffusestylegesture: Stylized audio-driven co-speech gesture generation with diffusion models, 2023. 1, 2, 6
- [46] Sicheng Yang, Zhiyong Wu, Minglei Li, Zhen-song Zhang, Lei Hao, Weihong Bao, and Haolin Zhuang. Qpgesture: Quantization-based and phase-guided motion matching for natural speech-driven gesture generation. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR*, pages 2321–2330. IEEE, 2023. 2
- [47] Heyuan Yao, Zhenhua Song, Yuyang Zhou, Tenglong Ao, Baoquan Chen, and Libin Liu. Moconvq: Unified physics-based motion control via scalable discrete representations. *ACM Trans. Graph.*, 43(4), 2024. 3
- [48] Hongwei Yi, Hualin Liang, Yifei Liu, Qiong Cao, Yandong Wen, Timo Bolkart, Dacheng Tao, and Michael J Black. Generating holistic 3d human motion from speech. In *CVPR*, 2023. 2, 3, 6
- [49] Youngwoo Yoon, Bok Cha, Joo-Haeng Lee, Minsu Jang, Jaeyeon Lee, Jaehong Kim, and Geehyuk Lee. Speech gesture generation from the trimodal context of text, audio, and speaker identity. *TOG (TOG)*, 39(6):1–16, 2020. 6
- [50] Zeyi Zhang, Tenglong Ao, Yuyao Zhang, Qingzhe Gao, Chuan Lin, Baoquan Chen, and Libin Liu. Semantic gesticulator: Semantics-aware co-speech gesture synthesis. *ACM Trans. Graph.*, 43(4), 2024. 2
- [51] Yihao Zhi, Xiaodong Cun, Xuelin Chen, Xi Shen, Wen Guo, Shaoli Huang, and Shenghua Gao. Livelyspeaker: Towards

- semantic-aware co-speech gesture generation. In *ICCV*, pages 20807–20817, 2023. [1](#)
- [52] Chongyang Zhong, Lei Hu, Zihao Zhang, and Shihong Xia. Att2m: Text-driven human motion generation with multi-perspective attention mechanism. In *ICCV*, pages 509–519, 2023. [3](#)
- [53] Lei Zhong, Yiming Xie, Varun Jampani, Deqing Sun, and Huaizu Jiang. Smoodi: Stylized motion diffusion model. *arXiv preprint arXiv:2407.12783*, 2024. [2](#), [3](#)
- [54] Lingting Zhu, Xian Liu, Xuanyu Liu, Rui Qian, Ziwei Liu, and Lequan Yu. Taming diffusion models for audio-driven co-speech gesture generation. In *CVPR*, pages 10544–10553, 2023. [1](#)