

Large Language Models Are Effective Human Annotation Assistants, But Not Good Independent Annotators

Feng Gu Zongxia Li Carlos Rafael Colon
Benjamin Evans Ishani Mondal Jordan Lee Boyd-Graber
University of Maryland, College Park
{fgu1, zli12321, raffy, benevans, imondal, jbg}@umd.edu

Abstract

Event annotation is important for identifying market changes, monitoring breaking news, and understanding sociological trends. Although expert annotators set the gold standards, human coding is expensive and inefficient. Unlike information extraction experiments that focus on single contexts, we evaluate a holistic workflow that removes irrelevant documents, merges documents about the same event, and annotates the events. Although LLM-based automated annotations are better than traditional TF-IDF-based methods or Event Set Curation, they are still not reliable annotators compared to human experts. However, adding LLMs to assist experts for Event Set Curation can reduce the time and mental effort required for Variable Annotation. When using LLMs to extract event variables to assist expert annotators, they agree more with the extracted variables than fully automated LLMs for annotation.

1 Introduction

Quality data is crucial for making informed decisions. Bloomberg,¹ for example, automatically extracts top-quality data from trusted sources. Companies like Scale AI² collect, curate, and annotate data for AI models (OpenAI) and applications (self-driving cars, mapping, AR/VR, robotics).³

While human annotators excel at reference resolution and aligning extracted information, machine coding can handle larger inputs, enhancing data collection efficiency and scalability (Mason et al., 2012; King and Lowe, 2003). The Uppsala Conflict Data Project Georeferenced Event Data, one of the earliest event datasets relying on human labour, covers only fewer than 300,000 events in over twenty years (Sundberg, 2013). In comparison, automated data processes like the GDELT Project

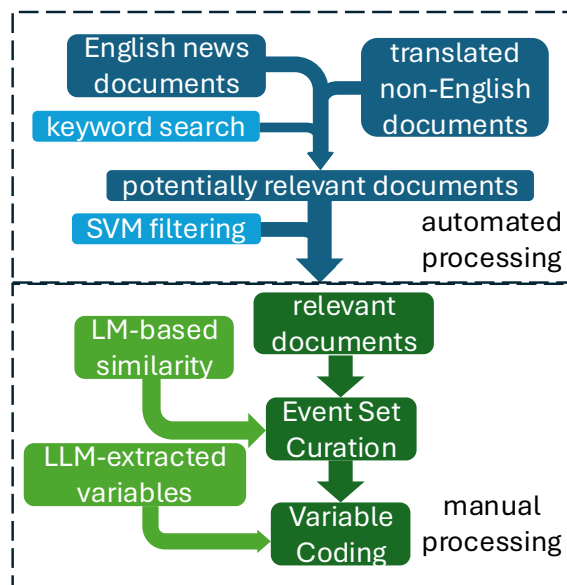


Figure 1: Our workflow for annotating events data begins with preprocessing incoming media news. A Support Vector Machine identifies highly relevant documents for manual review. During Event Set Curation, human annotators create unique event sets. Finally, annotators code the domain-specific variables. We apply LM-based similarity indices and use LM-extracted variables to aid manual processing.

collect trillions of datapoints (The GDELT Project, 2021).

Annotating event datasets presents significant challenges. First, statistical models often encounter challenges with text extraction and formatting when processing large corpora automatically (Schrodt and Van Brackle, 2013). Issues can arise from unreliable source documents, incorrect translations, conflicting information, and inadequate filtering. Second, empirical evaluations yield inconsistent results with extremely low confidence intervals (O’Brien, 2013). Third, unlike document-level annotation tasks, event annotation requires expertise in synthesizing information from multiple documents (Gao et al., 2024; Li et al., 2024a), which often involves additional steps beyond labelling, extraction, or annotation.

¹<https://www.bloomberg.com/>

²<https://scale.com/>

³<https://openai.com/>

Contemporary event datasets typically combine quantitative methods with manual efforts. Algorithms like unsupervised clustering group documents (Golub, 2006; Hakim et al., 2014; Probiez et al., 2022; Bouras and Tsogkas, 2013; Li et al., 2025a) before human annotators refine the results and extract information (Elliott, 2018; Pierre and Jackson, 2014).

We present a case study on AI automation for GTD⁴ (Global Terrorism Database), whose researchers maintain a similar open-source terrorism database used by various organizations. By integrating AI into the event annotation pipeline, we demonstrate that state-of-the-art NLP techniques can reduce human effort in traditional workflows. Specifically, we show that large language models (LLMs) are far from expert quality annotations, but they can serve as effective assistants for humans to extract event variables, thus reducing the variable coding time of experts.

More broadly, we outline the potential of integrating LLMs into event annotation pipelines. Capturing semantic similarity and coding diverse variables with high expert agreement, LMs show strong promise for real-world annotation tasks.

2 Related Work

Single-document Event Extraction: Prior work on information extraction focuses primarily on sentence and document-level tasks like part-of-speech tagging (Roth and Zelenko, 1998) and named-entity recognition (Collobert et al., 2011), creating various benchmarks. Gao et al. (2024) introduces cross-document event extraction, which involves merging duplicates and resolving conflicts. Our task aligns with cross-document event extraction but is more complex: an LM must identify documents about the same event and extract information adhering to a strictly defined schema.

Variable Extraction as a QA Task: Neural network models excel in QA benchmarks (Hermann et al., 2015; Li et al., 2025b). Extracting domain-specific variables can be framed as a QA task, leveraging contextual information from coding criteria. However, evaluating QA systems is challenging in contextual or complex output spaces (Xu et al., 2023; Bulian et al., 2022), often lacking ecological validity. We use trained rule-based and neural matching methods to achieve a more robust variable equivalence detection.

Text Segmentation: Text segmentation divides large text blocks into smaller, topically coherent sections. Koshorek et al. (2018) create an annotated corpus using Wikipedia pages, while Aumiller et al. (2021) use a BERT-based model for legal documents. Neural models have achieved excellent performance (Glavaš and Somasundaran, 2020). Although algorithms like TextTiling (Hearst, 1997) and TopicTiling (Riedl and Biemann, 2012) can handle texts with distinct sections, documents with closely related events like ours pose greater segmentation challenges.

LLM-assisted Annotation: Annotating domain-specific data requires expertise. Recent NLP advancements enable LLMs to annotate data efficiently, achieving high accuracy on document-level datasets (Tan et al., 2024). However, Tseng et al. (2024) show LMs cannot replace experts in financial data annotation. Similarly, Yadav et al. (2024) finds GPT-4 performs poorly in annotating word semantics. Our work explores LLM-assisted annotation in a real-world event annotation workflow.

3 A Case Study of Event Annotation

The existing data workflow at the GTD consists of automated and manual processing (Figure 1). To obtain quality data from news articles that can be later used for analysis, experts 1) compile a list of unique events from a collection of documents and 2) extract synthesized event information.

3.1 Event Set Curation

An event set is a collection of documents about the same event. Unlike document-level annotations, event details are scattered across multiple documents, each offering partial or complementary information. Annotators must prioritize informative documents (e.g., those with high TF-IDF scores), systematically review them to identify unique events, and create event sets that meet predefined criteria and sending them for downstream coding. For example, one document describes a gun attack “*in San Carlos City on Sunday, where armed men opened fire on a vehicle in Barangay Palampas,*” while another specifies that “*the shooting occurred in Barangay Palampas, San Carlos City, Negros Occidental, on February 20,*” providing precise details about the incident’s date.

To ensure consistency in event sets for downstream comparisons, we evaluate candidate event sets using precision, recall, and F_1 score.

⁴<https://www.start.umd.edu/data-tools/GTD>

3.2 Variable Coding

Annotators synthesize information from documents in event set for each event, identifying variables like *location* and *perpetrators*.⁵ One document describes a violent incident involving “*approximately 20 people, some armed with axes, who targeted security guards, workers, and police officers*” in “*Houston, British Columbia,*” while another document states that “*far-left anti-pipeline extremists*” attacked the “*Morice River drill pad site off the Marten Forest Service Road.*” Annotators use information from all relevant documents to code variables. These variables include text, enumerated types, and integers, representing diverse data types. We measure coding time with and without LLM-extracted variables and calculate the frequency of annotators choosing LLM-extracted variables.

4 Efficient Event Curation with EMBEDDING and LLM

Real-world data like news digest often describe multiple events in the same document, posing challenges for TF-IDF, which struggle to capture semantic relationships between texts (Bengio et al., 2003; Mikolov et al., 2013). We compare pre-trained transformer embeddings and an LLM with TF-IDF.

4.1 Methodology

We randomly sample 500 of 7,941 documents from February 2022, unseen by expert annotators, to evaluate similarity. We compare automatically create event sets against the expert-curated reference set. We describe our algorithms in Appendix A.3 and prompts in A.7.

EMBEDDING: We use BAAI Embeddings (Xiao et al., 2023) to calculate pairwise similarity, employing grid search to find the threshold maximizing the F_1 score. Articles with similarity above this threshold (0.8) are clustered.

LLM-CLS: We use GPT-4o-mini (Achiam et al., 2023) to determine if two documents describe the same event.

LLM-CLS+SEG: To address multiple events, we prompt GPT-4o-mini to segment documents before applying LLM-CLS for binary prediction (Appendix A.7).

4.2 Results and Discussion

EMBEDDING captures semantic relationships, significantly improving performance with 89% pre-

⁵Full list and description in Appendix A.5.

	Precision	Recall	F_1	Identical Sets
TF-IDF	0.19	0.09	0.10	12
EMBEDDING	0.89	0.51	0.59	66
LM-CLS	0.36	0.35	0.35	105
LM-CLS+SEG	0.65	0.66	0.63	203

Table 1: In Event Set Curation, EMBEDDING has the highest precision of creating event sets at 0.89. LM-CLS+SEG demonstrates superior recall and a higher overall F_1 score. Additionally, compared to 371 annotated event sets, LM-CLS+SEG generates event sets that align most closely with expert annotations, nearly doubling the amount of the second-best method, LM-CLS.

	Human	LM	Overlap	Average
Manual	271 (160)	233 (227)	220 (145)	236 (169)
Hybrid	260 (185)	175 (202)	173 (132)	197 (169)
Average	265 (174)	203 (216)	197 (140)	217 (170)

Table 2: The average time, in seconds along with standard deviations, taken by human annotators to code variables. Annotators consistently spend less time when they have access to LM-extracted variables. When annotators and LM-CLS+SEG concur on event sets, they take the least amount of time to annotate these sets.

cision. Unlike TF-IDF, which attaches less than 10% of relevant documents and has less than 20% relevance among attached documents, EMBEDDING reduces false negatives by 82% and identifies about half of the relevant documents. Overall, EMBEDDING has a 0.59 F_1 score (Table 1).

LLM Segmentation helps. Dividing documents into multiple events improves event set curation, yielding the best overall F_1 score (Table 1).

5 LLMs Help Experts Code Variables

Although EMBEDDING has the highest precision, recall is more important because missing document can significantly bias the downstream coding task. LLM-CLS+SEG not only has the highest recall but also finds many event sets identical to expert annotations (203 out of 371), outperforming LLM-CLS (105), EMBEDDING (66), and TF-IDF (12) (Table 1). While LLM-CLS+SEG can generate identical event sets, it may also produce problematic ones, negatively impacting annotation. To assess the effect of incorrect event sets in Variable Coding, we replace some expert-curated events with their nearest neighbours in LLM-CLS+SEG, creating three evaluation settings:

- 1) **Human:** events annotated by humans but absent in LLM-CLS+SEG.
- 2) **LM:** events in LLM-CLS+SEG but not in human-annotated sets.
- 3) **Overlap:** events present in both human-annotated and LLM-CLS+SEG sets.

Variable	Frequency(%)	Count
Country	92.1	278
Location	40.1	278
Target	64.5	265
Perpetrator	78.5	209
Generic Attack	58.5	241
Generic Weapon	73.7	218
Specific Weapon	61.3	194
Kills	79.4	106
Wounds	67.8	97
Overall	66.0	1886

Table 3: Total number of non-NA variables and how often they are chosen by human annotators in the OPTIONAL setting. Annotators select extracted variables 66% of the time on average. Notably, the variable *Country* has a high selection frequency of over 92%. In contrast, annotators choose *Location* only about 40% of the time.

5.1 Methodology

We divide the event sets into three settings:

Manual: Annotators code the variables without LLM assistance, serving as the control group.

Automated: We prompt GPT-4o-mini to extract variables from the documents.

Hybrid: Annotators see the LLM-extracted variables and can pre-populate them.

Human annotators may prefer LLM-extracted variables because seeing prepopulated LLM variables before manually entering them can cause automation bias (An et al., 2023). To ensure robust result, we duplicate a subset of events and assign them to three expert teams for calculating inter-human agreement. We compare this inter-human agreement with the agreement between the manual and the automated settings (human-LM in Figure 2) to assess whether LLM-extracted variables positively influence variable selection frequency. Each team codes 212 event sets. For each event, annotators code nine variables.

Traditional metrics can be overly strict (Kocmi et al., 2021; Chen et al., 2020), and we use two additional equivalence metrics besides exact match:

1) Normalized Match (NM) checks if two variables are identical after string normalization—removing articles and punctuations.

2) BERT, fine-tuned on human labeled and synthetic datasets, measures embedding similarity (Bullian et al., 2022).

3) PEDANTS uses optimized learned F_1 and TF-IDF encoding to measure matching between variables (Li et al., 2024b).

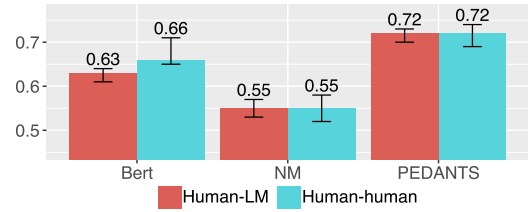


Figure 2: The agreement between the manual and the automated settings is comparable. On average, annotators and LM agree 50% using NM. PEDANTS and BERT show higher agreements. The difference between human-human and human-LM agreement is not statistically significant, suggesting that the LM-extracted variables provide approximately human-level utility.

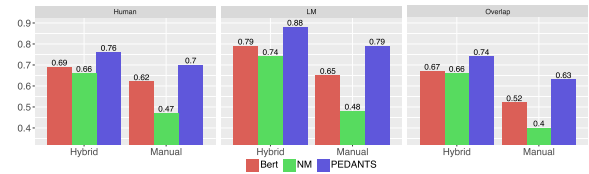


Figure 3: Agreement by event set type and setting. Annotators show higher agreement in the hybrid setting, where extracted variables are available. This indicates that these variables help code the events. Furthermore, the extracted variables prove particularly beneficial in LM-generated incident sets, which often contain misinformation.

5.2 Results and Discussion

LLM-extracted variables reduce annotation time.

Experts code fastest when their judgment align with LLM-CLS+SEG on event sets (Table 2). Coding event sets from human annotators takes the longest. Despite errors in LLM-extracted variables, extracted variables reduce annotation time by 25%.

Annotators align with LM-extracted variables.

Annotators agree with them over half of the time even without seeing them (Figure 2). Human-LM agreement nearly matches human-human agreement, indicating that LLM-extracted variables approximate human-level utility.

Annotators use LLM-extracted variables in the hybrid setting.

Annotators adopt extracted variables 66% of the time on average (Table 3). The most selected variable, *Country*, is chosen over 90% of of the time, while the least selected, *Location*, is still useful 40% of the time. The hybrid setting shows higher agreement than the manual setting across all event set types (Figure 3), suggesting LLM-extracted help coding.

6 Error Analysis

In Event Set Curation, automatically generated event sets correlate poorly with expert annotations.

Variable Coding face issues from interpretable errors and schema errors.

Automatic Event Set Curation: While being significantly better than the current baseline, LLM-CLS+SEG still includes over 30% of false positives and negatives, falling short of expert annotators. Nonetheless, EMBEDDING and LLM-CLS+SEG prove useful when document TF-IDF scores are identical.

Underspecified Instructions: Unclear guidelines lead to imprecise coding by the LLM. Table 3 shows high selection frequency for *Country* but low for *Location*. While *Country* is specific, *Location* is vague, ranging from broad regions to specific sites. For instance, a variable might refer to the administrative area “*Pale, Sagaing*” in Myanmar, while annotators prefer the specific “*Einmahti village*”.

Superfluous Information: Documents often contain multiple events, resulting in conflicting reports and causing LLM to extract data for the wrong event or get contradictory variables. For example, reports on a Colombian strike vary, with some stating “*at least eight people wounded, three seriously*,” and others report “*five people injured*”.

Interpretive Result: Human judgment influences coding. The *Facility/Infrastructure* category in *Generic Attack* refers to non-human entities. If buildings are the primary target, it is coded as *Facility/Infrastructure*; otherwise, it is *Armed Assault*. Human annotators may disagree on primary targets.

7 Conclusion

Current event annotation processes depends significantly on human judgment. Recent advancements in NLP offer promising potentials for downstream tasks. In this study, we use an LLM to reduce human effort in Event Set Curation and Variable Coding. Our results show that an LLM outperforms traditional baselines in Event Set Curation. For Variable Annotation, the existing workflow benefits from reduced annotation time. Although fully relying on SoTA LLMs is still far from expert quality annotations, using an out-of-the-box LLM proves useful in helping experts with diverse variable types in a realistic task.

8 Limitations

NLP techniques have not yet reached human-level accuracy in document classification. In Event Set Curation, the computational cost of pairwise similarity increases quadratically with the linear growth

in the number of documents, rendering LM-based methods inefficient for large document sets. Although it is impractical to fully replace TF-IDF, EMBEDDING finds semantically similar documents when TF-IDF are the same. To alleviate computational efforts, instead of computing pairwise embedding similarity for every document, we only compute pairwise embedding similarity for documents above the TF-IDF threshold. For Variable Coding, extracting variables requires greater granularity to meet the specific criteria outlined in the coding guidelines. These steps are essential for implementing LM-assisted large-scale event data collection workflows.

References

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. [Gpt-4 technical report](#).
- Haozhe An, Zongxia Li, Jieyu Zhao, and Rachel Rudinger. 2023. [Sodapop: Open-ended discovery of social biases in social commonsense reasoning models](#). *Preprint*, arXiv:2210.07269.
- Dennis Aumiller, Satya Almasian, Sebastian Lackner, and Michael Gertz. 2021. [Structural text segmentation of legal documents](#). In *Proceedings of the Eighteenth International Conference on Artificial Intelligence and Law, ICAIL '21*. ACM.
- Yoshua Bengio, Réjean Ducharme, Pascal Vincent, and Christian Janvin. 2003. A neural probabilistic language model. *Journal of Machine Learning Research*, 3(null):1137–1155.
- C. Bouras and V. Tsogkas. 2013. Enhancing news articles clustering using word n-grams. *DATA 2013 - Proceedings of the 2nd International Conference on Data Technologies and Applications*, pages 53–60.
- Jannis Bulian, Christian Buck, Wojciech Gajewski, Benjamin Börschinger, and Tal Schuster. 2022. [Tomayto, tomahto. beyond token-level answer equivalence for question answering evaluation](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 291–305, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Anthony Chen, Gabriel Stanovsky, Sameer Singh, and Matt Gardner. 2020. [MOCHA: A dataset for training and evaluating generative reading comprehension metrics](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6521–6532, Online. Association for Computational Linguistics.

- Ronan Collobert, Jason Weston, Leon Bottou, Michael Karlen, Koray Kavukcuoglu, and Pavel Kuksa. 2011. [Natural language processing \(almost\) from scratch](#). *Preprint*, arXiv:1103.0398.
- Victoria Elliott. 2018. [Thinking about the coding process in qualitative data analysis](#). *Qualitative Report*, 23:2850–2861.
- Qiang Gao, Zixiang Meng, Bobo Li, Jun Zhou, Fei Li, Chong Teng, and Donghong Ji. 2024. [Harvesting events from multiple sources: Towards a cross-document event extraction paradigm](#). In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 1913–1927, Bangkok, Thailand. Association for Computational Linguistics.
- Goran Glavaš and Swapna Somasundaran. 2020. [Two-level transformer and auxiliary coherence modeling for improved text segmentation](#). *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(05):7797–7804.
- Koraljka Golub. 2006. [Automatic subject classification of textual web documents](#). *Journal of Documentation*, 62.
- Ari Aulia Hakim, Alva Erwin, Kho I Eng, Maulahikmah Galinium, and Wahyu Muliady. 2014. [Automated document classification for news article in bahasa indonesia based on term frequency inverse document frequency \(tf-idf\) approach](#). In *2014 6th International Conference on Information Technology and Electrical Engineering (ICITEE)*, pages 1–4.
- Marti A. Hearst. 1997. [Texttiling: segmenting text into multi-paragraph subtopic passages](#). *Comput. Linguist.*, 23(1):33–64.
- Karl Moritz Hermann, Tomáš Kočiský, Edward Grefenstette, Lasse Espeholt, Will Kay, Mustafa Suleyman, and Phil Blunsom. 2015. [Teaching machines to read and comprehend](#). In *Proceedings of the 28th International Conference on Neural Information Processing Systems - Volume 1, NIPS'15*, page 1693–1701, Cambridge, MA, USA. MIT Press.
- Gary King and Will Lowe. 2003. [An automated information extraction tool for international conflict data with performance as good as human coders: A rare events evaluation design](#). *International Organization*, 57(3):617–642.
- Tom Kocmi, Christian Federmann, Roman Grundkiewicz, Marcin Junczys-Dowmunt, Hitokazu Matsushita, and Arul Menezes. 2021. [To ship or not to ship: An extensive evaluation of automatic metrics for machine translation](#). In *Proceedings of the Sixth Conference on Machine Translation*, pages 478–494, Online. Association for Computational Linguistics.
- Omri Koshorek, Adir Cohen, Noam Mor, Michael Rotman, and Jonathan Berant. 2018. [Text segmentation as a supervised learning task](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 469–473, New Orleans, Louisiana. Association for Computational Linguistics.
- Zongxia Li, Lorena Calvo-Bartolomé, Alexander Hoyle, Paiheng Xu, Alden Dima, Juan Francisco Fung, and Jordan Boyd-Graber. 2025a. [Large language models struggle to describe the haystack without human help: Human-in-the-loop evaluation of llms](#). *Preprint*, arXiv:2502.14748.
- Zongxia Li, Andrew Mao, Daniel Stephens, Pranav Goel, Emily Walpole, Alden Dima, Juan Fung, and Jordan Boyd-Graber. 2024a. [Improving the tenor of labeling: Re-evaluating topic models for content analysis](#). *Preprint*, arXiv:2401.16348.
- Zongxia Li, Ishani Mondal, Yijun Liang, Huy Nghiem, and Jordan Lee Boyd-Graber. 2024b. [Pedants: Cheap but effective and interpretable answer equivalence](#). *Preprint*, arXiv:2402.11161.
- Zongxia Li, Xiyang Wu, Hongyang Du, Huy Nghiem, and Guangyao Shi. 2025b. [Benchmark evaluations, applications, and challenges of large vision language models: A survey](#). *Preprint*, arXiv:2501.02189.
- Richard Mason, Brian McInnis, and Siddhartha Dalal. 2012. [Machine learning for the automatic identification of terrorist incidents in worldwide news media](#). In *2012 IEEE International Conference on Intelligence and Security Informatics*, pages 84–89.
- Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. 2013. [Distributed representations of words and phrases and their compositionality](#). In *Advances in Neural Information Processing Systems*, volume 26. Curran Associates, Inc.
- Sean P. O'Brien. 2013. *A Multi-Method Approach for Near Real Time Conflict and Crisis Early Warning*, pages 401–418. Springer New York, New York, NY.
- Elizabeth A. St. Pierre and Alecia Y. Jackson. 2014. [Qualitative data analysis after coding](#). *Qualitative Inquiry*, 20(6):715–719.
- Barbara Probiez, Jan Kozak, and Anita Hrabia. 2022. [Clustering of scientific articles using natural language processing](#). *Procedia Computer Science*, 207:3449–3458. Knowledge-Based and Intelligent Information & Engineering Systems: Proceedings of the 26th International Conference KES2022.
- Martin Riedl and Chris Biemann. 2012. [Topictiling: A text segmentation algorithm based on lda](#). In *Proceedings of the Student Research Workshop of the 50th Meeting of the Association for Computational Linguistics*, pages 37–42, Jeju, Republic of Korea.
- Dan Roth and Dmitry Zelenko. 1998. [Part of speech tagging using a network of linear separators](#). In *36th Annual Meeting of the Association for Computational Linguistics and 17th International Conference on Computational Linguistics, Volume 2*, pages 1136–1142, Montreal, Quebec, Canada. Association for Computational Linguistics.

Philip A. Schrodt and David Van Brackle. 2013. *Automated Coding of Political Event Data*, pages 23–49. Springer New York, New York, NY.

Ralph Sundberg. 2013. *Introducing the ucdp georeferenced event dataset*. *Journal of Peace Research*, 50(4):523–532.

Zhen Tan, Dawei Li, Song Wang, Alimohammad Beigi, Bohan Jiang, Amrita Bhattacharjee, Mansooreh Karami, Jundong Li, Lu Cheng, and Huan Liu. 2024. *Large language models for data annotation and synthesis: A survey*. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 930–957, Miami, Florida, USA. Association for Computational Linguistics.

The GDELT Project. 2021. *A planetary scale open dataset: Just how big is gdelt as of 2021?* Accessed: November 26, 2024.

Yu-Min Tseng, Wei-Lin Chen, Chung-Chi Chen, and Hsin-Hsi Chen. 2024. *Are expert-level language models expert-level annotators?* *Preprint*, arXiv:2410.03254.

Shitao Xiao, Zheng Liu, Peitian Zhang, and Niklas Muennighoff. 2023. *C-pack: Packaged resources to advance general chinese embedding*. *Preprint*, arXiv:2309.07597.

Fangyuan Xu, Yixiao Song, Mohit Iyyer, and Eunsol Choi. 2023. *A critical evaluation of evaluations for long-form question answering*. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3225–3245, Toronto, Canada. Association for Computational Linguistics.

Sachin Yadav, Tejaswi Chopra, and Dominik Schlechtweg. 2024. *Towards automating text annotation: A case study on semantic proximity annotation using gpt-4*. *Preprint*, arXiv:2407.04130.

A Appendix

A.1 Automated Data Processing

A retrieval model collects news articles from trusted sources. String filters identify documents containing potential terrorism attack information, focusing on keywords such as *assault*, *hostage*, and *rebel*. Then, an algorithm removes duplicates and irrelevant documents from this pool. A Support Vector Machine (SVM) uses TF-IDF to flag highly relevant documents for manual review.

A.2 Definition of Terrorism and Inclusion Criteria

The CUSS team defines a terrorist attack as the threatened or actual use of illegal force and violence by a non-state actor to attain a political,

economic, religious, or social goal through fear, coercion, or intimidation. Specifically, an article must have all of the following attributes to be included in the database:

1. **The event must be intentional** – the result of a conscious calculation on the part of a perpetrator.
2. **The event must involve violence** - against either property or people.
3. **The perpetrators of the events must be sub-national actors**. State-level terrorism is excluded from the database.

In addition, the article must also meet at least two of the following criterion:

1. **The act must be aimed at attaining a political, economic, religious, or social goal**. In terms of economic goals, the exclusive pursuit of profit does not satisfy this criterion. It must involve the pursuit of more profound, systemic economic change.
2. **There must be evidence of an intention to coerce, intimidate, or convey some other message to a larger audience (or audiences) than the immediate victims**. It is the act taken as a totality that is considered, irrespective if every individual involved in carrying out the act was aware of this intention. As long as any of the planners or decision-makers behind the attack intended to coerce, intimidate or publicize, the intentionality criterion is met.
3. **The action must be outside the context of legitimate warfare activities**. That is, the act must be outside the parameters permitted by international humanitarian law, insofar as it targets non-combatants.

A.3 Algorithm for Finding the Best Embedding Threshold

A.4 Over- and Under-generation of LM-CLS

Using an LM to generate event set candidates would almost always create different numbers of event sets compared to TF-IDF, making direct comparison difficult. To address potential over- or under-generation, we formulate this as a linear assignment problem, optimizing the average F_1 score between the results and the human-coded reference set (Appendix A.4).

The linear assignment problem is an optimization problem. The objective is to assign a gold

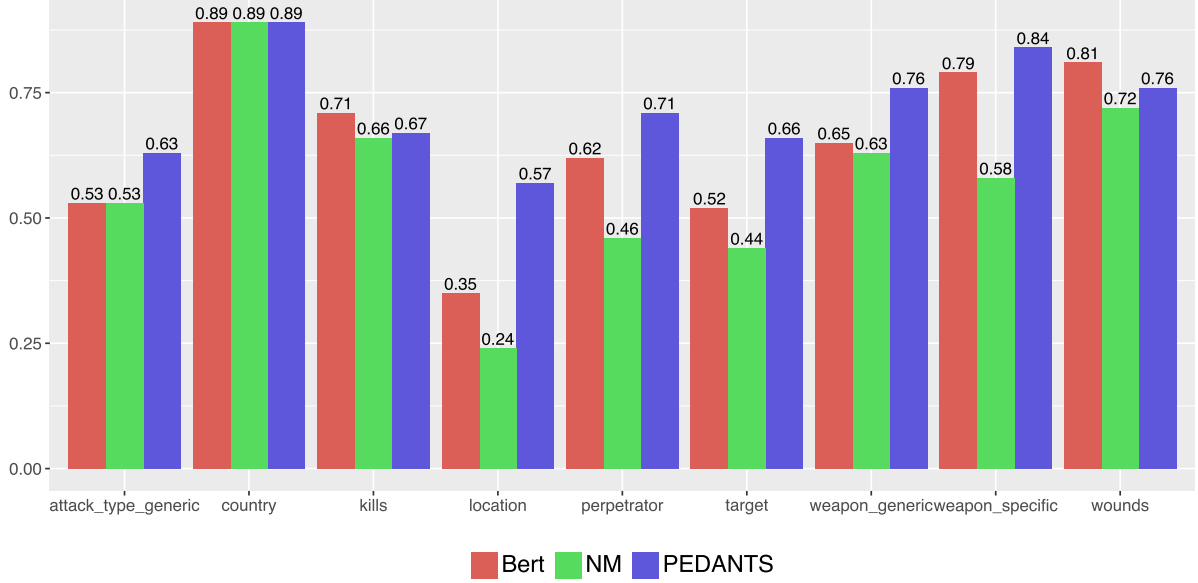


Figure 4: Agreement grouped by variable type. Human annotators agree more with extracted variables with higher degree of specificity. *Country* has over 90% agreement. *Generic attack type* and *weapon type* also high agreement. In comparison, low specificity variables like *location* demonstrate low agreement with human judgment.

Algorithm 1 Embedding Algorithm

```

1: Input: list of articles
2: Output: best precision, recall,  $F_1$ 
3: best precision, recall,  $F_1 \leftarrow 0, 0, 0$ 
4: for  $i = 1$  to steps do
5:   threshold  $\leftarrow \min + \frac{(\max - \min) \cdot i}{\text{steps}}$ 
6:   for each article1 in all articles do
7:     similars  $\leftarrow \emptyset$ 
8:     for each article2 in all articles do
9:       calculate similarity
10:      if similarity  $\geq$  threshold then
11:        similars.add(article2)
12:      end if
13:    end for
14:    if  $F_1(\text{ref}, \text{similars}) >$  best  $F_1$  then
15:      update best  $F_1$ 
16:    end if
17:  end for
18: end for
19: return best (precision, recall,  $F_1$ )

```

event set to a generated event set in such a way that the overall cost is minimized. $C_{i,j}$ represents the cost of matching event set i in the gold set with event set j in the prediction set. Formally, the optimal assignment has cost

$$\sum_i \sum_j C_{i,j},$$

where

$$C_{i,j} = -F_1(i, j)$$

A.5 Variable Coding Schema

Here, we describe the variables in the annotation process, specified by CUSS.

- Country:** the country in which the terrorism event occurred.
- Location:** the most specific location (e.g., village name) in which the terrorism event occurred.
- Target:** the targeted group of the terrorism event.
- Perpetrator:** the group carrying out the terrorism event.
- Generic Attack Type:** One or more of *Facility/Infrastructure Attack*, *Armed Assault*, *Assassination*, *Bombing/Explosion*, *Hostage Taking (Kidnapping)*, and *NA*.
- Generic Weapon:** One or more of *Explosives*, *Firearms*, *Incendiary*, *Sabotage Equipment*, *Melee*, *Vehicle*, and *NA*,
- Specific Weapon:** A detailed description of *Generic Weapon*.

8. **Kills:** Number of people killed during the terrorism event.
9. **Wounds:** Number of people injured during the terrorism event.

A.6 Human-LM Agreement by Variable Type

Figure 4 shows how often human annotators agree with LM-extracted variables using equivalence metrics. Annotators show 0.89 agreement with *Country*, a variable with high degree of specificity. In contrast, annotators agree with *Location* infrequently, suggesting less utility of variables with lower degree of specificity.

A.7 GPT-4o-mini Prompts

The specific model we used is *gpt-4o-mini-2024-07-18* with zero temperature. Output might change for future models.

Prompt for document classification:

*"Determine whether the following articles describe the same incident:
{article 1}
{article 2}"*

Prompt for Document segmentation:

*"The following document describes zero or more terrorism incidents. Segment the document based on incidents mentioned and return an array.
{article}"*
