A Fair and Lightweight Consensus Algorithm for IoT

Sokratis Vavilis [$^{0000-0002-3104-3973]}$, Harris Niavis [$^{0000-0002-5941-9987]}$, and Konstantinos Loupos [$^{0000-0002-9162-7233]}$

Inlecom Innovation, Athens, Greece
{sokratis.vavilis,harris.niavis,
konstantinos.loupos}@inlecomsystems.com

Abstract. As hyperconnected devices and decentralized data architectures expand, securing IoT transactions becomes increasingly challenging. Blockchain offers a promising solution, but its effectiveness relies on the underlying consensus algorithm. Traditional mechanisms like PoW and PoS are often impractical for resource-constrained IoT environments. To address these limitations, this work introduces a fair and lightweight hybrid consensus algorithm tailored for IoT. The proposed approach minimizes resource demands on the nodes while ensuring a secure and fair agreement process. Specifically, it leverages a distributed lottery mechanism to fairly propose blocks without requiring specialized hardware. In addition, a reputation-based block voting mechanism is incorporated to enhance trust and establish finality. Finally, experimental evaluation was conducted to validate the key features of the consensus algorithm.

Keywords: Blockchain \cdot Internet of Things \cdot IoT \cdot Consensus algorithm

1 Introduction

As we enter an era of hyperconnected devices and decentralized data architectures, maintaining the integrity and security of transactions within such a distributed ecosystem presents significant challenges [34,26]. Factors such as device heterogeneity, insecure communication protocols, and limited computational resources create barriers to establishing trust in the IoT device lifecycle [43]. Integrating Blockchain into IoT systems offers a transformative approach to enhance security, data integrity, and interoperability [23,11,25]. At the core of this integration is the consensus algorithm, a fundamental component that dictates network throughput, transaction validity, and immutability. Developing efficient and resilient consensus mechanisms is essential to enable secure, scalable, and trustworthy decentralized IoT ecosystems.

Although fundamental consensus algorithms such as Proof of Work (PoW) and Proof of Stake (PoS) have been effective in general-purpose blockchains such as Bitcoin and Ethereum, they face unique challenges when applied to IoT ecosystems. The resource-intensive nature of PoW, for instance, poses a significant hurdle in the resource-constrained environments characteristic of IoT

devices [41,38,35]. Moreover, the need for energy-efficient consensus mechanisms becomes paramount as the proliferation of connected devices continues unabated.

This research paper introduces a novel, fair and lightweight consensus algorithm designed specifically for the demands of Blockchain in IoT scenarios. The proposed algorithm addresses the limitations of existing mechanisms by optimizing for low resource consumption and fairness. It uses distributed lottery mechanisms to ensure fairness and reputation-based block voting to enable trust in the process, while it does not rely on specific hardware enabling its applicability to diverse devices. This approach improves performance, security, and trust in decentralized IoT networks, promoting broader blockchain adoption across various IoT applications.

The remainder of this paper is organized as follows. Section 2 presents an overview of the proposed algorithm along with details of each phase, while Section 3 analyzes the experiments performed to assess the algorithm in terms of fairness and robustness to attacks. Section 4 presents related work in the domain of IoT blockchain consensus algorithms, and Section 5 concludes and points out directions for future work.

2 Fair and lightweight consensus

In this section, we discuss our consensus algorithm for IoT devices. Firstly, we present an overview of our proposal and then we proceed to discuss the details of each phase of the consensus algorithm.

2.1 Overview

Due to its decentralized nature and immutability characteristics, blockchain technology is a promising candidate for addressing key security challenges of the IoT ecosystem. However, one of the biggest open challenges is the applicability of blockchain consensus algorithms in the IoT context. Particularly, the current consensus algorithms, such as Proof-of-Work (PoW) fail to properly respect the constraints of IoT devices, such as their limited resources. Next to that, less heavy-weight approaches such as Proof-of-Stake (PoS) or Proof-of-Interest (PoI) may give an unfair advantage to particular nodes of the network (e.g., favoring nodes with high monetary investments in the network) related to the block proposal, effectively demotivating newcomers or nodes with less involvement in the network. Lastly, traditional voting-based approaches, either cannot tolerate malicious nodes or introduce a significant communication overhead. Next to that, voting-based approaches are difficult to be applied in public networks, where node membership is fluid.

To address these limitations, we present a novel hybrid consensus algorithm for IoT, which aims to be lightweight and fair. In particular, as depicted in Figure 1, the proposed consensus algorithm consists of two parts; a distributed lottery mechanism for block proposals, and reputation-based voting for finalizing the agreement on a particular block. On the one hand, the proposed lottery

3

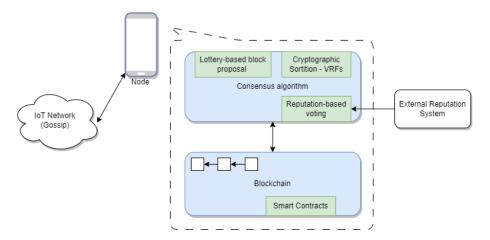


Fig. 1. Consensus algorithm structure overview

mechanism employs Verifiable Random Functions (VRFs) which allow nodes to calculate a random lot in a verifiable and distributed fashion. On the other hand, the voting phase is based on a consortium of trusted nodes, who vote for the best block proposal obtained for a round. To assess each node's level of trust, an external reputation system is employed [39,17,1]. We note that our proposal is not constrained to a particular reputation model; additionally, in this work we assume the existence of such a reputation system.

In contrast to other consensus algorithms, our approach applies to resourceconstrained environments as it does not rely on heavy-weight calculations and does not pose any particular hardware requirements, such as the support of a Trusted Execution Environment (TEE) as done for instance in Proof-Of-Luck [28]. In addition, our algorithm is fair since each node of the blockchain network, has an equal chance of proposing a block regardless of its resources/state (e.g., computational, monetary, importance). We note that the trusted consortium of voters (i.e., randomly selected nodes with high-reputation) does not interfere with the block proposal phase, and the voters only vet the best block proposal seen in a round. Lastly, considering the effort required to build high-reputation, it is counter intuitive for trusted nodes to adopt malicious practices.

2.2 Algorithm flow

The operational flow of the proposed algorithm is shown in Figure 2. In particular, nodes of the network compete with each other in adding a specific block to the chain by continuously executing the depicted process. At the beginning of each round (i.e., order of block to be added), nodes check whether they are in the correct round. This is achieved by assessing whether the node has received any messages regarding a round greater than the current size of the local blockchain known to the node. In case the node is out of sync with the other nodes, it requests from its neighboring nodes the most up-to-date chain available. Based on

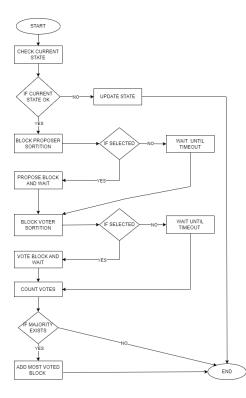


Fig. 2. Consensus algorithm execution flow

the replies from its neighbors, the node adopts the longest (in terms of blocks) valid chain. Otherwise, the nodes proceed with proposing a block.

During the block proposal phase, each node executes a cryptographic sortition algorithm to assess if it is selected to propose a block, and if positive it makes a proposal. The sortition mechanism involves the calculation of a random lot which is used for the block proposal. Then, the node waits until a timeout period to allow for the messages to disseminate in the network. Next, the nodes proceed to the voting phase, where the cryptographic sortition mechanism is employed to assess whether a high-reputable node is chosen to be part of the voting committee to vote for the best block proposal (i.e., with greater lot value) seen. After the voting timeout passes, each node assesses whether they have achieved a majority vote for a proposed block, which will be added to the blockchain.

During this process, each node executes in parallel a message handling routine, implementing a gossip protocol, responsible for disseminating messages in the network. For efficiency reasons, previously seen messages and messages regarding rounds smaller than the current known by a node are discarded. To protect the authenticity and integrity of the messages exchanged, they are cryptographically signed. We note that the employed communication approach is quite common in consensus algorithms and peer-to-peer networks, and its further investigation is out of the scope of this work.

2.3 Algorithm Details

Following, we discuss the details around our proposed consensus algorithms.

Random Lotteries and Sortition Random lotteries are a fundamental part of our consensus design, as both block proposal and voting rely on it. To this end, we need a secure and verifiable means of calculating random values in the distributed blockchain context. A plethora of approaches that address this issue exist in the literature [10,31,32,27], although not all of them fit the resource constrained IoT context.

In our algorithm, we have chosen Verifiable Random Functions (VRFs) [27] to generate random lots, as it is a mature primitive with low computational and communication overhead. VRFs rely on public key cryptography to produce verifiable and uniform random numbers, in the form of hashes, given an input. In particular, a node can use a common public value as input to the VRF, known as the seed, and using its secret key will generate a random number, along with a cryptographic proof. Other nodes of the network can verify the validity of the produced lot, using the associated proof, the seed used for the generation of the lot, and the public key of the lot issuer. Each round seed is calculated as $seed_r = VRF_{sk}(seed_r - 1)||r)$, where r represents a round. To properly utilize the properties of VRFs, the publicly known seeds used in each round must be chosen at random and not controlled by potential threat agents. To this end, we require that all agents' secret keys are defined well in advance the seed of a particular round (e.g., in the previous round or earlier). In this respect, we follow a similar strategy as the one discussed in [18], and we recommend the reader to read that work for more details.

Algorithm 1 Cryptographic Sortition

```
1: procedure SORTITION(sk, role, seed)
```

- 2: $lot, proof \leftarrow VRF_{sk}(seed||role)$
- 3: if role is PROPOSAL and lot \geq (THRESHOLD_{proposal} × MAX_LOT) then
- 4: **return True**, *lot*, *proof*
- 5: else if role is VOTE and node_reputation $\geq THRESHOLD_{reputation}$ and lot $\geq (THRESHOLD_{vote} \times MAX_LOT)$ then
- 6: return True, lot, proof
- 7: else
- 8: return False
- 9: **end if**
- $10:\ \mathbf{end}\ \mathbf{procedure}$

As the number of participants in the network can be arbitrarily high, we need a mechanism to select random subsets of nodes to actively participate in the block proposal and voting process. This will effectively decrease the communication overhead introduced by exchanging a large number of block proposals or voting messages. To meet this requirement, we employ cryptographic sortition based on VRFs, to secure the random selection of nodes. Due to the use of VRFs, cryptographic sortition is reliable and verifiable by the nodes of the network. As shown in Algorithm 1, of a particular round and phase of the algorithm (i.e., block proposal or voting), a node calculates a random lot using the VRF and if this value is above a predefined threshold, then the node is selected for participation. Other nodes of the system can verify the outcomes of the sortition mechanism for a node using Algorithm 2. In the following, we discuss how the sortition mechanism is used for proposing blocks and voting.

Block Proposal In each round, every node executes the sortition algorithm (Alg. 1) to assess if it is chosen to propose a block. Initially, the node calculates a random lot for the round using the VRF function along with its public key and the round's seed. If the calculated lot is over a particular threshold, the node proceeds to send its block to the network, including the generated lot with the associated proof and the block's seed. The nodes receiving the block proposal employ Algorithm 2 to verify it. This algorithm first verifies the VRF and then uses similar criteria to the ones used in the sortition. We note that the proposed sortition algorithms are designed to give equal chances for selection to every legible node, without prioritizing nodes based on any other factor (e.g. stake) than the random lot.

The threshold aims to limit the number of nodes proposing a block, thus limiting the number of proposals in the network. To calculate the threshold value, we use a weight (i.e., $THRESHOLD_{proposal}$) and multiply it by the potential maximum value of the VRF (i.e., MAX_LOT). Since VRF's output is uniformly distributed the $THRESHOLD_{proposal}$ defines the anticipated ratio of nodes to be selected. For instance, by setting $THRESHOLD_{proposal} = 0.9$, we anticipate that only 10% of the nodes will be selected.

We note that using this approach, the number of selected block proposers grows linearly to the number of nodes, although at a lower rate defined by $THRESHOLD_{proposal}$. However, in case the total number of nodes in the network is known, it is possible to dynamically adjust the $THRESHOLD_{proposal}$ value to fix the number of block proposers per round. Although this would be trivial in a permissioned blockchain network, it is not the case for public permissionless networks. However, assessing the potential number of nodes in a permissionless network is out of the scope of the current work.

Finally, to limit the amount of information transmitted over the network, during the block proposal phase only the generated lots along with their proofs, and the proposed block's hash are sent over the network. Only after the end of the proposal phase, the actual winning block(s) is transmitted. Next, we argue that due to the random selection procedure of our approach, potential adversaries have limited chances to be selected which is relative to their ratio over the participants of the network. In practice, an adversary has to control over 50% of the network to have meaningful chances of getting selected and posing a threat in the operation of the blockchain. Such a scenario would be feasible in a permission-less network via Sybil-attacks since our algorithm lacks explicit protection against Sybil attacks. However, even in that case, attackers will only be able to slow down the rate of adding blocks to the chain. Such an effect could be mitigated by using the reputation system to detect patterns of malicious behavior and ban nodes that consistently misbehave. We leave the investigation of such an approach for future work. Lastly, we note that the safety of the blockchain would not be compromised, due to the reputation-based voting mechanism.

Algorithm 2 Cryptographic Sortition Verification

```
1: procedure VERIFYSORTITION(pk, role, seed, lot, proof)
      if VerifyVRF_{pk}(lot, proof, seed || role) is False then
2:
3:
          return False
      end if
 4:
 5:
      if role is PROPOSAL and lot \geq (THRESHOLD<sub>proposal</sub> \times MAX LOT)
   then
 6:
          return True
      else if role is VOTE and node reputation \geq THRESHOLD_{reputation} and
 7:
   lot \geq (THRESHOLD_{vote} \times MAX \ LOT) then
8:
          return True
9:
      else
10:
          return False
11:
       end if
12: end procedure
```

Voting Phase After the block proposal phase, selected nodes of the network vote for the best block proposal, in terms of the highest lot, seen. To this end, every node of the network executes the sortition algorithm (Alg. 1) to decide if they are part of the voting comittee. The internal mechanics of the sortition algorithm for the voting phase, are quite similar to the block proposal phase. In particular, VRFs are again used for the calculation of a random lot, however, there are a few notable differences.

First and foremost, we have introduced a reputation-based criterion for the selection. The intuition behind this choice is to only select nodes with a high enough reputation, that have already proven their good behavior in the network. To achieve this, a $THRESHOLD_{reputation}$ value has to be set to a value that semantically denotes a high reputation. For instance, if a reputation system employs a [0, 1] scale, the threshold value could be set to 0.8. We stress the fact that $THRESHOLD_{reputation}$ should be high enough, in order not to allow adversaries to be selected for voting. We also argue that with a high enough $THRESHOLD_{reputation}$ value, potential attackers would have to invest a significant amount of time and effort to achieve and retain a high enough reputation.

Moreover, such a strategy should be done for multiple nodes, to achieve a high enough probability to be selected by the sortition algorithm and form a majority.

Secondly, we introduce a different threshold $(THRESHOLD_{vote})$ for the lots used in the voter selection process. The reason for such a choice is that we want to adjust the size of voting committees in a different manner than for the block proposal. Moreover, since the number of highly reputable nodes is known, this threshold value could be set to result in a voting committee of fixed size, further limiting the chances of potential adversaries being selected.

Block addition When the voting phase is completed, the network nodes will decide which block they will add to the blockchain. In particular, nodes first verify the received voting messages using the Algorithm 2. Then if a block has gathered the majority of the votes it is added to the chain. Otherwise, the nodes do not add any block and proceed to the next round. It should be noted that nodes will only add blocks containing valid data (e.g., valid transactions).

Assuming that the votes originate from high-reputable and trustworthy nodes, this approach ensures finality and safety of the chain. It should also be noted, that due to the use of digitally signed messages and verifiable lots, the integrity of the exchanged information is not at stake. Therefore, potential adversaries may only be able to hinder the efficiency of the network by reducing the rate at which blocks are added to the chain.

3 Experiments and Discussion

This section presents the experiments conducted to evaluate the proposed consensus algorithm. We begin by outlining the objectives of the tests and the experimental setup, followed by a detailed discussion of the results obtained.

3.1 Experiment objectives and setting

Our prime objective is to evaluate the performance of the proposed consensus algorithm concerning its fairness property and its robustness to attackers. To this end, we have developed a reference implementation of the algorithm in Python. To enable the communication and message exchange between the nodes, we implemented a REST API using Flask. Over this REST API a simple gossip protocol was developed, allowing nodes to spread messages to five random neighbors. Avoidance of repeating already sent messages, such as block proposals, was implemented to reduce the communication overhead. It is important to note that in terms of performance Python and Flash are sub-optimal choices. However, their ease of use enables rapid development which fits our objective of creating a Proof-of-Concept (PoC) to assess the algorithm's fundamental properties.

Regarding the configuration of the consensus algorithm, we made the following choices. Similarly to other algorithms [28,18], We set the overall round timeout period to 18 seconds (12 seconds for the block proposal, and 8 seconds for voting). Empirically, this time window would be sufficient for spreading information (i.e., messages) over the network. Furthermore, to reduce the network overhead we also set $THRESHOLD_{proposal} = 0.9$, allowing only 10% of the nodes to propose a block in each round. Regarding the voting mechanism, we set $THRESHOLD_{reputation} = 0.8$ (in the range [0,1]) to allow only highreputable nodes to vote, while $Threshold_{vote}$ is set to allow a voting committee of 11 nodes. Nodes obtain reputation information via a reputation system. We also note that we set the size of blocks to 200 kilobytes. Lastly, to reduce the computation overhead introduced by cryptographic operations (e.g., digital signatures of messages), we replaced such operations with less computationally intensive alternatives (e.g., time delays).

For the experiment, we deployed our sample implementation in the AWS cloud infrastructure, deploying up to 100 nodes (depending on the experiment use-case) in a similar number of t3.micro instances. Out of these nodes, 15 are highly reputable nodes, with a reputation of 0.9, from which the voting committee members will be randomly selected. Note that despite that the number of the highly-reputable nodes does not have an impact on the experiment results, it should be high enough to allow the formation of a voting committee. We assume that these nodes remain honest throughout the experiments. We acknowledge that our experiment setting, and implementation are not optimized for computational and network efficiency. However, we argue that this has a limited impact on our evaluation since we study the behavior of our algorithm with respect to fairness and robustness to adversaries rather than for efficiency and throughput.

3.2 Assessing the Fairness property

A key aspect of our design is the fairness with which nodes add blocks to the chain. To evaluate this aspect, we measure the diversity of the block proposers (i.e., the number of different proposers) that have successfully added a block to the chain. We also measure the size of the globally accepted chain (i.e., the longest most common chain) and the number of nodes that are in sync with it.

We evaluate the fairness property with a set of experiments deploying different numbers of nodes. We let the consensus algorithm run for ten minutes for each number of nodes. We repeat this process five times and report the averages per metric. The results of our experiments are shown in Table 1.

 Table 1. Fairness experiments results

Nodes	25	50	75	100
Blocks added	30	30	30	30
Proposer diversity	23	26	26	27
Nodes in sync	25	50	73	94

The first finding of our experiment is that the algorithm maintains a stable throughput of three blocks per minute, regardless of the number of nodes. Al-

though our setup involves a relatively small scale (up to 100 nodes) compared to large public blockchain networks with thousands of nodes, the results indicate that the proposed approach performs as expected, with a round time of approximately 20 seconds. Additionally, most nodes stay synchronized with the global chain, though a slight drop in synchronization is observed as the network size increases. After inspecting the logs of the nodes, we found that the desynchronized nodes were lagging for one block, which could be a result of network discrepancies. These nodes are expected to catch up with the last block during the next round. Lastly, regarding the fairness property of our consensus algorithm, we notice that the block proposer diversity grows from 76% to 90% as the number of nodes increases. This behavior is expected as the uniform distribution of the probability of the lotteries is better expressed on a greater scale.

3.3 Robustness to attacks

Before we move on to discuss how we assess the robustness of attacks, we need to define the attackers' profile. To this end, we consider that an attacker can deploy multiple malicious nodes that will not respect the consensus protocol. Since attackers cannot influence the integrity of the exchanged messages, and cannot forge the random lots (due to the use of VRFs), they concentrate their efforts on selecting which information to disseminate over the network to affect the block added to the chain. Malicious nodes may selectively forward block proposals and votes aiming at stopping the expansion of the chain with new blocks. Next to that, malicious nodes aim at increasing the chances that a malicious node is chosen to propose a block, effectively halting the addition of a block for that round. In our experiments, we assume that malicious nodes cannot have a high reputation and thus cannot participate in the voting committee.

To assess the robustness of our algorithm against attackers, we employ similar metrics to the ones used in the previous section. In particular, we measure how the presence of attackers impacts the fairness and the expansion of the chain. We do this with a set of experiments deploying 100 nodes and a varying ratio of malicious nodes on the network. For each case, we let the consensus algorithm run for ten minutes. We note that by definition, the malicious nodes are deliberately not in sync with the chain. The results of our experiments are shown in Table 2

Table 2. Robustness to attacks results

Malicious Nodes	0	10	20	30	40	50
Blocks added	30	26	26	25	18	15
Proposer diversity	27	23	23	22	17	14
Nodes in sync	94	84	75	68	58	47

Evaluating the results, we observe that the ratio of malicious nodes has an impact on the throughput of the blockchain network. In particular, we notice a

small drop of 14% in the number of blocks added when the ratio of attackers is relatively low (10% to 30%), however, a more significant drop of 40% -50% is noticed when the number of malicious nodes represents almost half of the nodes. This behavior can be justified by the fact that the ratio of malicious nodes in the network is proportional to the probability of being selected to propose a block. Such an effect could be mitigated by using the reputation system to decrease the reputation of nodes that consistently misbehave, and eventually ban them from the network. We leave the investigation of this use case for future work. We note that regardless of the drop in overall throughput, the network manages to operate with both safety and finality. Last but not least, it is noticed that the block proposer diversity (i.e., fairness) and the (honest) nodes synchronized to the global chain are not affected by the presence of adversaries in the network. This is evident in the scenario with 50 malicious nodes, where 14 out of 15 blocks were proposed by different nodes, and 47 out of 50 nodes remained synchronized.

4 Related work

Consensus algorithms are regarded as the cornerstone of blockchain as they provide the means for nodes to agree on the state of the blockchain. Specifically, they provide the mechanisms based on which nodes agree on the blocks to be added to the blockchain. The characteristics of the consensus algorithm are crucial both for the performance and security of properties on the blockchain solution. To this end, several different approaches have been proposed in the literature originating from the domain of distributed network systems and recently in blockchain technology per se. In general, consensus algorithms can be classified into two broad categories: voting-based and proof-based [19].

Traditional distributed systems approaches have been adapted for permissioned blockchains, as they share similar foundational assumptions. These methods rely on a voting mechanism where nodes elect a leader and vote on block proposals, with final decisions determined by majority rule. Their primary goal is to ensure consistency and finality, guaranteeing that all nodes have a unified view of the blockchain state after each round. However, these approaches tend to be more centralized and face scalability issues due to the high communication overhead required for consensus. Additionally, many voting-based models assume that most participating nodes are both honest and consistently available.

Over the past decades, Paxos [22] was the dominant voting-based consensus mechanism, although its complexity hindered its application. To address this issue, Raft [30] was proposed as a simple and understandable approach to reaching consensus. Raft addressed the issue of understandability by introducing a straightforward leader election mechanism, in which each node has the chance to campaign for a Leader role for a particular round. This was achieved by having random time-based rounds, where a node could request the support (i.e., votes) of its peers, aiming for a majority. Both approaches although being crash-fault tolerant assumed the honesty (i.e., trust) of all the participating nodes, restricting their application in many real-case scenarios. To this end, Byzantine-fault

tolerant (BFT) solutions were proposed. One of the most widely applied and efficient mechanisms of this kind is Practical Byzantine Fault Tolerance (pBFT) [9] consensus algorithm which was designed to tolerate up to |(n-1)/3| malicious nodes. It uses a three-phase protocol, where the failure to reach consensus among all consensus nodes triggers the election of a new Primary node (leader). The major drawback of pBFT is its quadratic complexity $O(n^2)$ compared to the linear complexity of the other two algorithms. Modern and scalable votingbased approaches have been also proposed exclusively for blockchain networks. A prominent example is Proof-Of-Vote [24] in which a committee of predefined members elects butler nodes, which are responsible for validating transactions and adding blocks to the chain.

Public permissionless blockchains face distinct security challenges, as they cannot assume trustworthy nodes and must prioritize performance due to their large scale. Their design emphasizes decentralization, security, and availability, often at the cost of immediate consistency and finality, leading to blockchain forks. To mitigate forks and achieve eventual consistency probabilistically, these blockchains employ mechanisms such as computational challenges (e.g., solving cryptographic puzzles) or leveraging node properties (e.g., stake ownership).

Regarding public blockchains, Proof of Work (PoW) [15,8] is the most popular consensus algorithm, since it is the one adopted by Bitcoin. It is a fully decentralized consensus mechanism that requires the network members to put computational effort into solving an arbitrary mathematical puzzle. The first node to solve the puzzle adds a block to the chain. Confirming a solution to such a puzzle can be easily and undeniably verified by other nodes. PoW approaches, however, suffer from low throughput and have a significant environmental impact due to the high energy consumption required. To address the latter, different consensus mechanisms have been proposed in the literature, such as Proof of Capacity / Proof of Storage [4,16] that pose a challenge related to the storage of data, which has a lower environmental footprint. Other approaches focus on selecting nodes in a physical manner employing the notion of randomness similar to participating in a lottery. For instance, in Proof of Elapsed time [12] each node has a random timer and the node that manages to time out first adds a block to the chain. Similarly, in the Proof of Luck (PoL) algorithm [28], each node calculated a random number and the luckiest (e.g., smallest number) adds a block. To guarantee the honest behavior of the nodes and the indisputably of the random procedures, a Trusted execution environment (TEE) is required to be present in each node. Based on the previous discussion it becomes apparent that these solutions require nodes to have a considerable number of resources or features, which renders them inappropriate for an IoT context [41,38,35,33]. Nonetheless, recent approaches like Proof of Verifiable Function (PoVF) utilize Verifiable Delay Functions (VDFs) and VRFs to achieve unpredictable node selection without relying on specialized hardware [42].

Apart from approaches that rely on a physical challenge to select a node for adding a block to the chain, other consensus algorithms make such a choice based on node properties. For instance, Proof of Authority [37] solutions rely on a set of pre-authorized nodes, whose identity and trust have already been verified. In each round, a node from that set is selected to add a block, while the rest of the nodes in the network follow that decision. Although quite efficient, these approaches increase the level of centralization and authorized nodes usually must be pre-approved in the physical world [41,38]. The most prominent consensus algorithm in the aforementioned family is Proof of Stake (PoS) [21], which is quickly gaining ground on modern crypto coins. In this approach, the node to add a block to the chain is selected considering the stake (e.g., the coins held) that a node has in the network. The underlying intuition is straightforward, the more the stake, the greater the chances to be selecting the node responsible for adding a block. In this context, nodes with high stakes have an incentive for the network to operate as designed and be profitable. Moreover, nodes who do not respect their responsibilities may lose part of their stake (i.e., slashing) as punishment, thus they will not misbehave. PoS algorithms exist in many different flavors, such as Delegated PoS [3] which aim to be more efficient or Pure PoS [18,13] solutions which aim to be more secure and fair. The main drawback of such approaches is that they are designed for cryptocurrencies where nodes have an economic incentive, making their application difficult in different contexts [41,38]. Moreover, such algorithms favor nodes with significant investments in the network, leading to increased centralization.

Although narrow in their applicability, PoS algorithms were proven to be secure, efficient, and with limited resource requirements, thus they gained the interest of the research community. To address their applicability issues, researchers have worked on expanding their concept to cover a wider variety of properties used in the consensus. To this end, Proof of Importance (PoI) [29] algorithms have been proposed. This family of algorithms extends the concept of stake by considering other aspects that highlight the importance of a node in the network. For example, the contribution to the network, the number of successful transactions, and the trustworthiness of the nodes are considered. A particular type of PoI type of algorithm is Proof of Trust / Reputation [44,20,36] algorithms which assess the overall trustworthiness of nodes (e.g., based on their characteristics and past behavior) to select a node for adding a block to the chain. These approaches are quite promising and there is considerable ongoing research in the field of IoT. However, the main challenge regarding these algorithms is related to their fairness, as nodes with higher importance tend to dominate the blockchain.

In real-world applications, most consensus algorithms adopt a hybrid approach, combining multiple mechanisms to capitalize on their strengths while mitigating their shortcomings. One such example is Proof of Activity [6], which integrates elements of both PoW and PoS. In this model, a lightweight PoW process is used to mine a block, after which PoS is used for validation and block addition. Other notable hybrid approaches include Ethereum's Proof-of-Stake and Algorand [18,13], which, while primarily PoS-based, incorporate pBFT voting schemes to enhance security and ensure stronger finality guarantees. Hybrid consensus mechanisms have also been explored in the IoT domain, such as PoE-

WAL [2], which combines PoW with PoLuck. Given their ability to balance security, efficiency, and scalability, hybrid approaches present a promising direction for IoT applications.

While we have already discussed the applicability of fundamental consensus paradigms in IoT, several recent studies have developed algorithms exclusively for IoT [33]. For example, the authors in [7] extend the HyperLedger Fabric framework by proposing a novel approach to reduce the number of participating nodes in the consensus process, enhancing its suitability for IoT environments. In [14], a leader-based consensus algorithm is introduced, where leaders precompute a hash-based token (i.e., consensus code) and are assigned to manage transactions associated with that token. This approach allows validators to create and commit blocks contraining transactions under their supervision, reducing the need for extensive coordination among nodes.

Additionally, two works share similarities with our proposed algorithm: REVO [5] and LVCA [40]. REVO leverages reputation to form trusted committees that elect nodes for block addition, whereas LVCA employs a random lottery voting-based consensus among trusted nodes to select the block proposer. In contrast, our algorithm emphasizes fairness by randomly selecting block proposers from the global pool of nodes while using reputation solely for validation and block addition to the chain.

5 Conclusion & Future Work

This work introduced a fair and lightweight hybrid consensus algorithm designed for IoT environments, balancing security, fairness, and efficiency. It combines random lotteries for fairness with reputation-based voting for safety and finality, all with minimal resource demands. A sample implementation validated the algorithm's fundamental fairness property and its resilience against adversarial attacks. However, real-world efficiency and scalability in the field of IoT remain open for further investigation. In addition, future research could further leverage reputation mechanisms employed to enhance security and throughput without compromising fairness.

References

- 1. Aaqib, M., Ali, A., Chen, L., Nibouche, O.: IoT trust and reputation: a survey and taxonomy. Journal of Cloud Computing **12**(1), 1–20 (2023)
- 2. Andola, N., et al.: PoEWAL: A lightweight consensus mechanism for blockchain in IoT. Pervasive and Mobile Computing **69** (2020)
- 3. Antheman, D.: DPOS consensus algorithm the missing white paper (2016), https://steemit.com/dpos/@dantheman/dpos-consensus-algorithm-this-missing-white-paper
- Ateniese, G., Bonacina, I., Faonio, A., Galesi, N.: Proofs of space: When space is of the essence. In: Security and Cryptography for Networks: 9th International Conference, SCN 2014, Amalfi, Italy, September 3-5, 2014. Proceedings 9. pp. 538– 557. Springer (2014)

- Barke, S., Srivastava, G.: ReVo: A hybrid consensus protocol for blockchain in the internet of things through reputation and voting mechanisms. In: 2024 IEEE 21st Consumer Communications & Networking Conference (CCNC). pp. 1–8. IEEE (2024)
- Bentov, I., Lee, C., Mizrahi, A., Rosenfeld, M.: Proof of activity: Extending bitcoin's proof of work via proof of stake. ACM SIGMETRICS Performance Evaluation Review 42(3), 34–37 (2014)
- Biswas, S., et, a.: PoBT: A lightweight consensus algorithm for scalable IoT business blockchain. IEEE Internet of Things Journal 7(3), 2343–2355 (2019)
- 8. Bitcoin, N.S.: Bitcoin: A peer-to-peer electronic cash system (2008)
- Castro, M., Liskov, B.: Practical byzantine fault tolerance and proactive recovery. ACM Transactions on Computer Systems (TOCS) 20(4), 398–461 (2002)
- Choi, K., Manoj, A., Bonneau, J.: SoK: Distributed randomness beacons. Cryptology ePrint Archive (2023)
- Christidis, K., Devetsikiotis, M.: Blockchains and smart contracts for the Internet of Things. IEEE Access 4, 2292–2303 (2016)
- 12. Coorporation, I.: Intel Sawtooth lake (2016), https://web.archive.org/web/ 20161025232205/https://intelledger.github.io/introduction.html
- 13. Dimitri, N.: Proof-of-stake in algorand 1(2) (dec 2022)
- Dorri, A., Jurdak, R.: Tree-chain: A lightweight consensus algorithm for iot-based blockchains. In: 2021 IEEE International Conference on Blockchain and Cryptocurrency (ICBC). pp. 1–9. IEEE (2021)
- Dwork, C., Naor, M.: Pricing via processing or combatting junk mail. In: Brickell, E.F. (ed.) Advances in Cryptology — CRYPTO' 92. pp. 139–147. Springer Berlin Heidelberg, Berlin, Heidelberg (1993)
- Dziembowski, S., Faust, S., Kolmogorov, V., Pietrzak, K.: Proofs of space. In: Annual Cryptology Conference. pp. 585–605. Springer (2015)
- Fortino, G., Fotia, L., Messina, F., Rosaci, D., Sarné, G.M.: Trust and reputation in the internet of things: State-of-the-art and research challenges. IEEE Access 8, 60117–60125 (2020)
- Gilad, Y., Hemo, R., Micali, S., Vlachos, G., Zeldovich, N.: Algorand: Scaling byzantine agreements for cryptocurrencies. In: Proceedings of the 26th symposium on operating systems principles. pp. 51–68 (2017)
- Jain, A.K., Gupta, N., Gupta, B.B.: A survey on scalable consensus algorithms for blockchain technology. Cyber Security and Applications 3, 100065 (2025)
- Kang, J., et al.: Toward secure blockchain-enabled internet of vehicles: Optimizing consensus management using reputation and contract theory. IEEE Transactions on Vehicular Technology 68(3), 2906–2920 (2019)
- King, S., Nadal, S.: Ppcoin: Peer-to-peer crypto-currency with proof-of-stake. selfpublished paper (2012)
- Lamport, L.: The part-time parliament. ACM Transactions on Computer Systems 16(2), 133–169 (1998)
- 23. Lee, I.: Internet of Things (IoT) cybersecurity: Literature review and IoT cyber risk management. Future Internet **12**(9) (2020)
- Li, K., Li, H., Hou, H., Li, K., Chen, Y.: Proof of vote: A high-performance consensus protocol based on vote mechanism & consortium blockchain. In: 2017 IEEE 19th International Conference on High Performance Computing and Communications; IEEE 15th International Conference on Smart City; IEEE 3rd International Conference on Data Science and Systems. pp. 466–473 (2017)

- 16 S. Vavilis et al.
- Loupos, K., et al.: An inclusive lifecycle approach for IoT devices trust and identity management. In: Proceedings of the 18th International Conference on Availability, Reliability and Security. pp. 1–6 (2023)
- Lu, Y., Xu, L.D.: Internet of Things (IoT) cybersecurity research: A review of current research topics. IEEE Internet of Things Journal 6(2), 2103–2115 (2019)
- Micali, S., Rabin, M., Vadhan, S.: Verifiable random functions. In: 40th annual symposium on foundations of computer science (cat. No. 99CB37039). pp. 120– 130. IEEE (1999)
- Milutinovic, M., He, W., Wu, H., Kanwal, M.: Proof of luck: An efficient blockchain consensus protocol. In: proceedings of the 1st Workshop on System Software for Trusted Execution. pp. 1–6 (2016)
- Niavis, H., Loupos, K.: Consenseiot: A consensus algorithm for secure and scalable blockchain in the IoT context. In: Proceedings of the 17th International Conference on Availability, Reliability and Security. pp. 1–6 (2022)
- Ongaro, D., Ousterhout, J.: In search of an understandable consensus algorithm. In: 2014 USENIX annual technical conference (USENIX ATC 14). pp. 305–319 (2014)
- Raikwar, M., Gligoroski, D.: Sok: Decentralized randomness beacon protocols. In: Australasian Conference on Information Security and Privacy. pp. 420–446. Springer (2022)
- 32. Randao.org: Randao: Verifiable random number generation (2017), https://www.randao.org/whitepaper/Randao_v0.85_en.pdf\$
- Sahraoui, S., Bachir, A.: Lightweight consensus mechanisms in the internet of blockchained things: Thorough analysis and research directions. Digital Communications and Networks (2025)
- Sicari, S., Rizzardi, A., Grieco, L., Coen-Porisini, A.: Security, privacy and trust in Internet of Things: The road ahead. Computer Networks 76, 146–164 (2015)
- Stefanescu, D., Montalvillo, L., Galán-García, P., Unzilla, J., Urbieta, A.: A systematic literature review of lightweight blockchain for IoT. IEEE Access (2022)
- Sun, L., Yang, Q., Chen, X., Chen, Z.: RC-chain: Reputation-based crowdsourcing blockchain for vehicular networks. Journal of network and computer applications 176, 102956 (2021)
- 37. Szilágyi, P.: Eip-225: Clique proof-of-authority consensus protocol (2017), https: //eips.ethereum.org/EIPS/eip-225
- Tripathi, G., Ahad, M.A., Casalino, G.: A comprehensive review of blockchain technology: Underlying principles and historical background with future challenges. Decision Analytics Journal 9, 100344 (2023)
- Vavilis, S., Petković, M., Zannone, N.: A reference model for reputation systems. Decision Support Systems 61, 147–154 (2014)
- Verma, S., Chandra, G., Yadav, D.: LVCA: An efficient voting-based consensus algorithm in private Blockchain for enhancing data security. Peer-to-Peer Networking and Applications 18(2), 1–19 (2025)
- Wen, Y., Lu, F., Liu, Y., Cong, P., Huang, X.: Blockchain consensus mechanisms and their applications in IoT: A literature survey. In: Algorithms and Architectures for Parallel Processing: 20th International Conference 2020, NY, USA. pp. 564–579. Springer (2020)
- Xiong, C., Yang, T., Wang, Y., Dong, B.: PoVF: Empowering decentralized blockchain systems with verifiable function consensus. arXiv preprint arXiv:2501.01146 (2025)

- Yousefnezhad, N., Malhi, A., Främling, K.: Security in product lifecycle of IoT devices: A survey. Journal of Network and Computer Applications 171, 102779 (2020)
- Zou, J., et al.: A proof-of-trust consensus protocol for enhancing accountability in crowdsourcing services. IEEE Transactions on Services Computing 12(3), 429–445 (2018)