

GS_DraavidianLangTech@2025: Women Targeted Abusive Texts Detection on Social Media

Girma Yohannis Bade^{1,a}, Zahra Ahani^{2,a}, Olga Kolesnikova,
José Luis Oropeza^{4,a}, Grigori Sidorov^{5,a}

^aCentro de Investigacion en Computación(CIC),
Instituto Politécnico Nacional(IPN), Miguel Othon de Mendizabal,
Ciudad de México, 07320, México.

¹girme2005@gmail.com

Abstract

The increasing misuse of social media has become a concern; however, technological solutions are being developed to moderate its content effectively. This paper focuses on detecting abusive texts targeting women on social media platforms. Abusive speech refers to communication intended to harm or incite hatred against vulnerable individuals or groups. Specifically, this study aims to identify abusive language directed toward women. To achieve this, we utilized logistic regression and BERT as base models to train datasets sourced from DraavidianLangTech@2025 for Tamil and Malayalam languages. The models were evaluated on test datasets, resulting in a 0.729 macro F1 score for BERT and 0.6279 for logistic regression in Tamil and Malayalam, respectively.

Keywords: Women target, social media, Abusive, BERT, Logistic regression

1 Introduction

Abusive speech encompasses communication designed to inflict harm or foster hatred toward vulnerable individuals or groups, targeting attributes such as gender, ethnicity, religion, complexion, or physical abilities (Shahiki Tash et al., 2025; Kolesnikova et al., 2025). The use of offensive language in such speech can profoundly impact the psychological well-being of victims, potentially leading to adverse outcomes (Prasanth et al., 2022) such as causing psychological effects (Ahani et al., 2024a; Tash et al., 2024c), including lowering self-esteem and increasing anxiety (Li, 2022; Ramos et al., 2024b). On the other hand, with the rapid development of technology, traditional forms of communication such as newspapers, radio and television have been overtaken by Internet-based media platforms (Bade and Seid, 2018). These digital channels provide personal communication opportunities and are very accessible to people who previously did not have a platform to interact with a wider audience. As a

result, social media has become an integral part of global communication, connecting people around the world (Sandaruwan et al., 2020), and this may enable distributing misogynistic content to the corner of the world within a minute.

However, there are efficient ways to automate the detection of this content using machine learning and deep learning models (Arif et al., 2024; Ramos et al., 2024a), with advanced approaches such as transformer architectures and large language models (LLM) (Tash et al., 2024b) showing significant efficiency in identifying and analyzing linguistic patterns (Vaswani, 2017; Ahani et al., 2024b). Social media platforms have become vital arenas for discussing violence against women (VAW), with movements like #MeToo raising global awareness about sexual harassment and abuse. However, these same platforms often expose women to targeted harassment, including abusive language and threats, particularly against activists, public figures, and those in leadership roles. This online abuse not only perpetuates harmful societal norms but also limits women’s participation in public and digital spaces. Efforts such as bystander intervention, digital activism, and community-level education have been instrumental in challenging these norms, though resource constraints and recurring harassment underscore the need for stronger institutional support to foster safer digital environments (efore #MeToo: Violence against Women on Social Media (Jenkins and Nickerson, 2019).

The objective of our research is to detect abusive remarks in Tamil and Malayalam, two Draavidian languages that are primarily used in South Asia and are acknowledged as one of India’s 22 scheduled languages (Priyadharshini et al., 2022a). However, the limited availability of linguistic resources for Tamil poses significant challenges for natural language processing (NLP), especially in building robust datasets. The detection of offensive comments involves text classification, where the

goal is to classify the text into predefined classes (Priyadharshini et al., 2023; Zamir et al., 2024). While transformer models (Vaswani, 2017; Tash et al., 2024a) have been effectively employed for this purpose, the language limitations of Tamil have limited the exploration of techniques such as data augmentation and have not developed this field.

We aimed to determine the most efficient model by thoroughly analyzing the results, emphasizing the critical need to address the challenge of reducing offensive comments against women in Tamil and Malayalam language online communities.

2 Related work

Several studies have explored detecting online misogyny using Natural Language Processing (NLP) (Bade et al., 2024a). Research has focused on challenges such as informal language, code-mixing (Bade et al., 2024a), and context-dependent expressions of misogyny (Bade et al., 2024a). Notably, a study by (Li, 2022) introduced a misogyny detection system using deep learning models trained on large datasets of online comments. Another key contribution is (Strathern and Pfeffer, 2022), which utilized transformer-based models to detect gender-based hate speech across multiple languages. Despite progress, detecting misogyny in low-resource languages remains underexplored (Bade et al., 2024c), with limited datasets and resources for languages like Tamil and Malayalam, which highlights the need for culturally sensitive and linguistically diverse approaches to tackle online misogyny.

Detecting abusive content online is challenging, largely because of the subtle distinction between offensive language and free speech (Khairy et al., 2021).

Efficient and precise detection and classification of abusive comments are essential for creating safer and more inclusive online platforms and communities (Bansal et al., 2022; Priyadharshini et al., 2022b). The study (Chakravarthi et al., 2023) introduced four Tamil and Tamil-English datasets from YouTube, addressing challenges like informal language and code-mixing. While MURIL excelled in binary abuse detection, fine-grained tasks favored classical models due to limited data. This was the first Tamil-focused FGACD study, providing datasets and methods for low-resource languages. (Roy et al., 2022) emphasize the urgent necessity of promptly identifying and eliminating

hate speech and offensive content from social media to prevent its harmful impact and rapid dissemination. They point out that code-mixed languages like Hindi-English, Tamil-English, Malayalam-English, and Telugu-English make it especially difficult to identify hate speech. Their study provides a detailed comparison of various machine learning and deep learning approaches to tackle this problem.

The study (Shanmugavadivel et al.) demonstrates that in low-resource languages like Tamil, adapter-based approaches outperform fine-tuned models. Additionally, the hyperparameter optimization framework Optuna is utilized to identify optimal hyperparameter values for improved classification performance. Among the proposed models, MuRIL (Large) achieves the highest performance with an accuracy of 74.7%, surpassing other models tested on the same dataset.

3 Task description

This task focuses on the detection of abusive text targeting women on social media, specifically in Tamil and Malayalam, two low-resource Dravidian languages. Social media platforms, while fostering communication and entertainment, have also become spaces where women face gender-based abuse, including hateful, derogatory, or threatening comments. This form of online harassment reflects societal biases and poses significant psychological, social, and professional challenges to the victims.

This task aims to identify and classify comments as either Abusive or Non-Abusive. The dataset used for this task was curated by scraping YouTube comments, focusing on controversial and sensitive topics where gender-based abuse is prevalent. These comments include a range of abusive language types, such as explicit abuse, implicit biases, stereotypes, and coded language.

The annotated datasets are provided to participants in both Tamil and Malayalam. Participants are required to build and evaluate models that can accurately classify each comment into one of the predefined categories: Abusive Non-Abusive.

4 Methodology

4.1 Datasets

The dataset comprises text samples categorized into two classes: Non-Abusive and Abusive. It includes 1,424 Non-Abusive entries and 1,366 Abusive entries in the Tamil training dataset, providing

a nearly balanced distribution. Similarly for Malayalam, 1424 are Non-abusive and 1366 Abusive are there in training. This data set is well suited for training and evaluating models for binary classification tasks, such as detecting abusive language in text. Its balance ensures fair representation of both classes, enabling robust model performance analysis.

Languages	Dataset	has_label?	Size
Tamil	Train	yes	2790
	Dev	yes	598
	Test	no	597
Malayalam	Train	yes	2933
	Dev	yes	629
	Test	no	628

Table 1: Dataset statistics

4.2 Dataset Preprocessing:

Preprocessing steps included: removing URLs, special characters, redundant spaces, and maintaining inconsistencies. Mapping class labels to binary values: "Abusive" (1) and "Non-Abusive" (0).

4.3 Experiment Models

BERT (Bidirectional Encoder Representations from Transformers)

BERT was employed for Tamil language in this study. It captures contextual information bidirectionally, making it effective for fine-tuning for binary classification with two output labels.

Tokenization and feature extraction for BERT transformer models was performed using their respective BertTokenizer (Bade et al., 2024b). The hyperparameters used for BERT model are summarized in the following Table 2. It's crucial to modify the hyperparameters in machine learning. The objective is to determine which parameter values result in the best model accuracy. The hyperparameters that each classifier possesses can have a big impact on how well the classifier performs (Gomes et al., 2023).

Hyperparameters	Values
Learning Rate	1e-5
Evaluation Strategy	epoch
Epochs	5
Batch Size	32
Max length	128
Activation function	sigmoid

Table 2: BERT Hyperparameters

As we can see from Table 2, The learning rate shows how many executions are made to enhance the model's functionality. An epoch is when the learning algorithm goes over the full training dataset once (Mersha et al., 2024). Thus, we set the epoch to be 5, i.e. the execution did pass 5 complete times. The batch size refers to dividing the total data size into 32 and bringing the divided batch one a time for the execution. This helps the execution to be fast. The last parameter, activation function is used to label or group the computational result into two classes.

Logistic Regression (LR): we implemented this approach to Malayalam language's data. It's a classic machine learning algorithm that predicts the relationship between input variables and the likelihood that an output will belong to a particular class (Krasitskii et al., 2024, 2025). Its sigmoid function transforms linear combinations of input features into probabilities, mapping real-valued predictions to a range between 0 and 1. This probabilistic output is critical for classification tasks, as it enables a threshold-based decision-making process. Since it has no its own feature extracting tool, we employed the TF-IDF (Term Frequency Inverse Document Frequency) feature extracting technique to tokenize and convert text data into numeric form (Bade et al., 2024c). For text feature extraction, the TF-IDF technique uses word statistics. This ignores the possibility that words could be represented by their synonyms and only takes into account ways that they are used consistently throughout all texts, like ASCLL (Liu et al., 2018). Table 3 summarizes the selected models and their feature extraction techniques.

Language	Modles	Feature Extraction
Tamil	BERT	BertTokenizer
Malayamal	LR	TF-IDF

Table 3: Model selection and their respective feature extraction techniques

Figure 1 illustrates the proposed system’s architecture. The process begins with dataset preprocessing to ensure data quality, followed by feature extraction, converting text into numerical form for model training. BERT undergoes fine-tuning, while LR trains from scratch to distinguish abusive and non-abusive content in Tamil and Malayalam. The trained model is then tested, generating predictions, which are evaluated against manually labeled test data using macro F1 to assess performance.

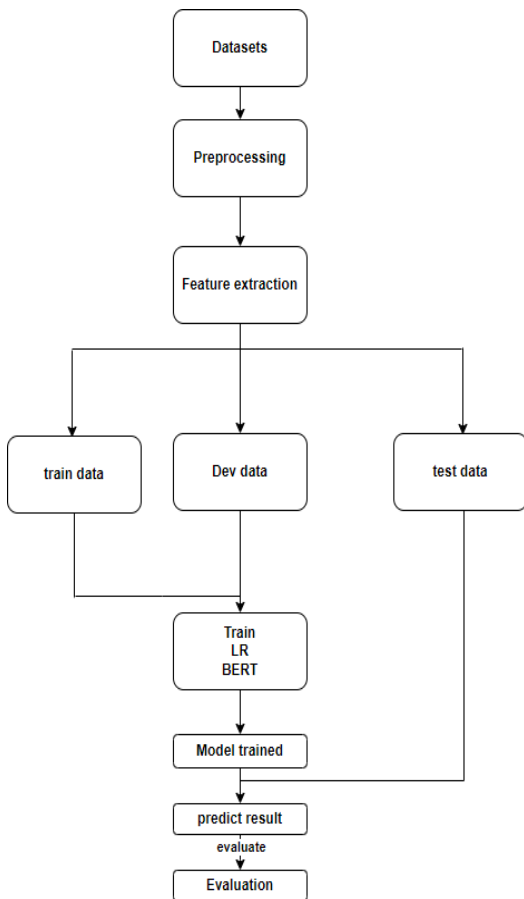


Figure 1: Proposed system architecture

5 Result and Discussion

The results represent a significant and exciting milestone in any experimental researches. As we trained the provided dataset on the chosen algorithm and tested its performance using a separate test set, the predictions generated from the trained

models were submitted to the workshop organizers for evaluation. These submissions were assessed using the evaluation metric of macro F1 score. The final results, when published by the organizers, reveals that BERT attained a significantly higher macro F1 score of 0.7293 for Tamil, whereas for Malayalam, LR attained a macro F1 score of 0.6279. Table 4 shows more details.

Table 4: Macro F1-scores of BERT model and LR on two languages’ data

Language	Model	Macro F1-Score
Tamil	BERT	0.7293
Malayalam	LR	0.6279

As we understand from the result Table 4, the model bert has resulted impressive prediction for this particular task, especially for Tamil. Figure 2 and 3 illustrate the results in visual manner using confusion matrix.

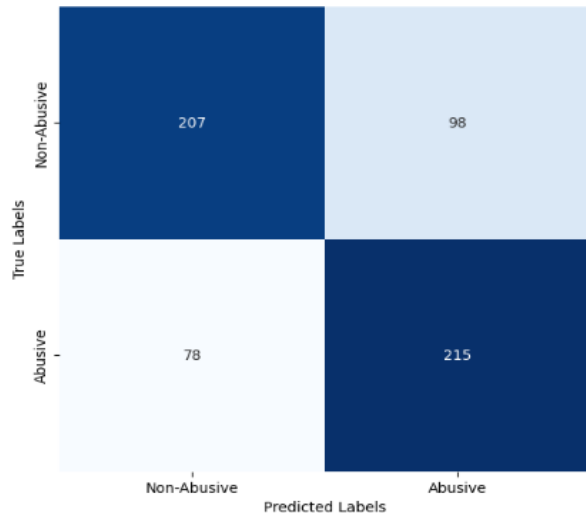


Figure 2: The confusion matrix that shows the bert model predictions on Tamil.

In Figure 2, our developed model predicted 207 instances as non-abusive, and they are actually too. Similarly, the model predicted 215 instances Abusive, and they are actually abusive too. On the other hand, there were two errors. By mistake, our model predicted 78 as abusive, but they are actually non-abusive, and it also predicted 98 instances as non-abusive, but actually it’s abusive.

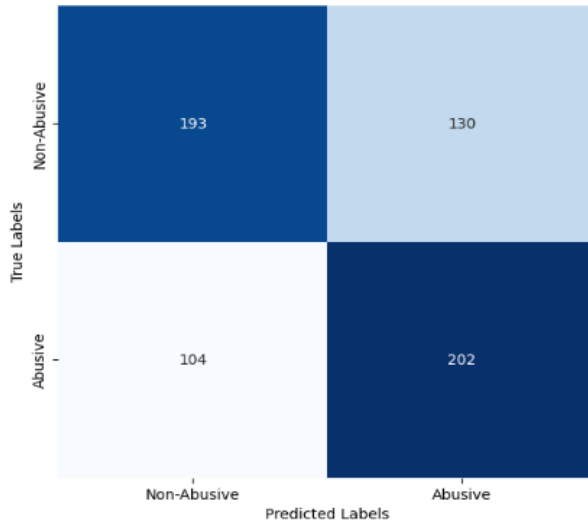


Figure 3: The confusion matrix that shows the logistic regression’s model predictions on Malayalam.

In the Figure 3, our developed model predicted 193 instances as non-abusive, and they are actually too. Similarly, the model predicted 202 instances of abuse, and they are actually abusive too. In the other hand, two errors occurred. Our model, by mistake, predicted 104 as abusive, but they are actually non-abusive, and it also predicted 130 instances as non-abusive, but actually they are abusive instances.

6 Conclusion and Future Work

In this task, we have developed two models to classify Tamil and Malayalam social media comments. We built the model for Tamil data based on BERT and for Malayalam based on Logistic Regression. The models are evaluated their conformance using various metrics. They are able to classify test dataset into into ‘Abusive’ and ‘Non-Abusive’ as expected. As the results show, bert outperformed Logistic Regression in this usecase.

Since social media posts are useful to identify the political opinion, the jobs ought to be transferred into other various languages. Furthermore, by offering additional algorithms for the languages utilized here and expanding the number of dataset sizes, the performance of the suggested model in this study should be enhanced.

Limitation and Ethics Statement

The dataset of language Tamil and Malayalam here were provided with limited data size and the model was trained using a this tiny dataset. Hence, the performance observed may not generalize well to all

unseen data. However, our model has demonstrated a comparable performance in detecting women targeted abusive comments for social media posts. Furthermore, our work adheres to the ethical principles outlined for computational research and professional conduct¹.

Acknowledgements

The work was done with partial support from the Mexican Government through the grant A1-S-47854 of CONACYT, Mexico, grants 20241816, 20241819, and 20240951 of the Secretaría de Investigación y Posgrado of the Instituto Politécnico Nacional, Mexico. The authors thank the CONACYT for the computing resources brought to them through the Plataforma de Aprendizaje Profundo para Tecnologías del Lenguaje of the Laboratorio de Supercómputo of the INAOE, Mexico and acknowledge the support of Microsoft through the Microsoft Latin America PhD Award.

References

- Zahra Ahani, Moein Shahiki Tash, Fazlourrahman Balouchzahi, Luis Ramos, Grigori Sidorov, and Alexander Gelbukh. 2024a. Social support detection from social media texts. *arXiv preprint arXiv:2411.02580*.
- Zahra Ahani, Moein Shahiki Tash, Majid Tash, Alexander Gelbukh, and Irna Gelbukh. 2024b. Multiclass hope speech detection through transformer methods. In *Proceedings of the Iberian Languages Evaluation Forum (IberLEF 2024), co-located with the 40th Conference of the Spanish Society for Natural Language Processing (SEPLN 2024)*, CEUR-WS. org.
- Muhammad Arif, Moein Shahiki Tash, Ainaz Jamshidi, Iqra Ameer, Fida Ullah, Jugal Kalita, Alexander Gelbukh, and Fazlourrahman Balouchzahi. 2024. *Exploring multidimensional aspects of hope speech computationally: A psycholinguistic and emotional perspective*. Preprint.
- Girma Bade, Olga Kolesnikova, Grigori Sidorov, and José Oropeza. 2024a. Social media hate and offensive speech detection using machine learning method. In *Proceedings of the Fourth Workshop on Speech, Vision, and Language Technologies for Dravidian Languages*, pages 240–244.
- Girma Yohannis Bade, O Koleniskova, José Luis Oropeza, Grigori Sidorov, and Kidist Feleke Bergene. 2024b. Hope speech in social media texts using transformer. In *Proceedings of the Iberian Languages Evaluation Forum (IberLEF 2024), co-located with*

¹<https://www.aclweb.org/portal/content/acl-code-ethics>

- the 40th Conference of the Spanish Society for Natural Language Processing (SEPLN 2024), CEURWS.org.*
- Girma Yohannis Bade, Olga Kolesnikova, José Luis Oropeza, and Grigori Sidorov. 2024c. Lexicon-based language relatedness analysis. *Procedia Computer Science*, 244:268–277.
- Girma Yohannis Bade and Hussien Seid. 2018. Development of longest-match based stemmer for texts of wolaita language. *vol*, 4:79–83.
- Vibhuti Bansal, Mrinal Tyagi, Rajesh Sharma, Vedika Gupta, and Qin Xin. 2022. A transformer based approach for abuse detection in code mixed indic languages. *ACM transactions on Asian and low-resource language information processing*.
- Bharathi Raja Chakravarthi, Ruba Priyadarshini, Shubanker Banerjee, Manoj Balaji Jagadeeshan, Prasanna Kumar Kumaresan, Rahul Ponnusamy, Sean Benhur, and John Philip McCrae. 2023. Detecting abusive comments at a fine-grained level in a low-resource language. *Natural Language Processing Journal*, 3:100006.
- Luiz Gomes, Ricardo da Silva Torres, and Mario Lúcio Côrtes. 2023. Bert-and tf-idf-based feature extraction for long-lived bug prediction in floss: a comparative study. *Information and Software Technology*, 160:107217.
- Lyndsay N Jenkins and Amanda B Nickerson. 2019. Bystander intervention in bullying: Role of social skills and gender. *The Journal of Early Adolescence*, 39(2):141–166.
- Marwa Khairy, Tarek M Mahmoud, and Tarek Abd-El-Hafeez. 2021. Automatic detection of cyberbullying and abusive language in arabic content on social networks: a survey. *Procedia Computer Science*, 189:156–166.
- Olga Kolesnikova, Moein Shahiki Tash, Zahra Ahani, Ameeta Agrawal, Raul Monroy, and Grigori Sidorov. 2025. Advanced machine learning techniques for social support detection on social media. *arXiv preprint arXiv:2501.03370*.
- Mikhail Krasitskii, Olga Kolesnikova, Liliana Chanona Hernandez, Grigori Sidorov, and Alexander Gelbukh. 2024. [Multilingual approaches to sentiment analysis of texts in linguistically diverse languages: A case study of Finnish, Hungarian, and Bulgarian](#). In *Proceedings of the 9th International Workshop on Computational Linguistics for Uralic Languages*, pages 49–58, Helsinki, Finland. Association for Computational Linguistics.
- Mikhail Krasitskii, Olga Kolesnikova, Liliana Chanona Hernandez, Grigori Sidorov, and Alexander Gelbukh. 2025. [Comparative approaches to sentiment analysis using datasets in major european and arabic languages](#).
- Kedi Li. 2022. An evaluation of automation on misogyny identification (ami) and deep-learning approaches for hate speech-highlight on graph convolutional networks and neural networks. In *2022 International Conference on Computers, Information Processing and Advanced Education (CIPAE)*, pages 239–244. IEEE.
- Qing Liu, Jing Wang, Dehai Zhang, Yun Yang, and NaiYao Wang. 2018. Text features extraction based on tf-idf associating semantic. In *2018 IEEE 4th international conference on computer and communications (ICCC)*, pages 2338–2343. IEEE.
- Melkamu Abay Mersha, Girma Yohannis Bade, Jugal Kalita, Olga Kolesnikova, Alexander Gelbukh, et al. 2024. Ethio-fake: Cutting-edge approaches to combat fake news in under-resourced languages using explainable ai. *Procedia Computer Science*, 244:133–142.
- SN Prasanth, R Aswin Raj, P Adhithan, B Premjith, and Soman Kp. 2022. Cen-tamil@ dravidianlangtech-acl2022: Abusive comment detection in tamil using tf-idf and random kitchen sink algorithm. In *Proceedings of the Second Workshop on Speech and Language Technologies for Dravidian Languages*, pages 70–74.
- Ruba Priyadarshini, Bharathi Raja Chakravarthi, Subalalitha Chinnaudayar Navaneethakrishnan, Malliga Subramanian, Kogilavani Shanmugavadivel, Premjith B, Abirami Murugappan, Sai Prashanth Karnati, Rishith, Chandu Janakiram, and Prasanna Kumar Kumaresan. 2023. Findings of the shared task on Abusive Comment Detection in Tamil and Telugu. In *Proceedings of the Third Workshop on Speech and Language Technologies for Dravidian Languages DravidianLangTech 2023*. Recent Advances in Natural Language Processing.
- Ruba Priyadarshini, Bharathi Raja Chakravarthi, Subalalitha Cn, Thenmozhi Durairaj, Malliga Subramanian, Kogilavani Shanmugavadivel, Siddhanth U Hegde, and Prasanna Kumaresan. 2022a. Overview of abusive comment detection in tamil-acl 2022. In *Proceedings of the Second Workshop on Speech and Language Technologies for Dravidian Languages*, pages 292–298.
- Ruba Priyadarshini, Bharathi Raja Chakravarthi, Subalalitha Cn, Thenmozhi Durairaj, Malliga Subramanian, Kogilavani Shanmugavadivel, Siddhanth U Hegde, and Prasanna Kumaresan. 2022b. [Overview of abusive comment detection in Tamil-ACL 2022](#). In *Proceedings of the Second Workshop on Speech and Language Technologies for Dravidian Languages*, pages 292–298, Dublin, Ireland. Association for Computational Linguistics.
- L Ramos, M Shahiki-Tash, Z Ahani, A Eponon, O Kolesnikova, and H Calvo. 2024a. Stress detection on code-mixed texts in dravidian languages using machine learning. *arXiv preprint arXiv:2410.06428*.

- Luis Ramos, Carolina Palma-Preciado, Olga Kolesnikova, Magdalena Saldana-Perez, Grigori Sidorov, and Moein Shahiki-Tash. 2024b. Intellileksika at homo-mex 2024: Detection of homophobic content in spanish lyrics with machine learning. In *Journal Name or Conference Proceedings Here*.
- Pradeep Kumar Roy, Snehaan Bhawal, and Chinnadayar Navaneethakrishnan Subalalitha. 2022. Hate speech and offensive language detection in dravidian languages using deep ensemble framework. *Computer Speech & Language*, 75:101386.
- Supun Tharaka Sandaruwan, Susil Aruna Shantha Lorensuhewa, and Kalyani Munasinghe. 2020. Identification of abusive sinhala comments in social media using text mining and machine learning techniques. *The International Journal on Advances in ICT for Emerging Regions*, 13(1).
- Moein Shahiki Tash, Luis Ramos, Zahra Ahani, Raul Monroy, Hiram Calvo, Grigori Sidorov, et al. 2025. Online social support detection in spanish social media texts. *arXiv e-prints*, pages arXiv-2502.
- Kogilavani Shanmugavadivel, Ramya Chinnasamy, Nandhini Subbarayan, Adhithiya Ganesan, Deepti Ravi, Vasanth Palanikumar, Bharathi Raja Chakravarthi, et al. On finetuning adapter-based transformer models for classifying abusive social media tamil comments.
- Wienke Strathern and Juergen Pfeffer. 2022. Identifying different layers of online misogyny. *arXiv preprint arXiv:2212.00480*.
- Moein Shahiki Tash, Zahra Ahani, Olga Kolesnikova, and Grigori Sidorov. 2024a. Analyzing emotional trends from x platform using senticnet: A comparative analysis with cryptocurrency price. *arXiv preprint arXiv:2405.03084*.
- Moein Shahiki Tash, Zahra Ahani, Mohim Tash, Olga Kolesnikova, and Grigori Sidorov. 2024b. Exploring sentiment dynamics and predictive behaviors in cryptocurrency discussions by few-shot learning with large language models. *arXiv preprint arXiv:2409.02836*.
- Moein Shahiki Tash, Olga Kolesnikova, Zahra Ahani, and Grigori Sidorov. 2024c. Psycholinguistic and emotion analysis of cryptocurrency discourse on x platform. *Scientific Reports*, 14(1):8585.
- A Vaswani. 2017. Attention is all you need. *Advances in Neural Information Processing Systems*.
- M Zamir, M Tash, Z Ahani, A Gelbukh, and G Sidorov. 2024. Tayyab@ dravidianlangtech 2024: detecting fake news in malayalam lstm approach and challenges. In *Proceedings of the Fourth Workshop on Speech, Vision, and Language Technologies for Dravidian Languages*, pages 113–118.