

HUMMUS: A Dataset of Humorous Multimodal Metaphor Use

Xiaoyu Tong[◇], Zhi Zhang[◇], Martha Lewis[◇] and Ekaterina Shutova^{◇†}

[◇]ILLC, University of Amsterdam, the Netherlands

[†]Computer Science Department, Stanford University, US


{x.tong,m.a.f.lewis,e.shutova}@uva.nl, z Zhang2626@gmail.com

Abstract

Metaphor and humor share a lot of common ground, and metaphor is one of the most common humorous mechanisms. This study focuses on the humorous capacity of multimodal metaphors, which has not received due attention in the community. We take inspiration from the Incongruity Theory of humor, the Conceptual Metaphor Theory, and the annotation scheme behind the VU Amsterdam Metaphor Corpus, and developed a novel annotation scheme for humorous multimodal metaphor use in image-caption pairs. We create the HUMMUS Dataset of **H**umorous **M**ultimodal **M**etaphor **U**se, providing expert annotation on 1k image-caption pairs sampled from the New Yorker Caption Contest corpus. Using the dataset, we test state-of-the-art multimodal large language models (MLLMs) on their ability to detect and understand humorous multimodal metaphor use. Our experiments show that current MLLMs still struggle with processing humorous multimodal metaphors, particularly with regard to integrating visual and textual information. We release our dataset and code at github.com/xiaoyuisrain/humorous-multimodal-metaphor-use.

1 Introduction

Conceptual Metaphor Theory (CMT; Lakoff and Johnson, 1980b) contends that the metaphors we use in language are based on cross-domain mappings in our mind; metaphor is essentially a cognitive process of understanding one thing in terms of another. For example, when one says *Our marriage has gone off the track*, one is using the LOVE IS A JOURNEY metaphor, conceptualizing LOVE or RELATIONSHIP in terms of a JOURNEY. CMT marks a turning point in metaphor research, shifting focus towards how metaphors are represented or processed in the mind and the brain

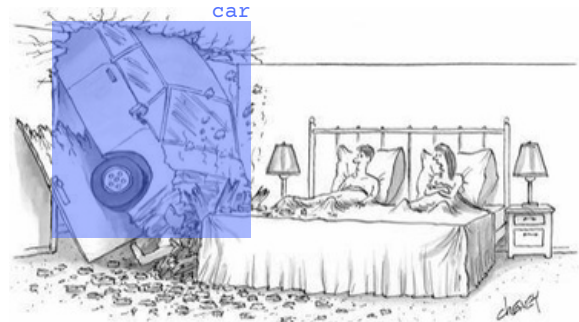

*I thought our sex life was a *<i>train wreck</i>*.*

Conceptual metaphor:

LOVE IS A JOURNEY

Explanation:

The couple's sex life is compared with a crash. This metaphorical comparison makes the caption a sarcastic comment on the couple's sex life and provides an unexpected resolution to the unusual scene in the image (a car crashing into a bedroom).

Figurative devices:

sarcasm; pun; exaggeration

Figure 1: HUMMUS metaphor sample, with **annotation** for image (bounding box and label), caption (*<i></i>*), conceptual metaphor, explanation of how the metaphor use contributes to humor, and additional figurative devices.

(see Holyoak and Stamenković, 2018 for a survey). There has also been an increased interest in nonverbal and multimodal manifestations of metaphor, such as metaphor in films, cartoons, adverts, and gestures (Forceville, 2015, 2017; Kappelhoff and Müller, 2011; Tsakona, 2009).

The influence of this cognitive turn in metaphor research has extended to the field of natural language processing. The VU Amsterdam Metaphor Corpus (VUA; Steen et al., 2010), which is created by cognitive linguists and employs an annotation scheme that closely follows the CMT, has inspired research on automatic detection of metaphors in text (see Tong et al., 2021 for a survey). There

is also recent work on computational modelling of visual and multimodal metaphors in adverts, memes, and videos (Alnajjar et al., 2022; Zhang et al., 2021, 2023; Xu et al., 2022).

Metaphor use serves many purposes in communication, including the delivery of humor (Michelli et al., 2024; Attardo, 2015). Metaphor and humor share a lot of common ground. The Incongruity Theory explains that humor arises from the perception of incongruity, something that violates one’s expectations (Clark, 1970; Morreall, 2024). Similarly, metaphor researchers consider incongruity as a major contextual clue for identifying metaphors in text (Cameron, 2003; Steen et al., 2010). Metaphor and humor have even been suggested to share neural pathways in the brain (Hellberg, 2018), and visual metaphor is found to be one of the most common humorous mechanisms in cartoons (Tsakona, 2009).

This study is concerned with the humorous capacity of multimodal metaphors, and sheds light on how well multimodal large language models (MLLMs) understand humorous multimodal metaphor use. We created a Dataset of Humorous Multimodal Metaphor Use (HUMMUS), providing expert annotation on 1k image-caption pairs sampled from the New Yorker Caption Contest (CapCon) corpus (Hessel et al., 2023) in terms of (1) whether the image-caption pair contains humorous multimodal metaphor use, (2) the conceptual metaphors involved, (3) image and text parts related to the metaphor use, (4) how the metaphor use contributes to humor, and (5) use of other figurative devices (e.g., idiom, irony, hyperbole). An example is provided in Figure 1. Our final dataset contains 558 metaphorical and 382 non-metaphorical items.

Based on the annotations, we created 6 tasks to test MLLMs’ ability to identify and understand humorous multimodal metaphor use. We tested four open-source and two closed source MLLMs: LLaVA-NeXT-110B/8B, Qwen2-VL-72B/7B-Instruct, GPT-4o, and GPT-4 Turbo, finding that the models struggle with distinguishing metaphorical and non-metaphorical items, as well as understanding the humorous multimodal metaphor use involved. Our ablation study and error analysis reveal that the models’ struggles are likely to be caused by difficulties in integrating visual and textual information.

2 Background

Metaphor. CMT posits the existence of conceptual metaphors, mappings in the human mind between different conceptual domains (Lakoff and Johnson, 1980b). Metaphor as a figure of speech is manifestation of conceptual metaphors in language use. Conceptual metaphors also give rise to visual metaphors (e.g., representing an idea as a light bulb) and multimodal metaphors, which involve more than one mode of communication.

The image-caption pair in Figure 1 is a multimodal instantiation of the LOVE IS A JOURNEY metaphor. The caption explicitly compares sex life, which belongs to the LOVE domain, with a train wreck, which can happen in a JOURNEY. The image depicts the LOVE domain with a couple in bed, and the JOURNEY domain with a car crashing into the couple’s bedroom. The metaphor use involves both the linguistic and the visual mode, and thus qualifies as multimodal metaphor use.

Figurative language. Metaphor, simile, personification, and zoomorphism are different types of figurative language, but they are all considered as metaphors under CMT. Similes are linguistic metaphors that use words such as *like* and *as* to highlight a cross-domain mapping (e.g., *my love’s like a red, red rose*); metaphor as a figure of speech uses categorization statements, making the cross-domain mapping more implicit (e.g., *my love is a red, red rose*). Personification is metaphor that compares something non-human to humans (e.g., pets as family members). Zoomorphism is metaphor with ANIMALS or a species of animal as the source domain (e.g., *the roar of the ocean*).

Idioms are sometimes called dead metaphors, expressions that have lost their metaphoricity over time. There is empirical evidence that people process idioms and metaphors differently (Gibbs, 1992; Desai, 2022). We therefore regard simile, personification, and zoomorphism as metaphor use, but treat idiom as a different phenomenon.

Humor. The Incongruity Theory of Humor can be traced back to Beattie (1779) and is the most influential theory for analyzing and explaining humor. The theory contends that laughter arises from the presence of incongruity, something that “violates our standard mental patterns and normal expectations (Morreall, 2024)”. Suls (1972) proposes a two-stage model for humor appreciation: perception of incongruity and resolution of incon-

gruity. For example, the cartoon image in Figure 1 is incongruous as car crash normally does not happen in a bedroom. The caption resolves the incongruity by attributing the car crash to the couple’s disastrous relationship, and humor arises from this witty, unexpected attribution.

3 Related Works

Linguistic metaphor. A large proportion of research on computational modelling of metaphor is restricted to linguistic metaphors, and automatic metaphor detection in particular (Li et al., 2023; Maudslay and Teufel, 2022; Shutova, 2015; Tong et al., 2021; Wang et al., 2023; Zhang and Liu, 2022). Most metaphor detection studies employ the VU Amsterdam Metaphor Corpus (VUA; Steen et al., 2010), a four-million word corpus where every word is annotated in terms of whether its use is metaphorical.

Nevertheless, recent years have seen an increased interest in metaphor understanding. More paraphrase datasets are released (Joseph et al., 2023; Tong et al., 2024), following earlier works that treat metaphor understanding as a paraphrasing task (Bizzoni and Lappin, 2018; Shutova, 2010). Other studies frame the issue as an inference task, providing entailed and non-entailed (Comşa et al., 2022; Stowe et al., 2022) or contradictory statements (Chakrabarty et al., 2022; Liu et al., 2022b) for metaphorical sentences. A framework for intentions behind metaphor use has also been proposed (Michelli et al., 2024).

Visual and multimodal metaphor. Automatic identification of text-based metaphors in videos (Alnajjar et al., 2022) and figurative language use in memes (Liu et al., 2022a) has been tackled. For metaphor understanding, the V-FLUTE dataset (Saakyan et al., 2024) provides automatically generated explanations for visual metaphors that are automatically generated from linguistic metaphors. Other datasets provide detailed annotations for monomodal and multimodal metaphors in social media and adverts (Zhang et al., 2021, 2023) or memes (Xu et al., 2022). Their annotations concern metaphor occurrence, modality (whether the metaphor is text-based, image-based, or multimodal), target domain, source domain, intent, and sentiment category.

Akula et al. (2023) annotate visual metaphors in adverts and introduce MetaCLUE, a set of five visual metaphor processing tasks: classification

(whether a given image contains metaphor), localization (identifying image regions), understanding (interpreting metaphors in the form “<target> is as <property> as <source>”), and generation (generating visual metaphors from text prompt).

Humor and metaphor. Hessel et al. (2023) propose a set of humor understanding tasks based on their New Yorker Caption Contest (CapCon) corpus. The corpus contains earlier releases (Jain et al., 2020; Radev et al., 2016; Shahaf et al., 2015) of *The New Yorker* cartoons and captions. It also provides manually created explanations for 651 image-caption pairs.

Chang et al. (2024) annotate a subset of the CapCon corpus and propose NYK-MS, a benchmark for metaphor and sarcasm understanding. While our work also uses the CapCon corpus, our contributions are different in the following ways: (1) Every metaphorical item in HUMMUS qualifies as multimodal metaphor use, and its multimodality is reflected in the annotations; NYK-MS, on the other hand, is primarily concerned with metaphorical words in captions. (2) We annotate the conceptual metaphors underlying the identified multimodal metaphor use; NYK-MS lacks this type of annotation. (3) We provide bounding box annotations for image areas related to the identified metaphor use, which is also absent in NYK-MS. (4) We explain our metaphorical items in relation to the humorous effect of the image-caption pairs, whereas NYK-MS does not consider the interplay between metaphor and humor. (5) HUMMUS is annotated by a linguist specializing in metaphor research while the ground truth of NYK-MS is based on GPT-4V generations.

4 Dataset Creation

HUMMUS is built upon the image-caption pairs in the CapCon corpus (Hessel et al., 2023). Each week, *The New Yorker* publishes a captionless cartoon and receives caption submissions from its readers. The CapCon corpus includes 2578 funny caption submissions for 679 high-quality cartoons of *The New Yorker*. We randomly sampled 251 cartoons from the corpus, for which a total of 1000 image-caption pairs are available. We designed an annotation scheme informed by theories of humor understanding and metaphor use, and a volunteer linguist with expertise in metaphor annotated the image-caption pairs. Our annotation scheme can be summarized into two stages: humorous



The way I see it, I'm the miner, and you're the canary.

Figure 2: Metaphor sample for which multiple conceptual metaphors are annotated: PUB IS A COAL MINE; HUMANS ARE ANIMALS.

metaphor identification and detailed metaphor annotation, which we explain below.

4.1 Humorous metaphor identification

Humorous metaphor use is identified in two steps: humor understanding and metaphor identification. Image-caption pairs are tagged “Yes”, “No”, “WIDLII (While In Doubt, Leave It In)”, or “Discard” at this stage. Given an image-caption pair, the annotator first employs the incongruity-resolution approach to understand the humor: They note down all possible incongruities in the image and see how the caption resolves those incongruities. If the annotator fails to understand the humor (incongruities remain unresolved), the item is tagged as “Discard”.

If the annotator understands the humor, they proceed to determine whether the humor involves metaphor use—whether it can be attributed to any cross-domain mapping, or a process of conceptualizing/depicting one thing in terms of another. If the answer is a definite yes or no, the item is marked as “Yes” or “No” respectively. If the annotator is uncertain, the item is marked as “WIDLII” instead. We adopt this strategy from the annotation scheme behind the VUA corpus (Steen et al., 2010). Both “Yes” and “WIDLII” items participate in the subsequent stage of detailed metaphor annotation; this allows us to avoid mistakenly marking an interesting or implicit case of metaphor use as non-metaphorical.

4.2 Detailed metaphor annotation

Image-caption pairs that are tagged as “Yes” or “WIDLII” in terms of the involvement of humor-

ous metaphor use are further annotated in three aspects: the involved conceptual metaphor, how the conceptual metaphor is reflected in the image (highlighting the relevant objects) and caption (highlighting relevant words), and an explanation of how the metaphor use contributes to the humorous effect of the image-caption pair. WIDLII items could be re-labelled as No or Discard items; an explanation is provided if a WIDLII item is eventually Discarded.

Conceptual metaphor. Following the tradition of previous research (Lakoff and Johnson, 1980a; Lakoff et al., 1991), the underlying conceptual metaphors are annotated in TARGET DOMAIN IS SOURCE DOMAIN format.

An image-caption pair could employ multiple conceptual metaphors to achieve humorous effects. The annotator is thus asked to be as inclusive as possible, specifying all conceptual metaphors they can identify. Take the image-caption pair in Figure 2 as an example. The image shows two people having drinks in a pub. One of them wears a hazmat suit, which is unheard-of in pubs. The caption justifies this strange clothing choice (thus resolving the incongruity) by revealing that the person considers himself in a coal mine. There is thus a metaphorical comparison between PUB and COAL MINE. The caption also explicitly compares the man in an ordinary suit to a canary in a coal mine (in its literal sense), an instantiation of the HUMANS ARE ANIMALS metaphor.

Image and caption annotation. The annotator also marks out image and text fragments that are related to the annotated conceptual metaphor(s). Metaphor-related image areas are annotated using both bounding boxes and texts (a word or phrase that tells which part of the image is highlighted); each bounding box has a corresponding textual description. Metaphor-related words or phrases are surrounded by *<i></i>* tags.

A conceptual metaphor is a mapping between two conceptual domains. To annotate the image and the caption thus requires the annotator to determine how the two domains are reflected in the two modalities. Usually, representations of the two domains are unbalanced: The image should have a recognizable setting that represents the target or the source domain of the metaphor, while a small part of the image (e.g., a particular object) points to the other domain, thus creating incon-

gruity and cross-domain mapping. Similarly, the context of the caption can be assigned to the target or the source domain, while a particular word or phrase suggests the involvement of the other domain. The annotator’s job is therefore to mark out the less represented domain in the image and the caption respectively.

Let us return to the image-caption pair in Figure 1, which illustrates the LOVE IS A JOURNEY metaphor. The image predominantly belongs to the LOVE domain, with a bedroom as the setting and the couple sitting in bed occupying more than half of the image. The car crashing into the room on the left side of the image evokes the JOURNEY domain, creating incongruity and encouraging cross-domain mapping. While the cracks in the ceiling, the damaged door and the mess on the ground come along with the car crash, they are visual representations of the result of the cross-domain mapping, as opposed to belonging to the source domain, JOURNEY, itself. The car is thus annotated as the metaphor-related fragment in the image. The caption talks about the couple’s sex life and compares it explicitly with a train wreck. The phrase *train wreck* is the “incongruous” part of the caption, evidence of the JOURNEY domain in the context of the LOVE domain. It is therefore marked out as metaphor-related.

Explanation. For each image-caption pair that contains humorous multimodal metaphor use, we also provide a short explanation about how the metaphor use contributes to the humor. This is different from the explanations provided in the CapCon corpus: While the CapCon corpus focuses on humor understanding and only explicitly mentions metaphor use for two image-caption pairs, our explanations, as exemplified in Figure 1, focus specifically on the interplay between humor and metaphor use.

Other figurative devices. We also provide annotation of the use of other figurative devices, such as pun, idiom, irony, hyperbole, for both metaphorical and non-metaphorical image-caption pairs. This part of the annotation provides insight into the relation between humor and the use figurative expressions in general, as well as co-occurrence of metaphor and other figures of speech in delivering humor. We do not use these data to test MLLMs in this study, but still include them in the dataset, as they could be of interest for

future research on figurative language.

5 Data Analysis

HUMMUS provides annotations for 1,000 image-caption pairs, including 558 items that contain humorous multimodal metaphor use (331 “Yes” and 227 “WIDLII”), 382 “No” items, and 60 items marked as “Discard”.

Multimodality of the metaphor samples. Are the metaphors annotated in our dataset identifiable from the captions alone? To answer this question, we employ FrameBERT, an automatic textual metaphor detector proposed by (Li et al., 2023). The model reaches an F1 score of 0.73 when tested on the VUA-20 dataset (Leong et al., 2020). We consider it as a “Yes” answer if the model predicts that a given caption contains a content-word real metaphor or borderline metaphor. Compared with ground truth, the model reaches an accuracy of 0.53 and a F1 score of 0.54, both of which are close to a random guess, and also lower than the model’s performance on detecting linguistic metaphors. This can be considered as an indicator of the multimodal nature of the metaphors annotated in our dataset.

Conceptual metaphor. Around 390 conceptual metaphors are identified in the dataset. The most frequently occurring ones are ANIMALS ARE HUMANS (23% metaphor samples) and HUMANS ARE ANIMALS (8%). In addition to comparison with ANIMALS, the dataset also includes mappings from HUMANS as a source domain to other target domains such as OBJECT, GOD, and ALIENS. Personification thus appears to be the most frequently used type of metaphor in these humorous image-caption pairs (51%).

Directionality of metaphors. A crucial and inevitable step in identifying any (conceptual) metaphor is determining the direction of the metaphorical mapping—in other words, which of the two conceptual domains at play is the target domain, and which is the source domain. Metaphorical mappings are unidirectional: Properties and relations of the source domain are projected onto the target domain, not the other way around. One cannot reverse the direction of a mapping without creating an entirely different metaphor. Consider the image-caption pair in Figure 3a, for example. It is clear that the joke is



(a) ANIMALS ARE HUMANS.



(b) ANIMALS/HUMANS ARE HUMANS/ANIMALS.



(c) Go through the roof.

Figure 3: Example of (a) unidirectional and (b) bidirectional metaphorical mappings between ANIMALS and HUMANS, and example of (c) metaphorically used idiom in our dataset.

based on a metaphor with ANIMALS as the target domain and HUMANS as the source domain: A hippo is given human characteristics—it uses telephones and gets angry when someone calls it at an inconvenient time.

This rule of unidirectionality applies to “prototypical metaphors of all kinds and occurring in all media” (Forceville, 2002) while exceptions also exist (Carroll, 1994; Forceville, 1995). HUMMUS also demonstrates some exceptions to the rule, especially with regard to the HUMANS and ANIMALS domains. The image-caption pair in Figure 3b, for example, shows a cat having a meeting with some other animals in a modern conference room. The cat expresses its wish to keep the meeting brief, so that it could go back to staring out the window. The fact that the animals are sitting in a conference room and engaged in a meeting can be considered as employing the ANIMALS ARE HUMANS metaphor. The humor of the image-caption pair thus lies in the cat attaching ample importance to staring out the window despite its position in the company; it also invites the reader to wonder what kind of business this company might be running.

On the other hand, one can also interpret the joke as based on the metaphor HUMANS ARE ANIMALS—people working in a company are represented as animals in the image. By representing the person in a higher position as a cat, the metaphor satirically emphasizes the absurdity of a common scenario in society: A person has an important position in a company while all they care about is something as unproductive as staring out the window. For this image-caption pair, therefore, it is difficult to distinguish HUMANS and ANIMALS in terms of target and source domains, unless we ask the caption writer directly; but it could also happen that the caption writer intended

the metaphor to be bidirectional in the first place. Nonetheless, the double interpretation adds to the depth of such image-caption pairs, making them particularly interesting cases for both metaphor analysis and model evaluation.

Co-occurrence with other figurative devices. More than half (65%) of the metaphor samples in HUMMUS feature metaphor use co-occurring with the use of other figurative devices (excluding personification and zoomorphism, which are considered metaphors in this study). The most frequently used ones include pun (27%), exaggeration (10%), and satire (10%).

We also find a small percentage of metaphor samples (5%) where the humorous metaphor use concerns an idiom—recall that idioms are usually considered dead metaphors (Section 2). Consider the image-caption pair in Figure 3c. When we look at the caption alone, its use of the idiom *go through the roof* is non-metaphorical: One understands it refers to a high cholesterol level without visualizing cholesterol actually going through the roof. When the caption is combined with the image, however, the metaphorical mapping between AMOUNT and HEIGHT is resurrected, and it is precisely the resurrection of the dead metaphor that brings out humor.

6 Model Evaluation

We design six tasks for humorous multimodal metaphor processing: Classification, Naming, ImageBbox, ImageLabel, CaptionHL, and Explanation. Table 1 provides an overview of the instructions and evaluation metrics for each task. The Classification task includes all items in the test set—that is, the image-caption pair is tagged “Yes”, “No”, or “WIDLII” in terms of whether

Task	Instructions	Evaluation
Classification	Does the humor of the given image-and-caption combination involve metaphor use? Answer the question with Yes or No.	Multiclass F1 score
Naming	The humor of the given image-and-caption combination involves metaphor use. Which conceptual metaphor is used? Answer the question in "TARGET DOMAIN IS SOURCE DOMAIN" format (e.g., "LOVE IS A JOURNEY").	Sentence similarity
ImageBbox	The humor [...] involves metaphor use. Which object in the image is related to the metaphor? Answer with its label and normalized bounding box coordinates in "label: [top, left, height, width]" format.	IoU, precision, recall
ImageLabel	The humor [...] involves metaphor use. Which object in the image is related to the metaphor? Answer the question with a single word.	Sentence similarity
CaptionHL	The humor [...] involves metaphor use. Which part of the caption is related to the metaphor? Surround it with a pair of <code><i></i></code> tag.	Jaccard index, precision, recall
Explanation	How does metaphor use contribute to the humor of the given image-and-caption combination? Explain in no more than 30 words.	ROUGE-1, ROUGE-2

Table 1: Benchmark tasks, prompts, and evaluation metrics. A full prompt includes an image, a caption, and instructions: `<image>+f"Caption:_{caption}\n\n{instructions}"`. The first sentence of Image and Caption tasks are the same as the Naming task. IoU = Intersection over Union.

or not it involves humorous multimodal metaphor use. The “No” items are considered negative cases in the Classification task; the “Yes” and “WIDLII” items positive, as our dataset provides full metaphor annotation for both categories. All other tasks only involve the positive cases.

The Naming task and the ImageLabel task employ LaBSE (Feng et al., 2022) as the evaluator. Our choice is based on a pilot Naming test that involves the first 100 items in our test set and two models: GPT-4o and GPT-4 Turbo. We calculate cosine similarity scores between the model outputs and ground truth using a variety of SBERT models. We choose LaBSE as its predictions are the closest to human judgement.

We evaluate six models, including four state-of-the-art MLLMs, GPT-4 Omni (GPT-4o, `gpt-4o-2024-05-13`), GPT-4 Turbo (`gpt-4-turbo-2024-04-09`), LLaVA-NeXT-110B (Liu et al., 2023a,b, 2024), and Qwen2-VL-72B-Instruct (Wang et al., 2024), and two smaller, open-source models, LLaVA-NeXT-8B, Qwen2-VL-7B-Instruct. The smaller models require less computing resources and can be more versatile than their larger counterparts in certain use cases (e.g., for fine-tuning).

6.1 Benchmark results

Table 2 and 3 show results of testing the six models on the six tasks presented in Table 1. We also report success rates, which measure whether the

models provide meaningful answers for evaluation (e.g., if a model merely repeats the instructions, it fails to provide a meaningful answer).

The random baseline for the Classification task is calculated by randomly choosing between a “Yes” and a “No” answer for each item, and averaging the results of 100 iterations. For ImageBbox, IoU scores above 0.5 are considered a match between model prediction and ground truth. For Naming, ImageLabel, and Explanation, we decide thresholds for good answers by manually examining model answers in various score ranges. The threshold for Naming and ImageLabel is set at 0.6. For Explanation, model answers reaching a ROUGE-1 score of 0.35 and a ROUGE-2 score of 0.087 are considered acceptable.

How well do the models identify humorous multimodal metaphor use?

All six models are prone to classifying the image-caption pairs as metaphorical. While they achieve F1 scores higher than the random baseline in identifying positive cases, even the highest F1 score for the negative category (0.47 by GPT-4 Turbo) is merely around the random baseline (0.45).

How well do the models identify the underlying conceptual metaphors?

All models struggle with identifying the underlying conceptual metaphors. Only a small proportion of model predictions (21%) reaches the threshold of 0.6 in the Naming task.

Model		Classification			Naming	Explanation	
		Pos	Neg	Avg		ROUGE-1	ROUGE-2
GPT-4	Omni	0.70	0.39	0.55	0.47 (0.22)	0.23 (0.08)	0.03 (0.04)
	Turbo	0.64	0.47	0.56	0.49 (0.21)	0.22 (0.08)	0.03 (0.04)
LLaVA-NeXT	110B	0.69	0.36	0.53	0.43 (0.18)	0.27 (0.08)	0.05 (0.04)
	8B	0.74	0.00	0.37	0.46 (0.18)	0.26 (0.08)	0.04 (0.04)
Qwen2-VL	72B	0.64	0.43	0.54	0.44 (0.18)	0.25 (0.08)	0.04 (0.04)
	7B	0.61	0.46	0.53	0.40 (0.18)	0.26 (0.08)	0.04 (0.04)
<i>Random</i>		0.54	0.45	0.50	–	–	–

Table 2: Classification, Naming, and Explanation benchmarks. Standard deviations are in parenthesis. GPT-4 Turbo has a success rate less than 100% in the Naming task (96%).

Model		ImageBbox			ImageLabel	Caption		
		P	R	IoU		P	R	Jaccard
GPT-4	Omni	0.40 (0.34)	0.43 (0.34)	0.25 (0.22)	0.63 (0.29)	0.47 (0.36)	0.85 (0.32)	0.42 (0.32)
	Turbo	0.38 (0.37)	0.32 (0.34)	0.19 (0.21)	0.56 (0.27)	0.54 (0.39)	0.80 (0.37)	0.47 (0.36)
LLaVA-NeXT	110B	0.17 (0.20)	0.50 (0.38)	0.14 (0.16)	0.58 (0.27)	0.42 (0.38)	0.93 (0.24)	0.40 (0.37)
	8B	0.17 (0.20)	0.64 (0.39)	0.15 (0.16)	0.58 (0.27)	0.33 (0.33)	0.95 (0.20)	0.31 (0.30)
Qwen2-VL	72B	0.17 (0.20)	0.40 (0.35)	0.13 (0.14)	0.59 (0.28)	0.40 (0.37)	0.89 (0.29)	0.36 (0.34)
	7B	0.17 (0.21)	0.40 (0.34)	0.13 (0.14)	0.57 (0.27)	0.36 (0.35)	0.94 (0.22)	0.34 (0.32)

Table 3: ImageBbox, ImageLabel, and CaptionHL benchmarks in mean (SD) format. A few tests result in success rates less than 100% : no less than 98% in the ImageBbox task; 97% for LLaVA-NeXT-8B, 89% for LLaVA-NeXT-110B, and 41% for Qwen2-VL-7B in the CaptionHL task.

How well do the models localize humorous multimodal metaphor use in image and caption?

The models are much better at labelling metaphor-related image areas than providing their coordinates: Around 40% model answers reach the 0.6 threshold in the ImageLabel task, whereas the highest mean IoU score in the ImageBbox task is 0.25 (GPT-4o), which suggests barely any overlap with the ground truth.

When highlighting metaphor-related text fragments, the models are able to cover a large proportion of ground truth annotations, but their answers also tend to be longer, including text fragments that are not related to the humorous metaphor use.

How well do the model explain humorous multimodal metaphor use? The Explanation task proves to be difficult for the models. Merely 5% of model predictions reach our threshold of acceptable explanations.

6.2 Prompt engineering

We experiment with other ways to formulate the Classification task, to see whether the high prob-

Model	Positive	Negative	Average
GPT-4o	0.71 (0.01)	0.43 (0.02)	0.57 (0.01)
Qwen2-VL-72B	0.61 (0.06)	0.46 (0.07)	0.53 (0.01)
Qwen2-VL-7B	0.66 (0.06)	0.36 (0.11)	0.51 (0.03)

Table 4: Mean F1 scores using 3 different prompts for the Classification task. Qwen2 stands for Qwen2-VL-Instruct. Success rate is always 100%.

ability of “Yes” answers is associated with the prompt we use. Using the first 100 items in the test set, we run a pilot study that tests a wide range of prompts on one of the worst performing models, Qwen2-VL-7B-Instruct. Instead of asking the model to reply with “Yes” or “No”, these prompts require different ways to label the given image-caption pair, such as “Metaphorical/Non-metaphorical”, “True/False”, “A/B”.

We determine the top-3 prompts that result in the highest average F1 scores in the pilot study. These prompts ask the models to reply with (1) “Yes (i.e., metaphor use is involved) or No (i.e., metaphor use is not involved)”, (2) “No or Yes”,

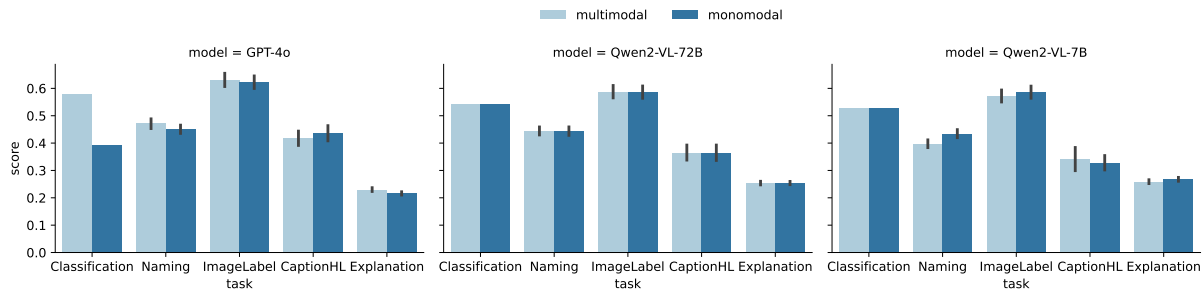


Figure 4: Model performance in multimodal versus monomodal experiments: average F1 score for Classification, sentence similarity score for Naming and ImageLabel, Jaccard index score for CaptionHL, ROUGE-1 for Explanation. Success rate is 100% except for Qwen2-VL-7B-Instruct in the monomodal CaptionHL task (97%).

and (3) “A or B”, respectively. For the third prompt, the two options correspond to whether or not the given image-caption pair involves humorous metaphor use (i.e., “involves” or “does not involve”), and the order of the two options is randomised for each test item.


We test these three prompts on three models: GPT-4o, and the two Qwen2-VL models. GPT-4o is one of the best-forming models over all tasks, and its success rate is always 100%. The two Qwen2-VL models represent the best and the worst open-source models. The 72B model has 100% success rate on all tasks. The 7B model is the most unstable, achieving a 41% success rate on the CaptionHL task.

As shown in Table 4, the two Qwen2-VL models, especially the smaller one, are sensitive to different prompts. The performance of GPT-4o, on the other hand, remains stable over different prompts. The experiment thus proves the reliability of our Classification benchmark results.

6.3 Ablation study

To examine the models’ processing of multimodal input in our tasks, we design an ablation study that replaces image input with textual descriptions of the images, making the input data purely textual. We use the `image_description` data provided in the CapCon corpus, which are short, literal descriptions of the scene. For example, the description for the image in Figure 1 is as follows: “A man and woman are in bed together under the covers. They are looking towards the bedroom door when a car has crashed into their home. They don’t seem too upset about the situation.”

We rerun the six tasks on the same three models for prompt engineering: GPT-4o and the two



<i>Well, that's embarrassing. How long has <i>it</i> been there?</i>

Class.	Yes	No
Naming	ANIMALS ARE HUMANS; A PERSON IS AN OBJECT	EMBARRASSMENT IS A SHARK ATTACK
Image.	Person	Shark
Explanation	The shark on the right didn't realize someone is standing on it until another shark point it out for it	The image of a person standing on a shark while another shark approaches from behind creates a metaphor for being in a precarious situation

Figure 5: Ground truth versus LLaVA-NeXT-110B predictions for the given image-caption pair. Explanations are shortened. For CaptionHL, the model outputs the entire caption as answer.

Qwen2-VL models. For Classification, we use the prompt that results in the highest average F1 score for most models in prompt engineering: It asks the models to answer the question with “No or Yes” instead of “Yes or No”.

As shown in Figure 4, there is not much difference between the models’ performance in the multimodal and monomodal experiments, except for GPT-4o in the Classification task. The comparison indicates that the multimodal input data is not adequately utilized by the models.

6.4 Error Analysis

A primary reason for incorrect answers is the models’ inability to integrate visual and textual information into a coherent story. For example, the humor of the image-caption pair in Figure 5 is based

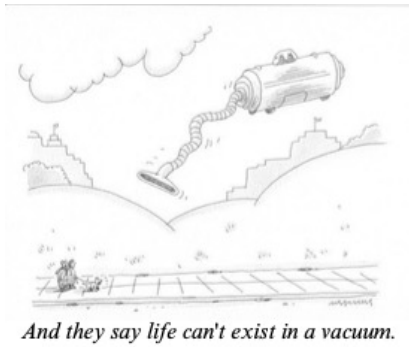


Figure 6: All models except GPT-4o predict LIFE IS A VACUUM for this item in the Naming task.

on personification of the sharks: They communicate in human language and can experience and express embarrassment. Subsequently, the person in the image is compared metaphorically to an object, referred to as *it* in the caption.

LLaVA-NeXT-110B’s answers indicate that the model assumes the caption is uttered by the person in the image, thus overlooking the ANIMALS ARE HUMANS metaphor and the subsequent A PERSON IS AN OBJECT metaphor. This example also shows the importance of metaphor processing in humor understanding: One cannot understand the humor of this image-caption pair without recognizing that the sharks are personified.

On the other hand, the models can usually identify common metaphorical or idiomatic expressions in the caption, although it does not guarantee adequate understanding of humorous multimodal metaphor use. For example, the cartoon in Figure 6 depicts an alien spaceship as a vacuum cleaner. The humor comes from the pun on *vacuum* in the caption: It refers both to aliens physically existing in a vacuum cleaner, as depicted in the image, and life existing *in a vacuum* in an idiomatic sense. The ground truth annotation of the conceptual metaphor is ALIEN SPACESHIP IS A VACUUM CLEANER, because it is the base of the pun on *vacuum* in the caption. The MLLMs acknowledge the metaphoricity of the expression *life can’t exist in a vacuum*, but their prediction in the Naming task, LIFE IS A VACUUM, indicates that they do not relate it to the vacuum cleaner spaceship in the image, thus failing to properly understand the humorous multimodal metaphor use.

Our analysis indicates that the models’ performance can potentially be improved when they are instructed more explicitly to combine image and

caption information. For example, one can use chain-of-thought prompting to instruct an MLLM to mimic the human annotation process: first process the image, and then integrate it with the caption, before proceeding to metaphor identification and understanding.

7 Conclusion

This study releases a dataset that provides expert annotation on humorous multimodal metaphor use. Using the dataset, we benchmark popular and state-of-the-art MLLMs on their capabilities to identify and understand humorous multimodal metaphor use. Our experiments show that current MLLMs struggle with processing humorous multimodal metaphor use, especially with regard to integrating visual and textual information.

Limitations and future directions. We hope this study will encourage more research on MLLMs’ capabilities to process humorous multimodal metaphors. Our dataset is annotated by a single expert. While this ensures efficient, high-quality, and systematic labelling, it may also introduce a certain level of subjectivity to the dataset. We envisage future work exploring alternative interpretations of the image-caption pairs and how MLLMs align with such individuality.

We also acknowledge that the latest reasoning models such as DeepSeek R1 and OpenAI o1 are not included in this study. They are released after the experiments were conducted and do not necessarily have multimodal capabilities (e.g., DeepSeek R1).

8 Ethical Considerations

We access the GPT-4 models through OpenAI API. The open-source models (LLaVA-NeXT-8/110B and Qwen2-VL-7/72B) as well as the CapCon corpus are accessed through HuggingFace. The CapCon corpus has CC-BY-4.0 license. Our dataset will be freely accessible on GitHub.

Our dataset includes jokes that could be considered offensive, and certain jokes may be inappropriate for a younger audience. These data remain in our dataset as they can be valuable for future research.

References

- Arjun R. Akula, Brendan Driscoll, Pradyumna Narayana, Soravit Changpinyo, Zhiwei Jia, Suyash Damle, Garima Pruthi, Sugato Basu, Leonidas Guibas, William T. Freeman, Yuanzhen Li, and Varun Jampani. 2023. Meta-clue: Towards comprehensive visual metaphors research. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 23201–23211.
- Khalid Alnajjar, Mika Hämmäläinen, and Shuo Zhang. 2022. Ring that bell: A corpus and method for multimodal metaphor detection in videos. In *Proceedings of the 3rd Workshop on Figurative Language Processing (FLP)*, pages 24–33, Abu Dhabi, United Arab Emirates (Hybrid). Association for Computational Linguistics.
- Salvatore Attardo. 2015. Humorous metaphors. In Geert Brône, Kurt Feyaerts, and Tony Veale, editors, *Cognitive Linguistics and Humor Research*, pages 91–110. De Gruyter Mouton, Berlin, München, Boston.
- James Beattie. 1779. *Essays on Poetry and Music: As They Affect the Mind: On Laughter, and Ludicrous Composition: On the Usefulness of Classical Learning*. Printed for E. and C. Dilly and W. Creech, Edinburgh, M.DCC.LXXIX, London. Retrieved from the Library of Congress, <https://www.loc.gov/item/20010861/>.
- Yuri Bizzoni and Shalom Lappin. 2018. Predicting human metaphor paraphrase judgments with deep neural networks. In *Proceedings of the Workshop on Figurative Language Processing*, pages 45–55, New Orleans, Louisiana. Association for Computational Linguistics.
- L. Cameron. 2003. *Metaphor in Educational Discourse*. Advances in Applied Linguistics. Bloomsbury Publishing.
- Noel Carroll. 1994. *Aspects of Metaphor*, chapter Visual Metaphor. Springer Netherlands.
- Tuhin Chakrabarty, Arkadiy Saakyan, Debanjan Ghosh, and Smaranda Muresan. 2022. FLUTE: Figurative language understanding through textual explanations. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 7139–7159, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Ke Chang, Hao Li, Junzhao Zhang, and Yunfang Wu. 2024. Nyk-ms: A well-annotated multi-modal metaphor and sarcasm understanding benchmark on cartoon-caption dataset.
- Michael Clark. 1970. Humour and incongruity. *Philosophy*, 45(171):20–32.
- Iulia Comşa, Julian Eisenschlos, and Srinu Narayanan. 2022. MiQA: A benchmark for inference on metaphorical questions. In *Proceedings of the 2nd Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics and the 12th International Joint Conference on Natural Language Processing (Volume 2: Short Papers)*, pages 373–381, Online only. Association for Computational Linguistics.
- Rutvik H. Desai. 2022. Are metaphors embodied? the neural evidence. *Psychological Research*, 86(8):2417–2433.
- Fangxiaoyu Feng, Yinfei Yang, Daniel Cer, Naveen Arivazhagan, and Wei Wang. 2022. Language-agnostic BERT sentence embedding. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 878–891, Dublin, Ireland. Association for Computational Linguistics.
- Charles Forceville. 1995. (a)symmetry in metaphor: The importance of extended context. *Poetics Today*, 16(4):677–708.
- Charles Forceville. 2002. The identification of target and source in pictorial metaphors. *Journal of Pragmatics*, 34(1):1–14.
- Charles Forceville. 2015. Visual and multimodal metaphor in film: charting the field. In *Embodied metaphors in film, television, and video games*, pages 17–32. Routledge.
- Charles Forceville. 2017. Visual and multimodal metaphor in advertising: Cultural perspectives. *Styles of communication*, 9(2).
- Raymond W. Gibbs. 1992. What do idioms really mean? *Journal of Memory and Language*, 31(4):485–506.

- Dustin Hellberg. 2018. Funny in the bones: The neural interrelation of humor, irony, and metaphor as evolved mental states. *Interdisciplinary Literary Studies*, 20(3):237–254.
- Jack Hessel, Ana Marasovic, Jena D. Hwang, Lillian Lee, Jeff Da, Rowan Zellers, Robert Mankoff, and Yejin Choi. 2023. Do androids laugh at electric sheep? humor “understanding” benchmarks from the new yorker caption contest. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 688–714, Toronto, Canada. Association for Computational Linguistics.
- Keith J Holyoak and Dušan Stamenković. 2018. Metaphor comprehension: A critical review of theories and evidence. *Psychological bulletin*, 144(6):641.
- Lalit Jain, Kevin Jamieson, Robert Mankoff, Robert Nowak, and Scott Sievert. 2020. The New Yorker cartoon caption contest dataset.
- Rohan Joseph, Timothy Liu, Aik Beng Ng, Simon See, and Sunny Rai. 2023. NewsMet : A ‘do it all’ dataset of contemporary metaphors in news headlines. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 10090–10104, Toronto, Canada. Association for Computational Linguistics.
- Hermann Kappelhoff and Cornelia Müller. 2011. Embodied meaning construction: Multimodal metaphor and expressive movement in speech, gesture, and feature film. *Metaphor and the social world*, 1(2):121–153.
- George Lakoff, Jane Espenson, and Alan Schwartz. 1991. Master metaphor list. Second Draft Copy, University of California, Berkeley.
- George Lakoff and Mark Johnson. 1980a. Conceptual metaphor in everyday language. *The Journal of Philosophy*, 77(8):453–486.
- George Lakoff and Mark Johnson. 1980b. *Metaphors we live by*. University of Chicago Press.
- Chee Wee (Ben) Leong, Beata Beigman Klebanov, Chris Hamill, Egon Stemle, Rutuja Ubale, and Xianyang Chen. 2020. A report on the 2020 VUA and TOEFL metaphor detection shared task. In *Proceedings of the Second Workshop on Figurative Language Processing*, pages 18–29, Online. Association for Computational Linguistics.
- Yucheng Li, Shun Wang, Chenghua Lin, Frank Guerin, and Loic Barrault. 2023. FrameBERT: Conceptual metaphor detection with frame embedding learning. In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 1558–1563, Dubrovnik, Croatia. Association for Computational Linguistics.
- Chen Liu, Gregor Geigle, Robin Krebs, and Iryna Gurevych. 2022a. FigMemes: A dataset for figurative language identification in politically-opinionated memes. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 7069–7086, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Emmy Liu, Chenxuan Cui, Kenneth Zheng, and Graham Neubig. 2022b. Testing the ability of language models to interpret figurative language. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4437–4452, Seattle, United States. Association for Computational Linguistics.
- Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. 2023a. Improved baselines with visual instruction tuning.
- Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. 2024. Llava-next: Improved reasoning, ocr, and world knowledge.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. 2023b. Visual instruction tuning.
- Rowan Hall Maudslay and Simone Teufel. 2022. Metaphorical polysemy detection: Conventional metaphor meets word sense disambiguation. In *Proceedings of the 29th International Conference on Computational Linguistics*, pages 65–77, Gyeongju, Republic of Korea. International Committee on Computational Linguistics.

- Gianluca Michelli, Xiaoyu Tong, and Ekaterina Shutova. 2024. [A framework for annotating and modelling intentions behind metaphor use](#).
- John Morreall. 2024. [Philosophy of Humor](#). In Edward N. Zalta and Uri Nodelman, editors, *The Stanford Encyclopedia of Philosophy*, Fall 2024 edition. Metaphysics Research Lab, Stanford University.
- Dragomir Radev, Amanda Stent, Joel Tetreault, Aasish Pappu, Aikaterini Iliakopoulou, Agustin Chanfreau, Paloma de Juan, Jordi Vallmitjana, Alejandro Jaimes, Rahul Jha, and Robert Mankoff. 2016. [Humor in collective discourse: Unsupervised funniness detection in the new yorker cartoon caption contest](#). In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC'16)*, pages 475–479, Portorož, Slovenia. European Language Resources Association (ELRA).
- Arkadiy Saakyan, Shreyas Kulkarni, Tuhin Chakrabarty, and Smaranda Muresan. 2024. [V-flute: Visual figurative language understanding with textual explanations](#).
- Dafna Shahaf, Eric Horvitz, and Robert Mankoff. 2015. [Inside jokes: Identifying humorous cartoon captions](#). In *KDD*.
- Ekaterina Shutova. 2010. [Automatic metaphor interpretation as a paraphrasing task](#). In *Human Language Technologies: The 2010 Annual Conference of the North American Chapter of the Association for Computational Linguistics*, pages 1029–1037, Los Angeles, California. Association for Computational Linguistics.
- Ekaterina Shutova. 2015. [Design and evaluation of metaphor processing systems](#). *Computational Linguistics*, 41(4):579–623.
- Gerard J. Steen, Aletta G. Dorst, J. Berenike Herrmann, Anna A. Kaal, Tina Krennmayr, and Tryntje Pasma. 2010. *A Method for Linguistic Metaphor Identification: From MIP to MIPVU*. John Benjamins.
- Kevin Stowe, Prasetya Utama, and Iryna Gurevych. 2022. [IMPLI: Investigating NLI models' performance on figurative language](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5375–5388, Dublin, Ireland. Association for Computational Linguistics.
- Jerry M. Suls. 1972. [A two-stage model for the appreciation of jokes and cartoons: An information-processing analysis](#). In Jeffrey H. Goldstein and Paul E. McGhee, editors, *The Psychology of Humor*, pages 81–100. Academic Press, San Diego.
- Xiaoyu Tong, Rochelle Choenni, Martha Lewis, and Ekaterina Shutova. 2024. [Metaphor understanding challenge dataset for LLMs](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3517–3536, Bangkok, Thailand. Association for Computational Linguistics.
- Xiaoyu Tong, Ekaterina Shutova, and Martha Lewis. 2021. [Recent advances in neural metaphor processing: A linguistic, cognitive and social perspective](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4673–4686, Online. Association for Computational Linguistics.
- Villy Tsakona. 2009. [Language and image interaction in cartoons: Towards a multimodal theory of humor](#). *Journal of Pragmatics*, 41(6):1171–1188.
- Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Yang Fan, Kai Dang, Mengfei Du, Xuancheng Ren, Rui Men, Dayiheng Liu, Chang Zhou, Jingren Zhou, and Junyang Lin. 2024. [Qwen2-vl: Enhancing vision-language model's perception of the world at any resolution](#).
- Shun Wang, Yucheng Li, Chenghua Lin, Loic Barrault, and Frank Guerin. 2023. [Metaphor detection with effective context denoising](#). In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 1404–1409, Dubrovnik, Croatia. Association for Computational Linguistics.
- Bo Xu, Tingting Li, Junzhe Zheng, Mehdi Naseriparsa, Zhehuan Zhao, Hongfei Lin, and Feng

- Xia. 2022. [Met-meme: A multimodal meme dataset rich in metaphors](#). In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR '22*, page 2887–2899, New York, NY, USA. Association for Computing Machinery.
- Dongyu Zhang, Jingwei Yu, Senyuan Jin, Liang Yang, and Hongfei Lin. 2023. [MultiCMET: A novel Chinese benchmark for understanding multimodal metaphor](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 6141–6154, Singapore. Association for Computational Linguistics.
- Dongyu Zhang, Minghao Zhang, Heting Zhang, Liang Yang, and Hongfei Lin. 2021. [MultiMET: A multimodal dataset for metaphor understanding](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 3214–3225, Online. Association for Computational Linguistics.
- Shenglong Zhang and Ying Liu. 2022. [Metaphor detection via linguistics enhanced Siamese network](#). In *Proceedings of the 29th International Conference on Computational Linguistics*, pages 4149–4159, Gyeongju, Republic of Korea. International Committee on Computational Linguistics.