

# Lemmanaid: Neuro-Symbolic Lemma Conjecturing

**Yousef Alhessi, Emily First & Sorin Lerner**  
Department of Computer Science and Engineering  
University of California, San Diego, USA  
{yalhessi, emfirst, lerner}@ucsd.edu

**Sólrun Halla Einarsdóttir, George Granberry, Moa Johansson & Nicholas Smallbone**  
Department of Computer Science and Engineering  
Chalmers University of Technology & University of Gothenburg  
Gothenburg, Sweden  
{slrn, georgegr, moa.johansson, nicsma}@chalmers.se

## Abstract

Automatically conjecturing useful, interesting and novel lemmas would greatly improve automated reasoning tools and lower the bar for formalizing mathematics in proof assistants. It is however a very challenging task for both neural and symbolic approaches. We present the first steps towards a practical neuro-symbolic lemma conjecturing tool, LEMMANAID, that combines Large Language Models (LLMs) and symbolic methods, and evaluate it on proof libraries for the Isabelle proof assistant. We train an LLM to generate *lemma templates* that describe the shape of a lemma, and use symbolic methods to fill in the details. We compare LEMMANAID against an LLM trained to generate complete lemma statements as well as previous fully symbolic conjecturing methods. Our results indicate that neural and symbolic techniques are complementary. By leveraging the best of both symbolic and neural methods we can generate useful lemmas for a wide range of input domains, facilitating computer-assisted theory development and formalization.

## 1 Introduction

Learning to construct new, interesting, and useful lemmas for proof assistants is an important yet underexplored area in AI for mathematical reasoning (Yang et al., 2024). Such lemmas can aid a human user working on a mathematical formalization, as well as strengthen automated theorem provers. In this work, we examine how LLMs can be used for lemma generation, and how they can be combined with symbolic tools for optimal results. Our aim is to provide a first tool towards generic conjecturing over a broad range of mathematical theories, which is practically useful for users of proof assistants.

A weakness of LLMs is that they sometimes generate repetitive or redundant lemmas, fail to discover more novel and useful lemmas, or hallucinate undefined symbols in the formalization. Furthermore, there are no correctness guarantees on the LLM’s output, so the generated lemmas may simply be false. These challenges have been encountered in previous work on neural conjecturing (Urban & Jakobův, 2020; Rabe et al., 2021; Johansson & Smallbone, 2023). Symbolic methods on the other hand, can be designed and programmed to avoid repetition and redundancy. However, symbolic methods will only generate lemmas that fit a predefined specific search space, and tend to scale poorly to a larger search space. Previous symbolic tools (Smallbone et al., 2017; Einarsdóttir et al., 2021; Singher & Itzhaky, 2021) have been used to successfully discover, for example, lemmas needed in automated (co-)inductive provers (Johansson et al., 2014; Einarsdóttir et al., 2018; 2024; Kurashige et al., 2024). However, these tools are limited in the shape, size and domain of lemmas they can generate, and do not scale well to larger sets of inputs.

To address these shortcomings, we propose a novel neuro-symbolic lemma conjecturing approach and tool: LEMMANAID. An LLM is trained to generate *lemma templates* that describe the shape of a family of analogous lemmas, rather than directly generating complete lemmas. Symbolic synthesis methods are then used to fill in the details. In this way, we leverage the best of both neural and symbolic methods. The LLM suggests appropriate analogous lemma-patterns likely to be relevant for the theory at hand. The symbolic engine ensures correctness and novelty, while keeping the search space manageable. As far as we are aware, this is the first work focusing on neuro-symbolic lemma conjecturing.

As a challenging first evaluation step we measure the coverage of (test-set) lemmas that can be recovered by LEMMANAID from Isabelle’s HOL library<sup>1</sup> and from its Archive of Formal Proofs (AFP)<sup>2</sup>. We compare the results of LEMMANAID configured with different LLMs (DeepSeek, Llama3), focusing on small LLMs as our ultimate aim is to create something that is accessible for regular proof-assistant users without need for huge compute resources. We further show that the LEMMANAID approach compares favorably to the results achievable using purely neural or purely symbolic conjecturing.

The main contributions of our work are:

- LEMMANAID, the first neuro-symbolic lemma conjecturing approach that uses an LLM to predict templates and a symbolic engine to instantiate templates as lemmas.
- An evaluation of LEMMANAID on the Isabelle proof assistant’s HOL and AFP libraries. This goes much beyond evaluations of prior tools that have focused on specific domains.
- A comparison to existing symbolic method, QuickSpec, and neural LLM-based lemma conjecturing models we create, showing LEMMANAID’s complementarity.

To ensure reproducibility of our results and enable others to build on our work, we make all code, experimental scripts, data, and models publicly available online<sup>3</sup>.

## 2 Related Work

**Proof Assistants** Proof Assistants, such as Isabelle (Nipkow et al., 2002) and Lean (de Moura et al., 2015) are increasingly being used to check proofs in both mathematics and computer science for correctness. To do so, the user needs to *formalize* their theory, by translating it into the formal language of the proof assistant. They then interact with the system to construct a proof by stringing together calls to *tactics*, each executing and checking some part of the proof. Popular tools like Sledgehammer can automate (parts of) many proofs by selecting a suitable set of previously proved lemmas, and sending the conjecture to an automated first-order prover or SMT-solver (Blanchette et al., 2011).

**Autoformalization and Proof Synthesis** Formalizing theories in proof assistants is however a non-trivial task, which has sparked interest in *autoformalization*: translating definitions, theorems and lemmas written in natural language to the formal language of a proof assistant (Wang et al., 2018; Szegedy, 2020; Wu et al., 2022). Furthermore, even with definitions and statements formalized, constructing the proofs from various tactics is again non-trivial, even with the help of tools like Sledgehammer. This has motivated work on various LLM-driven methods for synthesizing proof scripts for proof assistants such as Isabelle, either incrementally (Jiang et al., 2023), or by generating whole proofs at once (First et al., 2023). The LEGO-prover furthermore attempts to introduce intermediate proof statements as reusable lemmas Wang et al. (2024). Our work does not focus on producing proofs, but on suggesting suitable conjectures similar to the kind of lemmas that humans write down in libraries of formal proofs. As such it is orthogonal to much previous work, but could in the future be combined with, and complement, both proof synthesis and tools like Sledgehammer.

---

<sup>1</sup><https://isabelle.in.tum.de/dist/library/HOL/index.html>

<sup>2</sup><https://www.isa-afp.org>

<sup>3</sup><https://anonymous.4open.science/r/Lemmanaid>

**Templates for Synthesizing Conjectures** Following the observation that many mathematical theories share analogical lemmas of similar shapes, Buchberger et al. (2006) proposed to use *templates* as guidance in mathematical theory exploration, allowing efficient conjecturing of many (but not all) lemmas by analogy to known shapes. This has been implemented in a range of symbolic lemma conjecturing systems, including some targeting Isabelle/HOL (Montano-Rivas et al., 2012; Heras et al., 2013; McCasland et al., 2017; Einarsdóttir et al., 2021; Nagashima et al., 2023). A similar technique, called *sketching* has also been applied in the domain of program synthesis (Solar-Lezama, 2009). Unlike our work, where we use an LLM to suggest templates based on context, the templates in symbolic systems are typically pre-defined or provided in interaction with the user.

**Neural Conjecturing and Reinforcement Learning** Recent work on neural conjecturing and reinforcement learning has demonstrated success in specific domains, such as reasoning about programs generating integer sequences from the Online Encyclopedia of Integer Sequences (OEIS) (Gauthier & Urban, 2023; 2025). Poesia et al. (2024) treated conjecturing as a reinforcement learning game in simple propositional logic, arithmetic and group theory, with well formed conjectures generated neurally via constrained decoding. In contrast, we target the broad range of theories represented in proof assistant libraries, and want to avoid domain specific learning by generating generic templates as an intermediate step.

### 3 The LEMMANAID Approach

We have implemented a tool, LEMMANAID, for template-based conjecturing in Isabelle/HOL. The motivation comes from the observation that many lemmas in formalizations share a similar high-level structure and are analogous to each other (Buchberger et al., 2006; Einarsdóttir et al., 2022). The goal of LEMMANAID is to aid a proof assistant in identifying such analogies. We envision a user working on a new mathematical formalization having defined some functions, types and other concepts, and perhaps a few theorems about those. This collection of definitions, which we refer to as a (partial) *theory*, serves as input to the conjecturing system. LEMMANAID then outputs conjectures that are likely to be useful in this context, allowing the user to make progress in their formalization, or better understand the behavior of the theory they have defined so far (see Figure 1). This happens in two stages: First (neural part), the partial theory is given as input to an LLM which outputs templates likely to be relevant. Secondly (symbolic part), LEMMANAID searches over possible instantiation of those templates in the current theory, to produce concrete conjectures.

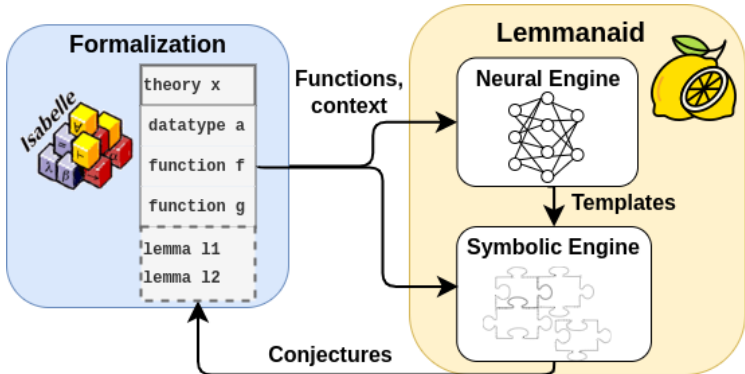


Figure 1: High-level overview of LEMMANAID.

Section 3.1 introduces the notion of template-based conjecturing, our template language, and how templates capture information about families of analogous lemmas. We also describe the symbolic engine of LEMMANAID and how it instantiates templates to produce conjectures. Section 3.2 discusses how we train LEMMANAID’s neural engine, a fine-tuned LLM that predicts templates, which are subsequently fed to the symbolic engine. Sec-

tion 3.3 details direct lemma conjecturing baselines that we implement for Isabelle. Finally, Section 3.4 describes the datasets we use for training and evaluation.

### 3.1 Template-based conjecturing via LEMMANAID’s Symbolic Engine

**Template Language** A *template* is an abstraction of a mathematical statement with concrete operators replaced by *holes*. The template thus captures the overall structure of the statement. As an example, consider the following lemmas about the Octonionic product and sum functions from the Isabelle ATP formalization about the octonions, an eight-dimensional extension of complex numbers (Koutsoukou-Argyragi, 2018):

**lemma** *octo\_product\_noncommutative*:  $\neg(\forall x y :: octo. (x * y = y * x))$

**lemma** *octo\_distrib\_left*:  $a * (b + c) = a * b + a * c$  for  $a b c :: octo$

**lemma** *octo\_assoc\_plus*:  $a + (b + c) = (a + b) + c$  for  $a b c :: octo$

If we abstract away the function symbols operating on octonions, and rename the variables according to our template abstraction method, we obtain the three templates:

$$\neg(\forall y_0 y_1. ?H_1 y_0 y_1 = ?H_1 y_1 y_0) \quad (1)$$

$$?H_1 x_1 (?H_2 x_2 x_3) = ?H_2 (?H_1 x_1 x_2) (?H_1 x_1 x_3) \quad (2)$$

$$?H_1 x_1 (?H_1 x_2 x_3) = ?H_1 (?H_1 x_1 x_2) x_3 \quad (3)$$

Note how the function symbols  $*$  and  $+$ , operating on octonions have been replaced by the holes  $?H_1$  and  $?H_2$ , and the variables  $a, b, c, x, y$  standardized to  $y_0, y_1, x_1, x_2, x_3$ . Note that logical symbols, such as negation  $\neg$ , universal quantifier  $\forall$  and equals sign  $=$  remain in the template structure. Technically, templates are implemented as instances of Isabelle/HOL’s term datatype<sup>4</sup>. Our template language represents analogous lemma statements, that have been abstracted and normalized in the following way: *Function symbols* are replaced with a hole, represented as  $?H_k$  where  $k$  is a positive integer label. Note that the type of the hole is also an abstraction of the type of the original symbol, with concrete types replaced by type variables. In our examples, the holes in the templates above have types that match any function with two arguments. *Variables* are renamed to  $x_k$  (or  $y_k$  in the case of bound variables), where  $k$  is a non-negative integer label, and their types set to match those of the corresponding holes. As mentioned, a small set of generic logic symbols have been specified to remain in the template. This is to avoid over-generalization and allow templates to act as representatives for meaningful families of analogous lemmas. See Appendix A.1 for details about these symbols.

**Template Instantiation** We can *instantiate* or *fill* the holes in a template by any operator with a matching type. For instance, template 1 can be instantiated using *any* binary operator, such as subtraction on real numbers or concatenation on lists to obtain a new conjecture. If the operator indeed is non-commutative, we obtain a correct lemma analogous to the lemma *octo\_product\_noncommutative*. In this way, templates are generalizations of lemma statements: each template matches many different lemmas that may apply in different theories.

LEMMANAID’s symbolic engine takes as input a template and a list of relevant function names from the current theory. It then searches over the possible instantiations of the holes in the template using the given functions (note that unlike holes the variables are fixed at instantiation, and not replaced by any further terms). Each indexed hole is replaced by one of the given function symbols while ensuring that the resulting candidate lemma is well typed. This may lead to a number of different candidate lemmas being produced. While using templates restricts the search, we still also set a time-out to deal with rare cases where the template contains very many holes or we have a large number of potential functions to instantiate them with.

Revisiting our example, consider again template 3 (associativity). Suppose we give this template to LEMMANAID’s symbolic engine, along with the functions  $+$  (addition),  $-$

<sup>4</sup>See section 2.2 of the Isabelle/Isar Implementation Manual <https://isabelle.in.tum.de/dist/Isabelle2025/doc/implementation.pdf>

(subtraction),  $\sin$ ,  $\cos$  and  $\hat{\phantom{x}}$  (exponentiation) for real numbers, and the functions  $len$  (the length of a list),  $rev$  (reversing a list) and  $@$  (concatenate two lists). In the hole-filling step, it will come up with the following candidates:

$$\begin{aligned} x_1 + x_2 + x_3 &= x_1 + (x_2 + x_3) & (x_1 @ x_2) @ x_3 &= x_1 @ (x_2 @ x_3) \\ x_1 - x_2 - x_3 &= x_1 - (x_2 - x_3) & (x_1^{x_2})^{x_3} &= x_1^{x_2^{x_3}} \end{aligned}$$

Note how  $\sin$ ,  $\cos$ ,  $len$ , and  $rev$  cannot be used to fill the hole  $H_1$  since it is applied to two arguments and therefore requires a binary operator. Also note that only instantiations with  $+$  and  $@$  result in valid lemmas, while the other two conjectures are false. The user can for instance apply Isabelle’s counterexample checker to easily identify these.

### 3.2 Template Prediction via LEMMANAID’s Neural Engine

LEMMANAID’s neural engine uses a fine-tuned LLM to predict templates given a theory context. Template predictions are inputted to LEMMANAID’s symbolic engine (§3.1). For fine-tuning, we create labeled training data (input-output pairs). Following §3.1, we extract the template of each lemma appearing in a corpus of human-written theory files, and use a string representation of the template as the desired output. For each output, its corresponding input is the list of symbols appearing in the body of the original lemma, as well as any known associated definition for each symbol. Revisiting the examples about octonions, the lemma `octo.distrib.left` would result in the datapoint of the shape:

*Input: [Symbols: \*, +] [Defs of \*, +]; Output: [?H<sub>1</sub> x<sub>1</sub> (?H<sub>2</sub> x<sub>2</sub> x<sub>3</sub>) = ?H<sub>2</sub> (?H<sub>1</sub> x<sub>1</sub> x<sub>2</sub>) (?H<sub>1</sub> x<sub>1</sub> x<sub>3</sub>)]*

To obtain the list of symbols present in a given lemma, we first construct a theory file with low-level ML code to interact with Isabelle/Isar top-level and retrieve the lemma. To extract the symbols, we recursively iterate over applications in the term storing any encountered constants, using Isabelle-client (Shminke, 2022). The list of symbols and their meanings is the minimal context necessary to recover a given lemma. However, additional context (such as type information or relevant existing lemmas) may further guide the conjecturing process and is an interesting direction for future work.

### 3.3 Direct Neural Lemma Conjecturing

While LEMMANAID employs a neural engine to generate templates and a symbolic engine to instantiate those templates into lemmas, there is another approach one can take, which is to use a neural engine to directly generate lemmas. To create such a baseline, we adapt LEMMANAID’s neural engine, by instead fine-tuning it on tuples of the form (symbol, definition, lemma) instead of a template. Revisiting the running example again, the lemma `octo.distrib.left` now results in a datapoint of the shape:

*Input: [Symbols: \*, +] [Defs of \*, +]; Output: [(a \* (b + c) = a \* b + a \* c)]*

Two possible string representations of the lemma in the output are: (1) the *lemma command* as appearing in the source code of the theory file (so what a human would write), and (2) a string representation of the internal *lemma object* within the proving engine. We noticed early in our experimentation that an LLM is almost never able to predict the lemma command as it is less structured than the lemma object, and so we use the lemma object representation. While there is some novelty in predicting lemma objects directly as opposed to lemma commands, the main purpose of doing direct neural lemma conjecturing is to create a suitable baseline for our experiments.

### 3.4 Dataset

We train and evaluate LEMMANAID on mathematical libraries from the Isabelle proof assistant. First, the Isabelle/HOL library, which contains formalizations based on higher order logic for a range of mathematics (e.g. number theory, analysis, algebra, set theory). Second, we also use the Isabelle Archive of Formal Proofs (AFP), which is a large collection of formalizations from the research community including mathematics, computer science and logic. At the time of writing, the AFP includes about 285,200 lemmas in close to 900

theories. We extract templates for the lemmas in the above libraries as described in §3.1. In total, this results in a dataset of 55,553 data-points from the HOL library and 193,810 data-points from the AFP<sup>5</sup>.

## 4 Evaluation

We set out to answer the following research questions:

**RQ1** How does our neuro-symbolic approach, LEMMANAID, compare with neural approaches and existing symbolic approaches?

**RQ2** How does an LLM compare to LEMMANAID’s symbolic engine in its ability to fill in lemma templates?

**RQ3** How well does an LLM understand the lemma template language?

**RQ4** What kinds of lemmas is LEMMANAID able to generate?

### 4.1 Experimental Setup

**Baselines** While prior work (Gauthier & Urban, 2023; 2025; Poesia et al., 2024) has explored direct neural lemma conjecturing, there are no existing neural-based tools or models for Isabelle to compare against. We train our own neural baselines (Section 3.3), and go beyond prior work by predicting the lemma objects. Models trained to predict the lemma object are denoted by “neural” in tables in the evaluation. The state-of-the-art symbolic tool for lemma conjecturing is QuickSpec (Smallbone et al., 2017). QuickSpec is limited in that it can only generate equational lemmas as its conjecturing algorithm is based around enumerative synthesis of terms and the construction of equivalence classes via automated testing.

**Benchmarks** We derive our datasets from the Isabelle/HOL library and the Archive of Formal Proofs (AFP) (recall §3.4) and create multiple train/validation/test sets from these libraries. We create a file-wise split of the HOL library so that we may evaluate the in-distribution capabilities of LLM-based approaches for lemma conjecturing tasks. The training, validation and test sets are called HOL-train (50,291 datapoints), HOL-val (500 datapoints), and HOL-test (4,762 datapoints), respectively.

Next, we supplement HOL-train and HOL-val with all projects from the AFP2024 that are published prior to 2024 to create HOL+AFP-train and HOL+AFP-val. We then create a new test set called AFP-test comprised of 31 AFP projects published in 2024 (and thus disjoint from those in HOL+AFP-train and HOL+AFP-val). Training models on HOL+AFP-train and evaluating on HOL-test allows us to understand the effect of more training data as opposed to training on only HOL-train. On the other hand, training models on HOL+AFP-train and evaluating on AFP-test allows us to evaluate an out-of-distribution task. Importantly, evaluating on AFP-test allows us to mitigate the risk of test leakage as the models we use have publicly reported pretraining cutoff dates in 2023. AFP-test consists of 11,986 datapoints. We separately test on the Octonions project (Koutsoukou-Argyryaki, 2018), which contains 359 lemmas, from the AFP and leave it out of all training sets in order to compare LEMMANAID, direct neural lemma conjecturing models, and symbolic tool, QuickSpec. We choose the Octonion theory for this comparison as it consists of equational lemmas, which is the domain QuickSpec supports. Recall that QuickSpec can only conjecture equational lemmas on computable functions which limits its applicability to a smaller subset of Isabelle theories.

We enumerate the lemmas appearing in a given project by compiling and processing a theory and counting the number of lemma objects that exist. We do this by using `Find.Theorems` tool in Isabelle which retrieves theorems from a proof context, and we only keep the theorems defined in the active theory. The implications of this enumeration are discussed in A.2.

---

<sup>5</sup>Some theories could not be processed by the batch method we used, due to technical issues with theory imports. Hence, our dataset does not cover everything from the AFP.

**Metrics** We define multiple metrics used throughout our evaluation. In our approach, we have a set of lemma-prediction tasks. In each such task, there is one ground-truth lemma, and the method being assessed generates a set of predicted lemmas. We define *lemma success rate* as the percentage of these lemma prediction tasks for which the given method is able to successfully generate (as part of the set of lemmas it generates) the ground-truth lemma (where we compare lemmas syntactically). This overall metric measures the performance of a method *end-to-end*. For LEMMANAID’s neural engine, we want to measure *template success rate*, which is the percentage of template-prediction tasks for which it predicts the correct ground-truth template (in this case the LLM only generates one template). For the symbolic engine, given a template, the symbolic engine generates many instantiations, and we consider the instantiation task to be successful if one of the generated instantiations matches the ground-truth lemma (syntactically). The *instantiation rate* measures the percentage of instantiation tasks that the symbolic engine can perform successfully. We also use this metric in RQ2 to measure an LLM’s ability to instantiate templates. To answer RQ3, we need to measure how well LLMs are able to generate templates from lemma objects. In this case, a task consists of predicting a template from a lemma object. We define *abstraction rate* as the percentage of such lemma-template-from-object prediction tasks the LLM is able to perform.

**Models and Inference** For most tasks, we use deepseek-coder-1.3b-base as the pretrained model that we fine-tune. Unless otherwise stated, this is the base LLM used throughout our evaluation. In RQ1, we additionally explore the use of Llama-3.2-1b to evaluate how different base models affect the performance of given approaches. One benefit of using smaller models in LEMMANAID is that it supports a more realistic setup for actual users wanting to use a conjecturing tool and run it locally on their machine. See A.4 for some details about computing resources and replication parameters used in our evaluation. At inference time, we use greedy decoding to obtain a template prediction from LEMMANAID’s LLM. In fact, we use greedy decoding for all neural models in our evaluation, including neural baselines. Thus, all methods with neural models have the same LLM inference budget. We discuss the impact of different representations of LLM input in A.3.

**Checking Outputs** For each *target lemma* we want to recover, we provide as input to LEMMANAID the ground-truth symbols (and their definitions) appearing in that lemma. To check the correctness of a predicted template, we use the exact match (string similarity) of the predicted template and the abstracted template of the target lemma. This is sufficient for templates given the way in which we define the template language. Exact match is not sufficient for comparing lemma objects because it requires identical variable names and therefore does not account for alpha equivalence of the terms. We want to count a generated lemma as matching the target even if it uses different variable names. We parse the target lemma object and the predicted lemma object in the context of a given theory, as some symbols are only defined in that context. We perform term comparison, where we traverse the tree, checking for equivalences on left and right, respectively. Since alpha renaming is already implemented in Isabelle, we use this for variable comparison. Note that this cannot be done easily outside of Isabelle because we must know a given variable’s scope. Since instantiation of a predicted template via LEMMANAID’s symbolic engine produces multiple candidate lemmas, we iterate over them and check each against the target lemma. LEMMANAID’s symbolic engine’s instantiation timeout is set to 60s.

## 4.2 RQ1: Neuro-symbolic vs Neural vs Symbolic

To compare LEMMANAID against neural-only baselines and symbolic methods, we train LEMMANAID’s neural model and the baseline models on either HOL-train or HOL+AFP-train, obtain multiple variants, and evaluate them across different test sets (Figure 2).

We see that both variants of LEMMANAID (Deepseek and Llama3) trained on HOL-train outperform the respective neural baselines on all test sets. We also see that, while LEMMANAID does not greatly outperform neural methods, it is complementary to them, conjecturing more lemmas together. Furthermore, LEMMANAID’s Deepseek variant trained on HOL-train, for example, has a template success rate of 23.2% on HOL-Test, very close to its lemma success rate of 23.0%, suggesting high instantiation rate. We see that on AFP-test, the performance drops for all variants trained on HOL-train. This is unsurprising, as the lemmas

Lemma Success rate						
Method	HOL-train			HOL+AFP-train		
	HOL-test	AFP-Test	Octonions	HOL-test	AFP-Test	Octonions
Deepseek-coder-1.3b						
LEMMANAID	23.0%	6.5%	36.8%	18.9%	6.8%	38.7%
Neural	21.3%	4.3%	26.0%	19.7%	7.0%	41.2%
Combined	28.5%	8.0%	41.5%	26.2%	10.1%	51.3%
Llama-3.2-1b						
LEMMANAID	14.2%	4.1%	22.3%	—	—	—
Neural	11.9%	2.5%	20.9%	—	—	—
Combined	18.5%	5.2%	30.9%	—	—	—
QuickSpec	—	—	22.8%	—	—	22.8%

Figure 2: Neuro-symbolic and neural methods trained on HOL-train and HOL+AFP-train lemma success rates for different test sets. QuickSpec lemma success rate for Octonions.

Method	Instantiation Rate	LLM Input	Abstraction Rate
LLM	67.1%	Lemma Object	82.4%
LEMMANAID	77.8%	+ Symbols + Defs	82.4%
Combined	87.6%	Combined	87.5%

Figure 3: Instantiation rate for LLM (fine-tuned on HOL-train) and LEMMANAID for ground-truth templates (HOL-test).

Figure 4: Template abstraction rate for LLMs (fine-tuned on HOL-train) with different inputs evaluated on HOL-test.

in AFP projects are more diverse than those in HOL. Also, the input to the LLMs may not include enough contextual information as retrieving definitions in AFP theories requires retrieving across dependencies, though we always account for HOL as a dependency. Still, LEMMANAID is complementary with neural-only methods on AFP-test. We see that when trained on HOL+AFP-train, both LEMMANAID’s and the neural baseline’s performance drop on HOL-test. Notably, the neural baseline’s performance increases greatly on AFP-test when trained with more data.

For Octonions, LEMMANAID’s Deepseek variant trained on HOL-train greatly outperforms the respective neural baseline. However, the neural baseline trained on HOL+AFP-train outperforms its LEMMANAID counterpart. In both cases, LEMMANAID and neural perform better together, with overall lemma success rate up to 52.6%. QuickSpec underperforms LEMMANAID and the neural baseline on Octonions, though is complementary to them. When we consider the lemma success rate of combining QuickSpec with our methods, the HOL-train Deepseek collection achieves a lemma success rate of 51.3%, the Llama3 collection achieves 46.0%, and HOL+AFP-train Deepseek collection achieves 60.7%. Not shown in Figure 2 is that QuickSpec generates several thousand lemmas, giving it an extremely poor precision of less than 1%. This is because it has no heuristics for judging which lemmas are interesting, and only skips lemmas that are logical consequences of existing lemmas. It also skips several useful and simple lemmas, such as  $inner\ e_1\ x = Im_1\ x$ , as they are non-trivial consequences of other lemmas. This shows the limitations of the purely symbolic approach in selecting relevant lemmas, and is further illustrated in A.5.

### 4.3 RQ2: Template instantiation by LEMMANAID’s symbolic engine vs an LLM

As discussed in Section 3.1, LEMMANAID instantiates its predicted templates symbolically. We also noted some limitations of this instantiation and how it is subject to timeouts. Alternatively, we can train an LLM to instantiate templates. Figure 3 displays the template instantiation rate for LEMMANAID’s symbolic engine and an LLM trained to instantiate templates when both are given the ground-truth lemma template and the symbols appearing in the target lemma. We observe that LEMMANAID’s symbolic engine has a greater instantiation rate than that of an LLM. However, interestingly, the LLM recovers some lemmas that we symbolically fail to recover, so when we consider lemmas recovered either symbolically or neurally, the rate is 87.6%.



	Lemma Count	Equational	Template Length					Lemma Length					# Symbols		# Holes	
			Min	25%	Median	75%	Max	Min	25%	Median	75%	Max	Mean	Max	Mean	Max
HOL-test	4762	2251	9	49	82	129	9028	7	58	91	151	10454	4.3	100	4.6	106
Lemmaid Success	1096	635	11	36	53	75	259	10	45	65	89	251	3.0	9	3.2	10
Neural Success	1015	574	11	37	55	77	289	10	45	65	89	278	3.0	9	3.3	10
Octonions	350	262	17	29	49	75	688	11	33	55	79	391	3.8	21	4.2	21
Lemmaid Success	139	104	17	23	37	58	137	11	25	43	59	179	2.7	7	3.2	7
Neural Success	148	101	17	23	45	67	137	15	25	43	67	179	2.6	7	3.2	7

Figure 5: Statistics on HOL-test and the successes of LEMMANAID and neural baselines trained on HOL-train. Statistics on Octonions and the successes of LEMMANAID and neural baselines trained on HOL+AFP-train. All methods here use deepseek-coder-1.3b.

In addition to timeouts, failures by LEMMANAID come from unsupported language features that sometimes appear in lemma terms. When instantiating holes, the symbolic engine only considers functions which have the same number of arguments as the given hole. Even though this successfully limits the size of the search space the symbolic engine has to explore, it excludes lemmas where functions may be partially applied, and therefore fit holes with smaller number of arguments than that of the function. We implemented a modification to attempt to instantiate such lemmas and experimented with it at a small scale, but it is a tradeoff, as it increases the search space and results in more timeouts. Since the LLM is able to overcome some of the failures of the symbolic engine, a potential hybrid system could have both an LLM and symbolic engine instantiating templates.

#### 4.4 RQ3: Template abstraction performance of LLM

To understand how well LLMs understand the language of lemma templates, we train an LLM to abstract templates from lemma objects. We have two variants of this task: (1) only lemma objects as input, and (2) lemma objects, symbols, and their definitions as inputs (Figure 4). Surprisingly, both models perform similarly, and there are some non-overlapping examples that each model uniquely predicts so the combination has 87.5% abstraction rate. Notably, a common point of confusion for both models is mapping the same symbol to different holes, likely related to polymorphic symbols. These appear in 62.6% and 62.4% of incorrect predictions in both variants, but only in 15.4% of correct predictions. This mismatch in representation suggests that a fruitful direction for future work would be to modify the template representation of polymorphic symbols to always use the same hole label for the same symbol even if the symbol occurs with different types.

#### 4.5 RQ4: Qualitative analysis

To assess the utility of our tools, we study the characteristics of HOL-test and Octonions, as well as the subsets of lemmas that LEMMANAID and neural baselines successfully generate. For each subset, we consider the number of equational lemmas, the length of the templates and lemmas, and the number symbols and holes appearing in the lemmas (Figure 5). Both LEMMANAID and the neural baselines demonstrate an ability to predict equational and non-equational lemmas. They successfully discover lemmas and templates of different lengths but show greater ability to handle shorter ones. This is to be expected because some contextual information for longer lemmas would be cutoff due to our max sequence length (where we limit the number of input and output tokens) and they are likely more complex for an LLM to reason about. See A.6 for some examples that LEMMANAID synthesizes that other methods do not.

### 5 Conclusion

LEMMANAID is a novel neuro-symbolic tool for conjecturing lemmas for mathematical formalization. LEMMANAID is complementary to neural baselines we create and symbolic tool, QuickSpec, and outperforms them on some test sets. We note that our experimental setup most likely under-reports results, as we measure matches with one specific target-lemma. It is entirely possible that LEMMANAID sometimes comes up with a different target lemma from the same theory, or even additional lemmas that are valid and useful but not present in the existing formalization. In future work, we will consider also other generation

strategies, such as sampling multiple templates and lemma candidates. Our evaluation is a first step towards demonstrating the usefulness of neuro-symbolic conjecturing for proof assistants. So far we have not yet explored its full potential. For instance, for future work LEMMANAID could easily be placed in a workflow utilizing the many tools available in Isabelle/HOL for e.g. counterexample checking and automated proofs: Sledgehammer, simp or even neural proof synthesis methods.

## References

- Jasmin Christian Blanchette, Sascha Böhme, and Lawrence C. Paulson. Extending sledgehammer with smt solvers. *Journal of Automated Reasoning*, 51:109 – 128, 2011. URL <https://api.semanticscholar.org/CorpusID:5389933>.
- Bruno Buchberger, Adrian Craciun, Tudor Jebelean, Laura Kovács, Temur Kutsia, Koji Nakagawa, Florina Piroi, Nikolaj Popov, Judit Robu, Markus Rosenkranz, and Wolfgang Windsteiger. Theorema: Towards computer-aided mathematical theory exploration. *Journal of Applied Logic*, 4:470–504, 12 2006. doi: 10.1016/j.jal.2005.10.006.
- Leonardo de Moura, Soonho Kong, Jeremy Avigad, Floris van Doorn, and Jakob von Raumer. The lean theorem prover (system description). In Amy P. Felty and Aart Middeldorp (eds.), *Automated Deduction - CADE-25*, pp. 378–388, Cham, 2015. Springer International Publishing. ISBN 978-3-319-21401-6.
- Sólrún Halla Einarisdóttir, Moa Johansson, and Johannes Áman Pohjola. Into the infinite - theory exploration for coinduction. In *Proceedings of AISC 2018*, pp. 70–86, 01 2018. ISBN 978-3-319-99956-2. doi: 10.1007/978-3-319-99957-9\_5.
- Sólrún Halla Einarisdóttir, Nicholas Smallbone, and Moa Johansson. Template-based theory exploration: Discovering properties of functional programs by testing. In *Proceedings of the 32nd Symposium on Implementation and Application of Functional Languages, IFL '20*, pp. 67–78, New York, NY, USA, 2021. Association for Computing Machinery. ISBN 9781450389631. doi: 10.1145/3462172.3462192. URL <https://doi.org/10.1145/3462172.3462192>.
- Sólrún Halla Einarisdóttir, Moa Johansson, and Nicholas Smallbone. Lol: A library of lemma templates for data-driven conjecturing. In *Work-in-progress papers presented at the 15th Conference on Intelligent Computer Mathematics (CICM 2022) Informal Proceedings*, pp. 22, 2022.
- Sólrún Halla Einarisdóttir, Márton Hajdu, Moa Johansson, Nicholas Smallbone, and Martin Suda. Lemma discovery and strategies for automated induction. In Christoph Benzmüller, Marijn J.H. Heule, and Renate A. Schmidt (eds.), *Automated Reasoning*, pp. 214–232, Cham, 2024. Springer Nature Switzerland. ISBN 978-3-031-63498-7.
- Emily First, Markus Rabe, Talia Ringer, and Yuriy Brun. Baldur: Whole-Proof Generation and Repair with Large Language Models. In *Proceedings of the 31st ACM Joint European Software Engineering Conference and Symposium on the Foundations of Software Engineering, ESEC/FSE 2023*, pp. 1229–1241, New York, NY, USA, November 2023. Association for Computing Machinery. doi: 10.1145/3611643.3616243. URL <https://doi.org/10.1145/3611643.3616243>.
- Thibault Gauthier and Josef Urban. Learning program synthesis for integer sequences from scratch. *Proceedings of the AAAI Conference on Artificial Intelligence*, 37(6):7670–7677, Jun. 2023. doi: 10.1609/aaai.v37i6.25930. URL <https://ojs.aaai.org/index.php/AAAI/article/view/25930>.
- Thibault Gauthier and Josef Urban. Learning conjecturing from scratch, 2025. URL <https://arxiv.org/abs/2503.01389>.
- Jonathan Heras, Ekaterina Komendantskaya, Moa Johansson, and Ewen Maclean. Proof-pattern recognition and lemma discovery in ACL2. In *Proceedings of LPAR*, 2013. doi: 10.1007/978-3-642-45221-5\_27.

- Albert Qiaochu Jiang, Sean Welleck, Jin Peng Zhou, Timothee Lacroix, Jiacheng Liu, Wenda Li, Mateja Jamnik, Guillaume Lample, and Yuhuai Wu. Draft, sketch, and prove: Guiding formal theorem provers with informal proofs. In *The Eleventh International Conference on Learning Representations*, 2023. URL <https://openreview.net/forum?id=SMA9EAovKMC>.
- Moa Johansson and Nicholas Smallbone. Exploring mathematical conjecturing with large language models. In *17th International Workshop on Neural-Symbolic Learning and Reasoning, NeSy 2023*, 2023.
- Moa Johansson, Dan Rosén, Nicholas Smallbone, and Koen Claessen. Hipster: Integrating theory exploration in a proof assistant. In *Proceedings of CICM*, pp. 108–122. Springer, 2014.
- Angeliki Koutsoukou-Argyraiki. Octonions. *Archive of Formal Proofs*, September 2018. ISSN 2150-914x. <https://isa-afp.org/entries/Octonions.html>, Formal proof development.
- Cole Kurashige, Ruyi Ji, Aditya Giridharan, Mark Barbone, Daniel Noor, Shachar Itzhaky, Ranjit Jhala, and Nadia Polikarpova. Clemma: E-graph guided lemma discovery for inductive equational proofs. *Proc. ACM Program. Lang.*, 8(ICFP), August 2024. doi: 10.1145/3674653. URL <https://doi.org/10.1145/3674653>.
- R. L. McCasland, A. Bundy, and P. F. Smith. MATHsAiD: Automated mathematical theory exploration. *Applied Intelligence*, Jun 2017. ISSN 1573-7497. doi: 10.1007/s10489-017-0954-8. URL <https://doi.org/10.1007/s10489-017-0954-8>.
- Omar Montano-Rivas, Roy McCasland, Lucas Dixon, and Alan Bundy. Scheme-based theorem discovery and concept invention. *Expert systems with applications*, 39(2):1637–1646, 2012.
- Yutaka Nagashima, Zijin Xu, Ningli Wang, Daniel Sebastian Goc, and James Bang. Template-based conjecturing for automated induction in isabelle/hol. In Hossein Hojjat and Erika Ábrahám (eds.), *Fundamentals of Software Engineering*, pp. 112–125, Cham, 2023. Springer Nature Switzerland. ISBN 978-3-031-42441-0.
- Tobias Nipkow, Markus Wenzel, and Lawrence C. Paulson. *Isabelle/HOL: a proof assistant for higher-order logic*. Springer-Verlag, Berlin, Heidelberg, 2002. ISBN 3540433767.
- Gabriel Poesia, David Broman, Nick Haber, and Noah Goodman. Learning formal mathematics from intrinsic motivation. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024. URL <https://openreview.net/forum?id=uNK1TQ8mBD>.
- Markus N. Rabe, Dennis Lee, Kshitij Bansal, and Christian Szegedy. Mathematical reasoning via self-supervised skip-tree training. In *Proceedings of ICLR*, 2021.
- Boris Shminke. Python client for isabelle server, 2022. URL <https://arxiv.org/abs/2212.11173>.
- Eytan Singher and Shachar Itzhaky. Theory exploration powered by deductive synthesis. In Alexandra Silva and K. Rustan M. Leino (eds.), *Computer Aided Verification*, pp. 125–148, Cham, 2021. Springer International Publishing. ISBN 978-3-030-81688-9.
- Nicholas Smallbone, Moa Johansson, Koen Claessen, and Maximilian Algehed. Quick specifications for the busy programmer. *Journal of Functional Programming*, 27, 2017.
- Armando Solar-Lezama. The sketching approach to program synthesis. In *Proceedings of the 7th Asian Symposium on Programming Languages and Systems, APLAS '09*, pp. 4–13, Berlin, Heidelberg, 2009. Springer-Verlag. ISBN 9783642106712. doi: 10.1007/978-3-642-10672-9\_3. URL [https://doi.org/10.1007/978-3-642-10672-9\\_3](https://doi.org/10.1007/978-3-642-10672-9_3).
- Christian Szegedy. A promising path towards autoformalization and general artificial intelligence. In Christoph Benzmüller and Bruce Miller (eds.), *Intelligent Computer Mathematics*, pp. 3–20, Cham, 2020. Springer International Publishing. ISBN 978-3-030-53518-6.

Josef Urban and Jan Jakubův. First neural conjecturing datasets and experiments. In *Proceedings of CICM, 2020*. doi: 10.1007/978-3-030-53518-6\_24.

Haiming Wang, Huajian Xin, Chuanyang Zheng, Zhengying Liu, Qingxing Cao, Yinya Huang, Jing Xiong, Han Shi, Enze Xie, Jian Yin, Zhenguo Li, and Xiaodan Liang. LEGO-prover: Neural theorem proving with growing libraries. In *The Twelfth International Conference on Learning Representations, 2024*. URL <https://openreview.net/forum?id=3f5PALef5B>.

Qingxiang Wang, Cezary Kaliszyk, and Josef Urban. First experiments with neural translation of informal to formal mathematics. In Florian Rabe, William M. Farmer, Grant O. Passmore, and Abdou Youssef (eds.), *Intelligent Computer Mathematics*, pp. 255–270, Cham, 2018. Springer International Publishing. ISBN 978-3-319-96812-4.

Yuhuai Wu, Albert Qiaochu Jiang, Wenda Li, Markus Norman Rabe, Charles E Staats, Mateja Jamnik, and Christian Szegedy. Autoformalization with large language models. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho (eds.), *Advances in Neural Information Processing Systems, 2022*. URL <https://openreview.net/forum?id=IUikebJ1Bf0>.

Kaiyu Yang, Gabriel Poesia, Jingxuan He, Wenda Li, Kristin Lauter, Swarat Chaudhuri, and Dawn Song. Formal mathematical reasoning: A new frontier in ai, 2024. URL <https://arxiv.org/abs/2412.16075>.

## A Appendix

### A.1 Template language and symbols

Templates are implemented as instances of Isabelle/HOL’s term datatype<sup>6</sup>. While theory-specific symbols are replaced by holes, general logical symbols remain in the template to not make it overly abstract and obscuring the analogies we wish to uncover. The symbols that are part of the template language and not abstracted away are:

- All constants whose names begin with ‘HOL.’ These are the functions defined in Isabelle/src/HOL/HOL.thy including equality, True, False, Not, All and Ex (quantifiers), conjunction and disjunction.
- All constants whose names begin with ‘Pure.’ Basic logical constructs including implication (Pure.imp), Pure.all, Pure.eq, defined in Isabelle/src/Pure/logic.ML
- Bounded quantifiers for sets (these are rendered the same as the regular quantifiers defined in HOL).
- Set membership.
- Pairs/Cartesian products as defined in src/HOL/Product\_Type.
- Inequality symbols: less, greater, less or equal, greater or equal Defined in “Orderings.ord\_class.less\_eq” and “Orderings.ord\_class.less” (greater and greater\_eq are defined in terms of less and less\_eq and are translated in the term structure so we don’t expect them to appear in templates).

Implementation details of the exact symbols and how to extract them are available in our anonymous code repository.

### A.2 Lemma Enumeration

Our lemma enumeration strategy is best described through an example. From the Cross\_Product\_7.thy file from the AFP’s Octonions project, the lemma vector\_7 was defined by the user as follows:

---

<sup>6</sup>See section 2.2 of the Isabelle/Isar Implementation Manual <https://isabelle.in.tum.de/dist/Isabelle2025/doc/implementation.pdf>

```

lemma vector_7 [simp]:
  "(vector [x1, x2, x3, x4, x5, x6, x7] :: ('a :: zero)^7)$1 = x1"
  "(vector [x1, x2, x3, x4, x5, x6, x7] :: ('a :: zero)^7)$2 = x2"
  "(vector [x1, x2, x3, x4, x5, x6, x7] :: ('a :: zero)^7)$3 = x3"
  "(vector [x1, x2, x3, x4, x5, x6, x7] :: ('a :: zero)^7)$4 = x4"
  "(vector [x1, x2, x3, x4, x5, x6, x7] :: ('a :: zero)^7)$5 = x5"
  "(vector [x1, x2, x3, x4, x5, x6, x7] :: ('a :: zero)^7)$6 = x6"
  "(vector [x1, x2, x3, x4, x5, x6, x7] :: ('a :: zero)^7)$7 = x7"

```

Given the way we count lemmas (or what we consider a datapoint in the entirety of the project), we consider this to be 7 lemmas. This stems from wanting our definition of a lemma to have one lemma object and one template associated with it. Isabelle differentiates between a “singleton” fact and an “indexed” fact, so we treat each as a singleton fact. In this example, these 7 lemmas are clearly very similar, but there is nothing enforcing this similarity, except perhaps conventions of Isabelle users. Furthermore, Isabelle allows one to also define multiple lemmas at the same time using a “lemmas” keyword where conventionally the lemmas are still similar but less similar than indexed facts typically are. Because this problem (one command, multiple facts) occurs a number of times across theories, we decided to treat every fact separately.

### A.3 Impact of contextual information representation on LEMMANAID’s performance

Train Input	Test Input	Template Success Rate
Ordered	Ordered	23.2 %
Randomized	Randomized	15.7%
Randomized+extra	Randomized+extra	7.3%
Ordered	Randomized	7.8%
Ordered	Randomized+extra	1.7%

Figure 6: The effect of different representations of contextual information (symbols and their definitions) at train and test time on LEMMANAID neural engine’s template success rate.

For template prediction, we give as input to an LLM the symbols used in the target lemma and the definitions of those symbols. There are multiple ways in which this input can be presented to the LLM. Our symbol extraction method for mining symbols in target lemmas (recall §3.2) outputs symbols in a particular order. A potential user of a lemma conjecturing tool, like LEMMANAID, may not necessarily have the same symbol ordering as our mined symbols when constructing their input. They may even provide *more* symbols as input than the just minimal set appearing in a target lemma, since, after all, they are trying to conjecture to see what is true.

Figure 6 shows the impact of different representations of contextual information given to the LLM at train and test time for the template prediction task. *Ordered* denotes that the symbols are in the order that we mine them (in-order traversal), while *randomized* is randomly ordered. We also experiment with randomized input plus extra symbols and their definitions (also randomly interleaved), which allows us to ascertain whether an LLM can still predict the template of a target lemma given a greater set of symbols. LEMMANAID’s neural engine achieves the best performance when the input symbols are ordered at train and test time. However, when symbols are ordered during training but appear in a randomized format and include extra symbols at test time, the performance drops drastically, suggesting that the model struggles to select which symbols to choose to recover the target template. This is unsurprising as fine-tuned models are sensitive to the features of their input, and it is a much harder task for the model to choose symbols and also conjecture a template of a valid lemma. A good future work direction would be to see how these different input representations affect the usability of the tool for real users. Likewise, when a user has some lemmas that are already known to be true, a promising direction to explore is the inclusion of these lemmas in the input to conjecture *other* distinct, useful lemmas.

#### A.4 Computing Resources and Details for Replication

We run the majority of our training and evaluation on 8 NVIDIA RTX 2080 Ti (11GB VRAM). We use 8-bit quantization when loading models for both fine-tuning and inference. We train models with DistributedDataParallel (DDP) for 12 epochs and  $8e - 4$  learning rate. We use a maximum sequence length of 1024 with 200 tokens reserved for the output. We use an effective batch size 16.

#### A.5 Partial QuickSpec output on Octonions

As reported in the main text, QuickSpec generated close to 10,000 lemmas on the Octonions example, so we do not include the full output here. However, we include the output on a small subset of the Octonions theory to illustrate some of the problems.

QuickSpec takes as input a list of function and constant symbols out of which it will build the terms. We started by giving it the functions (with  $\times$ , inverse and 1). As the inverse of 0 is not defined, we had to instruct QuickSpec to only test using non-zero Octonions, a limitation not shared by LEMMANAID. For the same reason we could not give it the constant symbol 0 or the functions  $+$  and  $-$ , which would allow it to construct a zero octonion. The output of QuickSpec was as follows:

```

== Functions ==
(*) :: It -> It -> It
  1 :: It

== Laws ==
  1. x * 1 = x
  2. 1 * x = x
  3. (x * x) * y = x * (x * y)
  4. (x * y) * x = x * (y * x)
  5. (x * y) * y = x * (y * y)
  6. x * (y * (x * y)) = (x * y) * (x * y)
  7. x * (y * (y * x)) = (x * y) * (y * x)
  8. x * (y * (y * y)) = (x * y) * (y * y)
  9. x * ((y * z) * x) = (x * y) * (z * x)
 10. (x * (y * x)) * z = x * (y * (x * z))
 11. ((x * y) * z) * y = x * (y * (z * y))

== Functions ==
inv :: It -> It

== Laws ==
 12. inv 1 = 1
 13. inv (inv x) = x
 14. x * inv x = 1
 15. inv x * inv y = inv (y * x)
 16. inv x * (x * y) = y
 17. x * (y * inv x) = (x * y) * inv x
 18. (inv x * y) * x = inv x * (y * x)

```

So far the number of lemmas is manageable and 9 of the 18 are found in the AFP theory, giving a precision of 50%.

Then we ran QuickSpec again, adding the extra functions  $+$ ,  $0$ , inner product  $(\cdot)$  and norm, but removing the inverse operation (as discussed above). The results are still reasonable but, especially with the inner product function, most of the lemmas are uninteresting, not found in the AFP theory, and generated only because they happen to be true:

```

== Functions ==
(*) :: It -> It -> It

```

0 :: It  
1 :: It

== Laws ==

1.  $x * 0 = 0$
2.  $x * 1 = x$
3.  $0 * x = 0$
4.  $1 * x = x$
5.  $(x * x) * y = x * (x * y)$
6.  $(x * y) * x = x * (y * x)$
7.  $(x * y) * y = x * (y * y)$
8.  $x * (y * (x * y)) = (x * y) * (x * y)$
9.  $x * (y * (y * x)) = (x * y) * (y * x)$
10.  $x * (y * (y * y)) = (x * y) * (y * y)$
11.  $x * ((y * z) * x) = (x * y) * (z * x)$
12.  $(x * (y * x)) * z = x * (y * (x * z))$
13.  $((x * y) * z) * y = x * (y * (z * y))$

== Functions ==

(+) :: It -> It -> It

== Laws ==

14.  $x + y = y + x$
15.  $x + 0 = x$
16.  $(x + x) * y = x * (y + y)$
17.  $(x + y) + z = x + (y + z)$
18.  $x * (y + 1) = x + (x * y)$
19.  $(x + 1) * y = y + (x * y)$
20.  $(x + x) * (x * y) = (x * x) * (y + y)$
21.  $(x + x) * (y * x) = (x * y) * (x + x)$
22.  $(x + x) * (y * y) = (x * y) * (y + y)$
23.  $(x * y) + (x * z) = x * (y + z)$
24.  $(x * y) + (z * y) = (x + z) * y$
25.  $(x + 1) * (x + x) = (x + x) * (x + 1)$
26.  $x * (y * (x + y)) = (x * y) * (x + y)$
27.  $x * (y + (y * x)) = (x * y) * (x + 1)$
28.  $x * (y + (y * y)) = (x * y) * (y + 1)$
29.  $(x * (x + y)) * y = x * ((x + y) * y)$
30.  $((x + y) * x) * y = (x + y) * (x * y)$
31.  $(x + (x * x)) * y = (x + 1) * (x * y)$
32.  $(x + (y * x)) * y = (y + 1) * (x * y)$
33.  $(x + (x + x)) * y = x * (y + (y + y))$

== Functions ==

(·) :: It -> It -> It

== Laws ==

34.  $x \cdot y = y \cdot x$
35.  $x \cdot 0 = 0$
36.  $1 \cdot 1 = 1$
37.  $(x \cdot y) * z = z * (x \cdot y)$
38.  $x \cdot (y * x) = x \cdot (x * y)$
39.  $x \cdot (y + y) = y \cdot (x + x)$
40.  $x \cdot (y \cdot y) = y \cdot (x * y)$
41.  $x \cdot (y \cdot 1) = y \cdot (x \cdot 1)$
42.  $1 \cdot (x * y) = 1 \cdot (y * x)$
43.  $1 \cdot (x \cdot y) = x \cdot y$
44.  $1 \cdot (x + 1) = 1 + (x \cdot 1)$
45.  $(x \cdot y) + (x \cdot z) = x \cdot (y + z)$

46.  $(x * y) \cdot (x * z) = (x \cdot x) * (y \cdot z)$
47.  $(x * y) \cdot (z * y) = (x \cdot z) * (y \cdot y)$
48.  $(x * y) \cdot (y + x) = (y * x) \cdot (y + x)$
49.  $(x * y) \cdot (z \cdot w) = (y * x) \cdot (z \cdot w)$
50.  $(x \cdot y) \cdot (z \cdot w) = (x \cdot y) * (z \cdot w)$
51.  $(x + x) * (x \cdot 1) = (x * x) + (x \cdot x)$
52.  $(x \cdot y) * (z \cdot 1) = z \cdot (x \cdot y)$
53.  $(x * y) \cdot (y + 1) = (y * x) \cdot (y + 1)$
54.  $(x \cdot y) \cdot (z \cdot 1) = z \cdot (x \cdot y)$
55.  $(1 + 1) \cdot (1 + 1) = (1 + 1) * (1 + 1)$
56.  $x * (y * (z \cdot w)) = (x * y) * (z \cdot w)$
57.  $(x * (y \cdot z)) * w = (x * w) * (y \cdot z)$
58.  $(x + (y \cdot z)) * x = x * (x + (y \cdot z))$
59.  $x \cdot (y * (z * x)) = (y * z) \cdot (x \cdot x)$
60.  $x \cdot (y * (z \cdot w)) = (x \cdot y) * (z \cdot w)$
61.  $x \cdot ((x * y) * z) = (y * z) \cdot (x \cdot x)$
62.  $x \cdot ((y * x) * z) = x \cdot (y * (x * z))$
63.  $x \cdot ((x + y) * y) = x \cdot (y * (x + y))$
64.  $x \cdot (y + (z * x)) = x \cdot (y + (x * z))$
65.  $x \cdot (y + (x \cdot x)) = x \cdot (y + (x * x))$
66.  $x \cdot (y + (x \cdot y)) = (x + 1) \cdot (x \cdot y)$
67.  $x \cdot (y + (y \cdot y)) = y \cdot (x + (x * y))$
68.  $x \cdot (y \cdot (z * y)) = z \cdot (y \cdot (x * y))$
69.  $x \cdot (y \cdot (z \cdot w)) = y \cdot (x \cdot (z \cdot w))$
70.  $x \cdot (y + (y + y)) = y \cdot (x + (x + x))$
71.  $x \cdot (y * (z \cdot 1)) = z \cdot (x \cdot y)$
72.  $1 \cdot ((x * y) * z) = 1 \cdot (x * (y * z))$
73.  $(x * (y \cdot 1)) \cdot z = y \cdot (x \cdot z)$
74.  $x \cdot (y + (y \cdot 1)) = y \cdot (x + (x \cdot 1))$

== Functions ==  
norm :: It -> It

- == Laws ==
75. norm 0 = 0
  76. norm 1 = 1
  77. norm x = x · x
  78. norm (x + (x \* x)) = norm (x + norm x)
  79. (x · y) \* (z · 1) = z · (x · y)
  80. (x · y) · (z · 1) = z · (x · y)
  81. norm (norm x + (y \* z)) = norm (norm x + (z \* y))
  82. (norm x + norm y) \* z = z \* (norm x + norm y)
  83. x · (y \* (z · 1)) = z · (x · y)
  84. (x \* (y · 1)) · z = y · (x · z)
  85. norm x \* (1 + norm y) = norm x + norm (x \* y)
  86. norm x · (1 + norm y) = norm x + norm (x \* y)
  87. norm (x \* (x + norm x)) = norm (norm x \* (x + 1))

In general, it seems that the more function symbols there are, the more QuickSpec suffers from combinatorial blowup and generating uninteresting lemmas.

In the complex numbers, the functions  $Re, Im : \mathbb{C} \rightarrow \mathbb{R}$  extract the real and imaginary parts of a number respectively. In the octonions, there are eight analogous functions  $Re, Im_1 \dots Im_7 : \mathbb{O} \rightarrow \mathbb{R}$ . When we added these functions, QuickSpec generated 775 laws, the vast majority extremely uninteresting for a human. An example of a typical generated law is  $Re(x + Im_2 y \times z) = Re(x + y \times Im_2 z)$ .

Corresponding to the complex number  $i$  there are seven octonions  $e_1 \dots e_7$  which (together with 1) act as unit numbers. Unfortunately when we add these as constants then QuickSpec starts to generate many thousands of irrelevant lemmas. Examples are  $(e_5 - e_4) \times (e_1 + e_4) =$



$(1 + e_1) \times (e_4 - e_1)$ , and  $e_4 \times (Im_1 x \times Im_2 y) = Im_7(Im_1 x \times (y \times e_4))$ . The problem is that QuickSpec does not attempt to judge which lemmas are relevant to a human user.

## A.6 Example Lemmas Discovered by LEMMANAID

There are numerous examples of LEMMANAID predicting correct templates (and then recovering the target lemmas), but it is sometimes difficult to explain exactly *why* LEMMANAID succeeded when other methods failed. In Octonions, for example, LEMMANAID recovers the following lemma, which neither the neural baseline nor QuickSpec recovers:

```
lemma Im7_tendsto_lowerbound:
  "\lbrakk
    (f \longlongrightarrow limit) net;
    \forall x in net. b \le Im7 (f x);
    net \noteq bot
  \rbrakk
    \Longrightarrow b \le Im7 limit"
```

The input (below) associated with this lemma is truncated when sent to the LLM due to our max sequence length, but LEMMANAID is still able to recover the correct template.

```
###symbols
  Orderings.bot_class.bot
  Octonions.octo.Im7
  Filter.eventually
  Topological_Spaces.topological_space_class.tendsto
###defs
class bot =
  fixes bot :: 'a ("\bottom")
codatatype octo =
  Octo (Ree: real) (Im1: real) (Im2: real) (Im3: real) (Im4: real)
      (Im5: real) (Im6: real) (Im7: real)
definition eventually :: "('a \rightarrow bool) \rightarrow 'a filter \rightarrow bool"
  where "eventually P F \longleftarrow Rep_filter F P"
class topological_space = "open" +
  assumes open_UNIV [simp, intro]: "open UNIV"
  assumes open_Int [intro]: "open S \Longrightarrow open T \Longrightarrow open (S \inter T)"
  assumes open_Union [intro]: "\forall S \in K. open S \Longrightarrow open (\Union K)"
  ...
```

LEMMANAID's neural engine predicts the following (correct) template:

```
\lbrakk
  ?H1 x_1 x_2 x_3;
  ?H2 (\lambda y_0. x_4 \le ?H3 (x_1 y_0)) x_3;
  x_3 \noteq ?H4
\rbrakk
  \Longrightarrow x_4 \le ?H3 x_2
```

Templates are typically shorter than their corresponding lemma objects, which may help with better reasoning in some cases for neural models. The following is an example lemma object from HOL-test that our neural baseline could not predict directly:

```
\lbrakk
  continuous_map ?X ?Y ?f; compact_space ?X; Hausdorff_space ?Y ;
  ?f ` topspace ?X = topspace ?Y; inj_on ?f (topspace ?X)
\rbrakk
  \Longrightarrow homeomorphic_map ?X ?Y ?f
```

The above lemma object is 230 characters, but the template extracted from this lemma is only 134. The associated template, which LEMMANAID's neural engine is able to correctly predict and then its symbol engine is able to successfully instantiate, looks as follows:

```
\<lbrakk>  
  ?H1 x_1 x_2 x_3; ?H2 x_1; ?H3 x_2;  
  ?H4 x_3 (?H5 x_1) = ?H6 x_2; ?H7 x_3 (?H5 x_1)  
\<rbrakk>  
  \<Longrightarrow> ?H8 x_1 x_2 x_3
```