

Ensuring Safety in an Uncertain Environment: Constrained MDPs via Stochastic Thresholds

Qian Zuo

School of Informatics
University of Edinburgh
Q.Zuo-1@sms.ed.ac.uk

Fengxiang He

School of Informatics
University of Edinburgh
F.He@ed.ac.uk

Abstract

This paper studies constrained Markov decision processes (CMDPs) with constraints against stochastic thresholds, aiming at safety of reinforcement learning in unknown and uncertain environments. We leverage a Growing-Window estimator sampling from interactions with the uncertain and dynamic environment to estimate the thresholds, based on which we design *Stochastic Pessimistic-Optimistic Thresholding (SPOT)*, a novel model-based primal-dual algorithm for multiple constraints against stochastic thresholds. SPOT enables reinforcement learning under both pessimistic and optimistic threshold settings. We prove that our algorithm achieves sublinear regret and constraint violation; i.e., a reward regret of $\tilde{O}(\sqrt{T})$ while allowing an $\tilde{O}(\sqrt{T})$ constraint violation over T episodes. The theoretical guarantees show that our algorithm achieves performance comparable to that of an approach relying on fixed and clear thresholds. To the best of our knowledge, SPOT is the first reinforcement learning algorithm that realises theoretical guaranteed performance in an uncertain environment where even thresholds are unknown.

1 Introduction

Reinforcement learning has enabled major advances in AI, such as AlphaGo [33], autonomous vehicle control [16], and LLM alignment [25], in which an agent is trained to maximise its expected cumulative reward from the environment [36]. Markov decision processes (MDPs) are widely adopted in reinforcement learning, where actions and rewards depend only on the current state rather than on the entire history [6]. In many applications, ensuring safety is of profound importance – for instance, autonomous vehicles are expected to avoid collisions and adhere to traffic regulations [39]. This motivates constrained Markov decision processes (CMDPs), introducing safety constraints against thresholds into optimisation of the cumulative reward function [1].

Existing research has shown that linear-programming and primal-dual methods are able to learn a (near-)optimal policy for selecting actions from given states [41, 11, 38, 29]. However, these methods rely on a prevailing assumption that thresholds can be pre-determined, which is not true in real applications where environmental knowledge is highly limited, and thresholds are unknown and uncertain. Consider the example of autonomous vehicles – they can enter an unseen area where safety thresholds are unknown. Our vision is that an agent could have to infer thresholds from interactions with the environment. Hence, an open problem arises:

Can we design a CMDP algorithm that achieves decent guarantees on its efficiency and safety in an environment with unknown safety thresholds?

To address this problem, this paper proposes *stochastic pessimistic-optimistic thresholding (SPOT)*, a new algorithm with theoretical guarantees on both safety and performance. Our primary objective is a strategy for CMDPs with finite horizon, similar to an array of existing works [4, 7, 11, 14, 22, 34, 41],

but we consider the situation that the agent does not know the thresholds. The agent’s efficiency and safety are measured by two regrets defined with respect to (w.r.t.) the reward function and the constraint violations, respectively. We make **contributions** as follows:

- **Mathematically grounding unknown and uncertain thresholds in CMDPs.** This paper first realises and defines a safe reinforcement learning problem in which knowledge of the environment is highly limited that even the thresholds are unknown, which is termed as CMDP-ST (CMDP with stochastic thresholds).
- **The first approach to safe reinforcement learning agents in such uncertain environment.** SPOT leverages a Growing-Window estimator sampling during the agent’s interactions with the environment to estimate the thresholds. Based on this estimator, SPOT employs the primal-dual scheme to integrate the constraints into the learnt agent. SPOT is compatible to two variants that (1) employs pessimistic thresholds to strictly enforce safety, and (2) applies optimistic thresholds to encourage exploration and boost performance. By systematically navigating the latent ‘margin’ between safety and performance without relying on any prior threshold information, our approach offers a dynamic balance between exploitation and exploration.
- **Theoretical guarantees on threshold estimator and the induced optimisation problem.** We first prove that our threshold estimator is asymptotically consistent with the hidden thresholds with a guaranteed convergence speed. Based on this estimator, we can then properly define a constrained optimisation problem for CMDP-ST. We also prove the feasibility and strong duality of this constrained optimisation problem, which respectively suggest that (1) at least one policy exists which meets all constraints, and (2) the optimal value of the original problem is maintained in its dual problem (Section 3.3).
- **Theoretical guarantees on the efficiency and safety of SPOT.** We prove that SPOT achieves $\tilde{O}(\sqrt{T})$ regrets, for both cumulative reward and constraint violations over T episodes without a pre-defined threshold, which are comparable to its counterpart with pre-defined thresholds (Section 4). Our analysis also suggests a trade-off between efficiency and safety: a constraint that enforces stringent safety can effectively mitigate violations but could incur higher reward regret, and vice versa.

Related Works. Research on MDPs for online learning has seen a long history, which primarily focused on achieving a sublinear regret in stochastic or adversarial environments [24, 2, 13, 23, 30, 31, 15]. Building on these, researchers have integrated safety and resource constraints into MDPs, yielding CMDP methods that achieve strong sublinear regret bounds under assumptions of ‘full-information feedback’, where the complete loss function is observable [38, 29]. Subsequent works on bandit feedback, where the agent only observes the outcomes of its chosen actions, extended these guarantees to both known- and unknown-transition models, achieving sublinear bounds on both weak reward regret and constraint violation [41, 11, 4, 7]. Recent works have pushed the frontier further, obtaining sublinear strong regret guarantees [34, 22, 14]. Efforts have also been seen in extending the results to more complex non-stationary environments (i.e., under assumptions that rewards and constraints have bounded variations), maintaining sublinear regrets even as the environment evolves [10, 37]. Although partial feedback models have been explored beyond simple bandit scenarios [3, 19], these methods generally yield weaker theoretical guarantees. In addition, adversarial scenarios remain particularly challenging, with most existing results achieving only weak regret bounds [35, 17]. As discussed, the entire literature assumes that safety thresholds can be clearly pre-defined. To our best knowledge, this work is the first to move beyond this limitation, studying safe reinforcement learning problem in an uncertain environment where thresholds are unknown.

2 Preliminaries

Constrained Markov decision process (CMDP) An MDP characterises the sequential decision-making process of an agent, positioned in a state s from a finite state \mathcal{S} (with $|\mathcal{S}| = S$), which could select an action a from a finite action space \mathcal{A} (with $|\mathcal{A}| = A$) and then transition to another state $s' \in \mathcal{S}$ according to a transition function $p_h : \mathcal{S} \times \mathcal{A} \times \mathcal{S} \rightarrow [0, 1]$. The course of each episode starts at an initial state $s_1 \in \mathcal{S}$ and continues for $H \in \mathbb{N}$ steps, which is named as horizon. At each step $h \in [H]$, the agent receives a non-stationary reward $\tilde{r}_h : \mathcal{S} \times \mathcal{A} \rightarrow [0, 1]$ drawn from a distribution \mathcal{R} with expectation reward $r_h(s, a)$, which means its underlying distribution may vary over time. The agent’s trajectory is determined by a policy π consisting of decision rules $(\pi_1, \dots, \pi_H) \in \Pi$, where

each $\pi_h(\cdot|s) \in \Delta(\mathcal{A})$ is a probability distribution over the action space \mathcal{A} . Here, $\Delta(\mathcal{A})$ denotes the probability simplex over the action space \mathcal{A} . A Constrained MDP (CMDP) extends an MDP by incorporating m constraints, each defined by a function $g_{i,h} : \mathcal{S} \times \mathcal{A} \rightarrow [0, 1]^m$ associated with a threshold. These thresholds collectively form a vector $\alpha \in [0, H]^m$. In the non-stationary scenario, the immediate constraint $\tilde{g}_{i,h}(s, a) \in [0, 1]$ is drawn from a distribution \mathcal{G}_i with expectation $\mathbb{E}_{\mathcal{G}_i}[\tilde{g}_{i,h}(s, a)] = g_{i,h}(s, a)$ for every constraint $i \in [m]$. Overall, a CMDP can be represented by the tuple $\mathcal{M} = (\mathcal{S}, \mathcal{A}, H, p, r, g, \alpha)$.

Value functions and objective functions Given a policy $\pi \in \Pi$ and a vector $v \in [0, 1]^{\mathcal{S} \times \mathcal{A}}$ indexed by state-action pairs, the value functions

$$V_{v,h}^\pi(s_h) = \mathbb{E}_{\pi,p} \left[\sum_{h'=h}^H v_{h'}(s_{h'}, a_{h'}) \mid s_h \right], \quad Q_{v,h}^\pi(s_h, a_h) = \mathbb{E}_{\pi,p} \left[\sum_{h'=h}^H v_{h'}(s_{h'}, a_{h'}) \mid s_h, a_h \right],$$

capture the expected sum of v from step h onward. For brevity, let V_v^π denote $V_{v,1}^\pi(s_1)$, the expected return starting at the initial state. The primary objective is to find a policy that maximises the expected cumulative reward while satisfying all the constraints; formally,

$$\max_{\pi \in \Pi} V_r^\pi \quad \text{s.t.} \quad V_{g_i}^\pi \geq \alpha_i \quad (\forall i \in [m]), \quad (1)$$

where V_r^π is the expected cumulative reward value, and $V_{g_i}^\pi$ is the expected cumulative constraint value for constraint $i \in [m]$, constrained by the safety threshold α_i . The Lagrangian of this optimisation problem is $\mathcal{L}(\pi, \lambda) = V_r^\pi + \sum_{i=1}^m \lambda_i (V_{g_i}^\pi - \alpha_i)$, where $\lambda \in \mathbb{R}_{\geq 0}^m$ is the vector of Lagrange multipliers. Consequently, problem (1) can be cast as a saddle-point problem: $\max_{\pi \in \Pi} \min_{\lambda \in \mathbb{R}_{\geq 0}^m} \mathcal{L}(\pi, \lambda)$.

Training process The algorithm interacts over a fixed number of $T \in \mathbb{N}$ episodes. Before each episode $t \in [T]$, the algorithm chooses a policy $\pi_t \in \Pi$ and executes it for one run of the horizon. The goal is to simultaneously minimise its reward regret and constraint violation,

$$\mathcal{R}_T(r) := \sum_{t=1}^T (V_r^{\pi^*} - V_r^{\pi_t}), \quad \mathcal{R}_T(g) := \max_{i \in [m]} \sum_{t=1}^T (\alpha_i - V_{g_i}^{\pi_t}).$$

The reward regret measures the cumulative gap between the rewards obtained by the selected policies and the optimal policy $\pi^* \in \Pi$, and the constraint violation measures how much the constraints are violated during the learning process. The objective of the agent is to select policies $\pi_t \in \Pi$ for each episode $t \in [T]$ such that both $\mathcal{R}_T(r)$ and $\mathcal{R}_T(g)$ grow sublinearly in the number of episodes T .

Other notations Throughout this paper, \tilde{O} indicates asymptotic bounds to polylogarithmic factors. \lesssim is used to represent \leq up to numerical constants or polylogarithmic factors.

3 Uncertainty of Environment: A Stochastic Threshold Perspective

Environments can be unknown and uncertain, including the safety thresholds. This means that an agent has to rely on incremental observations and feedback from the environment to ‘infer’ the thresholds over time, which is later served for training itself. This section first discusses what this means to a reinforcement learning agent, then mathematically grounds it into an optimisation problem. We also discuss the properties of this optimisation problem.

3.1 Unknown and Stochastic Environment in Terms of Thresholds

Unknown thresholds are common in real-world scenarios. A prime example is that autonomous vehicles may encounter unseen roads, or even travel to foreign countries with significantly different traffic laws, making their safety thresholds unknown. Even on the same road, the safety thresholds for collision avoidance can be unclear due to extreme weather, poor visibility, or unexpected traffic incidents [20]. A similar situation arises in healthcare, such as dose allocation in clinical trials. For a new drug, safety thresholds are certainly unknown [32].

Algorithm 1 Agent-Environment Interaction for $t \in [T]$

Require: Policy $\pi_t \in \Pi$, $\tilde{r}^t \in [0, 1]^{\mathcal{S} \times \mathcal{A}}$, $\tilde{g}_i^t \in [0, 1]^{\mathcal{S} \times \mathcal{A}}$, $\tilde{\alpha}_i^t \in [0, H]^{\mathcal{S} \times \mathcal{A}}$ for $i \in [m]$

- 1: Environment initialises state $s_1 \in \mathcal{S}$
 - 2: **for** $h = 1, \dots, H$ **do**
 - 3: Agent takes action $a \sim \pi_t(\cdot | s)$
 - 4: Agent observes reward $\tilde{r}_h^t(s, a)$, constraint $\tilde{g}_{i,h}^t(s, a)$ and threshold $\tilde{\alpha}_{i,h}^t(s, a)$ for $i \in [m]$
 - 5: Environment evolves to $s \sim p(\cdot | s, a)$
-

Stochastic thresholds Motivated by the examples above, we propose training a CMDP in which thresholds are unknown, and must therefore be inferred through real-time sampling. Specially, for constraint $i \in [m]$, the threshold $\tilde{\alpha}_{i,h}(s, a) \in [0, H]$ for any state-action pair (s, a) is drawn from a distribution \mathcal{L}_i with support of $[0, H]^{\mathcal{S} \times \mathcal{A}}$, whose expectation is $\mathbb{E}_{\mathcal{L}_i}[\tilde{\alpha}_{i,h}(s, a)] = \alpha_{i,h}(s, a)$.

Algorithm 1 depicts how an agent interacts with the environment, when rewards, constraints and thresholds are all stochastic. At each episode $t \in [T]$, the agent chooses a policy π_t , while independently sampling reward $r^t \sim \mathcal{R}$, constraint $g_i^t \sim \mathcal{G}_i$ and threshold $\alpha_i^t \sim \mathcal{L}_i$ for every constraint $i \in [m]$. It is important to note that the agent has no prior knowledge of the reward, constraint, and threshold distributions, nor the transition function p .

Dynamical nature of thresholds Also motivated by the examples, we note that the environment is not static – rewards, constraints, and thresholds change over time. To take these into account, we define that constraints, and thresholds are drawn from dynamical distributions $\mathcal{R}_t, \mathcal{G}_t, \mathcal{L}_t$, over T episodes, instead of fixed distributions. Consequently, their expectations $\tilde{r}_h^t(s, a)$, $\tilde{g}_{i,h}^t(s, a)$, $\tilde{\alpha}_{i,h}^t(s, a)$ also evolve over time.

Occupancy measure Given a policy π and transition function p , the occupancy measure q_h^π is defined as the probability of the agent visiting state s and taking action a at step h , that is, $q_h^\pi(s, a; p) = \mathbb{P}\{s_h = s, a_h = a | p, \pi\}$ [28, 1]. The entire collection of these probabilities across all steps, states and actions is denoted by $q^\pi(p) := [q_h^\pi(s, a; p)]_{H \times \mathcal{S} \times \mathcal{A}}$.

Probability measure of thresholds and feasible set We introduce a probability space $(\Omega, \mathcal{F}, \mathbb{P})$ to capture the randomness of thresholds, where each $\omega \in \Omega$ is referred to as a threshold ‘event’ (or, scenario), representing a specific realisation of these values. For every constraint $i \in [m]$, the threshold $\alpha_i(\omega_i)$ is drawn from an independent probability space $(\Omega_i, \mathcal{F}_i, \mathbb{P}_i)$. Consequently, the overall threshold vector is $\alpha = (\alpha_1(\omega_1), \dots, \alpha_m(\omega_m))$, where threshold scenario $\omega = (\omega_1, \dots, \omega_m)$. Under the occupancy measure formulation, the optimisation problem then becomes

$$\max_{q \in \Delta(\mathcal{M})} \min_{\lambda \in \mathbb{R}_{\geq 0}^m} \mathcal{L}(q, \lambda, \omega) := r^T q^\pi(p) + \lambda^T (G^T q^\pi(p) - \alpha(\omega)),$$

where ω is the threshold scenario. The corresponding random feasible set is

$$\mathcal{F}_q(\omega) := \{q \in \Delta(\mathcal{M}) \mid \sum_{h,s,a} q_h^\pi(s, a; p) g_{i,h}(s, a) \geq \alpha_i(\omega_i), \forall i \in [m]\},$$

which forms a random polytope within the space of occupancy measures $\Delta(\mathcal{M})$. Finally, the complete probability space for all constraints is defined as $(\Omega_1 \times \dots \times \Omega_m, \mathcal{F}_1 \otimes \dots \otimes \mathcal{F}_m, \mathbb{P}_1 \otimes \dots \otimes \mathbb{P}_m)$.

3.2 Estimators of Thresholds

We then design a Growing-Window (GW) approach to estimating the unknown and stochastic thresholds. In Appendix C, we also give a Monte Carlo (MC) estimator that aggregates all historical data. Compared with the MC estimator, the GW estimator offers better adaptability to environments while preserving asymptotic consistency.

Growing-Window estimator We introduce a sequence of window size $\{W_t\}_{t=1}^T$, growing with episode t . The GW estimator at episode t computes threshold estimates using data from the most

recent W_t episodes as follows:

$$\hat{\alpha}_{i,h}^{(W_t),t}(s,a) := \frac{\sum_{l=\max\{1,t-W_t+1\}}^t \tilde{\alpha}_{i,h}^l(s,a) \mathbf{1}_{\{s_h^l=s, a_h^l=a\}}}{\max\{1, N_h^{(W_t),t+1}(s,a)\}},$$

where $N_h^{(W_t),t}(s,a) := \sum_{l=\max\{1,t-W_t+1\}}^{t-1} \mathbf{1}_{\{s_h^l=s, a_h^l=a\}}$ counts visits to state-action pair (s,a) in the last W_t episodes before episode t . As t increases, the window size W_t grows. We prove its asymptotic consistency as follows.

Theorem 1 (Asymptotic consistency of Growing-Window estimator to thresholds). *Given a confidence parameter $\delta \in (0, 1)$, with probability at least $1 - \delta$, the following holds for every constraint $i \in [m]$, step $h \in [H]$, episode $t \in [T]$, and state-action pair $(s,a) \in \mathcal{S} \times \mathcal{A}$:*

$$\left| \hat{\alpha}_{i,h}^{(W_t),t}(s,a) - \alpha_{i,h}(s,a) \right| \leq \zeta_h^{(W_t),t}(s,a),$$

$$\text{where } \zeta_h^{(W_t),t}(s,a) = \min \left\{ H, \sqrt{\frac{4H^2 \ln(mSAHT/\delta)}{\max\{1, N_h^{(W_t),t}(s,a)\}}} \right\}.$$

When there is no ambiguity, we may simplify the notation $\hat{\alpha}_{i,h}^{(W_t),t}$ to $\hat{\alpha}_{i,h}^t$ and $\zeta_h^{(W_t),t}$ to ζ_h^t . The proof is given in Appendix C.

Remark 1. Fixed-window approaches may repeatedly discard valuable historical data, which hurts long-run convergence. Full-history methods may respond too slowly to changes. A Growing-Window approach preserves enough past information to ensure eventual convergence but can adapt to evolving conditions more rapidly – we desire this balance between statistical consistency and responsiveness to shifts in the environment or thresholds.

Remark 2. In this work, we adopt a linear Growing-Window scheme defined by $W_t = \lfloor \gamma t \rfloor$, where $\gamma \in (0, 1]$ is a fixed constant. In particular, setting $\gamma = 1$ recovers the traditional Monte Carlo (MC) method as a special case.

Pessimistic and optimistic estimators We also consider two ‘extreme’ estimation strategies, namely a conservative (pessimistic) approach and an optimistic estimation, defined as below,

$$\bar{\alpha}_{i,h}^t(s,a) := \hat{\alpha}_{i,h}^{t-1}(s,a) + \zeta_h^{t-1}(s,a), \quad \underline{\alpha}_{i,h}^t(s,a) := \hat{\alpha}_{i,h}^{t-1}(s,a) - \zeta_h^{t-1}(s,a), \quad (2)$$

for every pair (s,a) , step $h \in [H]$ and constraint $i \in [m]$.

Remark 3. With probability $1 - \delta$, any possible estimator $\hat{\alpha}_i$ satisfies inequality: $\underline{\alpha}_i \leq \hat{\alpha}_i \leq \bar{\alpha}_i$, for any constraint $i \in [m]$. This suggests that pessimistic and optimistic estimators are upper and lower boundaries of all possible estimators, respectively. Therefore, by analysing these pessimistic and optimistic estimators, we can effectively study and bound the performance of the GW estimator.

3.3 Feasibility and Strong Duality

A policy π is defined to be pessimistic if the expected cumulative constraint is no less than the pessimistic threshold $\bar{\alpha}$; i.e., $V_g^\pi \geq \bar{\alpha}$. Let \mathcal{F}_{pes} denote the feasibility set,

$$\mathcal{F}_{\text{pes}} := \{q \in \Delta(\mathcal{M}) \mid \sum_{h,s,a} q_h^\pi(s,a;p) g_{i,h}(s,a) \geq \bar{\alpha}_i, \forall i \in [m]\}.$$

Similarly, we define a policy π to be optimistic if the expected cumulative constraint is greater than or equal to the optimistic threshold $\underline{\alpha}$, i.e., $V_g^\pi \geq \underline{\alpha}$, and its feasibility set as below,

$$\mathcal{F}_{\text{opt}} := \{q \in \Delta(\mathcal{M}) \mid \sum_{h,s,a} q_h^\pi(s,a;p) g_{i,h}(s,a) \geq \underline{\alpha}_i, \forall i \in [m]\}.$$

Remark 4. From the definitions, pessimistic and optimistic policies are boundaries of all possible policies: $\mathcal{F}_{\text{pes}} \subseteq \mathcal{F}_q(\omega) \subseteq \mathcal{F}_{\text{opt}}$ with probability $1 - \delta$.

Pessimistic and optimistic policies can be obtained from the following optimisation problem, respectively.

$$\max_{q \in \mathcal{F}_{\text{pes}}} \min_{\lambda \in \mathbb{R}_{\geq 0}^m} \mathcal{L}(q, \lambda, \omega) := r^T q^\pi(p) + \lambda^T (G^T q^\pi(p) - \bar{\alpha}(\omega)), \quad (\text{Pessimistic})$$

$$\max_{q \in \mathcal{F}_{\text{opt}}} \min_{\lambda \in \mathbb{R}_{\geq 0}^m} \mathcal{L}(q, \lambda, \omega) := r^T q^\pi(p) + \lambda^T (G^T q^\pi(p) - \underline{\alpha}(\omega)), \quad (\text{Optimistic})$$

Their strong dualities are characterised by the following lemmas.

Lemma 1 (Strong duality under pessimistic thresholds). *If there exists $q^{\pi_1} \in \mathcal{F}_{\text{pes}}$ and $\xi \in \mathbb{R}_{>0}^m$ such that $G^T q^{\pi_1} \geq \bar{\alpha}_i + \xi_i$ for all constraint $i \in [m]$, then we have $\min_{\lambda} \max_{q \in \mathcal{F}_{\text{pes}}} \mathcal{L}(q, \lambda, \omega) = \max_{q \in \mathcal{F}_{\text{pes}}} \min_{\lambda} \mathcal{L}(q, \lambda, \omega)$.*

Lemma 2 (Strong duality under optimistic thresholds). *If there exists $q^{\pi_2} \in \mathcal{F}_{\text{opt}}$ and $\xi' \in \mathbb{R}_{>0}^m$ such that $G^T q^{\pi_2} \geq \underline{\alpha}_i + \xi'_i$ for all constraint $i \in [m]$, then we obtain $\min_{\lambda} \max_{q \in \mathcal{F}_{\text{opt}}} \mathcal{L}(q, \lambda, \omega) = \max_{q \in \mathcal{F}_{\text{opt}}} \min_{\lambda} \mathcal{L}(q, \lambda, \omega)$.*

Each lemma requires the existence of a policy that strictly satisfies the corresponding thresholds. We illustrate these feasible sets under pessimistic, intermediate and optimistic thresholds and their corresponding feasible solutions in Figure 1.

We set the Slater gap under pessimistic and optimistic thresholds as below, respectively,

$$\rho := (r^T q^{\pi^*}(p) - r^T q^{\pi_1}) / \min_{i \in [m]} \xi_i,$$

$$\rho' := (r^T q^{\pi^*}(p) - r^T q^{\pi_2}) / \min_{i \in [m]} \xi'_i,$$

Remark 5. *As discussed, with probability $1 - \delta$, pessimistic thresholds are boundaries for all possible thresholds. If there exists a policy that strictly satisfies pessimistic thresholds, for all possible thresholds, the strong duality holds.*

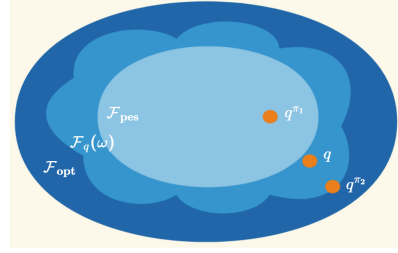


Figure 1: Feasible Sets and their Corresponding Feasible Solutions

3.4 A Primal-Dual Approach for CMDPs with Stochastic Thresholds

In this section, we propose **SPOT** (*Stochastic Pessimistic-Optimistic Thresholding*), a novel algorithm specifically tailored for CMDPs under stochastic thresholds. Unlike the closest algorithm OptPrimalDual-CMDP[11], which assumes a fixed and known threshold, SPOT tackles the more challenging setting in which the threshold is unknown, and potentially changing over time.

Algorithm 2 SPOT

Require: episodes T , $\lambda_1 = \mathbf{0}$, stepsizes η_t and η_λ , and initial policy $\pi_h^1(a|s) = 1/A$ for all s, a, h .

- 1: **for** $t = 1, \dots, T$ **do**
- 2: Update $\bar{r}^t, \bar{g}^t, \bar{p}^t$ via Equation (7) and compute α_\diamond^t via Equation (2) depending on the setting
- 3: Truncated policy evaluation (Algorithm 3) for \bar{r}^t and \bar{g}^t :
- 4: $\hat{Q}_h^t, \hat{V}_{\bar{g}}^{\pi_t} := \text{TPE}(\bar{r}^t, \bar{g}^t, \bar{p}^t, \pi^t, \lambda_t)$
- 5: Update primal variables for all $h, s, a \in [H] \times \mathcal{S} \times \mathcal{A}$:
- 6: $\pi_h^{t+1}(a|s) = \frac{\pi_h^t(a|s) \exp(\eta_t \hat{Q}_h^t(s, a))}{\sum_{a'} \pi_h^t(a'|s) \exp(\eta_t \hat{Q}_h^t(s, a'))}$
- 7: Update dual variables:
- 8: $\lambda_{t+1} = \Pi_C \left(\lambda_t + \frac{1}{\eta_\lambda} (\alpha_\diamond^t - \hat{V}_{\bar{g}}^{\pi_t}) \right)$
- 9: Execute π_t via Algorithm 1 and update counters and empirical model (i.e., $n^t, \hat{r}^t, \hat{g}^t, \hat{p}^t, \hat{\alpha}^t$) via Equation (6)

SPOT algorithm For a given dual variable, the algorithm first updates the primal policy and subsequently refines the dual value using the estimated value. In the first stage (Line 2), it updates the optimistic estimators \bar{r}^t and \bar{g}^t . Then, it computes the estimator α_\diamond^t as prescribed in Equation (2). Importantly, depending on the problem context, estimator α_\diamond^t can be either pessimistic estimator $\bar{\alpha}^t$ or optimistic estimator $\underline{\alpha}^t$, thereby accommodating different degrees of uncertainty in the thresholds. Thus, at each episode t , it yields a new CMDP $\mathcal{M}_t := (\mathcal{S}, \mathcal{A}, \bar{r}^t, \bar{g}^t, \alpha_\diamond^t, \bar{p}^t)$, which the algorithm then optimises via

$$\max_q \min_{\lambda \in \mathbb{R}_{\geq 0}^m} \mathcal{L}'(q, \lambda, \omega) := \bar{r}^T q^\pi + \lambda^T (\bar{G}^T q^\pi - \alpha_\diamond(\omega)).$$

In the policy evaluation stage (Line 3-4), a truncated policy evaluation approach (Algorithm 3) computes Q -values for both reward and constraints under policy π_t . Then, SPOT applies a Mirror Ascent (MA) rule to update the policy based on the computed Q -values. In the later stage of updating dual variables (Line 8), it employs a projected subgradient method:

$$\lambda_{t+1} = \Pi_{\mathcal{C}} \left(\lambda_t - \frac{1}{\eta_{\lambda}} (\bar{G}_{t-1} q^{\pi_t} - \alpha_{\diamond}^t) \right), \quad (3)$$

where $\bar{G}_{t-1} q^{\pi_t}$ is equal to $\hat{V}_{\bar{g}}^{\pi_t}$ and the projection set is defined as $\mathcal{C} := \{\lambda \in \mathbb{R}^m : 0 \leq \lambda \leq \rho \mathbf{1}\}$ with ρ being the Slater gap defined in Section 3.3 and the projection operator $\Pi_{\mathcal{C}} : \mathbb{R}^m \rightarrow \mathcal{C}$ is defined by $\Pi_{\mathcal{C}}(x) := \arg \min_{y \in \mathcal{C}} \|y - x\|_2$. The feasibility proof for Equation (3) is presented in Appendix F. Finally, the policy π_t is executed to collect new data, which is then used to update the empirical models and threshold estimates for subsequent iterations (Line 9).

Key differences and their significance

- **Stochastic and unknown thresholds vs. fixed thresholds.** SPOT can handle thresholds that are unknown and random, going beyond the scope of fixed-threshold methods, which fit in more realistic, critical scenarios.
- **Pessimistic or optimistic thresholds balancing exploration and safety.** SPOT allows using either pessimistic or optimistic thresholds, selected according to the application’s risk tolerance: pessimistic thresholds ensure robust feasibility under worst-case assumptions, while optimistic thresholds enable more ambitious exploration when additional risk is acceptable. This twofold approach empowers SPOT to adapt to varying levels of constraint uncertainty.
- **Decent Performance Guarantees.** By dynamically refining its threshold estimates, SPOT can maintain performance guarantees that are the same order as fixed-threshold approaches.

4 Theoretical Analysis

This section theoretically analyses SPOT from perspectives of reward regret and constraint violation. Intuitively, reward regret captures how much total reward an algorithm ‘loses’ compared to the optimal policy in hindsight; constraint violation tracks how often (or how much) an algorithm violates constraints. Both metrics are essential for quantifying how effectively our algorithm maximises rewards while adhering to constraints.

4.1 Reward Regret and Constraint Violation of a Pessimistic Policy

When safety and strict adherence to constraints are paramount, employing *pessimistic thresholds* helps mitigate worst-case risks. In Algorithm 2, this corresponds to selecting $\alpha_{\diamond}^t = \bar{\alpha}^t$ at each episode t . Under this choice, the reward regret and constraint violation satisfy the following bounds.

Theorem 2 (Bounds for reward regret and constraint violation of pessimistic policy). *Let S be the number of states, A be the number of actions, H be the horizon length, m be the number of constraints, ρ be the Slater gap under pessimistic thresholds, γ be the Growing-Window parameter, T be the number of episodes and \mathcal{N} denote the maximum number of non-zero transition probabilities across all state-action pairs. Then with probability $1 - \delta$, Algorithm 2 under pessimistic thresholds obtains the following regret bounds:*

$$\begin{aligned} \mathcal{R}_T(r) &\leq \tilde{\mathcal{O}} \left(\sqrt{SNH^4T} + \sqrt{(1+m\rho)^2SAH^4T/\gamma} + (\sqrt{\mathcal{N}} + H)H^2SA \right), \\ \mathcal{R}_T(g) &\leq \tilde{\mathcal{O}} \left(\frac{1}{\rho} \left(\sqrt{SNH^4T} + (\sqrt{\mathcal{N}} + H)H^2SA \right) + m\sqrt{SAH^4T/\gamma} \right), \end{aligned}$$

where $\tilde{\mathcal{O}}$ hides polylogarithmic factors in $(S, A, H, T, 1/\delta)$.

Remark 6. The closest works would be Efroni et al. [11], who first introduce online methods that achieve $\tilde{\mathcal{O}}(\sqrt{T})$ regret and constraint violation in CMDPs; later, Ghosh et al. [14] prove that $\tilde{\mathcal{O}}(\sqrt{T})$ regret and hard violation can be achieved by a primal-dual approach in tabular CMDPs. This paper removes the fixed-threshold assumption, and achieves comparable guarantees.

Remark 7. Existing studies have also employed pessimistic thresholds, but the thresholds are predetermined [7]. In contrast, our approach adaptively updates the thresholds during learning.

Proof sketch We present a proof sketch here, with a detailed proof deferred to Appendix H.

Step 1 Decompose the sum of regret and violation scaled by dual variable, applying Lemmas 21 and 23, as follows,

$$\mathcal{L}(\lambda) \leq \sum_{t=1}^{T'} (f_t - \tilde{f}_t) + \sum_{t=1}^{T'} (\tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*}) + \frac{1}{2\eta_\lambda} \sum_{t=1}^{T'} \|\tilde{y}_t\|^2 + \frac{\eta_\lambda}{2} \|\lambda\|_2^2, \quad (4)$$

where $\mathcal{L}(\lambda)$ denotes the Lagrangian for any $0 \leq \lambda \leq \rho \mathbf{1}$ and η_λ denotes the learning rate for dual update. The first term on the right side measures the gap between actual reward and the optimistic estimates; the second term quantifies the cumulative error between the estimated policy and the optimal policy with λ_t ; the last two terms capture the error from updating the dual variables.

Step 2 Upper bound each term in the decomposition. For the first term and third term, we have $\frac{1}{2\eta_\lambda} \sum_{t=1}^{T'} \|\tilde{y}_t\|^2 \leq \frac{mH^2T}{2\eta_\lambda}$. By applying Lemma 22, we have $\left| \sum_{t=1}^{T'} (f_t - \tilde{f}_t) \right| \leq \tilde{\mathcal{O}} \left(\sqrt{SNH^4T} \right)$. Bounding the second term is one of major technical contributions in this paper. We obtain the following lemma which is proved in Appendix G.

Lemma 3 (Policy optimality of pessimistic policy). *Conditioning on the success event (formally defined in Appendix D), for any episode $t \in [T']$, parameter $\gamma \in (0, 1]$. Under pessimistic thresholds, we have*

$$\sum_{t=1}^{T'} \tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \leq \tilde{\mathcal{O}} \left(\left[(1 + m\rho) + m\rho\sqrt{SA/\gamma} \right] H^2\sqrt{T} \right).$$

To obtain this, we need the following lemma.

Lemma 4 (Martingale difference term bound). *Let $\{\mathcal{F}_h^t\}_{(t,h) \in [T] \times [H]}$ be the filtration generated by the state-action sequences and threshold values observed up to time step h at episode t . Suppose that for every (t, h) , $\zeta_h^t(s_h, a_h)$ satisfies $|\zeta_h^t(s_h, a_h) - \mathbb{E}[\zeta_h^t(s_h, a_h) | \mathcal{F}_h^{t-1}]| \leq 2H$. Then, with probability $1 - \delta$,*

$$\left| \sum_{t=1}^T \sum_{h=1}^H \zeta_h^t(s_h, a_h) - \mathbb{E}[\zeta_h^t(s_h, a_h) | \mathcal{F}_h^{t-1}] \right| \leq \tilde{\mathcal{O}} \left(\sqrt{TH^3 \ln \frac{1}{\delta}} \right).$$

Step 3 Combining Step 2 and Step 3, and after rearrangement, we have

$$\begin{aligned} \mathcal{L}(\lambda) &\lesssim \left(\rho + \frac{\|\lambda\|_2^2}{\rho} \right) \sqrt{mH^2T} + \left(\left[(1 + m\rho) + m\rho\sqrt{SA/\gamma} \right] H^2\sqrt{T} \right) \\ &\quad + \sqrt{SNH^4T} + (\sqrt{N} + H)H^2SA, \end{aligned}$$

Please note that this is an upper bound for the combination of reward and constraint violation. We can obtain the regret bound for reward or constraint violation through setting $\lambda = 0$ or $\lambda_i = \rho e_i \mathbf{1}_{(\sum_{k=1}^{T'} g_{i,k}) \neq 0}$.

4.2 Reward Regret and Constraint Violations of an Optimistic Policy

When a certain degree of risk is acceptable in exchange for faster learning and higher reward potential (e.g., exploration-heavy tasks or loosely constrained resource allocation), an optimistic threshold could be adopted in Algorithm 2, by setting $\alpha_\diamond^t = \underline{\alpha}_t$ at every episode t . Similarly, we prove reward regret and constraint violations of an optimistic policy as below.

Theorem 3 (Bounds for reward regret and constraint violation with optimistic thresholds). *Under the same conditions of Theorem 2, with probability $1 - \delta$, Algorithm 2 under optimistic thresholds achieves the following regret bounds:*

$$\begin{aligned} \mathcal{R}_T(r) &\leq \tilde{\mathcal{O}} \left(\sqrt{SNH^4T} + \sqrt{H^4(1 + m\rho')^2T} + (\sqrt{N} + H)H^2SA \right), \\ \mathcal{R}_T(g) &\leq \tilde{\mathcal{O}} \left(\left(1 + \frac{1}{\rho'} \right) \left(\sqrt{mSNH^4T} + (\sqrt{N} + H)\sqrt{m}H^2SA \right) + mH^2\sqrt{T} \right) \\ &\quad + \tilde{\mathcal{O}} \left(\sqrt{mSAH^4T/\gamma} + \sqrt{mSAH^2} \right). \end{aligned}$$

where ρ' denotes the Slater gap under optimistic thresholds.

This theorem shows that, even under this aggressive stance, both reward regret and constraint violation remain sublinear over episodes T .

Proof sketch The proof idea is similar with the pessimistic counterpart, so we discuss the most significant differences below due to space limitation. A detailed proof is given in Appendix H.

Decomposition We can derive a decomposition similar to Equation (4); however, unlike the pessimistic policy case, an additional term $\sqrt{\sum_{i=1}^m \left(\sum_{t=1}^{T'} (y_{t,i} - \tilde{y}_{t,i}) \right)^2} \|\lambda\|_2$ appears, which measures the total estimation error for all constraints. Applying Lemma 14, we have that with probability $1 - \delta$,

$$\sqrt{\sum_{i=1}^m \left(\sum_{t=1}^{T'} (y_{t,i} - \tilde{y}_{t,i}) \right)^2} \leq \tilde{O} \left(\sqrt{mSNH^4T} + (\sqrt{N} + H + 1)\sqrt{m}H^2SA + \sqrt{mSAH^4T/\gamma} \right).$$

On-policy optimality Optimistic policies also exhibit difference, as below.

Lemma 5 (Policy optimality of optimistic policy). *Conditioning on the success event, for any episode $t \in [T']$, if we adopt the optimistic thresholds, then*

$$\sum_{t=1}^{T'} \tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \leq \tilde{O} \left((1 + m\rho')H^2\sqrt{T} \right).$$

4.3 Safety-Performance Trade-Off

Our theoretical analysis presents a *safety-performance trade-off*: policies aiming for strict adherence to constraints can incur larger reward regret, while policies that aggressively maximise rewards are more prone to constraint violations. Concretely, Theorems 2 and 3 show that, compared to fixed-threshold baselines, pessimistic (strict) thresholds yield lower violations but higher reward regret, whereas optimistic thresholds exhibit the opposite behaviour.

Practical implications One may wonder whether it is possible to tune a hyperparameter to leverage this trade-off without resorting to two extreme cases – pessimistic or optimistic. To this end, we may introduce a hyperparameter $\xi \in [0, 1]$ to interpolate between these extremes. In particular, instead of setting $\alpha_\diamond^t = \bar{\alpha}^t$ or $\underline{\alpha}^t$, we define a *blended threshold*

$$\alpha_\xi^t = \xi \underline{\alpha}^t + (1 - \xi) \bar{\alpha}^t$$

at episode t . Varying ξ adjusts how ‘strict’ or ‘relaxed’ the thresholds are, thereby controlling the balance between safety and performance. While our theorems currently focus on the two boundary cases $\xi = 0$ (pessimistic) and $\xi = 1$ (optimistic), it is straightforward to extend to an analogous analysis for intermediate ξ values.

5 Conclusion

In this paper, we propose a novel primal-dual scheme for CMDPs with stochastic thresholds, which utilises samples from environmental interactions to estimate these thresholds. Building on this framework, we introduce SPOT, a primal-dual algorithm for episodic CMDPs with stochastic thresholds that is designed to balance regret minimisation with safety guarantees in an uncertain environment. Furthermore, we leverage either pessimistic or optimistic thresholds in SPOT, respectively. We theoretically prove that SPOT, under both threshold settings, achieves a regret bound of $\tilde{O}(\sqrt{T})$ and a constraint violation of $\tilde{O}(\sqrt{T})$ over T episodes, which are in the same order as that of an approach with certain thresholds. Our findings reveal a subtle dance: pessimistic thresholds enforce stricter safety constraints that effectively reduce violations, albeit at the cost of increased reward regret; in the optimistic setting, a reverse situation is observed. This creates a ‘margin’ between safety and performance without relying on prior threshold information. To our best knowledge, SPOT is the first primal-dual algorithm to provide theoretical performance guarantees even when safety thresholds are uncertain, offering insight for exploring real-world applications in safety-critical domains such as autonomous driving and healthcare.

References

- [1] Eitan Altman. *Constrained Markov Decision Processes*, volume 7. CRC Press, 1999.
- [2] Peter Auer, Thomas Jaksch, and Ronald Ortner. Near-optimal regret bounds for reinforcement learning. *Advances in neural information processing systems*, 21, 2008.
- [3] Francesco Bacchiocchi, Francesco Emanuele Stradi, Matteo Castiglioni, Alberto Marchesi, and Nicola Gatti. Markov persuasion processes: Learning to persuade from scratch. *arXiv preprint arXiv:2402.03077*, 2024.
- [4] Qinbo Bai, Vaneet Aggarwal, and Ather Gattami. Provably efficient model-free algorithm for mdps with peak constraints. *arXiv preprint arXiv:2003.05555*, 2020.
- [5] Amir Beck. *First-order methods in optimization*. SIAM, 2017.
- [6] Richard Bellman. A markovian decision process. *Journal of mathematics and mechanics*, pages 679–684, 1957.
- [7] Archana Bura, Aria HasanzadeZonuzi, Dileep Kalathil, Srinivas Shakkottai, and Jean-Francois Chamberland. Dope: Doubly optimistic and pessimistic exploration for safe reinforcement learning. *Advances in neural information processing systems*, 35:1047–1059, 2022.
- [8] Christoph Dann, Tor Lattimore, and Emma Brunskill. Unifying pac and regret: Uniform pac bounds for episodic reinforcement learning. *Advances in Neural Information Processing Systems*, 30, 2017.
- [9] Dongsheng Ding, Kaiqing Zhang, Jiali Duan, Tamer Başar, and Mihailo R. Jovanović. Convergence and sample complexity of natural policy gradient primal-dual methods for constrained mdps. *arXiv preprint arXiv:2206.02346*, 2022.
- [10] Yuhao Ding and Javad Lavaei. Provably efficient primal-dual reinforcement learning for cmdps with non-stationary objectives and constraints. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, pages 7396–7404, 2023.
- [11] Yonathan Efroni, Shie Mannor, and Matteo Pirotta. Exploration-exploitation in constrained mdps. *arXiv preprint arXiv:2003.02189*, 2020.
- [12] Yonathan Efroni, Nadav Merlis, Mohammad Ghavamzadeh, and Shie Mannor. Tight regret bounds for model-based reinforcement learning with greedy policies. *Advances in Neural Information Processing Systems*, 32, 2019.
- [13] Eyal Even-Dar, Sham M Kakade, and Yishay Mansour. Online markov decision processes. *Mathematics of Operations Research*, 34(3):726–736, 2009.
- [14] Arnob Ghosh, Xingyu Zhou, and Ness Shroff. Towards achieving sub-linear regret and hard constraint violation in model-free rl. In *International Conference on Artificial Intelligence and Statistics*, pages 1054–1062. PMLR, 2024.
- [15] Chi Jin, Tiancheng Jin, Haipeng Luo, Suvrit Sra, and Tiancheng Yu. Learning adversarial markov decision processes with bandit feedback and unknown transition. In *International Conference on Machine Learning*, pages 4860–4869. PMLR, 2020.
- [16] Alex Kendall, Jeffrey Hawke, David Janz, Przemyslaw Mazur, Daniele Reda, John-Mark Allen, Vinh-Dieu Lam, Alex Bewley, and Amar Shah. Learning to drive in a day. In *2019 international conference on robotics and automation (ICRA)*, pages 8248–8254. IEEE, 2019.
- [17] Orin Levy, Alon Cohen, Asaf Cassel, and Yishay Mansour. Efficient rate optimal regret for adversarial contextual mdps using online function approximation. In *International Conference on Machine Learning*, pages 19287–19314. PMLR, 2023.
- [18] Tianjiao Li, Ziwei Guan, Shaofeng Zou, Tengyu Xu, Yingbin Liang, and Guanghui Lan. Faster algorithm and sharper analysis for constrained markov decision process. *Operations Research Letters*, 54:107107, 2024.
- [19] Tao Lin and Ce Li. Information design with unknown prior. *arXiv preprint arXiv:2410.05533*, 2024.
- [20] David Lindner, Xin Chen, Sebastian Tschiatschek, Katja Hofmann, and Andreas Krause. Learning safety constraints from demonstrations with unknown rewards. In *International Conference on Artificial Intelligence and Statistics*, pages 2386–2394. PMLR, 2024.

- [21] Andreas Maurer and Massimiliano Pontil. Empirical bernstein bounds and sample variance penalization. *arXiv preprint arXiv:0907.3740*, 2009.
- [22] Adrian Müller, Pragnya Alatur, Volkan Cevher, Giorgia Ramponi, and Niao He. Truly no-regret learning in constrained mdps. *arXiv preprint arXiv:2402.15776*, 2024.
- [23] Gergely Neu, Andras Antos, András György, and Csaba Szepesvári. Online markov decision processes under bandit feedback. *Advances in Neural Information Processing Systems*, 23, 2010.
- [24] Francesco Orabona. A modern introduction to online learning. *arXiv preprint arXiv:1912.13213*, 2019.
- [25] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- [26] Santiago Paternain, Miguel Calvo-Fullana, Luiz F. O. Chamon, and Alejandro Ribeiro. Safe policies for reinforcement learning via primal-dual methods. *IEEE Transactions on Automatic Control*, 68(3):1321–1336, 2022.
- [27] Santiago Paternain, Luiz Chamon, Miguel Calvo-Fullana, and Alejandro Ribeiro. Constrained reinforcement learning has zero duality gap. *Advances in Neural Information Processing Systems*, 32, 2019.
- [28] Martin L. Puterman. *Markov Decision Processes: Discrete Stochastic Dynamic Programming*. John Wiley & Sons, Inc., 1994.
- [29] Shuang Qiu, Xiaohan Wei, Zhuoran Yang, Jieping Ye, and Zhaoran Wang. Upper confidence primal-dual reinforcement learning for cmdp with adversarial loss. *Advances in Neural Information Processing Systems*, 33:15277–15287, 2020.
- [30] Aviv Rosenberg and Yishay Mansour. Online convex optimization in adversarial markov decision processes. In *International Conference on Machine Learning*, pages 5478–5486. PMLR, 2019.
- [31] Aviv Rosenberg and Yishay Mansour. Online stochastic shortest path with bandit feedback and unknown transition function. *Advances in Neural Information Processing Systems*, 32, 2019.
- [32] Cong Shen, Zhiyang Wang, Sofia Villar, and Mihaela Van Der Schaar. Learning for dose allocation in adaptive clinical trials with safety constraints. In *International Conference on Machine Learning*, pages 8730–8740. PMLR, 2020.
- [33] David Silver, Aja Huang, Chris J Maddison, Arthur Guez, Laurent Sifre, George Van Den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Veda Panneershelvam, Marc Lanctot, et al. Mastering the game of go with deep neural networks and tree search. *nature*, 529(7587):484–489, 2016.
- [34] Francesco Emanuele Stradi, Matteo Castiglioni, Alberto Marchesi, and Nicola Gatti. Optimal strong regret and violation in constrained mdps via policy optimization. *arXiv preprint arXiv:2410.02275*, 2024.
- [35] Francesco Emanuele Stradi, Jacopo Germano, Gianmarco Genalti, Matteo Castiglioni, Alberto Marchesi, and Nicola Gatti. Online learning in cmdps: Handling stochastic and adversarial constraints. In *Forty-first International Conference on Machine Learning*, 2024.
- [36] Richard S Sutton and Andrew G Barto. *Reinforcement Learning: An Introduction*. The MIT Press, 2018.
- [37] Honghao Wei, Arnob Ghosh, Ness Shroff, Lei Ying, and Xingyu Zhou. Provably efficient model-free algorithms for non-stationary cmdps. In *International Conference on Artificial Intelligence and Statistics*, pages 6527–6570. PMLR, 2023.
- [38] Xiaohan Wei, Hao Yu, and Michael J Neely. Online learning in weakly coupled markov decision processes: A convergence time study. *Proceedings of the ACM on Measurement and Analysis of Computing Systems*, 2(1):1–38, 2018.
- [39] Lu Wen, Jingliang Duan, Shengbo Eben Li, Shaobing Xu, and Huei Peng. Safe reinforcement learning for autonomous vehicles through parallel constrained policy optimization. In *2020 IEEE 23rd International Conference on Intelligent Transportation Systems (ITSC)*, pages 1–7. IEEE, 2020.

- [40] Donghao Ying, Yuhao Ding, and Javad Lavaei. A dual approach to constrained markov decision processes with entropy regularization. In *International Conference on Artificial Intelligence and Statistics*, pages 1887–1909. PMLR, 2022.
- [41] Liyuan Zheng and Lillian Ratliff. Constrained upper confidence reinforcement learning. In *Learning for Dynamics and Control*, pages 620–629. PMLR, 2020.

A Summary of Notation

In this section, we summarise the key notation used throughout the paper as follows.

Table 1: List of Notation

Description	Notation
State space	\mathcal{S} , with cardinality S
Action space	\mathcal{A} , with cardinality A
Number of constraints	m
Time horizon	H
Transition probability	$p_h(s' s, a)$
Initial state	$s_1 \in \mathcal{S}$
Slater gap under pessimistic thresholds	$\rho = (r^T q^{\pi^*}(p) - r^T q^{\pi_1}) / \min_{i \in [m]} \xi_i$
Slater gap under optimistic thresholds	$\rho' = (r^T q^{\pi^*}(p) - r^T q^{\pi_2}) / \min_{i \in [m]} \xi'_i$
Number of episodes	T
Reward	$\tilde{r}_h(s, a)$ with $\mathbb{E}[\tilde{r}_h(s, a)] = r_h(s, a)$
Constraint	$\tilde{g}_{i,h}(s, a)$ with $\mathbb{E}[\tilde{g}_{i,h}(s, a)] = g_{i,h}(s, a)$
Threshold	$\tilde{\alpha}_{i,h}(s, a)$ with $\mathbb{E}[\tilde{\alpha}_{i,h}(s, a)] = \alpha_{i,h}(s, a)$
Constraint functions	$y_t(s, a) = \alpha^t - Gq^{\pi_t}(p)$
Policy	$\pi \in \Pi$
Value function	$V_{v,h}^{\pi}(s) = \mathbb{E} \left[\sum_{h'=h}^H v_{h'}(s_{h'}, a_{h'}) \mid s_h = s \right]$
Value function (vector-valued)	$V_v^{\pi} = (V_{v,1}^{\pi}(s_1), \dots, V_{v,H}^{\pi}(s_1))^{\top} \in \mathbb{R}^m$
Q -value function	$Q_{v,h}^{\pi}(s, a) = \mathbb{E} \left[\sum_{h'=h}^H v_{h'}(s_{h'}, a_{h'}) \mid s_h = s, a_h = a \right]$
Occupancy measure	$q_h^{\pi}(s, a; p) = \mathbb{P}[s_h = s, a_h = a \mid p, \pi]$
Occupancy measure (matrix form)	$q^{\pi}(p) := [q_h^{\pi}(s, a; p)]_{H \times S \times A}$
Lagrangian under stochastic thresholds	$\mathcal{L}(q, \lambda, \omega) := r^T q^{\pi}(p) + \lambda^T (G^T q^{\pi}(p) - \alpha(\omega))$
Lagrangian of Algorithm 2	$\mathcal{L}'(q, \lambda, \omega) := \bar{r}^T q^{\pi}(p) + \lambda^T (\bar{G}^T q^{\pi}(p) - \alpha_{\diamond}(\omega))$
Optimal policy	$q^* \in \arg \max_{q \in \mathcal{F}_q} \min_{\lambda \in \mathbb{R}_{\geq 0}^m} \mathcal{L}(q, \lambda, \omega)$
Confidence level	$1 - \delta$
Reward regret	$\mathcal{R}_T(r) = \sum_{t \in [T]} (V_r^* - V_r^{\pi_t})$
Constraint violation	$\mathcal{R}_T(g) = \max_{i \in [m]} \sum_{t \in [T]} (\alpha_i - V_{g_i}^{\pi_t})$
Step size	$\eta_{\lambda} > 0$ (hyperparameter)
Dual domain	$\mathcal{C} = [0, \rho \mathbf{1}]^m$
Visitation counter	$N_{t,h}(s, a) = \sum_{l=1}^t \mathbf{1}\{s_h^l = s, a_h^l = a\}$
Averages	$\hat{r}_{t,h}(s, a), \hat{g}_{t,h}(s, a), \hat{\alpha}_{t,h}(s, a)$
Exploration bonuses	$\phi_h^{r,t}, \phi_h^{g,t}, \zeta_h^t$
Optimistic estimates	$\bar{r}_t, \bar{g}_t, \bar{\alpha}_t$
Pessimistic estimates	$\underline{\alpha}_t$
Scenario-dependent threshold	α_{\diamond}
Success event	\mathcal{E}
Truncated Q -function	$\hat{Q}_h^t(s, a) = \hat{Q}_h^t(\bar{r}_t, s, a) + \sum_i \lambda_{t,i} \hat{Q}_h^t(\bar{g}_{t,i}, s, a)$
Truncated value function	$\hat{V}_{v,h}^t(s) = \langle \pi_{t,h}(\cdot \mid s), \hat{Q}_{v,h}^t(s, \cdot) \rangle$

B Lagrangian Formulation of CMDPs

This section discusses the Lagrangian formulation of CMDPs with and without stochastic thresholds.

B.1 Lagrangian Formulation of CMDPs without Stochastic Thresholds

Under the bandit feedback paradigm, traditional CMDPs usually assume that rewards and constraints are stochastic or adversarial. Here, we take the stochastic case as an example, that is, rewards and

constraints are randomly drawn from some probability distributions \mathcal{R} and \mathcal{G}_i for all $i \in [m]$. The non-stationary immediate reward after taking an action a at state s is a random variable $\tilde{r}_h(s, a) \in [0, 1]$ with expectation $\mathbb{E}_{\mathcal{R}}[\tilde{r}_h(s, a)] = r_h(s, a)$. Similarly, for every constraint $i \in [m]$, the non-stationary immediate constraint $\tilde{g}_{i,h}(s, a) \in [0, 1]$ for every state-action pair (s, a) is a random variable with expectation $\mathbb{E}_{\mathcal{G}_i}[\tilde{g}_{i,h}(s, a)] = g_{i,h}(s, a)$.

Now, we explore strong duality in this setting. Occupancy measure is defined as in Section 3.1. We can reformulate the saddle-point problem into the following optimisation problem:

$$\max_{q \in \Delta(\mathcal{M})} \min_{\lambda \in \mathbb{R}_{\geq 0}^m} \mathcal{L}(q, \lambda) := r^T q^\pi(p) + \lambda^T (G^T q^\pi(p) - \alpha),$$

where $\Delta(\mathcal{M})$ is the set of valid occupancy measures, r is the reward vector, and G is the constraint matrix. Without the occupancy measure, the feasible set can be characterised as: $\mathcal{F}_\pi := \{\pi \in \Pi \mid V_{g_i}^\pi \geq \alpha_i, \forall i \in [m]\}$. Combining the definition of occupancy measure, the feasible set is described by:

$$\mathcal{F}_q := \{q \in \Delta(\mathcal{M}) \mid \sum_{h,s,a} q_h^\pi(s, a; p) g_{i,h}(s, a) \geq \alpha_i, \forall i \in [m]\}.$$

In order to further discuss its strong duality, we make the following assumption, which is commonly used in the study of CMDPs [1, 11, 18, 40, 9, 10, 22, 26].

Assumption 1 (Slater condition under fixed thresholds). *Given a constraint matrix $G = [g_1, \dots, g_m]$, there exists a strictly feasible solution $q^\pi \in \mathcal{F}_q$ such that $g_i^T q^\pi < \alpha_i$ for every constraint $i \in [m]$.*

Then, one can prove that CMDPs satisfy strong duality as follows.

Lemma 6 (Strong duality under fixed thresholds [27]). *We have*

$$\min_{\lambda \in \mathbb{R}_{\geq 0}^m} \max_{\pi \in \Pi} \mathcal{L}(\pi, \lambda) = \max_{\pi \in \Pi} \min_{\lambda \in \mathbb{R}_{\geq 0}^m} \mathcal{L}(\pi, \lambda).$$

and both optima are attained.

B.2 Lagrangian Formulation of CMDPs with Stochastic Thresholds

To rigorously study the implications of stochastic thresholds, we explore two distinct boundary scenarios: *pessimistic* and *optimistic*. Under the pessimistic scenario, a policy π is defined to be feasible if it satisfies constraints under a conservative threshold $\bar{\alpha}$: $V_g^\pi \geq \bar{\alpha}$. We denote the feasibility set for pessimistic policies as:

$$\mathcal{F}_{\text{pes}} := \{q \in \Delta(\mathcal{M}) \mid \sum_{h,s,a} q_h^\pi(s, a; p) g_{i,h}(s, a) \geq \bar{\alpha}_i, \forall i \in [m]\}.$$

In contrast, under the optimistic scenario, feasibility is evaluated against a more lenient threshold $\underline{\alpha}$: $V_g^\pi \geq \underline{\alpha}$. The corresponding feasibility set for optimistic policies is defined as:

$$\mathcal{F}_{\text{opt}} := \{q \in \Delta(\mathcal{M}) \mid \sum_{h,s,a} q_h^\pi(s, a; p) g_{i,h}(s, a) \geq \underline{\alpha}_i, \forall i \in [m]\}.$$

From these definitions, it follows that the pessimistic and optimistic scenarios define the boundaries for all feasible policies, yielding: $\mathcal{F}_{\text{pes}} \subseteq \mathcal{F}_q(\omega) \subseteq \mathcal{F}_{\text{opt}}$ with probability $1 - \delta$ due to Theorem 1.

To identify the corresponding optimal policies within these boundary scenarios, we solve the following constrained optimisation problems:

$$\max_{q \in \mathcal{F}_{\text{pes}}} \min_{\lambda \geq 0} \mathcal{L}(q, \lambda, \omega) := r^T q^\pi(p) + \lambda^T (G^T q^\pi(p) - \bar{\alpha}(\omega)), \quad (\text{Pessimistic})$$

$$\max_{q \in \mathcal{F}_{\text{opt}}} \min_{\lambda \geq 0} \mathcal{L}(q, \lambda, \omega) := r^T q^\pi(p) + \lambda^T (G^T q^\pi(p) - \underline{\alpha}(\omega)). \quad (\text{Optimistic})$$

These formulations explicitly capture the robustness and flexibility required when handling stochastic thresholds. For solving each problem, we have the following assumptions:

Assumption 2 (Slater condition under pessimistic thresholds). *There exists $q^{\pi_1} \in \mathcal{F}_{\text{pes}}$ and $\xi \in \mathbb{R}_{>0}^m$ such that $G^T q^{\pi_1} \geq \bar{\alpha}_i + \xi_i$ for all constraint $i \in [m]$. Set the Slater gap $\rho := (r^T q^{\pi^*}(p) - r^T q^{\pi_1}(p)) / \min_{i \in [m]} \xi_i$.*

Assumption 3 (Slater condition under optimistic thresholds). *There exists $q^{\pi^2} \in \mathcal{F}_{\text{opt}}$ and $\xi^l \in \mathbb{R}_{>0}^m$ such that $G^T q^{\pi^2} \geq \underline{\alpha}_i + \xi_i^l$ for all constraint $i \in [m]$. Set the Slater gap $\rho' := (r^T q^{\pi^*}(p) - r^T q^{\pi^2}) / \min_{i \in [m]} \xi_i^l$.*

Then we have the following lemmas:

Lemma 7 (Strong duality under pessimistic thresholds). *Conditioned on Assumption 2, we have*

$$\min_{\lambda \in \mathbb{R}_{\geq 0}^m} \max_{q \in \mathcal{F}_{\text{pes}}} \mathcal{L}(q, \lambda, \omega) = \max_{q \in \mathcal{F}_{\text{pes}}} \min_{\lambda \in \mathbb{R}_{\geq 0}^m} \mathcal{L}(q, \lambda, \omega).$$

Proof. Under Assumption 2, we can regard Equation (1) as the following convex optimisation problem:

$$q^{\pi^*} \in \arg \max_{q^{\pi} \in \mathcal{F}_{\text{pes}}} r^T q^{\pi} \quad \text{s.t.} \quad Gq^{\pi} \geq \alpha, \quad (5)$$

which satisfies all conditions in Assumption 4. Specifically:

1. \mathcal{F}_{pes} is a polytope and hence convex.
2. The objective function $f(\cdot) = -r^T(\cdot)$ is affine and therefore convex.
3. Each constraint $y_i(\cdot) := \alpha_i - g_i^T(\cdot)$ is affine and therefore convex.
4. By Assumption 2, Equation (5) admits at least one feasible solution, and since \mathcal{F}_{pes} is compact while $f(\cdot)$ is continuous, an optimal solution exists.
5. A Slater point exists by Assumption 2, namely q^{π^1} .
6. All dual problems admit an optimal solution because the domain is compact and $f(\cdot) + \lambda^T y(\cdot)$ is continuous.

Thus, the result immediately follows from Lemma 16. \square

Lemma 8 (Strong duality under optimistic thresholds). *Conditioned on Assumption 3, we have*

$$\min_{\lambda \in \mathbb{R}_{\geq 0}^m} \max_{q \in \mathcal{F}_{\text{opt}}} \mathcal{L}(q, \lambda, \omega) = \max_{q \in \mathcal{F}_{\text{opt}}} \min_{\lambda \in \mathbb{R}_{\geq 0}^m} \mathcal{L}(q, \lambda, \omega).$$

The proof is similar to that under the pessimistic thresholds.

C Estimators of Thresholds

We propose two types of threshold estimators, a Monte Carlo estimator and a Growing-Window (GW) estimator as discussed in the main text.

Monte Carlo estimator For every constraint $i \in [m]$, state s , action a , step $h \in [H]$ and episode $t \in [T]$, let (s_h^l, a_h^l) denotes the state-action pair visited in episode l at step h ; $(s_h^l, a_h^l, s_{h+1}^l)$ represents the state-action pair (s_h^l, a_h^l) is visited and the environment evolves to next state s_{h+1}^l at step h in episode l ; $\mathbf{1}_X$ is the indicator function of X ; and $N_h^t(s, a) = \sum_{l=1}^{t-1} \mathbf{1}_{\{s_h^l=s, a_h^l=a\}}$ is the total number of visits to the pair $(s, a) \in \mathcal{S} \times \mathcal{A}$ at step h before episode $t \in [T]$. First, we give the empirical averages of the thresholds as follows:

$$\hat{\alpha}_{i,h}^t(s, a) := \frac{\sum_{l=1}^t \tilde{\alpha}_{i,h}^l(s, a) \mathbf{1}_{\{s_h^l=s, a_h^l=a\}}}{\max\{1, N_h^{t+1}(s, a)\}}.$$

Then, we have the following lemmas.

Lemma 9 (Confidence interval of MC thresholds). *Given any confidence parameter $\delta \in (0, 1)$, constraint $i \in [m]$, step $h \in [H]$, episode $t \in [T]$ and state-action pair $(s, a) \in \mathcal{S} \times \mathcal{A}$, with probability at least $1 - \delta$, it holds*

$$|\hat{\alpha}_{i,h}^t(s, a) - \alpha_{i,h}(s, a)| \leq \iota_h^t(s, a),$$

$$\text{where } \iota_h^t(s, a) := \sqrt{\frac{H^2 \ln(\frac{2}{\delta})}{2N_t(s, a)}}.$$

Proof. Focus on specifics $i \in [m]$, $t \in [T]$ and $(s, a) \in \mathcal{S} \times \mathcal{A}$. By Hoeffding's inequality and noticing that threshold values are bounded in $[0, H]$, it holds that:

$$\mathbb{P} \left[|\hat{\alpha}_{i,h}^t(s, a) - \alpha_{i,h}(s, a)| \geq \frac{c}{N_t(s, a)} \right] \leq 2 \exp \left(-\frac{2c^2}{H^2 N_t(s, a)} \right).$$

Setting $\delta = 2 \exp \left(-\frac{2c^2}{H^2 N_t(s, a)} \right)$ and solving to find a proper value of c gives the result for the threshold function. \square

Theorem 4 (Asymptotically consistency of MC threshold empirical estimator). *Given a confidence parameter $\delta \in (0, 1)$, with probability at least $1 - \delta$, the following holds for every constraint $i \in [m]$, step $h \in [H]$, episode $t \in [T]$, and state-action pair $(s, a) \in \mathcal{S} \times \mathcal{A}$:*

$$|\hat{\alpha}_{i,h}^t(s, a) - \alpha_{i,h}(s, a)| \leq \zeta_h^t(s, a),$$

$$\text{where } \zeta_h^t(s, a) := \min \left\{ H, \sqrt{\frac{4H^2 \ln(mSAHT/\delta)}{\max\{1, N_t(s, a)\}}} \right\}.$$

Proof. From Lemma 9, given $\delta' \in (0, 1)$, we have for any constraint $i \in [m]$, step $h \in [H]$, episode $t \in [T]$ and state-action pair $(s, a) \in \mathcal{S} \times \mathcal{A}$:

$$\mathbb{P} \left[|\hat{\alpha}_{i,h}^t(s, a) - \alpha_{i,h}(s, a)| \leq \iota_h^t(s, a) \right] \geq 1 - \delta'.$$

Now, we are interested in the intersection of the aforementioned events:

$$\mathbb{P} \left[\bigcap_{s,a,m,h,t} \{ |\hat{\alpha}_{i,h}^t(s, a) - \alpha_{i,h}(s, a)| \leq \iota_h^t(s, a) \} \right].$$

Thus, we have:

$$\begin{aligned} & \mathbb{P} \left[\bigcap_{s,a,m,h,t} \{ |\hat{\alpha}_{i,h}^t(s, a) - \alpha_{i,h}(s, a)| \leq \iota_h^t(s, a) \} \right] \\ &= 1 - \mathbb{P} \left[\bigcup_{s,a,m,h,t} \{ |\hat{\alpha}_{i,h}^t(s, a) - \alpha_{i,h}(s, a)| \leq \iota_h^t(s, a) \}^c \right] \\ &= 1 - \sum_{s,a,m,h,t} \mathbb{P} \left[\{ |\hat{\alpha}_{i,h}^t(s, a) - \alpha_{i,h}(s, a)| \leq \iota_h^t(s, a) \}^c \right] \\ &\geq 1 - mSAHT\delta', \end{aligned}$$

where the inequality holds by union bound. Noticing that $\alpha_{i,h}^t(s, a) \leq H$, we substitute δ' with $\delta := \frac{\delta'}{mSAHT}$ in $\iota_h^t(s, a)$ with an additional union bound over the possible values of $N_t(s, a)$. This yields $\zeta_h^t(s, a)$, and concludes the proof. \square

Growing-Window estimator For each constraint $i \in [m]$, state-action pair $(s, a) \in \mathcal{S} \times \mathcal{A}$, step $h \in [H]$, and episode $t \in [T]$, let the sequence $\{W_t\}_{t=1}^T$ denote a strictly increasing window-size parameter (e.g., $W_t = \lfloor \gamma t \rfloor$ for some constant $\gamma \in (0, 1]$). Define

$$N_h^{(W_t),t}(s, a) = \sum_{l=\max\{1, t-W_t+1\}}^{t-1} \mathbf{1}_{\{s_h^l=s, a_h^l=a\}}$$

as the number of visits to (s, a) at step h during the most recent W_t episodes before episode t .

Then, the Growing-Window empirical threshold estimator is:

$$\hat{\alpha}_{i,h}^{(W_t),t}(s, a) = \frac{\sum_{l=\max\{1, t-W_t+1\}}^t \tilde{\alpha}_{i,h}^l(s, a) \mathbf{1}_{\{s_h^l=s, a_h^l=a\}}}{\max\{1, N_h^{(W_t),t+1}(s, a)\}}.$$

We then have the following theory.

Lemma 10 (Confidence interval of GW thresholds). *Given any $\delta \in (0, 1)$, constraint $i \in [m]$, step $h \in [H]$, episode $t \in [T]$, and state-action pair $(s, a) \in \mathcal{S} \times \mathcal{A}$, with probability at least $1 - \delta$, we have:*

$$\left| \hat{\alpha}_{i,h}^{(W_t),t}(s, a) - \alpha_{i,h}(s, a) \right| \leq \iota_h^{(W_t),t}(s, a),$$

where $\iota_h^{(W_t),t}(s, a) = \sqrt{\frac{H^2 \ln(\frac{2}{\delta})}{2 \max\{1, N_h^{(W_t),t}(s, a)\}}}$.

Proof. For fixed indices $i, h, t, (s, a)$, applying Hoeffding's inequality and noting threshold values are bounded within $[0, H]$, we obtain:

$$\mathbb{P} \left[\left| \hat{\alpha}_{i,h}^{(W_t),t}(s, a) - \alpha_{i,h}(s, a) \right| \geq \epsilon \right] \leq 2 \exp \left(-\frac{2\epsilon^2 N_h^{(W_t),t}(s, a)}{H^2} \right).$$

Setting $\delta = 2 \exp \left(-\frac{2\epsilon^2 N_h^{(W_t),t}(s, a)}{H^2} \right)$ and solving for ϵ yields the stated confidence bound. \square

Theorem 1 (Asymptotic consistency of GW threshold estimator). *Given $\delta \in (0, 1)$, with probability at least $1 - \delta$, the following holds uniformly for each constraint $i \in [m]$, step $h \in [H]$, episode $t \in [T]$, and state-action pair $(s, a) \in \mathcal{S} \times \mathcal{A}$:*

$$\left| \hat{\alpha}_{i,h}^{(W_t),t}(s, a) - \alpha_{i,h}(s, a) \right| \leq \zeta_h^{(W_t),t}(s, a),$$

where $\zeta_h^{(W_t),t}(s, a) = \min \left\{ H, \sqrt{\frac{4H^2 \ln(mSAHT/\delta)}{\max\{1, N_h^{(W_t),t}(s, a)\}}} \right\}$.

Proof. By Lemma 10, for any given confidence level δ' , we have:

$$\mathbb{P} \left[\left| \hat{\alpha}_{i,h}^{(W_t),t}(s, a) - \alpha_{i,h}(s, a) \right| \leq \iota_h^{(W_t),t}(s, a) \right] \geq 1 - \delta'.$$

Taking a union bound over all possible choices of $i \in [m]$, $h \in [H]$, $t \in [T]$, and $(s, a) \in \mathcal{S} \times \mathcal{A}$, we have:

$$\mathbb{P} \left[\bigcap_{i,h,t,s,a} \left\{ \left| \hat{\alpha}_{i,h}^{(W_t),t}(s, a) - \alpha_{i,h}(s, a) \right| \leq \iota_h^{(W_t),t}(s, a) \right\} \right] \geq 1 - mSAHT\delta'.$$

Letting $\delta' = \frac{\delta}{mSAHT}$ and substituting into $\iota_h^{(W_t),t}(s, a)$, we derive the stated uniform bound with probability at least $1 - \delta$. This completes the proof. \square

Remark 8. *When there is no ambiguity, we simplify the notation $\hat{\alpha}_{i,h}^{(W_t),t}(s, a)$ to $\hat{\alpha}_{i,h}^t(s, a)$ and $\zeta_h^{(W_t),t}(s, a)$ to $\zeta_h^t(s, a)$. In this paper, we employ a linear Growing-Window scheme specified by $W_t = \lfloor \gamma t \rfloor$, for a fixed constant $\gamma \in (0, 1]$. In particular, when $\gamma = 1$, we recover the classic MC method as a special case.*

Furthermore, we consider both pessimistic and optimistic estimators for thresholds under conservative and aggressive explorations, respectively as below

$$\bar{\alpha}_{i,h}^t(s, a) := \hat{\alpha}_{i,h}^{t-1}(s, a) + \zeta_h^{t-1}(s, a), \quad (\text{Pessimistic})$$

$$\underline{\alpha}_{i,h}^t(s, a) := \hat{\alpha}_{i,h}^{t-1}(s, a) - \zeta_h^{t-1}(s, a). \quad (\text{Optimistic})$$

We then give the empirical averages of the reward, constraints and transition probabilities as follows:

$$\hat{r}_h^t(s, a) := \frac{\sum_{l=1}^t \tilde{r}_h^l(s, a) \mathbf{1}_{\{s_h^l=s, a_h^l=a\}}}{\max\{1, N_h^{t+1}(s, a)\}}, \quad (6a)$$

$$\hat{g}_{i,h}^t(s, a) := \frac{\sum_{l=1}^t \tilde{g}_{i,h}^l(s, a) \mathbf{1}_{\{s_h^l=s, a_h^l=a\}}}{\max\{1, N_h^{t+1}(s, a)\}}, \quad (6b)$$

$$\hat{p}_h^t(s' | s, a) := \frac{\sum_{l=1}^t \mathbf{1}_{\{s_h^l=s, a_h^l=a, s_{h+1}^l=s'\}}}{\max\{1, N_h^{t+1}(s, a)\}}. \quad (6c)$$

Next, we define optimistic estimators for the reward, constraints and transition probabilities as below,

$$\bar{r}_h^t(s, a) := \hat{r}_h^{t-1}(s, a) + \phi_h^{t-1}(s, a), \quad (7a)$$

$$\bar{g}_{i,h}^t(s, a) := \hat{g}_{i,h}^{t-1}(s, a) + \phi_h^{t-1}(s, a), \quad (7b)$$

$$\bar{p}_h^t(s' | s, a) := \hat{p}_h^{t-1}(s' | s, a). \quad (7c)$$

The bonus term ϕ_h^t combines the uncertainties arising from both reward and transition estimations at step h in episode t : $\phi_h^t(s, a) = \phi_h^{r,t}(s, a) + \phi_h^{p,t}(s, a)$, where the reward bonus $\phi_h^{r,t}(s, a) = \mathcal{O}\left(\sqrt{\frac{\ln(SAHmT/\delta)}{\max\{1, N_h^t(s, a)\}}}\right)$ and the transition bonus $\phi_h^{p,t}(s, a) = \mathcal{O}\left(H\sqrt{\frac{S+\ln(SAHT/\delta)}{\max\{1, N_h^t(s, a)\}}}\right)$ for any confidence parameter $\delta \in (0, 1)$.

D Success Event

Fixing a confidence parameter $\delta > 0$ and defining $\delta' := \delta/4$, we first introduce the following *failure events*:

$$\begin{aligned} F_t^\alpha &:= \{\exists s, a, h, i : |\hat{\alpha}_{i,h}^t(s, a) - \alpha_{i,h}(s, a)| \geq \zeta_h^t(s, a)\}, \\ F_t^r &:= \{\exists s, a, h : |\hat{r}_h^t(s, a) - r_h(s, a)| \geq \phi_h^{r,t}(s, a)\}, \\ F_t^g &:= \{\exists s, a, h, i : |\hat{g}_{i,h}^t(s, a) - g_{i,h}(s, a)| \geq \phi_{i,h}^{g,t}(s, a)\}, \\ F_t^p &:= \{\exists s, a, s', h : |p_h(s' | s, a) - \hat{p}_h^{t-1}(s' | s, a)| \geq \phi_h^{p,t}(s, a, s')\}, \\ F_t^N &:= \left\{ \exists s, a, h : N_h^t(s, a) \leq \frac{1}{2} \sum_{j < t} q_h^{\pi_j}(s, a; p) - H \ln \left(\frac{SAH}{\delta'} \right) \right\}. \end{aligned}$$

Then, we define the union of these events over all episodes,

$$\begin{aligned} F^\alpha &:= \bigcup_{t \in [T]} F_t^\alpha, \quad F^r := \left(\bigcup_{t \in [T]} F_t^r \right) \cup \left(\bigcup_{t \in [T]} F_t^g \right), \\ F^p &:= \bigcup_{t \in [T]} F_t^p, \quad F^N := \bigcup_{t \in [T]} F_t^N. \end{aligned}$$

Furthermore, the success event \mathcal{E} is defined as the complement of those failure events:

$$\mathcal{E} = \overline{F^\alpha \cup F^r \cup F^p \cup F^N}.$$

We have the following lemma.

Lemma 11 (Success event). *Setting $\delta' = \frac{\delta}{4}$, we have $\mathbb{P}[\mathcal{E}] \geq 1 - \delta$.*

Proof. We apply the union bound to each event separately.

- By Lemma 1, we have $\mathbb{P}[F^\alpha] \leq \delta'$.
- Using Hoeffding's inequality and union bound arguments over all state-action-step combinations, similarly, we obtain $\mathbb{P}[F^r] \leq \delta'$.
- Using concentration inequalities for multinomial distributions [21] and the union bound, we derive $\mathbb{P}[F^p] \leq \delta'$.
- Employing similar techniques as in [8], by bounding occupancy measure deviations, we obtain $\mathbb{P}[F^N] \leq \delta'$.

Combining these results with the union bound, we have

$$\mathbb{P}[F^\alpha \cup F^r \cup F^p \cup F^N] \leq \mathbb{P}[F^\alpha] + \mathbb{P}[F^r] + \mathbb{P}[F^p] + \mathbb{P}[F^N] \leq 4\delta' = \delta.$$

Thus, $\mathbb{P}[\mathcal{E}] = 1 - \mathbb{P}[F^\alpha \cup F^r \cup F^p \cup F^N] \geq 1 - \delta$.

This completes the proof. \square

E Policy Evaluation

Truncated policy evaluation is essential in CMDPs under stochastic threshold settings. Given the presence of stochastic constraints and additional exploration bonuses, unbounded value estimates can lead to instability and hinder theoretical analysis. We employ truncation to maintain boundedness and numerical stability of value functions.

Formally, for given estimates of reward $\bar{r}_h(s, a)$, constraint functions $\bar{g}_{i,h}(s, a)$, transition probabilities $\bar{p}_h(\cdot | s, a)$, we iteratively compute truncated Q and V value estimates. The truncated Q -value update at each timestep h is expressed as below,

$$\hat{Q}_h^\pi(s, a; \bar{l}, \bar{p}) = \min \left\{ \bar{l}_h(s, a) + \sum_{s'} \bar{p}_h(s' | s, a) \hat{V}_{\bar{l}, h+1}^\pi(s'), H - h + 1 \right\},$$

where $\bar{l}_h(s, a)$ denotes the generalized immediate payoff (reward or cost with bonus), and $\hat{V}_h^\pi(s; \bar{l}, \bar{p})$ denotes the truncated value function,

$$\hat{V}_{\bar{l}, h}^\pi(s) = \left\langle \hat{Q}_h^\pi(s, a; \bar{l}, \bar{p}), \pi_h(a | s) \right\rangle.$$

The detailed truncated policy evaluation algorithm is shown in Algorithm 3.

Algorithm 3 TPE (Truncated Policy Evaluation [11])

Require: estimate $\bar{r}_h^t(s, a)$, $\bar{g}_i^t(s, a)$, transition probability $\bar{p}_h^t(s' | s, a)$, policy $\pi_h(a | s)$, and initial value function $\hat{V}_{\bar{r}, H+1}^{\pi_t}(s) = \hat{V}_{\bar{g}, H+1}^{\pi_t}(s) = 0$ for all s .

- 1: **for** $h = H, H - 1, \dots, 1$ **do**
 - 2: **for** $(s, a) \in \mathcal{S} \times \mathcal{A}$ **do**
 - 3: Compute truncated Q -function:
 - 4: $\hat{Q}_h^{\pi_t}(s, a; \bar{r}, \bar{p}) = \min \left\{ \bar{r}_h(s, a) + \bar{p}_h(\cdot | s, a) \hat{V}_{\bar{r}, h+1}^{\pi_t}(\cdot), H - h + 1 \right\}$
 - 5: $\hat{Q}_h^{\pi_t}(s, a; \bar{g}_i, \bar{p}) = \min \left\{ \bar{g}_{i,h}(s, a) + \bar{p}_h(\cdot | s, a) \hat{V}_{\bar{g}_i, h+1}^{\pi_t}(\cdot), H - h + 1 \right\} \quad (\forall i \in [m])$
 - 6: $\hat{Q}_h^t(s, a) = \hat{Q}_h^{\pi_t}(s, a; \bar{r}, \bar{p}) + \sum_{i=1}^m \lambda_{t,i} \hat{Q}_h^{\pi_t}(s, a; \bar{g}_i, \bar{p})$
 - 7: Compute truncated V -function:
 - 8: $\hat{V}_{\bar{g}_i, h}^{\pi_t}(s) = \left\langle \hat{Q}_h^{\pi_t}(s, \cdot; \bar{g}_i, \bar{p}), \pi_h(\cdot | s) \right\rangle \quad (\forall i \in [m])$
 - 9: **return** $\left\{ \hat{Q}_h^t(s, a) \right\}_{h,s,a}$ and $\left\{ \hat{V}_{\bar{g}_i, h}^{\pi_t} \right\}_h$
-

F Feasibility

This Appendix studies the feasibility of Projection (3).

Feasibility under pessimistic thresholds. We first prove the feasibility of Projection (3) under pessimistic scenarios.

Lemma 12. *Given a confidence parameter $\delta \in (0, 1)$, Algorithm 2 ensures that $\Pi_{\mathcal{C}}(\lambda_t, \bar{G}_{t-1}, q^{\pi_t}, \bar{\alpha}^t)$ is feasible at every episode $t \in [T]$ with probability at least $1 - \delta$.*

Proof. To prove the lemma we show that under the success event \mathcal{E} , which holds with probability at least $1 - \delta$, Projection (3) admits a feasible solution q^{π_1} . Precisely, under the success event \mathcal{E} , we have, for any feasible solution q^{π_1} under Assumption 2 and any episode $t \in [T]$,

$$\bar{G}^\top q^{\pi_1} \succeq G_t^\top q^{\pi_1} \succeq \alpha + \zeta_t = \bar{\alpha} \succeq \alpha,$$

where the first inequality holds by the optimism of the constraints. The second and third inequalities show that if q^{π_1} satisfies the constraints with respect to the true mean constraint matrix, it also satisfies the pessimistic thresholds. Thus, the feasible solutions are all available at every episode. \square

Feasibility of optimistic policies. We then prove the feasibility of Projection (3) of optimistic policies.

Lemma 13. *Given a confidence parameter $\delta \in (0, 1)$, Algorithm 2 ensures that $\Pi_{\mathcal{C}}(\lambda_t, \bar{G}_{t-1}, q^{\pi_t}, \bar{\alpha}^t)$ is feasible at every episode $t \in [T]$ with probability at least $1 - \delta$.*

Proof. To prove the lemma we show that under the success event \mathcal{E} , which holds with probability at least $1 - \delta$, Projection (3) admits a feasible solution. Similar to the discussion of Lemma 12,

$$\bar{G}^\top q^{\pi_2} \succeq G_t^\top q^{\pi_2} \succeq \alpha \succeq \alpha - \zeta_t = \underline{\alpha},$$

where the last inequality holds by the definition of the optimistic thresholds. This concludes the proof of the lemma. \square

G Optimality and Optimism of Policies

In this Appendix, we analyse the optimality and optimism of policies. To clearly present our theoretical results, we introduce concise notation from convex optimisation and probability theory.

The optimistic constraints valuation under either pessimistic or optimistic scenarios (i.e., with scenario-dependent threshold α_\diamond^t) and true constraints valuation are denoted by

$$\begin{aligned}\tilde{y}_t &:= \alpha_\diamond^t - \hat{V}_g^{\pi_t}(s_1), \\ y_t &:= \alpha^t - V_g^{\pi_t}(s_1).\end{aligned}$$

We also define the negative values of the optimistic, actual, and optimal rewards respectively:

$$\begin{aligned}\tilde{f}_t &:= -\hat{V}_r^{\pi_t}(s_1), \\ f_t &:= -V_r^{\pi_t}(s_1), \\ f_{opt} &:= -V_r^{\pi^*}(s_1).\end{aligned}$$

We present two lemmas that collectively control the variability of stochastic thresholds (Lemma 4) and the summation of key terms under the Growing-Window estimator. Both have the order of $\tilde{O}(\sqrt{T})$.

Lemma 14 (Martingale difference term bound). *Let $\{\mathcal{F}_h^t\}_{(t,h) \in [T] \times [H]}$ be the filtration generated by the state-action sequences and threshold values observed up to time step h in episode t . Suppose that for every (t, h) , $\zeta_h^t(s_h, a_h)$ satisfies*

$$|\zeta_h^t(s_h, a_h) - \mathbb{E}[\zeta_h^t(s_h, a_h)]| \leq 2H.$$

Then, with probability $1 - \delta$,

$$\left| \sum_{t=1}^T \sum_{h=1}^H (\zeta_h^t(s_h, a_h) - \mathbb{E}[\zeta_h^t(s_h, a_h) | \mathcal{F}_h^{t-1}]) \right| \leq \tilde{O} \left(\sqrt{TH^3 \ln \frac{1}{\delta}} \right).$$

Proof. We define a total order on (t, h) by

$$k(t, h) = (t-1)H + h$$

for $t \in [T]$ and $h \in [H]$. For each $k \in [TH]$, set

$$D_k := \zeta_k(s_h, a_h) - \mathbb{E}[\zeta_k(s_h, a_h) | \mathcal{F}_h^{t-1}].$$

which holds that $\mathcal{F}_h^t \subset \mathcal{F}_{h'}^{t'}$ for any $t \leq t'$.

For any $k(t, h) \in [T] \times [H]$,

$$\mathbb{E}[D_k | \mathcal{F}_h^{t-1}] = 0,$$

which means that $\{D_k\}_k$ is a martingale difference sequence with respect to the filtration $\{\mathcal{F}_h^{t-1}\}$ and satisfies $|D_k| \leq 2H$. By the Azuma-Hoeffding inequality, for any $\epsilon > 0$,

$$\mathbb{P} \left(\sum_{k=1}^{T \cdot H} D_k > \epsilon \right) \leq 2 \exp \left(-\frac{\epsilon^2}{2TH \cdot (2H)^2} \right) = 2 \exp \left(-\frac{\epsilon^2}{8TH^3} \right).$$

Setting the right-hand side equal to δ yields $\epsilon = 2\sqrt{2TH^3\ln\frac{2}{\delta}}$. Then, with probability $1 - \delta$, we have

$$\left| \sum_{t=1}^T \sum_{h=1}^H \zeta_h^t(s_h, a_h) - \mathbb{E}[\zeta_h^t(s_h, a_h) \mid \mathcal{F}_h^{t-1}] \right| = \left| \sum_{k=1}^{T \cdot H} D_k \right| \leq 2\sqrt{2TH^3\ln\frac{2}{\delta}} \lesssim \sqrt{TH^3\ln\frac{1}{\delta}}.$$

The proof is completed. \square

Lemma 15. Assume a strictly increasing window-size sequence $\{W_t\}$ satisfying $W_t = \lfloor \gamma t \rfloor$ at episode t with some constant $\gamma \in (0, 1]$. For all $s, a, h, t \in [T]$, if

$$N_h^{(W_t),t}(s, a) > \frac{1}{2} \sum_{j=\max\{1, t-W_t+1\}}^{t-1} q_h^{\pi^t}(s, a; p) - H \ln \frac{SAH}{\delta'},$$

then

$$\sum_{t=1}^T \sum_{h=1}^H \mathbb{E} \left[\sqrt{\frac{1}{\max\{N_h^{(W_t),t}(s, a), 1\}}} \mid \mathcal{F}_{t-1} \right] \leq \tilde{O}(\sqrt{SAH^2T/\gamma} + SAH).$$

Proof. We first define $w_h^t(s, a) = \mathbb{P}(s_h^t = s, a_h^t = a \mid \mathcal{F}_{t-1})$. Then, we have

$$\begin{aligned} \sum_{t=1}^T \sum_{h=1}^H \mathbb{E} \left[\sqrt{\frac{1}{\max\{N_h^{(W_t),t}(s, a), 1\}}} \mid \mathcal{F}_{t-1} \right] &= \sum_{t,h,s,a} w_h^t(s, a) \sqrt{\frac{1}{\max\{N_h^{(W_t),t}(s, a), 1\}}} \\ &\leq \sum_{t,h} \sum_{s,a \in L_t} w_h^t \sqrt{\frac{1}{N_h^{(W_t),t}(s, a)}} + \sum_{t,h} \sum_{s,a \in L_t^c} w_h^t \\ &\leq \sum_{t,h} \sum_{s,a \in L_t} w_h^t \sqrt{\frac{1}{N_h^{(W_t),t}(s, a)}} + SAH, \end{aligned}$$

where we set $L_t = \{N_h^{(W_t),t}(s, a) \geq 1\}$ and thus set $L_t^c = \{N_h^{(W_t),t}(s, a) = 0\}$. Consider the following term,

$$\begin{aligned} \sum_{t,h} \sum_{s,a \in L_t} w_h^t \sqrt{\frac{1}{N_h^{(W_t),t}(s, a)}} &\leq \sqrt{\sum_{t,h} \sum_{s,a \in L_t} w_h^t} \sqrt{\sum_{t,h} \sum_{s,a \in L_t} \frac{w_h^t}{N_h^{(W_t),t}(s, a)}} \\ &\leq \sqrt{\sum_{t,h,s,a} w_h^t} \sqrt{\sum_{t,h} \sum_{s,a \in L_t} \frac{w_h^t}{N_h^{(W_t),t}(s, a)}} \\ &\leq \sqrt{TH} \sqrt{\sum_{t,h,s,a} \frac{w_h^t}{N_h^{(W_t),t}(s, a)}} \leq \tilde{O}(\sqrt{SAH^2T/\gamma}). \end{aligned}$$

The first relation holds due to Cauchy–Schwarz inequality.

Combining all the results concludes the proof. \square

G.1 Optimality under Pessimistic Thresholds

In this section, we focus on the case where thresholds are set pessimistically. The following lemma provides a performance bound (Lemma 3) showing that despite the additional caution, the policies remain near-optimal under these pessimistic thresholds.

Lemma 3 (Policy optimality under pessimistic thresholds). Conditioned on the success event \mathcal{E} , for any episode $t \in [T']$ and parameter $\gamma \in (0, 1]$, if we use pessimistic thresholds, then

$$\sum_{t=1}^{T'} \tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \leq \tilde{O} \left(\left[(1 + m\rho) + m\rho\sqrt{SA/\gamma} \right] H^2 \sqrt{T} \right).$$

Proof. For each episode t , according to the definitions, we obtain:

$$\tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} = V_r^{\pi^*}(s_1) - \hat{V}_{\bar{r}}^{\pi_t}(s_1) + \sum_{i=1}^m \lambda_{t,i} (\bar{\alpha}_{t,i} - \alpha_i) + \sum_{i=1}^m \lambda_{t,i} \left(V_{g_i}^{\pi^*}(s_1) - \hat{V}_{\bar{g}_i}^{\pi_t}(s_1) \right).$$

We sum it over episode T' and decompose it as

$$\begin{aligned} & \sum_{t=1}^{T'} \tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \\ &= \sum_{t=1}^{T'} \left[V_{r+\lambda g}^{\pi^*}(s_1) - V_{\bar{r}+\lambda \bar{g}}^{\pi_t}(s_1) + \sum_{i=1}^m \lambda_{t,i} (\bar{\alpha}_{t,i} - \alpha_i) \right] \\ &= \sum_{t=1}^T \sum_{i=1}^m \lambda_{t,i} \left[\sum_{h=1}^H \bar{\alpha}_{t,i}(s_h, a_h) - \alpha_i(s_h, a_h) \right] \end{aligned} \quad (i)$$

$$+ \sum_{t=1}^T \sum_{h=1}^H \mathbb{E} \left[\langle \hat{Q}_h^t(s_h, \cdot), \pi_h^*(\cdot | s_h) - \pi_h^t(\cdot | s_h) \rangle \mid s_1, \pi^*, p \right] \quad (ii)$$

$$+ \sum_{t=1}^T \sum_{h=1}^H \mathbb{E} \left[-\hat{Q}_h^t(s_h, a_h) + r_h(s_h, a_h) + \sum_{i=1}^m \lambda_{t,i} g_{i,h}(s_h, a_h) + p_h(\cdot | s_h, a_h) \hat{V}_{h+1}^t \mid s_1, \pi^*, p \right] \quad (iii)$$

where composite Q -value function is $\hat{Q}_h^t(s, a) = \hat{Q}_h^{\pi_t}(s, a; \bar{r}_t, \bar{p}_{\pi_t}) + \sum_{i=1}^m \lambda_{t,i} \hat{Q}_h^{\pi_t}(s, a; \bar{g}_{t,i}, \bar{p}_t)$ for each episode t and step h , composite V -value function is defined by $\hat{V}_h^t(s) := \langle \hat{Q}_h^t(s, \cdot), \pi_h^t \rangle$ and the second equality holds because of Lemma 17.

We bound these terms separately:

First term (threshold estimation error) Under the pessimistic thresholds, for all s, a, h, i , it holds that

$$\alpha_i(s_h, a_h) \leq \bar{\alpha}_{t,i}(s_h, a_h),$$

so that

$$(i) = \sum_{t=1}^T \sum_{i=1}^m \lambda_{t,i} \left[\sum_{h=1}^H \bar{\alpha}_{t,i}(s_h, a_h) - \alpha_i(s_h, a_h) \right]$$

can be upper bounded as follows:

$$\begin{aligned} \sum_{i=1}^m \lambda_{t,i} \left[\sum_{h=1}^H \bar{\alpha}_{t,i}(s_h, a_h) - \alpha_i(s_h, a_h) \right] &\leq \sum_{i=1}^m \lambda_{t,i} \left[\sum_{h=1}^H |\bar{\alpha}_{t,i}(s_h, a_h) - \alpha_i(s_h, a_h)| \right] \\ &\leq m \max_{i \in [m]} \lambda_{t,i} \left[\sum_{h=1}^H |\bar{\alpha}_{t,i}(s_h, a_h) - \alpha_i(s_h, a_h)| \right] \\ &\leq m\rho \sum_{h=1}^H 2\zeta_h^t(s_h, a_h). \end{aligned}$$

By applying Lemmas 14 and 15, and summing over t and h , we further have

$$\begin{aligned} & \sum_{t=1}^T \sum_{i=1}^m \lambda_{t,i} \left[\sum_{h=1}^H \bar{\alpha}_{t,i}(s_h, a_h) - \alpha_i(s_h, a_h) \right] \leq 2m\rho \sum_{t=1}^T \sum_{h=1}^H \zeta_h^t(s_h, a_h) \\ & \lesssim m\rho \left[\sum_{t=1}^T \sum_{h=1}^H \mathbb{E} [\zeta_h^t(s_h, a_h) \mid s_1, \pi, p] + \sqrt{TH^3 \ln \frac{1}{\delta}} \right] \\ & \lesssim m\rho \left[\sqrt{SAH^4 T / \gamma} + SAH^2 + \sqrt{TH^3 \ln \frac{1}{\delta}} \right] \end{aligned} \quad (8)$$

Second term (policy difference) For the second term, by Lemma 20 (with $\pi = \pi^*$), we obtain:

$$(ii) = \sum_{t=1}^{T'} \sum_{h=1}^H \mathbb{E} \left[\left\langle \hat{Q}_h^t(s_h, \cdot), \pi_h^*(\cdot | s_h) - \pi_h^t(\cdot | s_h) \right\rangle \mid s_1, \pi^*, p \right] \lesssim \sqrt{H^4(1+m\rho)^2 T}. \quad (9)$$

Third term (Bellman residual) Moreover, Lemma 19 shows that for all s, a, h, t ,

$$r_h(s, a) + \sum_{i=1}^m \lambda_t g_{i,h}(s, a) + p_h(\cdot | s, a) \hat{V}_{h+1}^t - \hat{Q}_h^t(s, a) \leq 0,$$

so (iii) satisfies

$$(iii) \leq 0. \quad (10)$$

Combining (8), (9), and (10), we conclude the result:

$$\sum_{t=1}^{T'} \tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \lesssim \sqrt{H^4(1+m\rho)^2 T} + \sqrt{m^2 \rho^2 S A H^4 T / \gamma} + m \rho S A H^2 + \sqrt{m^2 \rho^2 T H^3 \ln \frac{1}{\delta}}.$$

□

G.2 Optimality of Optimistic Policies

We now turn to the scenario in which thresholds are chosen optimistically. Although such thresholds may facilitate exploration and potentially higher returns, it is essential to establish theoretical guarantees (Lemma 5) that they do not lead to excessively optimistic estimates. The next lemma shows that even with looser constraints, the performance remains near-optimal under standard assumptions.

Lemma 5 (Policy optimality with optimistic thresholds). *Conditioned on the success event \mathcal{E} , for any episode $t \in [T']$, if we adopt the optimistic thresholds, then*

$$\sum_{t=1}^{T'} \tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \leq \tilde{\mathcal{O}} \left((1+m\rho') H^2 \sqrt{T} \right).$$

where ρ' denotes the Slater gap under optimistic thresholds.

Proof. Following the similar initial steps in the proof of Lemma 3, we decompose $\sum_{t=1}^{T'} \tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*}$ into three terms (I), (II) and (III). The second and third terms (II) and (III) are identical to terms (ii) and (iii). As previously proved, we have

$$(II) \lesssim (1+m\rho') H^2 \sqrt{T} \quad \text{and} \quad (III) \leq 0 \quad (11)$$

However, term (I) exhibits a significant difference under optimistic thresholds compared to the pessimistic scenario as follows:

$$(I) = \sum_{t=1}^T \sum_{i=1}^m \lambda_{t,i} \left[\sum_{h=1}^H \underline{\alpha}_{t,i}(s_h, a_h) - \alpha_i(s_h, a_h) \right].$$

Specifically, under optimistic thresholds, it holds for all s, a, h, t, i that

$$\alpha_i(s_h, a_h) \geq \underline{\alpha}_{t,i}(s_h, a_h),$$

which implies

$$(iii) \leq 0. \quad (12)$$

Combining (11) and (12), we immediately obtain

$$\sum_{t=1}^{T'} \tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \lesssim \tilde{\mathcal{O}} \left((1+m\rho') H^2 \sqrt{T} \right).$$

□

H Regret Analysis

In this section, we present omitted proofs for the regret analysis in Section 4.

H.1 Proof of Theorem 2

We start by providing the proof under pessimistic thresholds.

Theorem 2 (Bounds for reward regret and constraint violation of pessimistic policies). *Let S be the number of states, A be the number of actions, H be the horizon length, m be the number of constraints, ρ be the Slater gap under pessimistic thresholds, γ be the Growing-Window parameter, T be the number of episodes and \mathcal{N} denote the maximum number of non-zero transition probabilities across all state-action pairs. Then with probability $1 - \delta$, Algorithm 2 under pessimistic thresholds obtains the following regret bounds:*

$$\begin{aligned}\mathcal{R}_T(r) &\leq \tilde{\mathcal{O}} \left(\sqrt{SNH^4T} + \sqrt{(1+m\rho)^2SAH^4T/\gamma} + (\sqrt{\mathcal{N}} + H)H^2SA \right), \\ \mathcal{R}_T(g) &\leq \tilde{\mathcal{O}} \left(\frac{1}{\rho} \left(\sqrt{SNH^4T} + (\sqrt{\mathcal{N}} + H)H^2SA \right) + m\sqrt{SAH^4T/\gamma} \right),\end{aligned}$$

where $\tilde{\mathcal{O}}$ hides polylogarithmic factors in $(S, A, H, T, 1/\delta)$.

Proof. We begin by leveraging the properties of dual optimisation from Lemmas 21 and Lemma 23, rearranging and obtaining that for any λ with $0 \leq \lambda \leq \rho 1$,

$$\begin{aligned}\mathcal{L}(\lambda) &= \sum_{t=1}^{T'} (f_t - f_{\text{opt}}) + \sum_{t=1}^{T'} y_t^T \lambda \\ &\leq \sum_{t=1}^{T'} (y_t - \tilde{y}_t)^T \lambda + \sum_{t=1}^{T'} \left(\tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \right) + \sum_{t=1}^{T'} (f_t - \tilde{f}_t) + \frac{1}{2\eta_\lambda} \sum_{t=1}^{T'} \|\tilde{y}_t\|^2 + \frac{\eta_\lambda}{2} \|\lambda\|_2^2.\end{aligned}$$

Under the pessimistic thresholds, we have $y_t \leq \tilde{y}_t$ at episode t , thus

$$\sum_{t=1}^{T'} (y_t - \tilde{y}_t) \lambda \leq 0,$$

leading us to simplify the above inequality as

$$\mathcal{L}(\lambda) \leq \underbrace{\sum_{t=1}^{T'} \left(\tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \right)}_{(a)} + \underbrace{\sum_{t=1}^{T'} (f_t - \tilde{f}_t)}_{(b)} + \underbrace{\frac{1}{2\eta_\lambda} \sum_{t=1}^{T'} \|\tilde{y}_t\|^2 + \frac{\eta_\lambda}{2} \|\lambda\|_2^2}_{(c)}. \quad (13)$$

We proceed by individually bounding each term:

First term (policy optimality gap) Under the pessimistic thresholds, it holds that $\lambda_{t,i}(\bar{\alpha}_{t,i} - \alpha_i) \geq 0$ for any episode t and constraint i . Thus by Lemma 3, we derive

$$\sum_{t=1}^{T'} \left(\tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \right) \lesssim \left[(1+m\rho) + m\rho\sqrt{SA/\gamma} \right] H^2\sqrt{T}.$$

Second term (reward estimation error) By Lemma 22, we get

$$\left| \sum_{t=1}^{T'} (f_t - \tilde{f}_t) \right| = \left| \sum_{t=1}^{T'} \left(\hat{V}_{\bar{r}}^{\pi_t}(s_1) - V_r^{\pi_t}(s_1) \right) \right| \leq \tilde{\mathcal{O}} \left(\sqrt{SNH^4T} + (\sqrt{\mathcal{N}} + H)H^2SA \right).$$

Third term (dual update bound) Due to $|\tilde{y}_{i,t}| \leq H$ for constraint $i \in [m]$, we have

$$\frac{\sum_{t=1}^{T'} \|\tilde{y}_t\|^2}{2\eta_\lambda} \leq \frac{mH^2T}{2\eta_\lambda}.$$

Substituting these results back into (13) and choosing the learning rate $\eta_\lambda = \sqrt{\frac{mH^2T}{\rho^2}}$, we achieve the intermediate bound, for any $0 \leq \lambda \leq \rho \mathbf{1}$,

$$\begin{aligned} \sum_{t=1}^{T'} (f_t - f_{\text{opt}}) + \sum_{t=1}^{T'} y_t^T \lambda &\lesssim (\rho + \frac{\|\lambda\|_2^2}{\rho}) \sqrt{mH^2T} + \left(\sqrt{SNH^4T} + (\sqrt{N} + H)H^2SA \right) \\ &\quad + \left[(1 + m\rho) + m\rho\sqrt{SA/\gamma} \right] H^2\sqrt{T}. \end{aligned} \quad (14)$$

Reward regret Setting $\lambda = \mathbf{0}$ in (14), we directly obtain the regret bound for rewards:

$$\mathcal{R}_T(r) \leq \tilde{\mathcal{O}} \left(\sqrt{SNH^4T} + (\sqrt{N} + H)H^2SA + \left[(1 + m\rho) + m\rho\sqrt{SA/\gamma} \right] H^2\sqrt{T} \right).$$

Constraint violation For constraint $i \in [m]$, set the vector $\lambda_i = \rho e_i$ if $[\sum_{t=1}^{T'} y_{t,i}]_+ > 0$ and 0 otherwise in (14), where e_i denotes the standard basis vector and the Slater gap ρ is defined in Assumption 2. This also guarantees $\|\lambda_i\|_2^2 \leq \rho^2$. We then have

$$\begin{aligned} \sum_{t=1}^{T'} (f_t - f_{\text{opt}}) + \rho \left[\sum_{t=1}^{T'} y_{i,t} \right]_+ \\ \lesssim \left(\sqrt{SNH^4T} + (\sqrt{N} + H)H^2SA \right) + \left[(1 + m\rho) + m\rho\sqrt{SA/\gamma} \right] H^2\sqrt{T} := \theta(T). \end{aligned} \quad (15)$$

Due to the linearity of both the reward and constraints, combined with the convexity of the occupancy-measure set, we leverage Lemmas 24 and 25 and then derive the following result for any $T' \in [T]$:

$$\max_{i \in [m]} \left[\sum_{t=1}^{T'} y_t \right] \leq \left\| \left[\sum_{t=1}^{T'} y_t \right]_+ \right\|_\infty \leq \frac{\theta(T)}{\rho}.$$

Therefore, we conclude

$$\mathcal{R}_T(g) \leq \tilde{\mathcal{O}} \left(\frac{1}{\rho} \left(\sqrt{SNH^4T} + (\sqrt{N} + H)H^2SA \right) + m\sqrt{SAH^4T/\gamma} \right).$$

□

H.2 Proof of Theorem 3

Next, we prove the bounds of reward regret and constraint violation for the optimistic thresholds carefully.

Theorem 3 (Bounds for reward regret and constraint violation with optimistic thresholds). *Under the same conditions of Theorem 2, with probability $1 - \delta$, Algorithm 2 under optimistic thresholds holds the following regret bounds:*

$$\begin{aligned} \mathcal{R}_T(r) &\leq \tilde{\mathcal{O}} \left(\sqrt{SNH^4T} + \sqrt{H^4(1 + m\rho')^2T} + (\sqrt{N} + H)H^2SA \right), \\ \mathcal{R}_T(g) &\leq \tilde{\mathcal{O}} \left(\left(1 + \frac{1}{\rho'} \right) \left(\sqrt{mSNH^4T} + (\sqrt{N} + H)\sqrt{m}H^2SA \right) + m\sqrt{H^4T} \right) \\ &\quad + \tilde{\mathcal{O}} \left(\sqrt{mSAH^4T/\gamma} + \sqrt{mSAH^2} \right). \end{aligned}$$

where ρ' denotes the Slater gap under optimistic thresholds.

Proof. We follow the similar initial decomposition as in the pessimistic scenario (Theorem 2), leading to the following inequality:

$$\begin{aligned}
\mathcal{L}(\lambda) &= \sum_{t=1}^{T'} (f_t - f_{\text{opt}}) + \sum_{t=1}^{T'} y_t^T \lambda \\
&\leq \sum_{t=1}^{T'} (y_t - \tilde{y}_t)^T \lambda + \sum_{t=1}^{T'} \left(\tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \right) + \sum_{t=1}^{T'} (f_t - \tilde{f}_t) + \frac{1}{2\eta_\lambda} \sum_{t=1}^{T'} \|\tilde{y}_t\|^2 + \frac{\eta_\lambda}{2} \|\lambda\|_2^2 \\
&\leq \underbrace{\sqrt{\sum_{i=1}^m \left(\sum_{t=1}^{T'} (y_{t,i} - \tilde{y}_{t,i}) \right)^2}}_{(a')} \|\lambda\|_2 + \underbrace{\sum_{t=1}^{T'} \left(\tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \right)}_{(b')} \\
&\quad + \underbrace{\sum_{t=1}^{T'} (f_t - \tilde{f}_t)}_{(c')} + \underbrace{\frac{1}{2\eta_\lambda} \sum_{t=1}^{T'} \|\tilde{y}_t\|^2}_{(d')} + \underbrace{\frac{\eta_\lambda}{2} \|\lambda\|_2^2}_{(e')}, \tag{16}
\end{aligned}$$

where the second relation holds due to Cauchy–Schwarz inequality.

We bound each term individually, and the principal difference from the pessimistic scenario lies in controlling terms (a') and (b'):

First term (constraint and threshold estimation error) Unlike pessimistic thresholds, for the optimistic thresholds, it holds that $\lambda_{t,i}(\alpha_i - \underline{\alpha}_{t,i}) \geq 0$ for any constraint i and episode t . We then obtain

$$\begin{aligned}
\left| \sum_{t=1}^{T'} (y_{t,i} - \tilde{y}_{t,i}) \right| &= \left| \sum_{t=1}^{T'} \left(\hat{V}_{\tilde{g}_i}^{\pi_t}(s_1) - V_{g_i}^{\pi_t}(s_1) \right) + \sum_{t=1}^{T'} (\alpha_i - \underline{\alpha}_{t,i}) \right| \\
&\leq \left| \sum_{t=1}^{T'} \left(\hat{V}_{\tilde{g}_i}^{\pi_t}(s_1) - V_{g_i}^{\pi_t}(s_1) \right) \right| + \left| \sum_{t=1}^{T'} (\alpha_i - \underline{\alpha}_{t,i}) \right|. \tag{17}
\end{aligned}$$

According to Equation (17), we have

$$\begin{aligned}
\sqrt{\sum_{i=1}^m \left(\sum_{t=1}^{T'} (y_{t,i} - \tilde{y}_{t,i}) \right)^2} &\leq \sqrt{m} \max_{i \in [m]} \left| \sum_{t=1}^{T'} (y_{t,i} - \tilde{y}_{t,i}) \right| \\
&\leq \sqrt{m} \max_{i \in [m]} \left[\left| \sum_{t=1}^{T'} \left(\hat{V}_{\tilde{g}_i}^{\pi_t}(s_1) - V_{g_i}^{\pi_t}(s_1) \right) \right| + \left| \sum_{t=1}^{T'} (\alpha_i - \underline{\alpha}_{t,i}) \right| \right] \\
&\leq \tilde{\mathcal{O}} \left(\sqrt{mSNH^4T} + (\sqrt{N} + H + 1) \sqrt{mH^2SA} + \sqrt{mSAH^4T/\gamma} \right).
\end{aligned}$$

Thus

$$(a') \leq \tilde{\mathcal{O}} \left(\sqrt{mSNH^4T} + (\sqrt{N} + H + 1) \sqrt{mH^2SA} + \sqrt{mSAH^4T/\gamma} \right) \|\lambda\|_2.$$

Second term (policy optimality gap) Under optimistic thresholds, by Lemma 5, we have

$$(b') = \sum_{t=1}^{T'} \left(\tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \right) \lesssim (1 + m\rho') H^2 \sqrt{T}.$$

Third and fourth terms They are the same as in the pessimistic setting. We restate here that

$$(c') = \frac{\sum_{t=1}^{T'} \|\tilde{y}_t\|^2}{2\eta_\lambda} \leq \frac{mH^2T}{2\eta_\lambda}.$$

Under the success event \mathcal{E} , we have

$$(d') \leq \left| \sum_{t=1}^{T'} (f_t - \tilde{f}_t) \right| \leq \tilde{\mathcal{O}} \left(\sqrt{SNH^4T} + (\sqrt{N} + H)H^2SA \right).$$

Incorporating all pieces and then choosing $\eta_\lambda = \sqrt{\frac{mH^2T}{\rho'^2}}$, we derive an overall bound

$$\begin{aligned} \sum_{t=1}^{T'} (f_t - f_{\text{opt}}) + \sum_{t=1}^{T'} y_t^T \lambda &\lesssim \left(\sqrt{mSNH^4T} + (\sqrt{N} + H)\sqrt{m}H^2SA \right) \|\lambda\|_2 \\ &\quad + \left(\sqrt{mSAH^4T/\gamma} + \sqrt{mSAH^2} \right) \|\lambda\|_2 + (1 + m\rho')H^2\sqrt{T} \\ &\quad + \left(\sqrt{SNH^4T} + (\sqrt{N} + H)H^2SA \right) + \left(\rho' + \frac{\|\lambda\|_2^2}{\rho'} \right) \sqrt{mH^2T}. \end{aligned} \quad (18)$$

Reward regret Taking $\lambda = \mathbf{0}$ in (18), we get the reward regret

$$\mathcal{R}_T(r) \leq \tilde{\mathcal{O}} \left(\sqrt{SNH^4T} + (\sqrt{N} + H)H^2SA + (1 + m\rho')H^2\sqrt{T} \right).$$

Constraint violation For constraint violation, set $\lambda_i = \rho' e_i \mathbf{1}_{\{\sum_{t=1}^{T'} y_{i,t}\}_+ \neq 0\}}$ for constraint $i \in [m]$.

We can obtain

$$\begin{aligned} \sum_{t=1}^{T'} (f_t - f_{\text{opt}}) + \rho' \left[\sum_{t=1}^{T'} y_{i,t} \right]_+ &\leq (1 + \rho') \left(\sqrt{mSNH^4T} + (\sqrt{N} + H)\sqrt{m}H^2SA \right) \\ &\quad + \rho' \left(\sqrt{mSAH^4T/\gamma} + \sqrt{mSAH^2} \right) + (1 + m\rho')H^2\sqrt{T} \\ &:= \theta'(T). \end{aligned}$$

□

By Lemmas 24 and 25, we have the following result for any $T' \in [T]$: $\max_{i \in [m]} \left[\sum_{t=1}^{T'} y_t \right] \leq \frac{\theta'(T)}{\rho'}$. Therefore, we conclude the bound for constraint violation

$$\begin{aligned} \mathcal{R}_T(g) &\leq \tilde{\mathcal{O}} \left(\left(1 + \frac{1}{\rho'} \right) \left(\sqrt{mSNH^4T} + (\sqrt{N} + H)\sqrt{m}H^2SA \right) + m\sqrt{H^4T} \right) \\ &\quad + \tilde{\mathcal{O}} \left(\sqrt{mSAH^4T/\gamma} + \sqrt{mSAH^2} \right). \end{aligned}$$

I Constrained Convex Optimisation

We consider the following optimisation problem:

$$\begin{aligned} f^* &= \min_x f(x) \\ \text{s.t. } y_i(x) &\leq 0, \quad i \in [m], \\ x &\in X, \end{aligned} \quad (19)$$

accompanied by the assumption stated below.

Assumption 4 ([5]). *In the context of (19), we assume:*

1. $X \subset \mathbb{R}^n$ is convex.
2. $f(\cdot)$ is convex.
3. Each $y_i(\cdot)$ is concave for $i \in [m]$ and $y(\cdot) := (y_1(\cdot), \dots, y_m(\cdot))^T$.

4. The problem in (19) has a finite optimal value f^* , and there exists at least one $x \in X$ that attains this optimum, i.e., $X^* \neq \emptyset$.
5. There exists $\bar{x} \in X$ such that $y(\bar{x}) < 0$.
6. For every $\lambda \in \mathbb{R}_{\geq 0}^m$, the minimisation problem $\min_{x \in X} [f(x) + \lambda^T y(x)]$ admits an optimal solution.

Under these conditions, we define the dual objective function as

$$q(\lambda) = \min_{x \in X} \mathcal{L}(x, \lambda) = \min_{x \in X} [f(x) + \lambda^T y(x)],$$

where $\mathcal{L}(\cdot, \cdot)$ is the Lagrangian associated with the problem in (19). The corresponding dual problem is then

$$q^* = \max_{\lambda \geq 0} q(\lambda).$$

Within this framework, we have the following result that establishes a connection between the primal and dual problem.

Lemma 16 ([5]). *Under Assumption 4, the strong duality property holds; that is,*

$$f^* = q^*.$$

Moreover, an optimal solution to the dual problem exists, with the set of optimal solutions $\Lambda^ \neq \emptyset$.*

J Preparation Lemmas

In this Appendix, we present important preparation lemmas from prior work [12, 11].

Lemma 17 ([11]). *Let π, π' be two policies, and $\mathcal{M} = (\mathcal{S}, \mathcal{A}, r, p)$ and $\mathcal{M}' = (\mathcal{S}, \mathcal{A}, r', p')$ be two MDPs. Let $\hat{Q}_h^\pi(s, a; r, p)$ be an approximation of the Q -function of policy π on the MDP \mathcal{M} for all h, s, a , and let $\hat{V}_h^\pi(s; r, p) = \langle \hat{Q}_h^\pi(s, \cdot; r, p), \pi_h(\cdot | s) \rangle$. Then,*

$$\begin{aligned} V_{r'}^{\pi'}(s_1) - \hat{V}_r^\pi(s_1) = & \sum_{h=1}^H \mathbb{E} \left[\langle \hat{Q}_h^\pi(s_h, \cdot), \pi_h(\cdot | s_h) - \pi'_h(\cdot | s_h) \rangle \mid s_1, \pi', p' \right] + \\ & \sum_{h=1}^H \mathbb{E} \left[-\hat{Q}_h^\pi(s_h, a_h; r, p) + r'_h(s_h, a_h) + p'_h(\cdot | s_h, a_h) \hat{V}_{h+1}^{\pi'}(\cdot; r, p) \mid s_1, \pi', p' \right] \end{aligned}$$

where $V_1^{\pi'}(s; r', p')$ is the value function of π' in the MDP \mathcal{M}' .

Lemma 18 ([12]). *Assume that for all $s, a, h, t \in [T]$*

$$N_h^t(s, a) > \frac{1}{2} \sum_{j < t} q_h^{\pi_j}(s, a; p) - H \ln \left(\frac{SAH}{\delta'} \right),$$

then

$$\sum_{t=1}^T \sum_{h=1}^H \mathbb{E} \left[\sqrt{\frac{1}{N_h^t(s_h^t, a_h^t) \vee 1}} \mid \mathcal{F}_{t-1} \right] \leq \tilde{\mathcal{O}}(\sqrt{SAH^2 T} + SAH).$$

Lemma 19 ([11]). *Under the success event, for any s, a, h, t , the following bound holds:*

$$r_h(s, a) + \sum_{i=1}^m \lambda_{t,i} g_{i,h}(s, a) + p_h(\cdot | s, a) V_{h+1}^t - Q_h^t(s, a) \leq 0.$$

where

$$Q_h^t(s, a) = Q_h^{\pi_t}(s, a; \bar{r}_t, \bar{p}_t) + \sum_{i=1}^m \lambda_{t,i} Q_h^{\pi_t}(s, a; \bar{g}_{t,i}, \bar{p}_t),$$

$$V_h^t(s) = \langle Q_h^t(s, \cdot), \pi_h^t(\cdot | s) \rangle.$$

See that $Q_h^{\pi_t}(s, a; \bar{r}_t, \bar{p}_{t-1})$, $Q_h^{\pi_t}(s, a; \bar{g}_{t,i}, \bar{p}_{t-1})$ are defined in the update rule of Algorithm 2.

Lemma 20 (OMD term bound [11]). *Conditioned on the success event, we have that for any π*

$$\sum_{t=1}^T \sum_{h=1}^H \mathbb{E} \left[\left\langle Q_h^t(s_h, \cdot), \pi_h(\cdot | s_h) - \pi_h^t(\cdot | s_h) \right\rangle \mid s_1 = s, \pi, p \right] \leq \sqrt{2H^4(1+m\rho)^2 T \log A}.$$

Lemma 21 (Dual optimism [11]). *Conditioning on the success event, for any $t \in [T']$*

$$\tilde{f}_t - f_{opt} \leq -\lambda_t^T \tilde{y}_t + \left(\tilde{f}_t + \lambda_t^T \tilde{y}_t - f_{\pi^*} - \lambda_t^T y_{\pi^*} \right).$$

Lemma 22 (On policy errors for truncated policy estimation [11]). *Let $l_h(s, a)$, $\bar{l}_h^t(s, a)$ be a cost function, and its optimistic cost. Let p be the true transition dynamics of the MDP and \bar{p}_t be an estimated transition dynamics. Let $V_h^\pi(s; l, p)$ be the value of a policy π according to the cost and transition model l, p . Furthermore, let $\hat{V}_h^\pi(s; \bar{l}_t, \bar{p}_t)$ be a value function calculated by a truncated value estimation by the cost and transition model \bar{l}_t, \bar{p}_t . Assume the following holds for all $s, a, h, t \in [T]$:*

1. $|\hat{l}_h^t(s, a) - l_h(s, a)| \lesssim \sqrt{\frac{1}{N_h^t(s, a)}}$.
2. $|\bar{p}_h^t(s' | s, a) - p_h(s' | s, a)| \lesssim \sqrt{\frac{p_h(s' | s, a)}{N_h^t(s, a) \vee 1}} + \frac{1}{N_h^t(s, a) \vee 1}$.
3. $N_h^t(s, a) \leq \frac{1}{2} \sum_{j < t} q_h^{\pi_j}(s, a | p) - H \ln \frac{SAH}{\delta'}$.

Furthermore, let π_t be the policy by which the agent acts at the t -th episode. Then, for any $T' \in [T]$, we have:

$$\sum_{t=1}^{T'} \left| V_1^{\pi_t}(s_1; l, p) - \hat{V}_1^{\pi_t}(s_1; \bar{l}_t, \bar{p}_t) \right| \leq \tilde{O} \left(\sqrt{SNH^4T} + (\sqrt{N} + H)H^2SA \right).$$

Lemma 23 (Update rule recursion bound primal-dual [11]). *For any $\lambda \in \{\lambda \in \mathbb{R}^m : 0 \leq \lambda \leq \rho \mathbf{1}\}$ and $T' \in [T]$,*

$$\sum_{t=1}^{T'} (-\tilde{y}_t^T \lambda_t) + \sum_{t=1}^N \tilde{y}_t^T \lambda \leq \frac{\eta \lambda}{2} \|\lambda_1 - \lambda\|_2^2 + \frac{1}{2\eta \lambda} \sum_{t=1}^{T'} \|\tilde{y}_t\|^2.$$

Lemma 24 ([11]). *Let λ^* be an optimal solution of the dual problem*

$$q_{opt} = \max_{\lambda \in \mathbb{R}_+^m, \mu \in \mathbb{R}^p} \{q(\lambda, \mu) : (\lambda, \mu) \in \text{dom}(-q)\},$$

where $\text{dom}(-q) = \{(\lambda, \mu) \in \mathbb{R}_+^m \times \mathbb{R}^p : q(\lambda, \mu) > -\infty\}$. And assume that $2\|\lambda^*\|_1 \leq \rho$. Let $\tilde{\mathbf{x}}$ satisfy $\mathbf{A}\tilde{\mathbf{x}} + \mathbf{b} = 0$ and

$$f(\tilde{\mathbf{x}}) - f_{opt} + \rho \| [y(\tilde{\mathbf{x}})]_+ \|_\infty \leq \delta,$$

then

$$\| [y(\tilde{\mathbf{x}})]_+ \|_\infty \leq \frac{\delta}{\rho}.$$

Lemma 25 ([11]). *Let $\bar{x} \in X$ be a point satisfying $\mathbf{y}(\bar{x}) < 0$ and $\mathbf{A}\bar{x} + \mathbf{b} = 0$, and λ^* be an optimal dual solution. Then,*

$$\|\lambda^*\|_1 \leq \frac{f(\bar{x}) - M}{\min_{j=1, \dots, m} -y_j(\bar{x})}.$$