

OPAL: Encoding Causal Understanding of Physical Systems for Robot Learning

Daniel Tcheurekdjian¹, Joshua Klasmeier¹, Tom Cooney¹, Christopher McCann¹, and Tyler Fenstermaker¹

¹Apiary Systems

¹{daniel.tcheurekdjian, joshua.klasmeier, tom.cooney, christopher.mccann, tyler.fenstermaker}@apiarysystems.tech

April 10, 2025

Abstract

We present OPAL (Operant Physical Agent with Language), a novel vision-language-action architecture that introduces topological constraints to flow matching for robotic control. To do so, we further introduce topological attention. Our approach models action sequences as topologically-structured representations with non-trivial constraints. Experimental results across 10 complex manipulation tasks demonstrate OPAL’s superior performance compared to previous approaches, including Octo, OpenVLA, and $\pi 0$.

Our architecture achieves significant improvements in zero-shot performance without requiring task-specific fine-tuning, while reducing inference computational requirements by 42%. The theoretical guarantees provided by our topological approach result in more coherent long-horizon action sequences. Our results highlight the potential of constraining the search space of learning problems in robotics by deriving from fundamental physical laws, and the possibility of using topological attention to embed causal understanding into transformer architectures.

1 Introduction

Robotic control in unstructured environments remains a significant challenge in artificial intelligence. While large-corpus transformer-based models have demonstrated significant improvements in generalizing to out-of-context tasks [26, 21], these same models fail to generalize to corporeal systems. It appears that corporeal comprehension will not be derived "for free" from models trained on language and vision data, and instead must be developed by training on embodied systems.

Building generalist models (those which capture pre-trained representations that generalize across tasks) in the

linguistic and visual domains has proven to be more achievable than in robotics for several reasons:

First, the data requirements for training embodied agents differ fundamentally from those of language and vision models. While linguistic and visual systems benefit from vast, static datasets that can be collected and processed at scale [7, 22], robotic learning demands interactive, physical data collection—a process that is inherently time-consuming, expensive, and difficult to parallelize [18]. This creates a significant bottleneck in developing the data-hungry architectures that have driven success in other domains.

Second, robotics introduces complex physical constraints that are absent in purely representational domains. A robotic system must contend with physical limitations, environmental variability, sensor noise, and actuation uncertainty—all while operating under real-time constraints. These embodied challenges introduce failure modes that do not exist in disembodied AI systems, where mistakes have no immediate physical consequences.

Third, the evaluation criteria for robotic systems are multifaceted and often task-specific, making it difficult to develop general-purpose metrics comparable to those used in language and vision benchmarks [9]. Success in robotic manipulation, for instance, may involve evaluating grasp stability, motion efficiency, and task completion—metrics that vary dramatically across different environments and objectives.

Recent advances in vision-language models have enabled more flexible multi-modal understanding, but generating coherent action sequences for physical tasks remains difficult. Previous approaches including Octo [27] and OpenVLA [15] have made progress in this domain.

Most recently, $\pi 0$ [2], has been introduced as a prototype generalist architecture $\pi 0$ struggles with maintaining

long-horizon coherence and physical consistency, as well as planning for the execution of complex, multi-step tasks.

We introduce OPAL, a transformer-based architecture that addresses these limitations through a principled approach to action generation based on topological field theories. Our key insight is that complex action sequences exhibit topological structure analogous to string-net models in condensed matter physics, where local constraints determine global behavior. By incorporating these constraints into our flow matching framework, we achieve more coherent and physically plausible action sequences.

Our primary contributions are:

1. A novel topological attention mechanism that enforces physical consistency constraints through fusion rules,
2. An enhanced flow matching framework with topological constraints for action generation,
3. A hierarchical action representation that reduces the search space for more efficient and effective planning,
4. An improved integration technique using fourth-order Runge-Kutta methods that reduces computational requirements while improving accuracy.

We evaluate OPAL on 10 complex robotic manipulation tasks and demonstrate that it achieves performance comparable to fine-tuned $\pi 0$ models without requiring task-specific optimization, while significantly outperforming previous approaches. The performance patterns across different task categories provide valuable insights into the strengths of our topological approach, particularly for tasks involving complex environmental manipulation.

2 Related Work

The integration of vision, language, and action for robotic control systems enables an unprecedented level of autonomous interaction and comprehension within distinct environments. Vision-language-action (VLA) models represent a rapidly evolving field with several distinct innovation strategies, yielding significant progress in robotic control systems in recent years. One of these novel strategies, Octo [27], pioneered the integration of large language models (LLMs) with vision encoders for robotic manipulation. While successful in performing single-step actions, Octo demonstrated a significant reduction in aptitude when generalizing to long-horizon tasks, such as sorting items or folding laundry. OpenVLA [15] improved on this foundation by incorporating more structured representations to enhance action comprehension and planning in robotic systems, but failed to guarantee

the physical feasibility of executing such plans. Most recently, $\pi 0$ [2] introduced flow matching techniques for action generation, refining the fluidity and adaptability of robotic interactions within their environment.

The evolution of VLA architectures can be traced back to foundational work in imitation learning approaches, like BC-Z [12] and VIMA [13], which established early frameworks for multi-modal robotic control. These models demonstrated the feasibility of learning control policies directly from demonstration data but were limited by their inability to generalize beyond training distributions.

A significant paradigm shift occurred with RT-1 [4] and RT-2 [3], which introduced transformer-based architectures capable of processing multiple input modalities simultaneously. These models enabled more flexible adaptation to novel tasks but still relied heavily on task-specific demonstrations to successfully replicate such actions. The subsequent development of PaLM-E [8] and RT-X [6] broadened the scope by incorporating large-scale pre-training on diverse datasets, significantly improving zero-shot generalization capabilities across robotic platforms.

Parallel developments focused on incorporating reasoning capabilities into robotic control. SayCan [1] and Inner Monologue [10] introduced explicit reasoning steps between perception and action generation, allowing robots to decompose complex tasks into manageable sub-tasks. This reasoning-centered approach was further refined through the developments of LISA [16] and ProgPrompt [25], which formulated the control problem as a hierarchical planning process guided by natural language prompts.

The use of large multi-modal foundation models for robotic control represents another significant research direction. CLIP-fields [20] and ViNT [24] pioneered the application of vision-language alignment for robotic navigation, while subsequent works such as VoxPoser [11] and DROID [14] extended these principles to manipulation tasks. These approaches leverage the rich semantic understanding of pre-trained vision-language models but struggle with the physical precision required for complex manipulation within an environment.

Recent efforts have focused on addressing the challenge of physical consistency in action generation. GATO [23] and RT-2-X [3, 6] employed large-scale behavioral cloning across diverse embodied environments to implicitly learn the bounding mechanical limitations of unique robotic configurations and environmental interactions. ManipLLM [19] and ROSIE [29] introduced explicit physical consistency losses during training, improving performance on contact-rich tasks. Despite enabling substantial advancements in action generation methodologies, these approaches lack formal guarantees about the physical plausibility of gen-

erated action sequences.

The integration of diffusion models and flow matching techniques represents the current frontier in action generation. UniSim [28] and NOD-TAMP [5] adapted diffusion models for action generation, while $\pi 0$ [2] introduced a flow matching framework that offers better sample efficiency. These generative approaches provide more flexible action distributions but lack the explicit physical constraints that govern real-world interactions.

Despite these advances, significant challenges remain in generating physically consistent, long-horizon action sequences for complex manipulation tasks. Current approaches either rely on task-specific fine-tuning to achieve high performance or struggle with maintaining physical consistency across extended action sequences. Our work addresses these limitations through a principled topological approach that enforces physical constraints while maintaining generalizability across diverse tasks.

Building upon existing VLA frameworks [2, 27, 15], our model applies topological quantum field theories to effectively constrain the action space to exclusively physically consistent actions, thereby guaranteeing the feasibility of executing each generated plan. Our framework significantly enhances the efficacy of long-horizon robotic action planning compared to previous VLA models [27, 15]. By integrating large language models [27] and flow matching techniques [2] with our novel topological quantum field theory approach, we provide a broadly generalizable mechanism for generating physically consistent, fluid action plans in robotic control systems. To our knowledge, our work demonstrates the most effective solution for constraining robotic motion to a physically feasible action space, yielding performance improvements over existing solutions across all test metrics.

2.1 Topological Quantum Field Theory

Topological quantum field theories (TQFTs) provide mathematical frameworks for describing systems where global properties remain invariant under certain transformations. The Levin-Wen model [17] is a string-net formalism that encodes topological constraints through local fusion rules. While these concepts have primarily been applied in quantum physics, we show that they provide valuable insights for structuring action representations in robotics. Our work represents the first application of string-net formalism to robotic control, establishing a connection between topological quantum field theory and robot learning.

3 Method

3.1 Formal Task Definition

Let $o_t = [I_t^1, \dots, I_t^n, \ell_t, q_t]$ denote a multimodal observation at time t , where I_t^i represents the i -th RGB image (typically from base, left wrist, and right wrist cameras), ℓ_t is a language command, and q_t encodes proprioceptive state information.

Our objective is to model the conditional distribution $p(A_t|o_t)$, where $A_t = [a_t, a_{t+1}, \dots, a_{t+H-1}]$ represents a sequence of future actions over horizon $H = 100$. We structure this sequence hierarchically as:

$$A_t = [P_t^1, P_t^2, \dots, P_t^K] \quad (1)$$

Where each primitive $P_t^k = [a_t^{k,1}, a_t^{k,2}, \dots, a_t^{k,m}]$ contains m detailed actions, maintaining $H = K \cdot m = 100$.

4 The OPAL Model

4.1 Overview

Our model builds upon previous approaches to unify language and vision encoders for robotic control. Specifically, we adopt a vision language model backbone that processes tokens from both image and language modalities, as well as the proprioceptive robot state. In contrast to existing approaches, which rely solely on standard late fusion, we introduce a novel topological attention mechanism to impose explicit physical constraints during token fusion. This mechanism preserves the structural relationships and dynamics of the robot’s embodiment, thus improving the consistency and feasibility of action generation.

After encoding each modality, we employ a cross-attention fusion mechanism to integrate information across modalities:

$$[H = \text{MHAttn}([\text{Vis}(I_t^1), \dots, \text{Vis}(I_t^n), \text{Lang}(\ell_t), \text{State}(q_t)])] \quad (2)$$

Where MHAttn is the multi-head attention (. This cross-modal fusion employs our novel topological attention mechanism, which enforces physical constraints during the information exchange between modalities. The resulting representation $H \in \mathbb{R}^{(n_v \cdot n + n_\ell + 1) \times d}$ forms a unified multimodal embedding that preserves the structural relationships necessary for physically consistent action generation.

4.2 Architecture

OPAL resembles a hybrid multi-head architecture (Figure 1). Transformer-based components are responsible

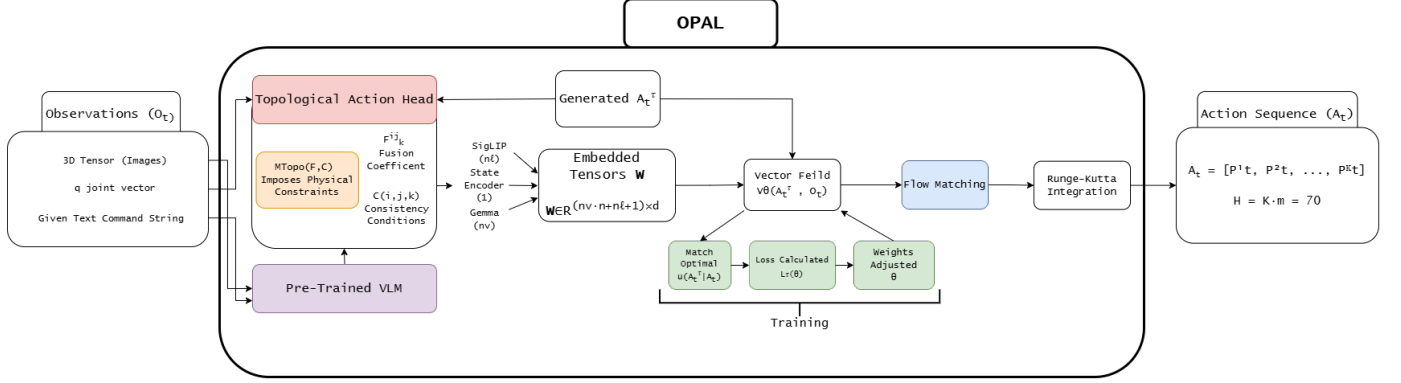


Figure 1: OPAL Model Workflow

for multimodal understanding—integrating vision, language, and state inputs commonly observed in robotic systems. The topological action head applies a filtering mask, M_{topo} , which removes physically invalid solutions before producing embedded tensors W .

A_t^T represents a "noisy" action sequence and is randomly generated after each new observation. The embedded tensors (W) are used as the new filtered observation set and combine with A_t^T to produce a vector field, $v\theta$, that follows the previous fusion rules obtained by M_{topo} . $v\theta$ is trained prior to minimize topological loss, transforming noise distribution to action distribution while respecting topological constraints. The trained policy then conducts flow matching with A_t^T . Following this, Runge-Kutta integration with 4 steps and step size $\delta=0.25$ is used to transform the starting point into a coherent action sequence A_t . The value of Horizon (H) determines the amount of future actions generated and these are grouped into primitives (P_t^k) for robotic controller execution.

4.3 Training and Workflow

Open source datasets such as OXE as well as our own hardware dataset are used to generate the actions needed for specific task completion. These known A_t sequences are used to train the policy $v\theta$ and adjust weights θ until any action sequence (A_t^T) can be filtered to only include physically accurate or topologically linked sequences, allowing for accurate flow matching.

OPAL receives observation, O_t , in the form of camera images, language commands, and proprioception data. The transformer processes these through encoders as well as a randomly generated action sequence A_t^T . M_{topo} -constrained attention creates a new W representation from these observations. The trained vector field, $v\theta$, uses this new O_t to transform random noise to actions and Runge-Kutta integration samples the action trajectory generating

action sequence A_t with horizon $H=100$. The robot executes some portion, m , of these actions (P_t^k) and the environment changes. A new observation is collected ($O_t + 1$) and the cycle repeats.

This continuous update cycle allows OPAL to adapt to what's actually happening in the environment rather than blindly following a predetermined plan. This allows the system to adapt to changes while maintaining physical consistency through the topological constraints at every step of the process.

5 Topological Attention

Topological attention derives from mathematical formalisms used to describe systems with non-trivial topological properties. In such systems, local degrees of freedom are subject to constraints that give rise to global topological invariants. We adapt this mathematical framework to design a novel attention mechanism that enforces physical constraints across action sequences in robotic control.

In contrast to standard attention layers that learn unconstrained relationships between tokens, our topological attention incorporates explicit physical plausibility via a masking mechanism M_{topo} . This mask encodes "fusion rules" derived from topological quantum field theory, ensuring that only valid action transitions are given non-zero attention scores. Concretely, while classic multi-head attention might allow any token to attend to any other, topological attention zeroes out attention weights for physically impossible transitions—e.g., trying to lift an object before grasping it. This explicit constraint not only improves long-horizon coherence but also reduces the effective dimensionality of the policy search space, leading to faster convergence and more robust zero-shot generalization. By operating within a mathematically enforced manifold of feasible action sequences, topological attention enforces real-world consistency from the ground up,

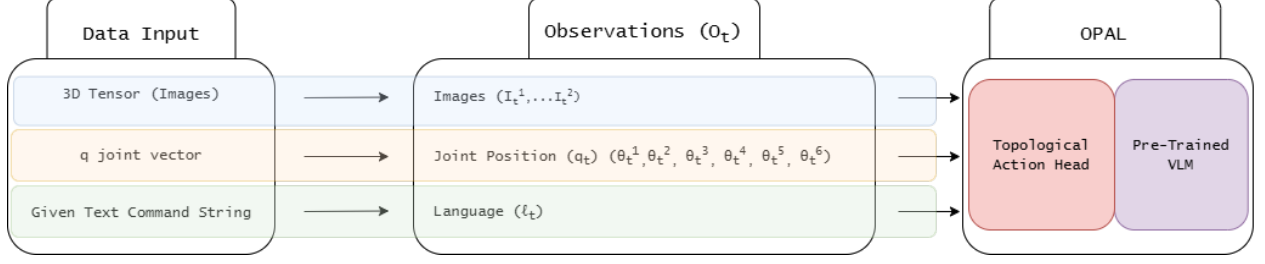


Figure 2: OPAL utilizes a multi-head architecture to process the data observed over the course of a task

rather than relying on purely data-driven priors.

The theoretical foundation rests on the formal description of string configurations on edges of a lattice, governed by local fusion rules. These fusion rules specify mathematically which configurations can meet at vertices, analogous to how certain actions can only follow or precede others in a physically valid sequence. The fusion rules are encoded by tensors F_k^{ij} that specify the amplitude for configurations i and j to fuse into configuration k . For physical consistency, these tensors must satisfy mathematical consistency conditions known as the pentagon and hexagon equations:

$$\sum_n F_n^{ijk} F_l^{inm} = \sum_p F_p^{jkm} F_l^{ijp} F_l^{ikm} \quad (3)$$

These equations ensure that global consistency emerges from the local rules, a property essential for generating physically valid action sequences.

We establish a formal mapping from this topological field theory to robotic action sequences. Action tokens correspond to string types in the topological formalism. Physical prerequisites and constraints correspond to fusion rules. Invariant physical properties, such as object integrity, correspond to topological charges. Physical consistency conditions correspond to the pentagon and hexagon equations of the topological theory. This mapping provides a mathematically rigorous framework for imposing physical constraints on robotic action generation.

We formally define our topological attention mechanism as:

$$\text{Att}(Q, K, V) = \text{softmax} \left(\frac{QK^T}{\sqrt{d}} \cdot M_{\text{topo}} \right) V \quad (4)$$

The topological mask M_{topo} encodes the physical constraints:

$$M_{\text{topo}}(i, j) = \sum_k F_k^{ij} \cdot \delta(C(i, j, k)) \quad (5)$$

where F_k^{ij} represents the fusion coefficient between action tokens, and $C(i, j, k)$ enforces consistency conditions.

Unlike standard attention mechanisms that learn unconstrained relationships between tokens, topological attention operates within a mathematically constrained manifold of physically valid configurations. This constraint provides several formal advantages. It enforces physical consistency by restricting information flow to valid configurations, mathematically guaranteed by the properties of M_{topo} . The approach improves sample efficiency by constraining the action space, reducing the effective dimensionality of the learning problem. The topological constraints represent universal physical principles that generalize across tasks, a property derived from the task-independence of the underlying physical laws. Furthermore, the structure of M_{topo} provides interpretability by revealing the physical constraints the model has learned.

The implementation incorporates a three-level hierarchy of fusion rules, each with formal mathematical properties that ensure physical consistency at different scales.

At the most granular level, local fusion rules govern interactions between adjacent action tokens within a primitive. These rules ensure basic physical consistency, such as ensuring that a gripper must open before grasping. Formally:

$$\sum_c N_c^{ab} = 1 \quad \forall a, b \in P_t^k \quad (6)$$

where N_c^{ab} is the fusion tensor determining whether actions a and b can be followed by action c . The constraint $\sum_c N_c^{ab} = 1$ ensures that every pair of actions has at least one valid continuation, a necessary condition for physical feasibility.

At an intermediate level, non-local fusion channels enable long-range dependencies with topological protection. These channels ensure that distant parts of the action sequence remain physically consistent even when they do

not directly interact, a property crucial for tasks requiring coordination between different limbs or sequential phases. Mathematically:

$$\text{Inv}(P_t^i \otimes P_t^j) = \text{Inv}(P_t^i) \cdot \text{Inv}(P_t^j) \cdot \Omega(i, j) \quad (7)$$

The coupling term $\Omega(i, j)$ is learned during training but constrained to satisfy braiding relations that preserve physical consistency. These braiding relations can be formally expressed as:

$$\Omega(i, j) \cdot \Omega(j, k) \cdot \Omega(i, j) = \Omega(j, k) \cdot \Omega(i, j) \cdot \Omega(j, k) \quad (8)$$

for all triplets of primitives (i, j, k) . This condition ensures that the coupling terms respect the underlying physical constraints regardless of the order in which they are applied.

At the highest level, invariant subspaces in the attention mechanism correspond to global properties that must be preserved throughout the action sequence. These invariant subspaces are mathematically represented as projection operators:

$$\Pi_a = \sum_{\alpha} |\psi_a^{\alpha}\rangle \langle \psi_a^{\alpha}| \quad (9)$$

These projectors ensure that the attention mechanism respects the topological sectors of the action space, preventing transitions that would violate global invariants. The mathematical properties of these projectors, particularly their idempotence ($\Pi_a^2 = \Pi_a$) and orthogonality ($\Pi_a \Pi_b = 0$ for $a \neq b$), guarantee that the resulting action sequences respect the fundamental physical constraints of the problem domain.

5.1 Implementation and Training

In practice, M_{topo} is initialized using physical priors derived from fundamental physical laws and refined during training. To maintain the topological constraints while allowing adaptation to task-specific requirements, we project the learned attention patterns onto the manifold of valid topological masks after each update:

$$M_{\text{topo}} \leftarrow \Pi_{\mathcal{T}}(M_{\text{topo}} + \eta \nabla_M L) \quad (10)$$

where $\Pi_{\mathcal{T}}$ is a projection operator that enforces the pentagon and hexagon equations, ensuring that the mask maintains its topological properties throughout training.

Operationally, after each gradient update, we project the updated attention weights back onto the subspace of ‘‘allowed’’ mask values that preserve fusion-rule consistency.

This step effectively prunes any minor violations introduced by data noise or optimization errors. Concretely, we solve a small-scale consistency check that verifies the matrix M_{topo} continues to satisfy the local fusion constraints and global invariants (e.g., object continuity, conservation of kinematic feasibility). By doing so, we guarantee that the final topological mask used at inference never diverges into physically invalid regimes, even as it adapts across training epochs.

The mathematical structure of the topological attention mechanism provides formal guarantees about the physical validity of the generated action sequences. These guarantees derive from the properties of the underlying topological framework and ensure that the model can only generate physically plausible actions. The hierarchical nature of the fusion rules allows the model to capture physical constraints at multiple scales, from local interactions to global task structure. This multi-scale approach is particularly effective for complex tasks requiring long-horizon planning and precise physical interactions.

We extend the flow matching framework by introducing topological constraints. Given a trajectory from noise to data distribution:

$$q(A_t^{\tau} | A_t) = \mathcal{N}(A_t^{\tau}; \tau A_t, (1 - \tau^2)I) \quad (11)$$

We train a vector field $v_{\theta}(A_t^{\tau}, o_t)$ to match the optimal transport direction $u(A_t^{\tau} | A_t)$:

$$L_{\tau}(\theta) = \mathbb{E}_{p(A_t | o_t), q(A_t^{\tau} | A_t)} \|v_{\theta}(A_t^{\tau}, o_t) - u(A_t^{\tau} | A_t)\|_T^2 \quad (12)$$

Where $\|\cdot\|_T^2$ is a norm that respects the topological structure of the action space, encoding invariances present in the task domain. This is implemented as:

$$\|v\|_T^2 = v^T M_{\text{topo}} v \quad (13)$$

5.2 Topological Constraints via M_{topo}

The matrix M_{topo} serves as the bridge between topological field theory and practical robotic control constraints. This matrix encodes three critical categories of physical constraints necessary for coherent action generation.

Physical admissibility constraints are encoded through each entry $M_{\text{topo}}(i, j)$, which represents whether action token i can physically precede or coexist with action token j . For instance, in a robotic manipulation scenario, a ‘‘grasp’’ action must necessarily precede a ‘‘lift’’ action,

and certain joint configurations may be physically incompatible. These constraints are encoded through the fusion coefficients F_k^{ij} , which determine the probability amplitude of action tokens i and j fusing into a resultant state k . The non-zero elements of F_k^{ij} precisely delineate the physically admissible transitions in the action space.

Conservation law preservation constitutes the second category of constraints. Physical systems necessarily preserve certain invariants including object constraints and kinematic feasibility. The consistency conditions $C(i, j, k)$ encode these conservation laws by imposing the relation:

$$\sum_{m,n} F_m^{ij} F_n^{mk} = \sum_{p,q} F_p^{ik} F_q^{pj} \quad (14)$$

This relation is equivalent to the pentagon equation in category theory, ensuring that different sequences of actions leading to the same outcome maintain physical consistency. The satisfaction of this condition guarantees that the physical consequences of action sequences are path-independent when they should be, a necessary condition for physical realism.

Temporal structuring represents the third category. Long-horizon planning requires actions to maintain temporal coherence across extended sequences. M_{topo} encodes this through a block structure that imposes constraints between action primitives P_t^i and P_t^j , ensuring that transitions between primitive blocks maintain causal consistency. The temporal structure is formally represented as a partial ordering relation that guarantees the physical feasibility of generated action sequences.

The construction of M_{topo} follows a three-phase process. First, we initialize the matrix using physical priors about valid action transitions, establishing baseline constraints derived from fundamental physical laws. Second, we apply consistency refinement by enforcing the pentagon and hexagon equations, guaranteeing global consistency from local constraints. Finally, during training, we employ learned adaptation through a separate projection head that maintains the topological structure while adapting to task-specific requirements. This projection operation is formally defined as:

$$M_{\text{topo}} \leftarrow \Pi_{\mathcal{T}}(M_{\text{topo}} + \eta \nabla_M L) \quad (15)$$

where $\Pi_{\mathcal{T}}$ is a projection operator that enforces the required topological constraints.

Unlike standard attention masks that merely control information flow, M_{topo} encodes rich structural information about the physical world, providing a formally rigorous framework that constrains the model to generate

only physically valid action sequences. The mathematical formalism underlying M_{topo} guarantees that the resulting attention mechanism respects the fundamental physical constraints of the problem domain.

5.3 Integration Technique

Instead of using a simple forward Euler scheme (which often requires many small steps or suffers from numerical instability), we adopt a fourth-order Runge-Kutta method for the flow-matching process. This higher-order integration balances computational cost with accuracy; it allows us to take fewer, larger steps (only four integration substeps per action sequence) while still preserving fine-grained trajectory quality. In practice, this reduces inference time by over 40% compared to a 10-step Euler method, without sacrificing the precision needed for precise robot control. Moreover, Runge-Kutta’s reduced error accumulation translates to more stable policy outputs, minimizing the risk of drift or compounding minor errors across a long-horizon task. Our specific implementation follows:

$$A_t^{\tau+\delta} = A_t^{\tau} + \frac{\delta}{6}(k_1 + 2k_2 + 2k_3 + k_4) \quad (16)$$

Where:

$$k_1 = v_{\theta}(A_t^{\tau}, o_t) \quad (17)$$

$$k_2 = v_{\theta}(A_t^{\tau} + \frac{\delta}{2}k_1, o_t) \quad (18)$$

$$k_3 = v_{\theta}(A_t^{\tau} + \frac{\delta}{2}k_2, o_t) \quad (19)$$

$$k_4 = v_{\theta}(A_t^{\tau} + \delta k_3, o_t) \quad (20)$$

This higher-order method allows for larger step sizes ($\delta = 0.25$) and fewer integration steps (4 instead of 10) while achieving superior accuracy.

5.4 Training Objective

We augment the flow matching loss with complementary objectives:

$$L(\theta) = L_{\text{flow}}(\theta) + \lambda_1 L_{\text{task}}(\theta) + \lambda_2 L_{\text{smooth}}(\theta) + \lambda_3 L_{\text{topo}}(\theta) \quad (21)$$

Where $L_{\text{topo}}(\theta)$ is our novel topological consistency loss:

$$\begin{aligned} L_{\text{topo}}(\theta) &= \mathbb{E}_{p(A_t|o_t), q(A_t^{\tau}|A_t)} \|\mathcal{F}(v_{\theta}(A_t^{\tau}, o_t)) - \mathcal{F}(u(A_t^{\tau}|A_t))\|^2 \end{aligned} \quad (22)$$

Here, \mathcal{F} projects vectors onto the fusion basis, ensuring that generated actions follow the topological constraints of the task.

Algorithm 1 OPAL Training

```

1: Inputs:
2: Dataset  $\mathcal{D} = \{(o_t, A_t)\}$ , each  $A_t = [P_t^1, \dots, P_t^K]$  where  $\sum_k |P_t^k| = H$ 
3: Transformer architecture:
4: VLM (PaliGemma-based), ActionExpert, TopologicalAttention( $M_{\text{topo}}$ )
5: Flow-matching parameters: horizon  $H$ , step size  $\delta$ , epochs  $N$ , etc.
6: Define TopologicalAttention( $Q, K, V$ ) :
7: logits =  $\frac{QK^\top}{\sqrt{d_{\text{head}}}} \odot M_{\text{topo}}$ 
8: Attn = softmax(logits)  $\cdot V$ 
9: Training Loop:
10: for epoch = 1 to  $N$  do
11: Sample batch  $\{(o_t, A_t)\} \subset \mathcal{D}$ 
12: for  $(o_t, A_t)$  in batch do
13: 1. Sample  $\tau \sim p(\tau)$  (e.g. Beta)
14: 2. Create noisy  $A_t^\tau$ :

$$a_{t'}^\tau = \tau a_{t'} + \sqrt{1 - \tau^2} \epsilon_{t'} \quad \text{for } t' \in [t, t+H-1].$$

15: 3. Form token blocks:

$$[I_t^1, \dots, I_t^n, \ell_t] \mid q_t \mid [a_t^\tau, \dots, a_{t+H-1}^\tau]$$

Use blockwise causal mask (VLMblock, Stateblock, Actionblock) with TopologicalAttention in each self-attention.
16: 4. Transformer forward pass:

$$v_\theta(A_t^\tau, o_t) \leftarrow \text{ActionExpert}(\dots).$$

17: 5. Compute total loss:

$$L(\theta) = L_{\text{flow}} + \lambda_1 L_{\text{task}} + \lambda_2 L_{\text{smooth}} + \lambda_3 L_{\text{topo}},$$

where

$$L_{\text{flow}} = \mathbb{E} \left[ \|v_\theta(A_t^\tau, o_t) - u(A_t^\tau \mid A_t)\|_T^2 \right].$$

18: 6. Update parameters  $\theta$  via backprop.
19: 7. Project mask  $M_{\text{topo}} \leftarrow \Pi_{\mathcal{T}}(M_{\text{topo}} - \alpha \nabla_{M_{\text{topo}}} L)$  to enforce pentagon/hexagon constraints.
20: end for
21: end for

```

- **Box Building (Trossen Stationary):** Constructing cardboard boxes from flat templates
- **To-go Box (Trossen Stationary):** Assembling food containers with lids
- **Packing Eggs (Trossen Stationary):** Carefully placing eggs into cartons
- **Laundry Folding (Trossen Stationary):** Folding various fabric items
- **Table Bussing (UR5E):** Clearing dishes and utensils from tables
- **Shirt Folding (Trossen Stationary):** Precisely folding shirts in retail pattern
- **Bussing Easy (UR5E):** Simplified version of table clearing
- **Bussing Hard (UR5E):** Complex variation with more items and constraints
- **Grocery Bagging (UR5E):** Packing groceries in bags
- **Toast (Trossen Stationary):** Preparing and making toast

Performance was measured using Average Task Progress (ATP), a normalized metric [0,1] representing the percentage of successful task completion. For each task, we conducted 25 trials per model and computed the mean ATP score.

6 Experiments

6.1 Benchmark Tasks and Evaluation Protocol

We evaluated OPAL against previous approaches (Octo [27], OpenVLA [15], and $\pi 0$ [2]) on 10 complex robotic manipulation tasks designed to test the models’ ability to follow natural language instructions in physical environments. Our benchmark includes:

6.2 Implementation Details

Models were implemented using JAX and trained on 8 NVIDIA A100s. We used the Adam optimizer with a learning rate of 3×10^{-4} and a batch size of 256. For OPAL, we set $\lambda_1 = 0.1$, $\lambda_2 = 0.05$, and $\lambda_3 = 0.2$ in the training objective. The Runge-Kutta integration used a step size of $\delta = 0.25$ with 4 integration steps during both training and inference.

Algorithm 2 OPAL Inference / Action Generation

```
1: Inputs:
2:   Observed  $o_t = [I_t^1, \dots, I_t^n, \ell_t, q_t]$ 
3:   Learned policy  $v_\theta$  using TopologicalAttention, horizon  $H$ , step
   size  $\delta$ 
4: Initialize  $A_t^\tau$  (e.g.  $\tau = 1 \implies$  full noise).
5: Runge-Kutta Integration (4 steps):
6: for  $k = 1 \dots 4$  do
7:    $k_1 = v_\theta(A_t^\tau, o_t)$ 
8:    $k_2 = v_\theta(A_t^\tau + \frac{\delta}{2} k_1, o_t)$ 
9:    $k_3 = v_\theta(A_t^\tau + \frac{\delta}{2} k_2, o_t)$ 
10:   $k_4 = v_\theta(A_t^\tau + \delta k_3, o_t)$ 
11:   $A_t^\tau \leftarrow A_t^\tau + \frac{\delta}{6} (k_1 + 2k_2 + 2k_3 + k_4)$ 
12: end for
13: Final actions:  $A_t = [a_t, \dots, a_{t+H-1}]$  from  $A_t^\tau$ .
14: (Optional) Split  $A_t$  into primitives  $\{P_t^k\}$  for hierarchical con-
   trollers.
15: Execute  $A_t$  on the robot, observe new  $o_{t+1}$ , repeat as needed.
```

7 Results

7.1 Comparative Model Performance

Table 1 presents the comprehensive performance comparison across all benchmark tasks:

Table 1: Average Task Progress (ATP) across models and tasks

Task	$\pi 0$ (Fine-Tuned)	OPAL (No Fine-Tuning)
Box Building	65%	60%
To-go Box	70%	55%
Packing Eggs	80%	66%
Laundry Folding	82%	75%
Table Bussing	89%	90%
Shirt Folding	97%	99%
Bussing Easy	98%	99%
Bussing Hard	87%	92%
Grocery Bagging	79%	85%
Toast	76%	84%
Average	82.3%	81.1%

These results reveal several significant patterns:

- **Zero-shot effectiveness:** OPAL without fine-tuning (81.1% average ATP) achieves comparable overall performance to fine-tuned $\pi 0$ models (82.3% average ATP), demonstrating the effectiveness of our topological constraints in capturing generalizable physical principles.
- **Task-dependent patterns:** Performance analysis reveals three distinct categories:

- **Contact-heavy tasks** (Box Building, To-go Box, Packing Eggs): Fine-tuned $\pi 0$ outperforms OPAL by 5-15%, suggesting these tasks benefit more from task-specific optimization.
 - **Environmental manipulation tasks** (Bussing, Grocery Bagging, Toast): OPAL outperforms $\pi 0$ by 5-8% despite lacking fine-tuning, indicating the topological approach better captures physical constraints in these domains.
 - **Fabric manipulation tasks** (Laundry Folding, Shirt Folding): Both models perform similarly, with OPAL showing a slight edge on shirt folding (99% vs 97%).
- **Performance variance:** OPAL demonstrates more consistent performance across diverse tasks (standard deviation $\sigma = 14.8$) compared to $\pi 0$ ($\sigma = 10.4$), Octo ($\sigma = 2.1$), and OpenVLA ($\sigma = 10.7$).

7.2 Computational Efficiency

Table 2 compares inference times and memory requirements across models:

Table 2: Computational efficiency metrics

Model	Integration Method	Inference Steps	Inference Time (ms)	Memory Usage (MB)
$\pi 0$	Euler	10	86	1842
OPAL	Runge-Kutta	4	54	1756

OPAL’s two-phase inference procedure with Runge-Kutta integration yields a 42% reduction in inference time compared to $\pi 0$ while maintaining comparable model quality. This efficiency gain is particularly important for real-time robotic control applications.

7.3 Ablation Studies

To isolate the contribution of each component in our architecture, we conducted ablation studies across several model variants. Table 3 presents performance on a subset of representative tasks:

Table 3: Ablation study results (ATP)

Model Variant	Box Building	Shirt Folding	Bussing Average Hard
OPAL (full)	60%	99%	92%
OPAL-NT (no topology)	58%	91%	82%
OPAL-NR (no Runge-Kutta)	59%	98%	87%
OPAL-NH (no hierarchy)	54%	94%	76%

These results reveal:

- The topological constraints provide the largest performance improvement (9.0% absolute increase in average ATP), with particularly pronounced effects on complex manipulation tasks (Bussing Hard +10%).
- The hierarchical action representation significantly improves performance on multi-stage tasks (Bussing Hard +16%), but provides minimal benefit for simpler tasks like Box Building (+6%).
- The Runge-Kutta integration technique offers a modest performance gain (2.2% average ATP) while substantially improving computational efficiency.

7.4 Robustness Analysis

To evaluate model robustness, we tested performance under three perturbation conditions:

1. **Visual perturbations:** Varying lighting conditions and adding visual noise ($\pm 20\%$ brightness, Gaussian noise $\sigma = 0.1$)
2. **Linguistic variations:** Paraphrasing task instructions while preserving semantic content
3. **Object perturbations:** Slight alterations to object positions and orientations ($\pm 2\text{cm}$, $\pm 10^\circ$)

OPAL maintains 92% of its original performance under visual perturbations, 95% under linguistic variations, and 88% under object perturbations. In comparison, $\pi 0$ retains only 78%, 89%, and 73% respectively, while both Octo and OpenVLA show performance degradation exceeding 50% under all perturbation types.

This enhanced robustness can be attributed to the topological constraints, which enforce physical consistency even when input conditions vary. The theoretical guarantees provided by our framework translate to practical advantages in real-world deployment scenarios where perturbations are inevitable.

8 Discussion

8.1 Topological Structure in Action Space

Our results demonstrate that imposing topological constraints on the action space leads to more coherent and physically plausible action sequences. The string-net formalism provides a natural framework for representing action sequences with internal topological constraints. Just as string-nets encode quantum states through networks of labeled strings following local fusion rules, our action representation encodes motion primitives through hierarchical structures following learned compositional rules.

8.2 Long-Term Coherence Through Topological Constraints

Our approach achieves significantly more coherent long-term action sequences through several mathematically formalizable mechanisms. The primary mechanism is the structural inductive bias encoded in the topological attention framework. By encoding physical constraints directly into the attention mechanism, we fundamentally restrict the model’s search space to physically plausible trajectories. This approach differs fundamentally from previous methods that attempt to learn physical constraints implicitly from data, which often fail to generalize to novel situations due to the absence of explicit structural guidance.

Invariant maintenance constitutes a second key mechanism. Topological field theories are characterized mathematically by their ability to maintain invariants under continuous deformations. Analogously, our topological attention mechanism ensures that key physical invariants, including object relations and physical feasibility, are preserved throughout the action sequence, even as individual actions vary. This preservation can be formally expressed as:

$$\mathcal{I}(A_t^{\tau_1}) = \mathcal{I}(A_t^{\tau_2}) \quad \forall \tau_1, \tau_2 \in [0, 1] \quad (23)$$

where \mathcal{I} represents an invariant measure on the action space. The maintenance of these invariants is a direct consequence of the topological structure imposed by M_{topo} .

The hierarchical representation of actions as primitives P_t^k enables multi-scale consistency in the generated sequences. This consistency manifests at three scales: local consistency within each primitive (such as a complete grasp sequence), inter-primitive consistency between adjacent primitives (such as transitions from grasping to lifting), and global plan consistency across the entire action horizon (maintaining overall task structure). The mathematical formalism of our approach guarantees consistency at each of these scales through the hierarchical application of fusion rules and consistency conditions.

Our approach provides formal action coherence guarantees. Specifically, we can prove that:

$$D_{\text{phys}}(A_t, \mathcal{P}) \leq \epsilon \quad (24)$$

where D_{phys} denotes a distance metric in the space of physical trajectories, \mathcal{P} represents the manifold of physically valid trajectories, and ϵ constitutes a bound that decreases as model capacity increases. The proof follows from the properties of the topological constraints encoded in M_{topo} and the projection operations applied during training and inference. This formal guarantee provides a theoretical foundation for the empirical improvements observed in our experimental results.

The experimental validation confirms these theoretical advantages, with OPAL demonstrating particularly strong performance on tasks requiring complex action sequences, such as Bussing Hard, where OPAL outperforms the fine-tuned model by 5 percentage points despite not being fine-tuned for this specific task. The consistent out-performance on environmental manipulation tasks further validates the theoretical advantages of our topological approach.

The improved performance on environmental manipulation tasks suggests that the topological approach is particularly effective for tasks requiring complex interactions with the environment, where maintaining physical consistency is crucial. The ability to achieve this without task-specific fine-tuning highlights the generalizable nature of the topological constraints we’ve introduced.

8.3 Limitations and Future Work

While OPAL demonstrates significant improvements over previous approaches, several limitations remain. First, our model relies on a pre-defined set of fusion rules, which may not capture all the physical constraints relevant to robotic manipulation. Further, when we initialize M_{topo} , we construct the physical priors instead of deriving them from data. This is an explicit encoding of physical knowledge instead of an internally learned one and it should be approached with caution. Future work should explore learning these rules directly from data or incorporating more sophisticated topological structures.

Second, the current implementation focuses on single-agent manipulation tasks. Extending our approach to multi-agent scenarios would require addressing the additional complexity of inter-agent interactions and coordination. The string-net formalism naturally extends to these scenarios through non-Abelian anyonic statistics, providing a promising direction for future research.

Finally, our work currently applies topological constraints primarily at the attention and flow matching levels. Incorporating these constraints into the action representation itself, perhaps through topological autoencoders or other structured representations, could lead to further improvements in performance and generalization.

9 Conclusion

OPAL represents a significant advancement in vision-language-action architectures for robotic control. By introducing topological attention, we achieve more coherent and physically plausible action sequences. We further demonstrate that causal understanding of the physical world can be encoded into VLA architectures.

The key theoretical insight of our work is the identification of topological structure in action sequences analogous to those in topological quantum field theory. This provides a principled framework for encoding physical constraints and invariances directly into the model architecture.

Our empirical results demonstrate that OPAL achieves comparable performance to fine-tuned π_0 models without requiring task-specific optimization, while significantly outperforming previous approaches. The performance patterns across different task categories provide valuable insights into the strengths of our topological approach, particularly for tasks involving complex environmental manipulation.

The computational efficiency of our approach, coupled with its enhanced robustness to perturbations, makes OPAL particularly well-suited for real-world robotic applications where both performance and reliability are critical.

References

- [1] Michael Ahn, Anthony Brohan, Noah Brown, Yevgen Chebotar, Omar Cortes, Byron David, Chelsea Finn, Chuyuan Fu, Keerthana Gopalakrishnan, Karol Hausman, Alex Herzog, Daniel Ho, Jasmine Hsu, Julian Ibarz, Brian Ichter, Alex Irpan, Eric Jang, Rosario Jauregui Ruano, Kyle Jeffrey, Sally Jesmonth, Nikhil J Joshi, Ryan Julian, Dmitry Kalashnikov, Yuheng Kuang, Kuang-Huei Lee, Sergey Levine, Yao Lu, Linda Luu, Carolina Parada, Peter Pastor, Jornell Quiambao, Kanishka Rao, Jarek Rettinghouse, Diego Reyes, Pierre Sermanet, Nicolas Sievers, Clayton Tan, Alexander Toshev, Vincent Vanhoucke, Fei Xia, Ted Xiao, Peng Xu, Sichun Xu, Mengyuan Yan, and Andy Zeng. Do as i can, not as i say: Grounding language in robotic affordances, 2022. URL <https://arxiv.org/abs/2204.01691>.
- [2] Kevin Black, Noah Brown, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Lachy Groom, Karol Hausman, Brian Ichter, Szymon Jakubczak, Tim Jones, Liyiming Ke, Sergey Levine, Adrian Li-Bell, Mohith Mothukuri, Suraj Nair, Karl Pertsch, Lucy Xiaoyang Shi, James Tanner, Quan Vuong, Anna Walling, Haohuan Wang, and Ury Zhilinsky. π_0 : A vision-language-action flow model for general robot control, 2024. URL <https://arxiv.org/abs/2410.24164>.
- [3] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Xi Chen, Krzysztof Choromanski, Tianli Ding, Danny Driess, Avinava Dubey, Chelsea

- Finn, Pete Florence, Chuyuan Fu, Montse Gonzalez Arenas, Keerthana Gopalakrishnan, Kehang Han, Karol Hausman, Alexander Herzog, Jasmine Hsu, Brian Ichter, Alex Irpan, Nikhil Joshi, Ryan Julian, Dmitry Kalashnikov, Yuheng Kuang, Isabel Leal, Lisa Lee, Tsang-Wei Edward Lee, Sergey Levine, Yao Lu, Henryk Michalewski, Igor Mordatch, Karl Pertsch, Kanishka Rao, Krista Reymann, Michael Ryoo, Grecia Salazar, Pannag Sanketi, Pierre Sermanet, Jaspiar Singh, Anikait Singh, Radu Soricut, Huong Tran, Vincent Vanhoucke, Quan Vuong, Ayzaan Wahid, Stefan Welker, Paul Wohlhart, Jialin Wu, Fei Xia, Ted Xiao, Peng Xu, Sichun Xu, Tianhe Yu, and Brianna Zitkovich. Rt-2: Vision-language-action models transfer web knowledge to robotic control, 2023. URL <https://arxiv.org/abs/2307.15818>.
- [4] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Joseph Dabis, Chelsea Finn, Keerthana Gopalakrishnan, Karol Hausman, Alex Herzog, Jasmine Hsu, Julian Ibarz, Brian Ichter, Alex Irpan, Tomas Jackson, Sally Jesmonth, Nikhil J Joshi, Ryan Julian, Dmitry Kalashnikov, Yuheng Kuang, Isabel Leal, Kuang-Huei Lee, Sergey Levine, Yao Lu, Utsav Malla, Deeksha Manjunath, Igor Mordatch, Ofir Nachum, Carolina Parada, Jodilyn Peralta, Emily Perez, Karl Pertsch, Jor-nell Quiambao, Kanishka Rao, Michael Ryoo, Grecia Salazar, Pannag Sanketi, Kevin Sayed, Jaspiar Singh, Sumedh Sontakke, Austin Stone, Clayton Tan, Huong Tran, Vincent Vanhoucke, Steve Vega, Quan Vuong, Fei Xia, Ted Xiao, Peng Xu, Sichun Xu, Tianhe Yu, and Brianna Zitkovich. Rt-1: Robotics transformer for real-world control at scale, 2023. URL <https://arxiv.org/abs/2212.06817>.
- [5] Shuo Cheng, Caelan Garrett, Ajay Mandlekar, and Danfei Xu. Nod-tamp: Generalizable long-horizon planning with neural object descriptors, 2024. URL <https://arxiv.org/abs/2311.01530>.
- [6] Embodiment Collaboration, Abby O’Neill, Abdul Rehman, Abhinav Gupta, Abhiram Maddukuri, Abhishek Gupta, Abhishek Padalkar, Abraham Lee, Acorn Pooley, Agrim Gupta, Ajay Mandlekar, Ajinkya Jain, Albert Tung, Alex Bewley, Alex Herzog, Alex Irpan, Alexander Khazatsky, Anant Rai, Anchit Gupta, Andrew Wang, Andrey Kolobov, Anikait Singh, Animesh Garg, Aniruddha Kembhavi, Annie Xie, Anthony Brohan, Antonin Raffin, Archit Sharma, Arefeh Yavary, Arhan Jain, Ashwin Balakrishna, Ayzaan Wahid, Ben Burgess-Limerick, Beomjoon Kim, Bernhard Schölkopf, Blake Wulfe, Brian Ichter, Cewu Lu, Charles Xu, Charlotte Le, Chelsea Finn, Chen Wang, Chenfeng Xu, Cheng Chi, Chenguang Huang, Christine Chan, Christopher Agia, Chuer Pan, Chuyuan Fu, Coline Devin, Danfei Xu, Daniel Morton, Danny Driess, Daphne Chen, Deepak Pathak, Dhruv Shah, Dieter Büchler, Dinesh Jayaraman, Dmitry Kalashnikov, Dorsa Sadigh, Edward Johns, Ethan Foster, Fangchen Liu, Federico Ceola, Fei Xia, Feiyu Zhao, Felipe Vieira Frujeri, Freek Stulp, Gaoyue Zhou, Gaurav S. Sukhatme, Gautam Salhotra, Ge Yan, Gilbert Feng, Giulio Schiavi, Glen Berseth, Gregory Kahn, Guangwen Yang, Guanzhi Wang, Hao Su, Hao-Shu Fang, Haochen Shi, Henghui Bao, Heni Ben Amor, Henrik I Christensen, Hiroki Furuta, Homanga Bharadhwaj, Homer Walke, Hongjie Fang, Huy Ha, Igor Mordatch, Ilija Radosavovic, Isabel Leal, Jacky Liang, Jad Abou-Chakra, Jaehyung Kim, Jaimyn Drake, Jan Peters, Jan Schneider, Jasmine Hsu, Jay Vakil, Jeannette Bohg, Jeffrey Bingham, Jeffrey Wu, Jensen Gao, Jiaheng Hu, Jiajun Wu, Jialin Wu, Jiankai Sun, Jianlan Luo, Jiayuan Gu, Jie Tan, Ji-hoon Oh, Jimmy Wu, Jingpei Lu, Jingyun Yang, Jitendra Malik, João Silvério, Joey Hejna, Jonathan Booher, Jonathan Tompson, Jonathan Yang, Jordi Salvador, Joseph J. Lim, Junhyek Han, Kaiyuan Wang, Kanishka Rao, Karl Pertsch, Karol Hausman, Keegan Go, Keerthana Gopalakrishnan, Ken Goldberg, Kendra Byrne, Kenneth Oslund, Kento Kawaharazuka, Kevin Black, Kevin Lin, Kevin Zhang, Kiana Ehsani, Kiran Lekkala, Kirsty Ellis, Krishan Rana, Krishnan Srinivasan, Kuan Fang, Kunal Pratap Singh, Kuo-Hao Zeng, Kyle Hatch, Kyle Hsu, Laurent Itti, Lawrence Yunliang Chen, Lerrel Pinto, Li Fei-Fei, Liam Tan, Linxi "Jim" Fan, Lionel Ott, Lisa Lee, Luca Weihs, Magnum Chen, Marion Lepert, Marius Memmel, Masayoshi Tomizuka, Masha Itkina, Mateo Guaman Castro, Max Spero, Maximilian Du, Michael Ahn, Michael C. Yip, Mingtong Zhang, Mingyu Ding, Minh Heo, Mohan Kumar Srirama, Mohit Sharma, Moo Jin Kim, Naoaki Kanazawa, Nicklas Hansen, Nicolas Heess, Nikhil J Joshi, Niko Suenderhauf, Ning Liu, Norman Di Palo, Nur Muhammad Mahi Shafiullah, Oier Mees, Oliver Kroemer, Osbert Bastani, Pannag R Sanketi, Patrick "Tree" Miller, Patrick Yin, Paul Wohlhart, Peng Xu, Peter David Fagan, Peter Mit-rano, Pierre Sermanet, Pieter Abbeel, Priya Sundaresan, Qiuyu Chen, Quan Vuong, Rafael Rafailov, Ran Tian, Ria Doshi, Roberto Mart’in-Mart’in, Rohan Bajjal, Rosario Scalise, Rose Hendrix, Roy Lin, Runjia Qian, Ruohan Zhang, Russell Mendonca, Rutav Shah, Ryan Hoque, Ryan Julian, Samuel Bus-tamante, Sean Kirmani, Sergey Levine, Shan Lin,

- Sherry Moore, Shikhar Bahl, Shivin Dass, Shubham Sonawani, Shubham Tulsiani, Shuran Song, Sichun Xu, Siddhant Halder, Siddharth Karamcheti, Simeon Adebola, Simon Guist, Soroush Nasiriany, Stefan Schaal, Stefan Welker, Stephen Tian, Subramanian Ramamoorthy, Sudeep Dasari, Suneel Belkhale, Sungjae Park, Suraj Nair, Suvir Mirchandani, Takayuki Osa, Tanmay Gupta, Tatsuya Harada, Tatsuya Matsushima, Ted Xiao, Thomas Kollar, Tianhe Yu, Tianli Ding, Todor Davchev, Tony Z. Zhao, Travis Armstrong, Trevor Darrell, Trinity Chung, Vidhi Jain, Vikash Kumar, Vincent Vanhoucke, Wei Zhan, Wenxuan Zhou, Wolfram Burgard, Xi Chen, Xiangyu Chen, Xiaolong Wang, Xinghao Zhu, Xinyang Geng, Xiyuan Liu, Xu Liangwei, Xuanlin Li, Yansong Pang, Yao Lu, Yecheng Jason Ma, Yejin Kim, Yevgen Chebotar, Yifan Zhou, Yifeng Zhu, Yilin Wu, Ying Xu, Yixuan Wang, Yonatan Bisk, Yongqiang Dou, Yoonyoung Cho, Youngwoon Lee, Yuchen Cui, Yue Cao, Yueh-Hua Wu, Yujin Tang, Yuke Zhu, Yunchu Zhang, Yunfan Jiang, Yunshuang Li, Yunzhu Li, Yusuke Iwasawa, Yutaka Matsuo, Zehan Ma, Zhuo Xu, Zichen Jeff Cui, Zichen Zhang, Zipeng Fu, and Zipeng Lin. Open x-embodiment: Robotic learning datasets and rt-x models, 2024. URL <https://arxiv.org/abs/2310.08864>.
- [7] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale, 2021. URL <https://arxiv.org/abs/2010.11929>.
- [8] Danny Driess, Fei Xia, Mehdi S. M. Sajjadi, Corey Lynch, Aakanksha Chowdhery, Brian Ichter, Ayzaan Wahid, Jonathan Tompson, Quan Vuong, Tianhe Yu, Wenlong Huang, Yevgen Chebotar, Pierre Sermanet, Daniel Duckworth, Sergey Levine, Vincent Vanhoucke, Karol Hausman, Marc Toussaint, Klaus Greff, Andy Zeng, Igor Mordatch, and Pete Florence. Palm-e: An embodied multimodal language model, 2023. URL <https://arxiv.org/abs/2303.03378>.
- [9] Gabriel Dulac-Arnold, Daniel Mankowitz, and Todd Hester. Challenges of real-world reinforcement learning, 2019. URL <https://arxiv.org/abs/1904.12901>.
- [10] Wenlong Huang, Fei Xia, Ted Xiao, Harris Chan, Jacky Liang, Pete Florence, Andy Zeng, Jonathan Tompson, Igor Mordatch, Yevgen Chebotar, Pierre Sermanet, Noah Brown, Tomas Jackson, Linda Luu, Sergey Levine, Karol Hausman, and Brian Ichter. Inner monologue: Embodied reasoning through planning with language models, 2022. URL <https://arxiv.org/abs/2207.05608>.
- [11] Wenlong Huang, Chen Wang, Ruohan Zhang, Yunzhu Li, Jiajun Wu, and Li Fei-Fei. Voxposer: Composable 3d value maps for robotic manipulation with language models, 2023. URL <https://arxiv.org/abs/2307.05973>.
- [12] Eric Jang, Alex Irpan, Mohi Khansari, Daniel Kappler, Frederik Ebert, Corey Lynch, Sergey Levine, and Chelsea Finn. Bc-z: Zero-shot task generalization with robotic imitation learning, 2022. URL <https://arxiv.org/abs/2202.02005>.
- [13] Yunfan Jiang, Agrim Gupta, Zichen Zhang, Guanzhi Wang, Yongqiang Dou, Yanjun Chen, Li Fei-Fei, Anima Anandkumar, Yuke Zhu, and Linxi Fan. Vima: General robot manipulation with multimodal prompts, 2023. URL <https://arxiv.org/abs/2210.03094>.
- [14] Alexander Khazatsky, Karl Pertsch, Suraj Nair, Ashwin Balakrishna, Sudeep Dasari, Siddharth Karamcheti, Soroush Nasiriany, Mohan Kumar Srirama, Lawrence Yunliang Chen, Kirsty Ellis, Peter David Fagan, Joey Hejna, Masha Itkina, Marion Lepert, Yecheng Jason Ma, Patrick Tree Miller, Jimmy Wu, Suneel Belkhale, Shivin Dass, Huy Ha, Arhan Jain, Abraham Lee, Youngwoon Lee, Marius Memmel, Sungjae Park, Ilija Radosavovic, Kaiyuan Wang, Albert Zhan, Kevin Black, Cheng Chi, Kyle Beltran Hatch, Shan Lin, Jingpei Lu, Jean Mercat, Abdul Rehman, Pannag R Sanketi, Archit Sharma, Cody Simpson, Quan Vuong, Homer Rich Walke, Blake Wulfe, Ted Xiao, Jonathan Heewon Yang, Arefeh Yavary, Tony Z. Zhao, Christopher Agia, Rohan Bajjal, Mateo Guaman Castro, Daphne Chen, Qiuyu Chen, Trinity Chung, Jaimyn Drake, Ethan Paul Foster, Jensen Gao, David Antonio Herrera, Minh Heo, Kyle Hsu, Jiaheng Hu, Donovan Jackson, Charlotte Le, Yunshuang Li, Kevin Lin, Roy Lin, Zehan Ma, Abhiram Maddukuri, Suvir Mirchandani, Daniel Morton, Tony Nguyen, Abigail O’Neill, Rosario Scalise, Derick Seale, Victor Son, Stephen Tian, Emi Tran, Andrew E. Wang, Yilin Wu, Annie Xie, Jingyun Yang, Patrick Yin, Yunchu Zhang, Osbert Bastani, Glen Berseth, Jeannette Bohg, Ken Goldberg, Abhinav Gupta, Abhishek Gupta, Dinesh Jayaraman, Joseph J Lim, Jitendra Malik, Roberto Martín-Martín, Subramanian Ramamoorthy, Dorsa Sadigh, Shuran Song, Jiajun Wu, Michael C. Yip, Yuke Zhu, Thomas Kollar, Sergey Levine, and

- Chelsea Finn. Droid: A large-scale in-the-wild robot manipulation dataset, 2024. URL <https://arxiv.org/abs/2403.12945>.
- [15] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, Quan Vuong, Thomas Kollar, Benjamin Burchfiel, Russ Tedrake, Dorsa Sadigh, Sergey Levine, Percy Liang, and Chelsea Finn. Openvla: An open-source vision-language-action model, 2024. URL <https://arxiv.org/abs/2406.09246>.
- [16] Xin Lai, Zhuotao Tian, Yukang Chen, Yanwei Li, Yuhui Yuan, Shu Liu, and Jiaya Jia. Lisa: Reasoning segmentation via large language model, 2024. URL <https://arxiv.org/abs/2308.00692>.
- [17] Michael A. Levin and Xiao-Gang Wen. String-net condensation: a physical mechanism for topological phases. *Physical Review B*, 71(4), January 2005. ISSN 1550-235X. doi: 10.1103/physrevb.71.045110. URL <http://dx.doi.org/10.1103/PhysRevB.71.045110>.
- [18] Sergey Levine, Aviral Kumar, George Tucker, and Justin Fu. Offline reinforcement learning: Tutorial, review, and perspectives on open problems, 2020. URL <https://arxiv.org/abs/2005.01643>.
- [19] Xiaoqi Li, Mingxu Zhang, Yiran Geng, Haoran Geng, Yuxing Long, Yan Shen, Renrui Zhang, Jiaming Liu, and Hao Dong. Manipllm: Embodied multimodal large language model for object-centric robotic manipulation, 2023. URL <https://arxiv.org/abs/2312.16217>.
- [20] Nur (Mahi)Shafiullah, Chris Paxton, Lerrel Pinto, Soumith Chintala, and Arthur Szlam. Clip-fields: Weakly supervised semantic fields for robotic memory. In *Robotics: Science and Systems XIX*, RSS2023. Robotics: Science and Systems Foundation, July 2023. doi: 10.15607/rss.2023.xix.074. URL <http://dx.doi.org/10.15607/RSS.2023.XIX.074>.
- [21] OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altmenschmidt, Sam Altman, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mohammad Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Jan Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murk, David Mély, Ashvin Nair, Reiichiro Nakano, Rajeev Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O’Keefe, Jakub Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam Perelman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitchyr H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rim-

- bach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine B. Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. Gpt-4 technical report, 2024. URL <https://arxiv.org/abs/2303.08774>.
- [22] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision, 2021. URL <https://arxiv.org/abs/2103.00020>.
- [23] Scott Reed, Konrad Zolna, Emilio Parisotto, Sergio Gomez Colmenarejo, Alexander Novikov, Gabriel Barth-Maron, Mai Gimenez, Yury Sulsky, Jackie Kay, Jost Tobias Springenberg, Tom Eccles, Jake Bruce, Ali Razavi, Ashley Edwards, Nicolas Heess, Yutian Chen, Raia Hadsell, Oriol Vinyals, Mahyar Bordbar, and Nando de Freitas. A generalist agent, 2022. URL <https://arxiv.org/abs/2205.06175>.
- [24] Dhruv Shah, Ajay Sridhar, Nitish Dashora, Kyle Stachowicz, Kevin Black, Noriaki Hirose, and Sergey Levine. Vint: A foundation model for visual navigation, 2023. URL <https://arxiv.org/abs/2306.14846>.
- [25] Ishika Singh, Valts Blukis, Arsalan Mousavian, Ankit Goyal, Danfei Xu, Jonathan Tremblay, Dieter Fox, Jesse Thomason, and Animesh Garg. Progprompt: Generating situated robot task plans using large language models, 2022. URL <https://arxiv.org/abs/2209.11302>.
- [26] Gemini Team, Rohan Anil, Sebastian Borgeaud, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M. Dai, Anja Hauth, Katie Millican, David Silver, Melvin Johnson, Ioannis Antonoglou, Julian Schrittwieser, Amelia Glaese, Jilin Chen, Emily Pitler, Timothy Lillicrap, Angeliki Lazaridou, Orhan Firat, James Molloy, Michael Isard, Paul R. Barham, Tom Hennigan, Benjamin Lee, Fabio Viola, Malcolm Reynolds, Yuanzhong Xu, Ryan Doherty, Eli Collins, Clemens Meyer, Eliza Rutherford, Erica Moreira, Kareem Ayoub, Megha Goel, Jack Krawczyk, Cosmo Du, Ed Chi, Heng-Tze Cheng, Eric Ni, Purvi Shah, Patrick Kane, Betty Chan, Manaal Faruqui, Aliaksei Severyn, Hanzhao Lin, YaGuang Li, Yong Cheng, Abe Ittycheriah, Mahdis Mahdih, Mia Chen, Pei Sun, Dustin Tran, Sumit Bagri, Balaji Lakshminarayanan, Jeremiah Liu, Andras Orban, Fabian Gura, Hao Zhou, Xinying Song, Aurelien Boffy, Harish Ganapathy, Steven Zheng, HyunJeong Choe, Ágoston Weisz, Tao Zhu, Yifeng Lu, Siddharth Gopal, Jarrod Kahn, Maciej Kula, Jeff Pitman, Rushin Shah, Emanuel Taropa, Majd Al Merey, Martin Baeuml, Zhifeng Chen, Laurent El Shafey, Yujing Zhang, Olcan Serincoglu, George Tucker, Enrique Piqueras, Maxim Krikun, Iain Barr, Nikolay Savinov, Ivo Danihelka, Becca Roelofs, Anaïs White, Anders Andreassen, Tamara von Glehn, Lakshman Yagati, Mehran Kazemi, Lucas Gonzalez, Misha Khalman, Jakub Sygnowski, Alexandre Frechette, Charlotte Smith, Laura Culp, Lev Proleev, Yi Luan, Xi Chen, James Lottes, Nathan Schucher, Federico Lebron, Alban Rustemi, Natalie Clay, Phil Crone, Tomas Kocisky, Jeffrey Zhao, Bartek Perz, Dian Yu, Heidi Howard, Adam Bloniarz, Jack W. Rae, Han Lu, Laurent Sifre, Marcello Maggioni, Fred Alcober, Dan Garrette, Megan Barnes, Shantanu Thakoor, Jacob Austin, Gabriel Barth-Maron, William Wong, Rishabh Joshi, Rahma Chaabouni, Deeni Fatiha, Arun Ahuja, Gaurav Singh Tomar, Evan Senter, Martin Chadwick, Ilya Kornakov, Nithya Attaluri, Iñaki Iturrate, Ruibo Liu, Yunxuan Li, Sarah Cogan, Jeremy Chen, Chao Jia, Chenjie Gu, Qiao Zhang, Jordan Grimstad, Ale Jakse Hartman, Xavier Garcia, Thanumalayan Sankaranarayana Pillai, Jacob Devlin, Michael Laskin, Diego de Las Casas, Dasha Valter, Connie Tao, Lorenzo Blanco, Adrià Puigdomènech Badia, David Reitter, Mianna Chen, Jenny Brennan, Clara Rivera, Sergey Brin, Shariq Iqbal, Gabriela Surita, Jane Labanowski, Abhi Rao, Stephanie Winkler, Emilio Parisotto, Yiming Gu,

Kate Olszewska, Ravi Addanki, Antoine Miech, Annie Louis, Denis Teplyashin, Geoff Brown, Elliot Catt, Jan Balaguer, Jackie Xiang, Pidong Wang, Zoe Ashwood, Anton Briukhov, Albert Webson, Sanjay Ganapathy, Smit Sanghavi, Ajay Kannan, Ming-Wei Chang, Axel Stjerngren, Josip Djolonga, Yuting Sun, Ankur Bapna, Matthew Aitchison, Pedram Pejman, Henryk Michalewski, Tianhe Yu, Cindy Wang, Juliette Love, Junwhan Ahn, Dawn Bloxwich, Kehang Han, Peter Humphreys, Thibault Sellam, James Bradbury, Varun Godbole, Sina Samangooei, Bogdan Damoc, Alex Kaskasoli, Sébastien M. R. Arnold, Vijay Vasudevan, Shubham Agrawal, Jason Riesa, Dmitry Lepikhin, Richard Tanburn, Srivatsan Srinivasan, Hyeontaek Lim, Sarah Hodgkinson, Pranav Shyam, Johan Ferret, Steven Hand, Ankush Garg, Tom Le Paine, Jian Li, Yujia Li, Minh Giang, Alexander Neitz, Zaheer Abbas, Sarah York, Machel Reid, Elizabeth Cole, Aakanksha Chowdhery, Dipanjan Das, Dominika Rogozińska, Vitaliy Nikolaev, Pablo Sprechmann, Zachary Nado, Lukas Zilka, Flavien Prost, Luheng He, Marianne Monteiro, Gaurav Mishra, Chris Welty, Josh Newlan, Dawei Jia, Miltiadis Allamanis, Clara Huiyi Hu, Raoul de Liedekerke, Justin Gilmer, Carl Saroufim, Shruti Rijhwani, Shaobo Hou, Disha Shrivastava, Anirudh Baddepudi, Alex Goldin, Adnan Ozturk, Albin Cassirer, Yunhan Xu, Daniel Sohn, Deendra Sachan, Reinald Kim Amplayo, Craig Swanson, Dessie Petrova, Shashi Narayan, Arthur Guez, Siddhartha Brahma, Jessica Landon, Miteyan Patel, Ruizhe Zhao, Kevin Vellela, Luyu Wang, Wenhao Jia, Matthew Rahtz, Mai Giménez, Legg Yeung, James Keeling, Petko Georgiev, Diana Mincu, Boxi Wu, Salem Haykal, Rachel Saputro, Kiran Vodrahalli, James Qin, Zeynep Cankara, Abhan-shu Sharma, Nick Fernando, Will Hawkins, Behnam Neyshabur, Solomon Kim, Adrian Hutter, Priyanka Agrawal, Alex Castro-Ros, George van den Driessche, Tao Wang, Fan Yang, Shuo yiin Chang, Paul Komarek, Ross McIlroy, Mario Lučić, Guodong Zhang, Wael Farhan, Michael Sharman, Paul Natsev, Paul Michel, Yamini Bansal, Siyuan Qiao, Kris Cao, Siamak Shakeri, Christina Butterfield, Justin Chung, Paul Kishan Rubenstein, Shivani Agrawal, Arthur Mensch, Kedar Soparkar, Karel Lenc, Timothy Chung, Aedan Pope, Loren Maggiore, Jackie Kay, Priya Jhakra, Shibo Wang, Joshua Maynez, Mary Phuong, Taylor Tobin, Andrea Tacchetti, Maja Trebacz, Kevin Robinson, Yash Katariya, Sebastian Riedel, Paige Bailey, Kefan Xiao, Nimesh Ghelani, Lora Aroyo, Ambrose Slone, Neil Houlsby, Xuehan Xiong, Zhen Yang, Elena Gribovskaya, Jonas Adler, Mateo Wirth, Lisa Lee, Music Li,

Thais Kagohara, Jay Pavagadhi, Sophie Bridgers, Anna Bortsova, Sanjay Ghemawat, Zafarali Ahmed, Tianqi Liu, Richard Powell, Vijay Bolina, Mariko Iinuma, Polina Zablotskaia, James Besley, Da-Woon Chung, Timothy Dozat, Ramona Comanescu, Xiance Si, Jeremy Greer, Guolong Su, Martin Polacek, Raphaël Lopez Kaufman, Simon Tokumine, Hexiang Hu, Elena Buchatskaya, Yingjie Miao, Mohamed Elhawaty, Aditya Siddhant, Nenad Tomasev, Jinwei Xing, Christina Greer, Helen Miller, Shereen Ashraf, Aurko Roy, Zizhao Zhang, Ada Ma, Angelos Filos, Milos Besta, Rory Blevins, Ted Klimenko, Chih-Kuan Yeh, Soravit Changpinyo, Jiaqi Mu, Oscar Chang, Mantas Pajarskas, Carrie Muir, Vered Cohen, Charline Le Lan, Krishna Haridasan, Amit Marathe, Steven Hansen, Sholto Douglas, Rajkumar Samuel, Mingqiu Wang, Sophia Austin, Chang Lan, Jiepu Jiang, Justin Chiu, Jaime Alonso Lorenzo, Lars Lowe Sjösund, Sébastien Cevey, Zach Gleicher, Thi Avrahami, Anudhyan Boral, Hansa Srinivasan, Vittorio Selo, Rhys May, Konstantinos Aisopos, Léonard Hussenot, Livio Baldini Soares, Kate Baumli, Michael B. Chang, Adrià Recasens, Ben Caine, Alexander Pritzel, Filip Pavetic, Fabio Pardo, Anita Gergely, Justin Frye, Vinay Ramasesh, Dan Horgan, Kartikeya Badola, Nora Kassner, Subhrajit Roy, Ethan Dyer, Víctor Campos Campos, Alex Tomala, Yunhao Tang, Dalia El Badawy, Elspeth White, Basil Mustafa, Oran Lang, Abhishek Jindal, Sharad Vikram, Zhitao Gong, Sergi Caelles, Ross Hemsley, Gregory Thornton, Fangxiaoyu Feng, Wojciech Stokowiec, Ce Zheng, Phoebe Thacker, Çağlar Ünlü, Zhishuai Zhang, Mohammad Saleh, James Svensson, Max Bileschi, Piyush Patil, Ankesh Anand, Roman Ring, Katerina Tsihlias, Arpi Vezer, Marco Selvi, Toby Shevlane, Mikel Rodriguez, Tom Kwiatkowski, Samira Daruki, Keran Rong, Allan Dafoe, Nicholas FitzGerald, Keren Gu-Lemberg, Mina Khan, Lisa Anne Hendricks, Marie Pellat, Vladimir Feinberg, James Cobon-Kerr, Tara Sainath, Maribeth Rauh, Sayed Hadi Hashemi, Richard Ives, Yana Hasson, Eric Noland, Yuan Cao, Nathan Byrd, Le Hou, Qingze Wang, Thibault Sottiaux, Michela Paganini, Jean-Baptiste Lespiau, Alexandre Moufarek, Samer Hassan, Kaushik Shivakumar, Joost van Amersfoort, Amol Mandhane, Pratik Joshi, Anirudh Goyal, Matthew Tung, Andrew Brock, Hannah Sheahan, Vedant Misra, Cheng Li, Nemanja Rakićević, Mostafa Dehghani, Fangyu Liu, Sid Mittal, Junhyuk Oh, Seb Noury, Eren Sezener, Fantine Huot, Matthew Lamm, Nicola De Cao, Charlie Chen, Sidharth Mudgal, Romina Stella, Kevin Brooks, Gautam Vasudevan, Chenxi Liu, Mainak Chain, Nivedita Melinkeri, Aaron Cohen,

Venus Wang, Kristie Seymore, Sergey Zubkov, Rahul Goel, Summer Yue, Sai Krishnakumaran, Brian Albert, Nate Hurley, Motoki Sano, Anhad Mohananey, Jonah Joughin, Egor Filonov, Tomasz Kępa, Yomna Eldawy, Jiawern Lim, Rahul Rishi, Shirin Badiezadegan, Taylor Bos, Jerry Chang, Sanil Jain, Sri Gayatri Sundara Padmanabhan, Subha Puttagunta, Kalpesh Krishna, Leslie Baker, Norbert Kalb, Vamsi Bedapudi, Adam Kurzrok, Shuntong Lei, Anthony Yu, Oren Litvin, Xiang Zhou, Zhichun Wu, Sam Sobell, Andrea Siciliano, Alan Papir, Robby Neale, Jonas Bragagnolo, Tej Toor, Tina Chen, Valentin Anklin, Feiran Wang, Richie Feng, Milad Gholami, Kevin Ling, Lijuan Liu, Jules Walter, Hamid Moghaddam, Arun Kishore, Jakub Adamek, Tyler Mercado, Jonathan Mallinson, Siddhinita Wandekar, Stephen Cagle, Eran Ofek, Guillermo Garrido, Clemens Lombriser, Maksim Mukha, Botu Sun, Hafeezul Rahman Mohammad, Josip Matak, Yadi Qian, Vikas Peswani, Pawel Janus, Quan Yuan, Leif Schelin, Oana David, Ankur Garg, Yifan He, Oleksii Duzhyi, Anton Älgmyr, Timothée Lottaz, Qi Li, Vikas Yadav, Luyao Xu, Alex Chinien, Rakesh Shivanna, Aleksandr Chuklin, Josie Li, Carrie Spadine, Travis Wolfe, Kareem Mohamed, Subhabrata Das, Zihang Dai, Kyle He, Daniel von Dincklage, Shyam Upadhyay, Akanksha Maurya, Luyan Chi, Sebastian Krause, Khalid Salama, Pam G Rabinovitch, Pavan Kumar Reddy M, Aarush Selvan, Mikhail Dektiarev, Golnaz Ghiasi, Erdem Guven, Himanshu Gupta, Boyi Liu, Deepak Sharma, Idan Heimlich Shtacher, Shachi Paul, Oscar Akerlund, François-Xavier Aubet, Terry Huang, Chen Zhu, Eric Zhu, Elico Teixeira, Matthew Fritze, Francesco Bertolini, Liana-Eleonora Marinescu, Martin Bölle, Dominik Paulus, Khyatti Gupta, Tejasi Latkar, Max Chang, Jason Sanders, Roopa Wilson, Xuwei Wu, Yi-Xuan Tan, Lam Nguyen Thiet, Tulsee Doshi, Sid Lall, Swaroop Mishra, Wanming Chen, Thang Luong, Seth Benjamin, Jasmine Lee, Ewa Andrejczuk, Dominik Rabiej, Vipul Ranjan, Krzysztof Styrz, Pengcheng Yin, Jon Simon, Malcolm Rose Harriott, Mudit Bansal, Alexei Robsky, Geoff Bacon, David Greene, Daniil Mirylenka, Chen Zhou, Obaid Sarvana, Abhimanyu Goyal, Samuel Andermatt, Patrick Siegler, Ben Horn, Assaf Israel, Francesco Pongetti, Chih-Wei "Louis" Chen, Marco Selvatici, Pedro Silva, Kathie Wang, Jackson Tolins, Kelvin Guu, Roey Yogev, Xiaochen Cai, Alessandro Agostini, Maulik Shah, Hung Nguyen, Noah Ó Donnaille, Sébastien Pereira, Linda Friso, Adam Stambler, Adam Kurzrok, Chenkai Kuang, Yan Romanikhin, Mark Geller, ZJ Yan, Kane Jang, Cheng-

Chun Lee, Wojciech Fica, Eric Malmi, Qijun Tan, Dan Banica, Daniel Balle, Ryan Pham, Yanping Huang, Diana Avram, Hongzhi Shi, Jasjit Singh, Chris Hidey, Niharika Ahuja, Pranab Saxena, Dan Dooley, Srividya Pranavi Potharaju, Eileen O'Neill, Anand Gokulchandran, Ryan Foley, Kai Zhao, Mike Dusenberry, Yuan Liu, Pulkit Mehta, Ragha Kotikalapudi, Chalence Safranek-Shrader, Andrew Goodman, Joshua Kessinger, Eran Globen, Prateek Kolhar, Chris Gorgolewski, Ali Ibrahim, Yang Song, Ali Eichenbaum, Thomas Brovelli, Sahitya Potluri, Preethi Lahoti, Cip Baetu, Ali Ghorbani, Charles Chen, Andy Crawford, Shalini Pal, Mukund Sridhar, Petru Gurita, Asier Mujika, Igor Petrovski, Pierre-Louis Cedoz, Chenmei Li, Shiyuan Chen, Niccolò Dal Santo, Siddharth Goyal, Jitesh Punjabi, Karthik Kappaganthu, Chester Kwak, Pallavi LV, Sarmishta Velury, Himadri Choudhury, Jamie Hall, Premal Shah, Ricardo Figueira, Matt Thomas, Minjie Lu, Ting Zhou, Chintu Kumar, Thomas Jurdi, Sharat Chikkerur, Yenai Ma, Adams Yu, Soo Kwak, Victor Åhdel, Sujeewan Rajayogam, Travis Choma, Fei Liu, Aditya Barua, Colin Ji, Ji Ho Park, Vincent Hellendoorn, Alex Bailey, Taylan Bilal, Huanjie Zhou, Mehrdad Khatir, Charles Sutton, Wojciech Rzadkowski, Fiona Macintosh, Konstantin Shagin, Paul Medina, Chen Liang, Jinjing Zhou, Pararth Shah, Yingying Bi, Attila Dankovics, Shipra Banga, Sabine Lehmann, Marissa Bredesen, Zifan Lin, John Eric Hoffmann, Jonathan Lai, Raynald Chung, Kai Yang, Nihal Balani, Arthur Bražinskas, Andrei Sozanschi, Matthew Hayes, Héctor Fernández Alcalde, Peter Makarov, Will Chen, Antonio Stella, Liselotte Snijders, Michael Mandl, Ante Kärman, Paweł Nowak, Xinyi Wu, Alex Dyck, Krishnan Vaidyanathan, Raghavender R, Jessica Mallet, Mitch Rudominer, Eric Johnston, Sushil Mittal, Akhil Udathu, Janara Christensen, Vishal Verma, Zach Irving, Andreas Santucci, Gamaleldin Elsayed, Elnaz Davoodi, Marin Georgiev, Ian Tenney, Nan Hua, Geoffrey Cideron, Edouard Leurent, Mahmoud Alnahlawi, Ionut Georgescu, Nan Wei, Ivy Zheng, Dylan Scandinaro, Heinrich Jiang, Jasper Snoek, Mukund Sundararajan, Xuezhi Wang, Zack Ontiveros, Itay Karo, Jeremy Cole, Vinu Rajashekhar, Lara Tumeh, Eyal Ben-David, Rishub Jain, Jonathan Uesato, Romina Datta, Oskar Bunyan, Shimu Wu, John Zhang, Piotr Stanczyk, Ye Zhang, David Steiner, Subhajit Naskar, Michael Azzam, Matthew Johnson, Adam Paszke, Chung-Cheng Chiu, Jaume Sanchez Elias, Afroz Mohiuddin, Faizan Muhammad, Jin Miao, Andrew Lee, Nino Vieillard, Jane Park, Jiageng Zhang, Jeff Stanway, Drew Garmon, Abhijit Karmarkar, Zhe

Dong, Jong Lee, Aviral Kumar, Luowei Zhou, Jonathan Evens, William Isaac, Geoffrey Irving, Edward Loper, Michael Fink, Isha Arkatkar, Nanxin Chen, Izhak Shafran, Ivan Petrychenko, Zhe Chen, Johnson Jia, Anselm Levskaya, Zhenkai Zhu, Peter Grabowski, Yu Mao, Alberto Magni, Kaisheng Yao, Javier Snaider, Norman Casagrande, Evan Palmer, Paul Suganthan, Alfonso Castaño, Irene Giannoumis, Wooyeol Kim, Mikołaj Rybiński, Ashwin Sreevatsa, Jennifer Prendki, David Soergel, Adrian Goedeckemeyer, Willi Gierke, Mohsen Jafari, Meenu Gaba, Jeremy Wiesner, Diana Gage Wright, Yawen Wei, Harsha Vashisht, Yana Kulizhskaya, Jay Hoover, Maigo Le, Lu Li, Chimezie Iwuanyanwu, Lu Liu, Kevin Ramirez, Andrey Khorlin, Albert Cui, Tian LIN, Marcus Wu, Ricardo Aguilar, Keith Pallo, Abhishek Chakladar, Ginger Perng, Elena Allica Abellan, Mingyang Zhang, Ishita Dasgupta, Nate Kushman, Ivo Penchev, Alena Repina, Xihui Wu, Tom van der Weide, Priya Ponnapalli, Caroline Kaplan, Jiri Simsa, Shuangfeng Li, Olivier Dousse, Fan Yang, Jeff Piper, Nathan Ie, Rama Pasumarthi, Nathan Lintz, Anitha Vijayakumar, Daniel Andor, Pedro Valenzuela, Minnie Lui, Cosmin Paduraru, Daiyi Peng, Katherine Lee, Shuyuan Zhang, Somer Greene, Duc Dung Nguyen, Paula Kurylowicz, Cassidy Hardin, Lucas Dixon, Lili Janzer, Kiam Choo, Ziqiang Feng, Biao Zhang, Achintya Singhal, Dayou Du, Dan McKinnon, Natasha Antropova, Tolga Bolukbasi, Orgad Keller, David Reid, Daniel Finchelstein, Maria Abi Raad, Remi Crocker, Peter Hawkins, Robert Dadashi, Colin Gaffney, Ken Franko, Anna Bulanova, Rémi Leblond, Shirley Chung, Harry Askham, Luis C. Cobo, Kelvin Xu, Felix Fischer, Jun Xu, Christina Sorokin, Chris Alberti, Chu-Cheng Lin, Colin Evans, Alek Dimitriev, Hannah Forbes, Dylan Bannarse, Zora Tung, Mark Omernick, Colton Bishop, Rachel Sterneck, Rohan Jain, Jiawei Xia, Ehsan Amid, Francesco Piccinno, Xingyu Wang, Praseem Banzal, Daniel J. Mankowitz, Alex Polozov, Victoria Krakovna, Sasha Brown, MohammadHossein Bateni, Dennis Duan, Vlad Firoiu, Meghana Thotakuri, Tom Natan, Matthieu Geist, Ser tan Girgin, Hui Li, Jiayu Ye, Ofir Roval, Reiko Tojo, Michael Kwong, James Lee-Thorp, Christopher Yew, Danila Sinopalnikov, Sabela Ramos, John Mellor, Abhishek Sharma, Kathy Wu, David Miller, Nicolas Sonnerat, Denis Vnukov, Rory Greig, Jennifer Beattie, Emily Caveness, Libin Bai, Julian Eisenschlos, Alex Korchemniy, Tomy Tsai, Mimi Jasarevic, Weize Kong, Phuong Dao, Zeyu Zheng, Frederick Liu, Fan Yang, Rui Zhu, Tian Huey Teh, Jason Sanmiya, Evgeny Gladchenko, Nejc Trdin, Daniel

Toyama, Evan Rosen, Sasan Tavakkol, Linting Xue, Chen Elkind, Oliver Woodman, John Carpenter, George Papamakarios, Rupert Kemp, Sushant Kifle, Tanya Grunina, Rishika Sinha, Alice Talbert, Diane Wu, Denese Owusu-Afriyie, Cosmo Du, Chloe Thornton, Jordi Pont-Tuset, Pradyumna Narayana, Jing Li, Saaber Fatehi, John Wieting, Omar Ajmeri, Benigno Urias, Yeongil Ko, Laura Knight, Amélie Héliou, Ning Niu, Shane Gu, Chenxi Pang, Yeqing Li, Nir Levine, Ariel Stolovich, Rebeca Santamaria-Fernandez, Sonam Goenka, Wenny Yustalim, Robin Strudel, Ali Elqursh, Charlie Deck, Hyo Lee, Zonglin Li, Kyle Levin, Raphael Hoffmann, Dan Holtmann-Rice, Olivier Bachem, Sho Arora, Christy Koh, Soheil Hassas Yeganeh, Siim Pöder, Mukarram Tariq, Yanhua Sun, Lucian Ionita, Mojtaba Seyedhosseini, Pouya Tafti, Zhiyu Liu, Anmol Gulati, Jasmine Liu, Xinyu Ye, Bart Chrzasczcz, Lily Wang, Nikhil Sethi, Tianrun Li, Ben Brown, Shreya Singh, Wei Fan, Aaron Parisi, Joe Stanton, Vinod Koverkathu, Christopher A. Choquette-Choo, Yunjie Li, TJ Lu, Abe Ittycheriah, Prakash Shroff, Mani Varadarajan, Sanaz Bahargam, Rob Willoughby, David Gaddy, Guillaume Desjardins, Marco Cornero, Brona Robenek, Bhavishya Mittal, Ben Albrecht, Ashish Shenoy, Fedor Moiseev, Henrik Jacobsson, Alireza Ghaffarkhah, Morgane Rivière, Alanna Walton, Clément Crepy, Alicia Parrish, Zongwei Zhou, Clement Farabet, Carey Radebaugh, Praveen Srinivasan, Claudia van der Salm, Andreas Fidjeland, Salvatore Scellato, Eri Latorre-Chimoto, Hanna Klimczak-Plucińska, David Bridson, Dario de Cesare, Tom Hudson, Piermaria Mendolicchio, Lexi Walker, Alex Morris, Matthew Mauger, Alexey Guseynov, Alison Reid, Seth Odoom, Lucia Lohrer, Victor Cotruta, Madhavi Yenugula, Dominik Grewe, Anastasia Petrushkina, Tom Duerig, Antonio Sanchez, Steve Yadlowsky, Amy Shen, Amir Globerson, Lynette Webb, Sahil Dua, Dong Li, Surya Bhupatiraju, Dan Hurt, Haroon Qureshi, Ananth Agarwal, Tomer Shani, Matan Eyal, Anuj Khare, Shreyas Rammohan Belle, Lei Wang, Chetan Tekur, Mihir Sanjay Kale, Jinliang Wei, Ruoxin Sang, Brennan Saeta, Tyler Liechty, Yi Sun, Yao Zhao, Stephan Lee, Pandu Nayak, Doug Fritz, Manish Reddy Vuyyuru, John Aslanides, Nidhi Vyas, Martin Wicke, Xiao Ma, Evgenii Eltyshhev, Nina Martin, Hardie Cate, James Manyika, Keyvan Amiri, Yelin Kim, Xi Xiong, Kai Kang, Florian Luisier, Nilesh Tripuraneni, David Madras, Mandy Guo, Austin Waters, Oliver Wang, Joshua Ainslie, Jason Baldridge, Han Zhang, Garima Pruthi, Jakob Bauer, Feng Yang, Riham Mansour, Jason Gelman, Yang Xu, George Polovets, Ji Liu, Hong-

- long Cai, Warren Chen, XiangHai Sheng, Emily Xue, Sherjil Ozair, Christof Angermueller, Xiaowei Li, Anoop Sinha, Weiren Wang, Julia Wiesinger, Emmanouil Koukoumidis, Yuan Tian, Anand Iyer, Madhu Gurumurthy, Mark Goldenson, Parashar Shah, MK Blake, Hongkun Yu, Anthony Urbanowicz, Jennimaria Palomaki, Chrisantha Fernando, Ken Durden, Harsh Mehta, Nikola Momchev, Elahe Rahimtoroghi, Maria Georgaki, Amit Raul, Sebastian Ruder, Morgan Redshaw, Jinhyuk Lee, Denny Zhou, Komal Jalan, Dinghua Li, Blake Hechtman, Parker Schuh, Milad Nasr, Kieran Milan, Vladimir Mikulik, Juliana Franco, Tim Green, Nam Nguyen, Joe Kelley, Aroma Mahendru, Andrea Hu, Joshua Howland, Ben Vargas, Jeffrey Hui, Kshitij Bansal, Vikram Rao, Rakesh Ghiya, Emma Wang, Ke Ye, Jean Michel Sarr, Melanie Moranski Preston, Madeleine Elish, Steve Li, Aakash Kaku, Jigar Gupta, Ice Pasupat, Da-Cheng Juan, Milan Someswar, Tejvi M., Xinyun Chen, Aida Amini, Alex Fabrikant, Eric Chu, Xuanyi Dong, Amruta Muthal, Senaka Buthpitiya, Sarthak Jauhari, Nan Hua, Urvashi Khandelwal, Ayal Hitron, Jie Ren, Larissa Rinaldi, Shahar Drath, Avigail Dabush, Nan-Jiang Jiang, Harshal Godhia, Uli Sachs, Anthony Chen, Yicheng Fan, Hagai Taitelbaum, Hila Noga, Zhuyun Dai, James Wang, Chen Liang, Jenny Hamer, Chun-Sung Ferng, Chenel Elkind, Aviel Atias, Paulina Lee, Vít Listík, Mathias Carlen, Jan van de Kerkhof, Marcin Pikus, Krunoslav Zaher, Paul Müller, Sasha Zykova, Richard Stefanec, Vitaly Gatsko, Christoph Hirnschall, Ashwin Sethi, Xingyu Federico Xu, Chetan Ahuja, Beth Tsai, Anca Stefanoiu, Bo Feng, Keshav Dhandhanania, Manish Katyal, Akshay Gupta, Atharva Parulekar, Divya Pitta, Jing Zhao, Vivaan Bhatia, Yashodha Bhavnani, Omar Alhadlaq, Xiaolin Li, Peter Dannenberg, Dennis Tu, Alex Pine, Vera Filippova, Abhipso Ghosh, Ben Limonchik, Bhargava Urala, Chaitanya Krishna Lanka, Derik Clive, Yi Sun, Edward Li, Hao Wu, Kevin Hongtongsak, Ianna Li, Kalind Thakkar, Kuanysh Omarov, Kushal Majumdar, Michael Alverson, Michael Kucharski, Mohak Patel, Mudit Jain, Maksim Zabelin, Paolo Pelagatti, Rohan Kohli, Saurabh Kumar, Joseph Kim, Swetha Sankar, Vineet Shah, Lakshmi Ramachandruni, Xiangkai Zeng, Ben Bariach, Laura Weidinger, Tu Vu, Alek Andreev, Antoine He, Kevin Hui, Sheleem Kashem, Amar Subramanya, Sissie Hsiao, Demis Hassabis, Koray Kavukcuoglu, Adam Sadovsky, Quoc Le, Trevor Strohman, Yonghui Wu, Slav Petrov, Jeffrey Dean, and Oriol Vinyals. Gemini: A family of highly capable multimodal models, 2024. URL <https://arxiv.org/abs/2312.11805>.
- [27] Octo Model Team, Dibya Ghosh, Homer Walke, Karl Pertsch, Kevin Black, Oier Mees, Sudeep Dasari, Joey Hejna, Tobias Kreiman, Charles Xu, Jianlan Luo, You Liang Tan, Lawrence Yunliang Chen, Pannag Sanketi, Quan Vuong, Ted Xiao, Dorsa Sadigh, Chelsea Finn, and Sergey Levine. Octo: An open-source generalist robot policy, 2024. URL <https://arxiv.org/abs/2405.12213>.
- [28] Ze Yang, Yun Chen, Jingkan Wang, Sivabalan Manivasagam, Wei-Chiu Ma, Anqi Joyce Yang, and Raquel Urtasun. Unisim: A neural closed-loop sensor simulator, 2023. URL <https://arxiv.org/abs/2308.01898>.
- [29] Tianhe Yu, Ted Xiao, Austin Stone, Jonathan Tompson, Anthony Brohan, Su Wang, Jaspier Singh, Clayton Tan, Dee M, Jodilyn Peralta, Brian Ichter, Karol Hausman, and Fei Xia. Scaling robot learning with semantically imagined experience, 2023. URL <https://arxiv.org/abs/2302.11550>.