

Thermodynamic inequalities in superfluid

A.F. Andreev*, L.A. Melnikovsky†

November 5, 2018

*P.L.Kapitza Institute for Physical Problems
Russian Academy of Sciences,
Kosygin str., 2, 119334, Moscow, Russia*

Abstract

We investigate general thermodynamic stability conditions for the superfluid. This analysis is performed in an extended space of thermodynamic variables containing (along with the usual thermodynamic coordinates such as pressure and temperature) superfluid velocity and momentum density. The stability conditions lead to *thermodynamic inequalities* which replace the Landau superfluidity criterion at finite temperatures.

1 Introduction

Usually in experiments the vortices destroy superfluidity at velocities far below the Landau critical velocity. This is why the superfluid hydrodynamics equations can be expanded in powers of low velocities and one safely uses the first nontrivial terms of this expansion.

Nevertheless, there is a number of experiments (see [1]) where the superfluid flow is investigated in small orifices. It has been shown that in these circumstances the maximum velocity is a decreasing function of the orifice width and may reach the order of the Landau critical velocity if the aperture is small enough. This means that all thermodynamic quantities of the superfluid become nontrivial functions of the not small superfluid velocity (*i.e.*, it depends not only on the usual thermodynamic coordinates such as pressure and temperature). The only assumption one can make (and we do it) is that the fluid at rest is isotropic. This quite general statement of the problem is used in the paper; we find the complete set of thermodynamic inequalities in this light, *i.e.*, the conditions imposed on thermodynamic functions for the superfluid to remain stable.

Finally we employ the Landau phonon-roton model to calculate the highest velocity compatible with obtained thermodynamic inequalities and show that it can be interpreted as a critical velocity. This thermodynamic scenario supposedly explains the superfluidity break-up in small orifices.

2 Stability

When deriving general superfluid hydrodynamic equations it is usually supposed [2] that each infinitesimal volume of the liquid is (locally) in equilibrium and this equilibrium is stable. For the state of the liquid to be stable, it should provide an entropy maximum (at least local) for an isolated system. Instead of investigating the condition of the entropy maximality, it is convenient [3] to use another, equivalent to the first one, condition,

*E-mail: andreev@kapitza.ras.ru

†E-mail: leva@kapitza.ras.ru

that is the condition of the energy minimality under constant entropy and additive integrals of motion. Thus, to examine if the state is stable or not, one must investigate the second variation of the energy. Such analysis will provide sufficient conditions for the energy minimality.

Total energy of the superfluid E_{tot} is an integral of the energy density E over the entire volume

$$E_{\text{tot}} = \int E \, \text{d}\mathbf{r}. \quad (1)$$

The energy density can be obtained via a Galilean transformation

$$E = \frac{\rho v_s^2}{2} + \mathbf{v}_s \mathbf{j}_0 + E_0. \quad (2)$$

Here \mathbf{v}_s is the superfluid velocity, ρ is the mass density and subscript 0 denotes quantities measured in the frame of reference of the superfluid component (that is the frame where the superfluid velocity is zero). Namely, E_0 and \mathbf{j}_0 are the energy density and the momentum density (or, equally, the mass flux) with respect to the superfluid component. The former is a function of ρ , \mathbf{j}_0 , and the entropy density S . Its differential can be written as

$$\text{d}E_0 = T \, \text{d}S + \mu \, \text{d}\rho + \mathbf{w} \, \text{d}\mathbf{j}_0, \quad (3)$$

where Lagrange multipliers T , μ , and \mathbf{w} are the temperature, the chemical potential, and the so-called relative velocity of normal and superfluid components. The liquid is isotropic and, consequently, the velocity \mathbf{w} and the momentum density \mathbf{j}_0 are parallel to each other, as expressed by

$$\mathbf{j}_0 = j_0(T, \rho, w) \frac{\mathbf{w}}{w}.$$

This leads to a useful identity for the partial derivatives of \mathbf{j}_0 with respect to \mathbf{w} :

$$\left(\frac{\partial j_0^k}{\partial w^l} \right)_{T, \rho} = \frac{w^k w^l}{w^2} \left(\frac{\partial j_0}{\partial w} \right)_{T, \rho} + \left(\frac{\delta^{kl}}{w} - \frac{w^k w^l}{w^3} \right) j_0. \quad (4)$$

Further transforming (2), we can rewrite it with the help of (3) in the form

$$\text{d}E = T \, \text{d}S + \left(\mu + \frac{v_s^2}{2} - \mathbf{v}_s \mathbf{v}_n \right) \text{d}\rho + (\mathbf{j} - \rho \mathbf{v}_n) \text{d}\mathbf{v}_s + \mathbf{v}_n \, \text{d}\mathbf{j}, \quad (5)$$

where we denoted the total momentum density $\mathbf{j} = \rho \mathbf{v}_s + \mathbf{j}_0$ and the normal velocity $\mathbf{v}_n = \mathbf{v}_s + \mathbf{w}$.

As usual, stability implies that each ‘‘allowed’’ fluctuation increases the total energy of the system E_{tot} . Allowed are the fluctuations leaving conserved quantities unchanged. This means that the minimality of E_{tot} must be investigated under fixed entropy and all additive integrals of motion: mass, momentum, and superfluid velocity. While the conservation of mass and momentum is well-known, conservation of the superfluid velocity worths a special comment. Really, since the superfluid flow is irrotational, the velocity \mathbf{v}_s is a gradient of a scalar: $\mathbf{v}_s = \nabla \phi$. The same is true for the time derivative $\dot{\mathbf{v}}_s = \nabla \dot{\phi}$. This formula expresses the conservation of all three components of the vector

$$\mathbf{V}_s = \int \mathbf{v}_s \, \text{d}\mathbf{r}. \quad (6)$$

Consider a macroscopic fluctuation of all the variables δS , $\delta \rho$, $\delta \mathbf{v}_s$, and $\delta \mathbf{j}$. They are conserved and this ensures that the first variation of the total energy for a uniform system is identically zero

$$\delta E_{\text{tot}} = \int \left(\left(\frac{\partial E}{\partial S} \right)_{\rho, \mathbf{v}_s, \mathbf{j}} \delta S + \left(\frac{\partial E}{\partial \rho} \right)_{S, \mathbf{v}_s, \mathbf{j}} \delta \rho + \left(\frac{\partial E}{\partial \mathbf{v}_s} \right)_{S, \rho, \mathbf{j}} \delta \mathbf{v}_s + \left(\frac{\partial E}{\partial \mathbf{j}} \right)_{S, \rho, \mathbf{v}_s} \delta \mathbf{j} \right) \text{d}\mathbf{r} \equiv 0. \quad (7)$$

The minimality criterion must be obtained as the condition of the positive definiteness of the second differential quadratic form. The matrix of this quadratic form is a Jacobian matrix 8×8 :

$$Q = \left\| \frac{\partial(T, \mathbf{v}_n, \mu + v_s^2/2 - \mathbf{v}_s \mathbf{v}_n, \mathbf{j} - \rho \mathbf{v}_n)}{\partial(S, \mathbf{j}, \rho, \mathbf{v}_s)} \right\|. \quad (8)$$

Common rule states that it is positive definite if all principal minors M_1, M_2, \dots, M_8 in the top-left corner are positive. We recursively test these minors:

- The first positivity condition

$$M_1 = \frac{\partial(T, \mathbf{j}, \rho, \mathbf{v}_s)}{\partial(S, \mathbf{j}, \rho, \mathbf{v}_s)} = \frac{\partial(T, \mathbf{j}, \rho, \mathbf{v}_s)}{\partial(T, \mathbf{v}_n, \rho, \mathbf{v}_s)} \frac{\partial(T, \mathbf{v}_n, \rho, \mathbf{v}_s)}{\partial(S, \mathbf{j}, \rho, \mathbf{v}_s)} = \left(\frac{\partial j_0}{\partial w} \right)_{T, \rho} \left(\left(\frac{\partial S}{\partial T} \right)_{\rho, w} \left(\frac{\partial j_0}{\partial w} \right)_{T, \rho} - \left(\frac{\partial j_0}{\partial T} \right)_{\rho, w}^2 \right)^{-1} > 0$$

corresponds to the usual requirement of the heat capacity positivity. It is shown below that $(\partial j_0 / \partial w)_{T, \rho} > 0$, hence the last inequality eventually becomes

$$\left(\frac{\partial S}{\partial T} \right)_{\rho, w} \left(\frac{\partial j_0}{\partial w} \right)_{T, \rho} - \left(\frac{\partial j_0}{\partial T} \right)_{\rho, w}^2 > 0. \quad (9)$$

- Positivity of the next group of minors is easily verified with the following transformation

$$Q' = \left\| \frac{\partial(T, \mathbf{v}_n, \rho, \mathbf{v}_s)}{\partial(S, \mathbf{j}, \rho, \mathbf{v}_s)} \right\| = \left\| \frac{\partial(T, \mathbf{j}, \rho, \mathbf{v}_s)}{\partial(S, \mathbf{j}, \rho, \mathbf{v}_s)} \right\| \left\| \frac{\partial(T, \mathbf{v}_n, \rho, \mathbf{v}_s)}{\partial(T, \mathbf{j}, \rho, \mathbf{v}_s)} \right\|. \quad (10)$$

Whether the minors M_2, M_3, M_4 are positive is determined by the second multiplier in (10). Required condition is therefore equivalent to the positive definiteness of the matrix

$$\left\| \left(\frac{\partial \mathbf{j}}{\partial \mathbf{v}_n} \right)_{T, \rho, \mathbf{v}_s} \right\|^{-1} = \left\| \left(\frac{\partial \mathbf{j}_0}{\partial \mathbf{w}} \right)_{T, \rho} \right\|^{-1} = \left\| \begin{pmatrix} (\partial j_0 / \partial w)_{T, \rho} & 0 & 0 \\ 0 & j_0 / w & 0 \\ 0 & 0 & j_0 / w \end{pmatrix} \right\|^{-1}.$$

Here we used (4) and chosen the direction of the \mathbf{w} vector as the first coordinate. This adds to our collection two more inequalities

$$\mathbf{j}_0 \mathbf{w} \geq 0, \quad (11)$$

$$\left(\frac{\partial j_0}{\partial w} \right)_{T, \rho} > 0. \quad (12)$$

- The same transformation applied to the biggest minors gives:

$$Q = Q' \left\| \frac{\partial(T, \mathbf{v}_n, \mu + v_s^2/2 - \mathbf{v}_s \mathbf{v}_n, \mathbf{j} - \rho \mathbf{v}_n)}{\partial(T, \mathbf{v}_n, \rho, \mathbf{v}_s)} \right\| = Q' Q''.$$

Again, the minors M_5, M_6, M_7, M_8 correspond to nontrivial principal minors of Q'' . We use the thermodynamic identity to relate the chemical potential μ and the conventional pressure p

$$d\mu = \frac{dp}{\rho} - \frac{S}{\rho} dT + \mathbf{v}_s d\mathbf{w}.$$

This gives

$$\left(\frac{\partial (\mu + v_s^2/2 - \mathbf{v}_s \mathbf{v}_n)}{\partial \rho} \right)_{T, \mathbf{v}_n, \mathbf{v}_s} = \left(\frac{\partial \mu}{\partial \rho} \right)_{T, \mathbf{w}} = \frac{1}{\rho} \left(\frac{\partial p}{\partial \rho} \right)_{T, w}.$$

The following is an explicit representation of Q'' sub-matrix corresponding to a four-dimensional space $\rho, v_s^x, v_s^y, v_s^z$; as before we let the x -axis run along \mathbf{w} direction. Using (4) we obtain

$$\left\| \begin{array}{cccc} (\partial p / \partial \rho)_{T, w} / \rho & (\partial j_0 / \partial \rho)_{T, w} - w & 0 & 0 \\ (\partial j_0 / \partial \rho)_{T, w} - w & \rho - (\partial j_0 / \partial w)_{T, \rho} & 0 & 0 \\ 0 & 0 & \rho - j_0 / w & 0 \\ 0 & 0 & 0 & \rho - j_0 / w \end{array} \right\|.$$

Appropriate inequalities are:

$$\left(\frac{\partial p}{\partial \rho} \right)_{T, w} > 0, \quad (13)$$

which is literally a generalized (to a non-zero inter-component velocity w) positive compressibility requirement,

$$j_0 < w\rho, \quad (14)$$

and

$$\left(\frac{\partial p}{\partial \rho} \right)_{T, w} \left(\rho - \left(\frac{\partial j_0}{\partial w} \right)_{T, \rho} \right) - \rho \left(\left(\frac{\partial j_0}{\partial \rho} \right)_{T, w} - w \right)^2 > 0. \quad (15)$$

Inequalities (9), (11), (12), (13), (14), and (15) are sufficient conditions for the thermodynamic stability.

3 Discussion

In a “stopped-normal-component” arrangement, the mass flux \mathbf{f} with respect to the normal component may become more convenient than \mathbf{j}_0 —the mass flux relative to the superfluid one. The obvious relation between them $f = \rho w - j_0$ leads to the following reformulation of the inequalities:

$$\mathbf{f} \mathbf{w} < 0, \quad f < w\rho, \quad (16)$$

$$0 < \left(\frac{\partial f}{\partial w} \right)_{\rho, T} < \rho \quad (17)$$

$$\left(\frac{\partial S}{\partial T} \right)_{\rho, w} \left(\rho - \left(\frac{\partial f}{\partial w} \right)_{T, \rho} \right) > \left(\frac{\partial f}{\partial T} \right)_{\rho, w}^2, \quad (18)$$

$$\left(\frac{\partial p}{\partial \rho}\right)_{T,w} \left(\frac{\partial f}{\partial w}\right)_{\rho,T} > \rho \left(\frac{\partial f}{\partial \rho}\right)_{w,T}^2 \quad (19)$$

As a simple application of the derived inequalities, consider them at $w = 0$. From (16), (17), (18), and (19) we get

$$\left(\frac{\partial S}{\partial T}\right)_{\rho,w} > 0, \quad \left(\frac{\partial p}{\partial \rho}\right)_{T,w} > 0, \quad (20)$$

$$\rho > \left(\frac{\partial j_0}{\partial w}\right)_{T,\rho} > 0. \quad (21)$$

Using conventional notation, last inequality reads in the limit $w \rightarrow 0$

$$\rho_s > 0, \quad \rho_n > 0. \quad (22)$$

4 Phonon-Roton model

Here we provide a usage example of the stability criteria for real superfluid ^4He . To calculate derivatives involved in the inequalities one take refuge in the microscopic approach. Simple and clear Landau phonon-roton model works pretty well in wide temperature and velocity ranges. We use this model to calculate the contribution of these quasiparticles to the “modified” free energy in the frame of reference of the superfluid component:

$$\tilde{\mathcal{F}}_0 = \mathcal{F}_0 - \mathbf{w}\mathbf{j}_0. \quad (23)$$

Differential of this potential is given by

$$d\tilde{\mathcal{F}}_0 = -S dT - \mathbf{j}_0 d\mathbf{w}. \quad (24)$$

The modified free energy is obtained from the excitation spectrum with a conventional formula

$$\tilde{\mathcal{F}}_0 = T \int \ln \left(1 - \exp \left(\frac{\mathbf{p}\mathbf{w} - \epsilon(p)}{T} \right) \right) \frac{d\mathbf{p}}{(2\pi\hbar)^3}. \quad (25)$$

We denoted the excitation energy $\epsilon(p)$, which is given for two branches by the expressions

$$\epsilon_{\text{ph}}(p) = cp, \quad \epsilon_{\text{r}}(p) = \Delta + \frac{(p - p_0)^2}{2m}. \quad (26)$$

Here and below, subscripts distinguish the quantities related to phonons and rotons, c is the sound velocity, Δ is the roton energy gap, m is the effective mass, and p_0 is the momentum at the roton minimum¹. A small dimensionless parameter $m\Delta/p_0^2 \sim 0.03 \ll 1$ ensures, *e.g.*, that the Landau critical velocity is determined by $v_L = \Delta/p_0$.

¹Data taken from [4, 5]: $\rho = 0.145 \text{ g/cm}^3$, $\Delta = 8.7 \text{ K}$, $m = 0.16m_{\text{He}}$, $p_0 = 3.673 \cdot 10^8 \text{ g}^{-1/3} \rho^{1/3} \hbar$, $c = 23800 \text{ cm/s}$, $\partial\Delta/\partial\rho = -0.47 \cdot 10^{-14} \text{ cm}^5 \text{ s}^{-2}$, $\partial m/\partial\rho = -0.45 \cdot 10^{-23} \text{ cm}^3$, $\partial c/\partial\rho = 467 \cdot 10^3 \text{ cm}^4 \text{ s}^{-1} \text{ g}^{-1}$.

When integrated, these dispersion laws give the following contributions to the free energy:

$$\tilde{\mathcal{F}}_{0,\text{ph}} = -\frac{T^4\pi^2}{90\hbar^3c^3} \left(1 - \frac{w^2}{c^2}\right)^{-2}, \quad (27)$$

$$\tilde{\mathcal{F}}_{0,\text{r}} = -\frac{T^{5/2}m^{1/2}}{2^{1/2}\pi^{3/2}\hbar^3} \frac{p_0}{w} \sinh \frac{wp_0}{T} \exp\left(-\frac{\Delta}{T}\right). \quad (28)$$

One can obtain all² thermodynamic variables by differentiating this potential. Namely

$$S = -\left(\frac{\partial\tilde{\mathcal{F}}_0}{\partial T}\right)_{w,\rho},$$

$$j_0 = -\left(\frac{\partial\tilde{\mathcal{F}}_0}{\partial w}\right)_{T,\rho}.$$

Inequality (15) is the first to become invalid. Appropriate validity region is plotted in Fig. 1. The liquid is unstable above the curve.

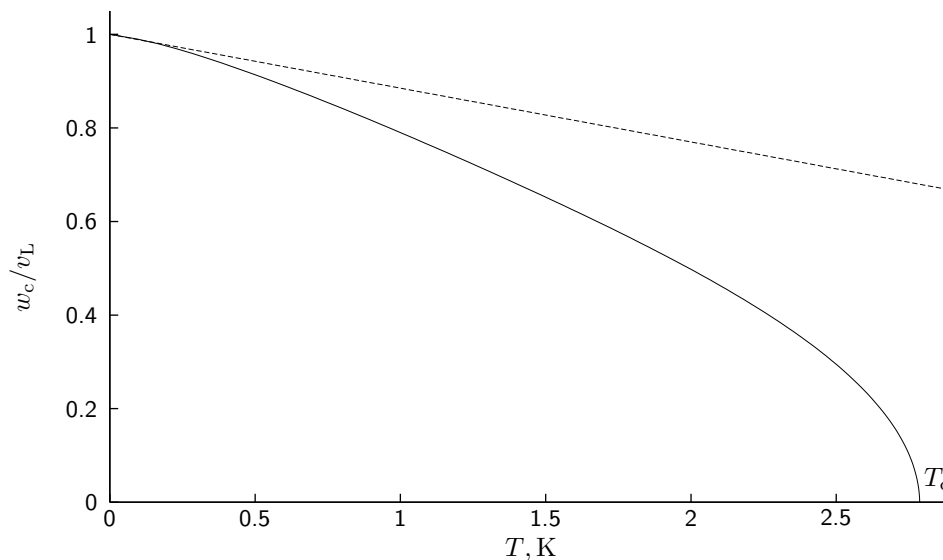


Figure 1: Critical velocity w_c versus temperature T at normal pressure. Dashed line corresponds to the equation $T = \Delta - p_0w$. Note that the condition $T < \Delta - p_0w$ holds true over entire stability domain. The “stability” critical velocity w_c coincides with the Landau critical velocity v_L at zero temperature and vanishes completely (22) at the critical temperature T_c (the λ -point). In the phonon-roton model the critical temperature is $T_c \approx 2.8$ K.

At zero temperature the critical velocity becomes the Landau critical velocity v_L . It should also be noted that for systems where all quasiparticles can be described hydrodynamically (in other words, systems lacking roton branch) inequality (15) at zero temperature includes $(\partial p/\partial \rho)_{T,w} - w^2 > 0$ *i.e.*, $w < c$.

²We neglect the quasiparticle contribution to the pressure derivative because it is just a small correction to the speed of sound.

5 Conclusion

Experimentally, the superfluidity break-up in small orifices is believed to have the following nature (see [1]). Until the aperture size is too small the critical velocity does not depend on the temperature and increases as the size decreases. This is the very behaviour that is specific to the vortex-related critical velocity.

When the orifice width is narrow enough the vortex-related critical velocity becomes so high, that the break-up scenario and its features change. The critical velocity does not depend on the aperture any more but decreases when the temperature increases. This behaviour is commonly associated (see [1]) with the Iordanski-Langer-Fisher mechanism (see [6]). Nevertheless, this association lacks numerical comparison because no reliable information about the actual orifice shape is available.

On the other side experimentally observed behaviour of the critical velocity can be attributed to the suggested stability criterion. In other words we provide an alternative explanation of experimental results based on an assumption that in narrow orifices the thermodynamic limit of w_c is reached.

We should also note that our approach to the critical velocity as a stability limit is similar to that used by Kramer[7]. Actually the inequality he employed is not a thermodynamic one. Moreover, generally speaking it is wrong. But numerical results for the critical velocity he obtained using the phonon-roton model do not deviate much from those plotted in Fig.1.

6 Acknowledgments

It is a pleasure for us to thank I.A.Fomin for useful discussions. This work was supported in parts by INTAS grant 01-686, CRDF grant RP1-2411-MO-02, RFBR grant 03-02-16401, and RF president program.

References

- [1] E.Varoquaux, W.Zimmermann, and O.Avnel, in *Excitations in Two-Dimensional and Three-Dimensional Quantum Fluids*, edited by A.F.G.Wyatt and H.J.Lauter (NATO ASI Series, Plenum Press, New York-London, 1991), p.343.
- [2] I.M.Khalatnikov, *An Introduction to the theory of superfluidity*. (W.A.Benjamin, New York-Amsterdam 1965).
- [3] L.D.Landau, E.M.Lifshitz, *Statistical Physics*, part 1 (Pergamon Press, Oxford, 1980).
- [4] R.J.Donnelly, P.H.Roberts, *Journal of Low Temperature Physics*, **27**, 687 (1977).
- [5] R.J.Donnelly, J.A.Donnelly, R.N.Hills, *Journal of Low Temperature Physics*, **44**, 471 (1981).
- [6] J.S.Langer, J.D.Reppy, *Prog. Low. Temp. Phys.*, Vol. VI, ed. C.J.Gorter (North-Holland, Amsterdam, 1970) Ch.1.
- [7] L.Kramer, *Phys. Rev.*, **179**, 149 (1969).