A mean-field analysis of community structure in social and kin networks

Eric Durand† I

Michael G.B. Blum[‡] Olivier François[†]

November 15, 2018

†TIMB Department of Mathematical Biology, TIMC UMR 5525, Fac. Méd., Grenoble Universités, F38706 La Tronche cedex, France

‡Department of Human Genetics, University of Michigan, 2017 Palmer Commons, 100 Washtenaw Ave., Ann Arbor, MI 48109-2218, USA

Corresponding author: olivier.francois@imag.fr

Abstract

We provide a mean-field analysis of community structure of social and biological networks assuming that actors are able to evaluate some tree-derived distance to the other actors and tend to aggregate with the less distant. We show that such networks have small components, and give exact descriptions for the probability distribution of a typical community size and the number of communities. In particular, we show that the probability distribution of the community size is wellapproximated by a power-law distribution with exponent two. We illustrate the robustness of the mean-field analysis by comparing its predictions on previously studied social networks and biological data.

Key-words: Community structure - Random trees - Coalescence - Distributional recursions - power laws - kin networks - kin selection.

1 Introduction

Social networks have recently emerged as a paradigm of the complexity of human or animal interactions (Newman, 2003; Wasserman and Faust, 1994; Franck, 1998; Scott, 2000). Such networks are sets of actors with some pattern of contacts or interactions between pairs represented as edges in a graph. It is widely assumed that most social networks show *community structure*, i.e., groups of strongly connected vertices, with few connections between groups (Girvan and Newman, 2002). Community structure gives raise to a hierarchy of nested social relationships, which in turn can be thought of as a special kind of binary tree called a *dendrogram* (e.g. Guimera et al., 2003; Arenas et al., 2004).

Algorithms that seek community structure in graphs often attempt to reconstruct such a tree, and those that do so generally fall in two main categories: hierarchical clustering and edge removal (Scott, 2000; Girvan and Newman, 2002; Newman, 2004; Radicchi et al., 2004). In this study, we adopt a slightly different perspective on social networks, in which the network itself derives from a hierarchical process represented as a tree. The novelty is that the trees are considered as unobserved/hidden data, and there is no attempt to reconstruct them. Instead, the trees are viewed as random objects which enable us to make predictions about the shape of the observed community structure.

The network formation requires the actors to have an ability of assessing a (perhaps subjective) distance deduced from the tree (see Boguña, 2004 and references therein for similar postulates). Such distances are sometimes called *ultrametric*. Then the network evolves from the preferential attachment of each actor to the subset of her less distant actors. Here we present a meanfield analysis of community structure under this model. More specifically we describe the probability distributions of a typical community size, and the number of communities in the network.

In Section 2, we give a description of the mean-field theory for tree-derived networks, and show that the quantities of interest are involved in recursive distributional equations. In Section 3, we prove that the networks have small components, with community size depending logarithmically of the network size, while the number of communities depends linearly on the network size. Then we study a variant of model with additional clustering, and obtain a number of useful extensions of the previous results. Section 4 illustrates and tests the robustness of the mean-field theory on two lists of examples, one from the social network literature, and the second from the social object and ecology literature.

2 Mean-field models

Trees. Ruling the basic principles of social network formation is an highly difficult task. There is a large tradition in sociology for extracting community structure from a general network by cluster analysis (Scott, 2000; Newman, 2003). This method assumes a hierarchical organization of the network based on pair similarities (or distances). Cluster analysis can generally be represented by a binary tree structure (a dendrogram). Starting with n vertices and no edges, one adds one edge between the pair with the strongest similarities. Then, the two vertices are aggregated, and the distances to remaining vertices are recalculated. The process is iterated until all vertices aggregate. The connection between social network and trees is also exploited in reconstruction algorithms that remove edges to the network progressively (Girvan and Newman, 2003).

In this study we assume that the network derives from a tree. The tree has internal branches that links the internal nodes to the root, and external branches that starts from the tips. The network is formed by going backward along external branches of the tree until a first ancestor is met. Edges are then drawn from each tip to all the descendants of the ancestor obtained in this process. We call this type of construction a *kin network* by analogy with biological networks where the tree represents a common genealogy. This construction is actually inspired from a biological process called *kin recognition* in which related individuals can recognize their kin, and attach preferentially to their closest relatives. This process forms the basis for the evolution of altruism (Hamilton, 1964). In the sequel this model is also referred to as the *perfect clustering* model in contrast with an imperfect clustering model presented afterwards.

Proposing models of random interactions between actors using learning and rationality to evolve the structure is a standard approach in sociology and sociobiology (see Skyrms and Pemantle, 2000 an references therein). Because it is more amenable to analysis, we consider a *mean-field* approximation of these interactions through the underlying tree process. In the mean-field approximation, the tree is random. It starts with n tips (the actors), adds one edge between a randomly chosen pair, and then coalesces the two tips into an ancestor. This model is often called a coalescent tree (see Aldous, 1999), and arises as a robust approximation of the neutral genealogical process in population genetics (Kingman, 1982). In analogy with studies of genetic polymorphism, we never attempt to reconstruct the tree. The coalescent model is used as a basis for analyzing data such as community sizes or number of communities in a network. Still in analogy with population genetics, the coalescent tree may also serve as a model for testing the null-hypothesis that social networks evolve under random/neutral interactions.

Recursive definition of random trees. Random coalescent trees share the same topology as other well-studied branching processes (Yule, 1924; Harding, 1971; Aldous, 2001). Considering *n* tips, these trees have the particular property that the size L_n of the left sister clade at the basal split of the tree has uniform distribution over the set $\{1, \ldots, n-1\}$

$$P(L_n = \ell) = \frac{1}{n-1}, \quad \ell = 1, \dots, n-1,$$

and this property is also valid within each subtree. From this, Aldous (1996) proposed a recursive definition of dendrograms through a *split distribution*, the distribution of the left sister clade given the size of the parent clade. The connection been random trees and recursive structures have been exploited by Blum and François (2005a) to prove results about minimal clades in the neutral coalescent. Their results can be rephrased to say that the outdegree out_n of an arbitrary vertex in a network with perfect clustering has a power-law distribution with exponent $\alpha = 3$. More precisely we have

$$P[out_n = x] = \frac{4}{x(x+1)(x+2)}, \quad x = 1, \dots, n-2,$$

and $P[out_n = n - 1] = 2/n(n - 1)$, where *n* is the network size. Power-laws are not surprising in this context since this parallels similar results for (perhaps undirected) networks with incremental construction such as the Albert-Barabasi model (Albert and Barabasi, 2002) or the Price model (Price, 1965). See also (Newman, 2003) and (Durrett, 2006).

Imperfect clustering. Communities in real social networks may sometimes consist of two or several subcommunities whereas this property is partly missing in the perfect clustering model for which each community is a clade subtended by and edge that connects a tip. Therefore we consider a modification of the basic model that tolerates *imperfect clustering* without modifying the underlying tree model. In the imperfect clustering model, communities may sometimes arise from the random coalescence of two previously formed clusters in addition to those created from the perfect clustering process. We also assume that the random clustering events occur during the construction process at a rate p, called the *clustering rate* (See Fig.1).

Distributional recursions. In this work the recursive definition of random trees is exploited to study the mathematical properties of community structure under the mean-field model. This is done by using distributional recursions. We call a *typical community* the network cluster that contains the leftmost tip in the underlying tree (the tip labelled 1). Because in the mean-field model the n actors play exchangeable roles, studying the leftmost actor's community amounts to study an arbitrary community. We denote the community size by S_n for n the total network size. Obviously, we have $S_2 = 2$, and $S_3 = 3$. To give a recursive definition of S_n (and then forget the tree), let us split the tree at the root so that two sister clades of sizes L_n and $R_n = n - L_n$ are obtained, and let $I_n = \min(L_n, R_n)$. The community size S_n can be recursively defined by $S_n = n$ if $I_n = 1$, otherwise $S_n = S_{L_n}$. In this definition, the replicates of L_n are recursively sampled from the uniform distribution. The above set of recursive equations basically translates the idea of self-similarity and the scale-free property for a typical community size, but it also provides us with an efficient simulation algorithm for the probability distribution of S_n that avoids the simulation of the tree itself. Sets of recursive distributional equations such as those described here also appear in computer science and are natural in the analysis of random divide-and-conquer algorithms (Rösler, 2001; Hwang and Neinninger, 2002; Blum and François, 2005b). Regarding the number of communities N_n we have $N_2 = N_3 = 1$. Like S_n , N_n is involved in a set of recursive distributional equations. The number of communities can actually be defined as $N_n = 1$ if $I_n = 1$, and otherwise $N_n = N_{L_n} + N_{R_n}^*$ where N_n^* denotes an independent copy of N_n . Again the above recursive equations provide an efficient simulation algorithm for the probability distribution of N_n .

Turning to the model with imperfect clustering, the equations for the community size S_n change as follows. We now have $S_n = n$ if $I_n = 1$,

otherwise

$$S_n = \begin{cases} n & \text{with probability } p \\ S_{L_n} & \text{with probability } q \end{cases}$$

where q = 1 - p. Regarding the number of communities we have $N_n = 1$ if $I_n = 1$, and otherwise,

$$N_n = \begin{cases} 1 & \text{with probability } p \\ N_{L_n} + N_{R_n}^* & \text{with probability } q \end{cases}$$

Community structure in the mean-field model and recursive computations for N_n are illustrated in Fig.1 where an example with n = 12 vertices and perfect and imperfect clustering is presented.

3 Community size and the number of communities

3.1 Typical community size

Probability distribution. We consider the probability distribution of S_n , and denote it by $p_n(x) = P(S_n = x)$ for all $2 \le x < n$. Then, for large n, we have

$$p_n(2) \sim \frac{e-2}{e},$$

and for all $x \ge 3$, we have

$$p_n(x) \sim (-1)^{x+1} 2x! \frac{e^{-1} - e(x)}{x-1}, \quad \text{as } n \to \infty$$
 (1)

where $e(x) = \sum_{k=2}^{x} (-1)^k / k!$ is defined as the exponential sum function $e_x(z)$ at the point z = -1. In particular, for x = 3, we obtain that $p_n(3) \approx 2(3-e)/e$, etc.

The key argument for obtaining the above probability distribution is the use of the recursive equations defining S_n . From the formula of conditional probabilities, we see that the $p_n(x)$'s are involved in sets of recursions of the following form

$$p_{n+1}(x) = (1 - \frac{1}{n})p_n(x) + \frac{1}{n}p_{n-1}(x)$$

for $n \ge x + 1$. For x = 2, the initial values are $p_2(2) = 1$ and $p_3(2) = 0$. For $x \ge 3$, the recursions start from $p_x(x) = 2/(x-1)$ and $p_{x+1}(x) = 0$.

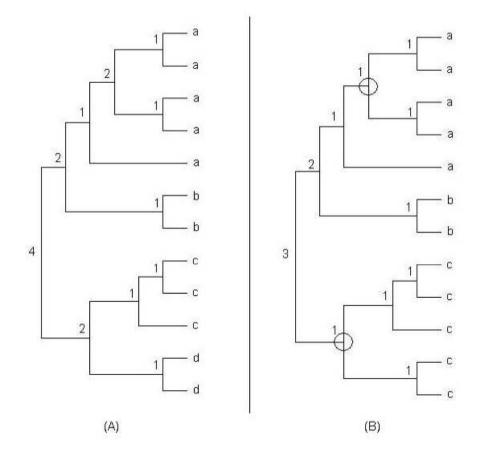


Figure 1: Recursive computations of N_n for n = 12. (A) Perfect clustering: the network has 4 communities. (B) Imperfect clustering: Two clustering events occur and are symbolized by circles. The network has 3 communities. Letters at the tips stand for community labels.

The proof of the result stated in Eq. 1 follows from considerations about the differences $u_{n+1} = p_{n+1} - p_n$ and elementary calculations. Numerical computations show that the approximations given by Eq. 1 are accurate for $n \ge 20$. For large x and n, there is a perfect agreement with a power-law distribution of exponent $\alpha = 2$

$$p(x) \sim \frac{2}{(x+1)(x-1)}$$
, as $x \to \infty$.

Numerical computations (not reported) show that the large n - large x approximations are accurate for $x \ge 25$ and $n \ge 100$.

Expected community size. The above result suggests that under the mean-field model with perfect clustering, the size of a community grows to infinity as the number of actors increases. Here we give a more precise result, which states that the growth is in fact very slow. Considering the expected size, we denote $s_n = E[S_n]$, and obtain that

$$s_n \sim 2\log(n), \quad \text{as } n \to \infty.$$

In other words the kin networks studied here have small components. The sets of recursions for s_n are similar to that obtained for p_n . Actually we have

$$s_{n+1} = (1 - \frac{1}{n})s_n + \frac{s_{n-1}}{n} + \frac{2}{n}, \quad n \ge 3,$$

and the initial values are $s_2 = 2$ and $s_3 = 3$. The equation involving the difference u_n can also be solved, and leads to $u_n = 2A_{n-1}/n!$ where A_{n-1} is the alternating factorial sum (Sloane's sequence number A005165 in EIS)). For large n, we obtain that $u_n \sim 2/n$ using (Abramowitz and Stegun 1970) and this leads us to the conclusion that $s_n \sim 2(\gamma + \log(n))$ with γ the Euler constant. To establish comparisons with the sequence $2\log n$, we find that $s_n/\log n \approx 2.04$ for n = 1000, and $s_n/\log n \approx 2.02$ for n = 100,000.

More generally, if we let $s_n^k = E[S_n^k]$, $k \ge 1$, denote the kth moment of the community size S_n , then for large n and $k \ge 2$, we obtain that

$$s_n^k \sim \frac{2k}{k-1} n^{k-1}$$
, as $n \to \infty$.

In particular we have $s_n^2 \sim 4n$, and the variance of S_n grows as 4n.

3.2 Number of communities

Probability distribution of the number of communities. The probability distribution of N_n can be computed exactly by solving a triangular system. If we let $\pi_n(x) = P(N_n = x)$ for all integer x, we have $\pi_n(1) = 2/(n-1)$, and

$$\pi_n(x) = \frac{1}{n-1} \sum_{\ell=2}^{n-2} \sum_{y=1}^{x-1} \pi_\ell(y) \pi_{n-\ell}(x-y) \quad 1 \le x \le \lfloor n/2 \rfloor.$$

Expected Number of communities. The expected number of communities is proportional to the number of vertices in the network

$$e_n = E[N_n] \sim cn, \quad c = \frac{1 - e^{-2}}{4} = 0.216\dots$$

for large n. From the recursive definition and a basic use of conditional probabilities, we obtain subsets of recursive equations for all the moments of N_n . In particular, the expected number of communities satisfies the following recursion

$$e_{n+1} = \left(1 - \frac{1}{n}\right)e_n + \frac{2}{n}e_{n-1}, \quad n \ge 3$$

where the initial values are $e_2 = e_3 = 1$. In the appendix, we show that this leads to

$$e_n = (1 - e^{-2})(n+2)/4 + O(2^n/(n-1)!).$$

Convergence in probability. To see a convergence in probability result, remark that $t_n = E[N_n^2]$ solves the recursion

$$t_{n+1} - t_n = -(t_n - t_{n-1})/n + t_{n-1}/n + 2(r_{n+1} - r_n)/n,$$

with the residual term r_n equal to $r_n = \sum_{i=2}^{n-2} e_i e_{n-i}$. Having proved $e_n \sim cn$ for large n, we can check that the residual difference term is equivalent to $r_{n+1} - r_n = c^2 n^2 / 2 + o(n^2)$. This leads to $E[N_n^2] = c^2 n^2 + o(n^2)$ which can be translated into a convergence in probability result $(N_n/n \to c)$ by a standard application of the Chebischev's inequality.

3.3 Imperfect clustering

Assuming imperfect clustering at rate p modifies the recursions for S_n and N_n , and complicates their mathematical analysis. Nevertheless, the main results can be summarized as follows (see the Appendix for details).

Community size. Assume that the clustering rate is positive p > 0. For $1 < x \le n$, we let $p_n(x) = P(S_n = x)$. Then, we have for all $n \ge x + 1$

$$p_{n+1}(x) = (1 - \frac{1}{n})p_n(x) + \frac{q}{n}p_{n-1}$$
(2)

where $p_x(x) = p + 2q/(x-1)$ and $p_{x+1}(x) = 0$.

To discuss the probability distribution of S_n under imperfect clustering, let us distinguish the case x = 2 from the general case. For x = 2, Eq. 2 starts with the initial values $p_2(2) = 1$ and $p_3(2) = 0$. We set

$$I(p) = q \int_0^1 y^2 e^{qy} (1-y)^{-p} dy$$

When n grows to infinity, we obtain that

$$p_n(2) \sim \frac{e^{-q}}{\Gamma(q)} I(p) n^{-p}, \quad n \to \infty$$

For $p \to 0+$, we have

$$\frac{e^{-q}}{\Gamma(q)}I(p) = \frac{e-2}{e} + ap + O(p^2).$$

With $a = e(\gamma - 1 + e^{-1}E_i(1, 1)) = 0.0639$ (E_i is the exponential integral, see Abramowitz and Stegun, 1970). For x > 2, we denote $f_n = p_{n+x}(x)$, and we have

$$(n+x-1)f_n = (n+x-2)f_{n-1} + qf_{n-2},$$
(3)

where $f_0 = p + 2q/(x-1)$ and $f_1 = 0$. Using notations similar as above, we set

$$I_x(p) = q(2 + (x - 3)p) \int_0^1 y^x e^{qy} (1 - y)^{-p} dy,$$

and, we obtain that for large n,

$$p_n(x) \sim \frac{e^q}{(x-1)\Gamma(q)} I_x(p) n^{-p}$$

The expected value $s_n = E[S_n]$ solves the following recursion

$$s_{n+1} = \left(1 - \frac{1}{n}\right)s_n + \frac{q}{n}s_{n-1} + 2\left(p + \frac{q}{n}\right)$$

where the initial values are $s_2 = 2$ and $s_3 = 3$. The solution satisfies

$$s_n \sim \frac{2p}{1+p}n, \quad n \to \infty$$

for 0 .

Number of communities. Regarding the number of communities, we let $\pi_n(x) = P(N_n = x)$. Then the distribution π_n can be calculated using triangular induction as follows

$$\pi_n(1) = p + \frac{2q}{n-1},$$

and

$$\pi_n(x) = \frac{q}{n-1} \sum_{\ell=2}^{n-2} \sum_{y=1}^{x-1} \pi_\ell(y) \pi_{n-\ell}(x-y) \,, \quad 2 \le x \le \lfloor n/2 \rfloor \,.$$

We can use the above set of recursive equations to compute exact distributions up to network sizes greater than n = 500. In addition these equations enable us to obtain maximum likelihood estimates of the clustering rate \hat{p} using either basic grid or more elaborate dichotomic searches.

The expected number of communities e_n is involved in the following recursion

$$e_{n+1} = \left(1 - \frac{1}{n}\right)e_n + 2\frac{q}{n}e_{n-1} + \frac{p}{n}, \quad n \ge 3$$

 $(e_2 = e_3 = 1)$, that can be solved, and when n grows to infinity, we find that

$$e_n \sim \begin{cases} c(p)n^{1-2p} & \text{if } p < \frac{1}{2}, \\ \\ \frac{1}{2}\log n & \text{if } p = \frac{1}{2}, \\ \\ \\ \frac{p}{2p-1} & \text{if } p > \frac{1}{2}, \end{cases}$$

where $0 \leq p < 1$,

$$c(p) \sim \frac{e^{-2q}}{\Gamma(2q)} \left(\frac{1}{q} + qJ(p)\right) ,$$

and

$$J(p) = 2 \int_0^1 y^2 e^{2qy} (1-y)^{1-2p} dy.$$

The exact expression of c(p) is not simple, but we have

.

$$c(p) \sim c + dp + o(p)$$
, as $p \to 0$

where

$$d = \frac{1}{2} E_{i}(1,2) + (\gamma - 2)e^{-2} + \log 2 + 1 \approx 0.7747$$

All the equations given in Sections 3.1-3.2 can be retrieved for p = 0. We see that the model undergoes a *phase transition* at p = 1/2 where, for p < 1/2 the network has essentially small components, and for p > 1/2 a giant component may emerge. Examples of the above described probability distributions with different network sizes are displayed in Fig.4.1-4.2. These graphics are taken from the real examples discussed in the next section.

4 Examples

4.1 Collaboration and frienship networks

Zachary's frienship network A much-analyzed example of social network is a karate club observed over two years by an anthropologist, Wayne Zachary in the 1970s (Zachary, 1977). The network of friendships among the club members has been depicted in a graph by White and Harary (2001). The "karate club" network of Zachary was studied previously by a number of other authors in this context (Girvan and Newman, 2002; Zhou, 2003). During the period of study, the club splitted in two with those closest to the leader (the karate teacher) following him, and those closest to the administrator as a result of a dispute between two factions. Previous studies have found that the fault lines along which the split occurred are readily visible in the structure of the network. The network size is n = 34 (number of club members). Under the mean-field model, we obtained $P(N_{34} \leq 2) = 0.087$, which can be considered as a one-sided p-value. We computed a one-sided p-value because the model is generally more likely to underestimate the true community size than overestimating (here we have $E[N_{34}] = 7.1 > 2$). The clustering rate was estimated as $\hat{p} = 0.58$. Assuming an error of p = 1/2during the network construction, the p-value raised to 0.704. In this and the next examples, the second p-value can be interpreted as a type-II error when the perfect clustering model is rejected against an imperfect clustering model. In the Zachary's club example, the perfect clustering model is rejected at the confidence level $\alpha = 0.087$, but the power of the test is low (around 0.3).

American football conferences An interesting example in Girvan and Newman (2002) is the network of United States college football, a representation of the schedule of Division I games for the 2000 season: vertices in the

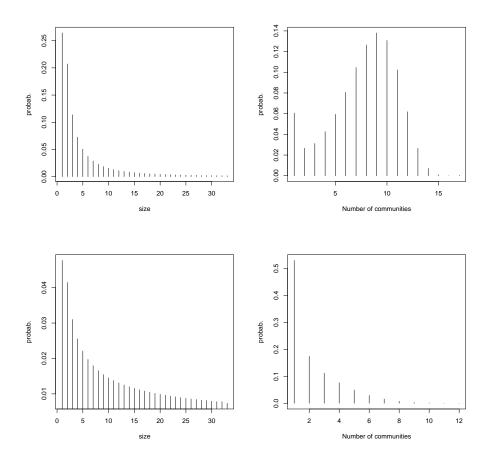


Figure 2: Probability distribution of S_{34} (left) and N_{34} (right) for p = 0 (up) and p = 0.5 (down) corresponding to Zachary's friendship network. Data from (Zachary 1977).

graph represent teams. It has a known community structure, and the reconstructed tree published in the original study matches the model presented here quite well (most communities end with an external branch). In this example the community structure come from geographical (and historical) relationships between colleges. The network has 115 teams and 12 conferences. Computing the distribution of the number of communities under the mean-field model, we obtained that $P(N_{115} \leq 16) = 0.063$. The estimated clustering rate was $\hat{p} = 0.2$, Assuming an error of p = 0.2 during the network construction, the p-value increases as $P(N_{115} \leq 16) = 0.654$.

Santa-Fe collaboration network. Girvan and Newman (2002) have also applied their community-finding method to a collaboration network of scientists at the Santa Fe Institute, an interdisciplinary research center in Santa Fe, New Mexico. The 118 vertices in this network represent the largest component of the collaboration graph among scientists in residence at the Santa Fe Institute during any part of calendar year 1999 or 2000 and their collaborators. An edge is drawn between a pair of scientists if they coauthored one or more articles during the same time period. The algorithm splits the network into six strong communities, which lead us to estimate a large clustering rate $\hat{p} = 0.36$. In this example the neutral model is rejected (p-value = 0.029), perhaps due to the fact that the algorithm found surprising groupings, and the network contains ties between researchers from traditionally disparate fields. Girvan and Newman conjectured that this feature may be peculiar to interdisciplinary centers like the Santa Fe Institute.

A remark about the average community size. The ecological or sociobiology literature is not always as formal as we are regarding the average community size. The typical community as studied here contains one prespecified individual. If there are N_n communities in the sample, then the average community size is generally computed as

Average community size
$$=\sum_{j=1}^{N_n} S_n^j / N_n$$

where the S_n^j are the sizes of the distinct communities within the sample. This quantity can be equivalently formulated as n/N_n , and its expectation differs from s_n . Among the examples in the previous section, only the football

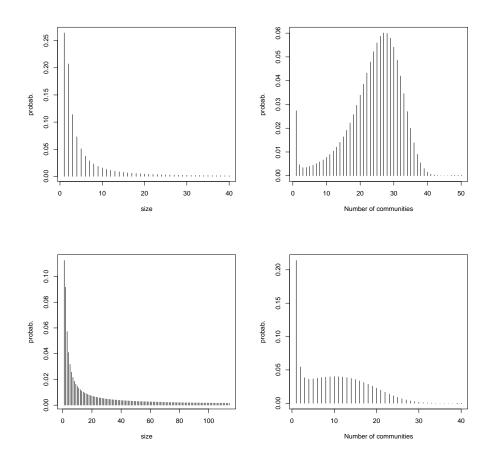


Figure 3: Probability distribution of S_{115} (left) and N_{115} (right) for p = 0 (up) and p = 0.2 (down) corresponding to the current American football conference network. Data from (Girvan and Newman 2002)

conferences met the criteria of large size and consistency with the mean-field model. In this case, we had $n/N_n = 9.58$ which was strinkingly close to $s_{115} \approx 2 \log(115) = 9.48$. In general, the bias can be stronger.

4.2 Groups in social animals

In the wild, social animals (and especially social carnivores) usually live in small sized groups. The groups are given different names according to the species. For example lions live in prides, dolphins live in pods, or wolves live in packs. A process called *kin-selection* was suggested by Hamilton (1964) as a mechanism for the evolution of altruistic behavior, and as one of the mechanism that may explain the formation of kin-networks in social animal species (Dawkins, 1989; Forster et al., 2006). The process can be sketch as follows. Since identical copies of genes may be carried in relatives, a gene that favors altruism may become successful provided the reproductive benefit gained by the recipient of the 'altruistic' act compares favorably to the reproductive cost to the individual performing the act. In this comparison, the reproductive benefit gained by the recipient is weighted by that the genetical relatedness (r) of the recipient, defined as the percentage of genes that those two individuals share by common descent. Kin-selection involves kin recognition at a basic level, and shares similarities with the aggregation model presented in this study. For instance, genetic relatedness corresponds to a natural measure of closeness between living organisms, and obviously derives from a (genealogical) tree.

In the next paragraphs we compare the mean-field model predictions with published data that report precise sample sizes and observed number of groups in Wolves and Lions, where kin-selection is often assumed to be acting (see e.g., Rodman, 1981). Many workers have proposed the alternative idea that the reason social carnivores live in groups, or packs, is because group hunting facilitates their acquisition of large prey (Mech 1970; Nudds 1978; Pulliam and Caraco 1978). However this idea is not shared by all, and recent summaries have argued that communal hunting has little power to explain group patterns in felids (Packer et al. 1990) and across social carnivores in general (Caro 1994). Beyond this discussion a general consensus that kin-selection contributes to the organization and evolution of animal social structures remains. Wolf packs. Grey wolves (*Canis lupus*) are pack-living animals with a complex social organization. Packs are primarily family groups. Packs include up to 30 individuals, but smaller sizes (8-12) are more common. A review of wolf social behavior and ecology can be found in Mech (1970). We use data from three sources: The Wolf project of Yellowstone national park which annually publishes accurate data on wolf pack sizes (Smith et al., 2002; 2004), and studies of wolf population recovery after quasi-extinction in Scandinavia (Wakkaben et al, 2001) and in Alaska (Ballard et al., 1987). When available, the total sample size was given as the number of sampled adults (in wolves the number of pups per packs is usually small). In 2002, n = 90 adult wolves were sampled in Yellowstone, living in 14 packs. From the mean-field analysis, we obtained that $P(N_{90} \le 14) = 0.17$. The clustering rate was $\hat{p} = 0.11$. Table 4.2 reports similar results for the year 2004. In the Alaska, n = 151wolves were sampled, living in 30 packs (number of pups not known). From the mean-field analysis, we obtained that $P(N_{151} \leq 30) = 0.31$. The clustering rate was $\hat{p} = 0.03$. In Scandinavia, 76 wolves were sampled, living in 12 packs (number of pups not known). From the mean-field analysis, we obtained that $P(N_{76} \le 16) = 0.18$. The clustering rate was $\hat{p} = 0.12$. The last two p-values may be slight underestimates because the pups were included in the sample.

African lions *Panthera leo* live in prides that typically consist Lion prides. of two males, 4-10 females and their offspring. The adult females are usually related to one another and are group members for life. A review of Serengeti lion behavior and ecology can be found in Schaffer (1972). We use recent data from three sources: Selous Game reserve Tanzania (Spong et al., 2002), Serengeti Tanzania (Packer et al. 2005), and Kafue Park Zambia (Carlson et al, 2004). The study of social and genetic structure of Selous Game reserve lions (Spong et al. 2004) reported the presence of 14 prides, with an average number of 5.6 adults (range 2-9) and 2 males in each pride. These observations can be turned into an estimate of 51 females in the sample. A recent survey of Serengeti lions reports the presence of about one hundred lionesses in the park (Packer et al. 2005). Based on an average of 6 females per pride, a number of 16-17 prides in Serengeti is consistent with the current data. At least 95 adult lions reside in the northern sector of Kafue National Park, either living in one of 14 prides or roaming as solitary males (Carlson et al., 2004). Among the adult lions, there are 31 males and 64 females (a sex ratio

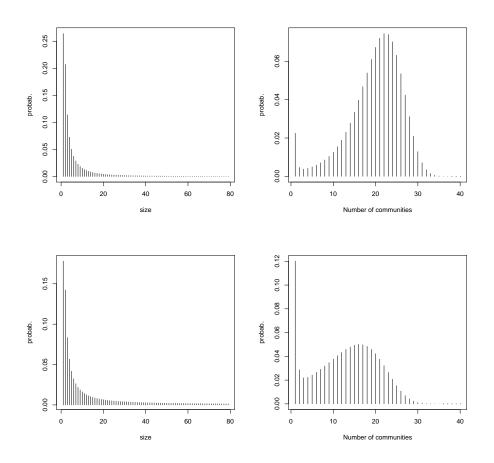


Figure 4: Probability distribution of S_{90} (left) and N_{90} (right) for p = 0 (up) and p = 0.1 (down) corresponding to wolf packs data (Smith et al. 2002).

of 1:2). Nine of the 14 prides did not have a sexually mature male residing with them. Pride sizes ranged from 2-14 adult animals (mean = 6.4 animals per pride). Of the 17 sexually mature males that were identified, six of them associated with prides of females while 11 lived either alone or in all-male dyads.

Table 4.2 reports results for the three samples. As for wolves, the lion samples exhibit high p-values and low estimates of the clustering rate \hat{p} . In addition, estimates for Zambia may be biased downward because we may have included males. Actual values of female counts would exhibit larger p-values, lower clustering rates, and an even stronger agreement with the mean-field model.

5 Discussion

The mean-field networks presented in this article are rough models of social aggregation based on a measure of similarity or kinship. While the network clearly reflects an aggregation process, this is also clear that the underlying tree model does not account for highly structured interactions.

The results obtained on several real-world networks and biological data have shown that the mean-field model is sufficiently robust to capture some essential patterns of group formation, especially if imperfect clustering is included. In the three examples of social networks, the mean-field model was however strongly rejected once (Sante Fe), and weakly rejected twice (Zachary's club and Football conferences). Although the test lack power, the fact that clustering rates were high suggests that interactions stronger than random may be shaping these networks.

The situation was different and perhaps more interesting in social canivore examples for which we observed stronger acceptance of the mean-field model. One perceptible conclusion from the results about wolves and lions is that the mean-field model predicts the number of communities quite well. This does not contradict the fact that more specific models may better explain community structure (e.g., Giraldeau and Caraco, 1993). Kin-selection is acknowledged to be a major actor of the evolution of social structures in wolves and lions, and kin recognition is believed to happen at the same time. Although the mean-field model includes kin recognition, it actually neglects the effects of selection, or assumes that selection has a very weak impact on the shape of the underlying genealogical process. This idea is consistent

A. Social networks:	network size	number of communities	p-value	rate \hat{p}
Zachary's	34	2	0.087	0.58
Sante-Fe	118	6	0.029	0.36
Football	115	12	0.063	0.2
B. Social carnivores:	sample size	number of packs/prides	p-value	rate \hat{p}
Yellowstone Wolf 2002	90	14	0.17	0.11
Yellowstone Wolf 2004	112	16	0.12	0.19
Alaska Wolf	151	30	0.31	0.03
Scandinavian Wolf	76	12	0.18	0.12
Zambia Kafue Lions	95	14	0.145	0.12
Selous Game Lions	51	13	0.64	0.00
Serengeti Lions	100	16	0.17	0.10

Table 1: Data on community structure. A. Social networks. B. Wolves and lions

with mathematical studies of selection processes (Neuhauser and Krone 1997, Krone and Neuhauser, 1997). Studying population genetics models with weak selection, Neuhauser and Krone (1997) actually remarked that weak selection does not modify the neutral coalescent topology significantly.

Although wolves/lions data agree with the perfect clustering mean-field model predictions, there are other social species for which the fit may be poorer. This may be the case of fish schools or large ungulate herds, where other models of group formation may be more appropriate (e.g., Bonabeau et al, 1999). For example, in an aerial survey of known and suspected wild camels habitat *Camelus bactrianus*, Reading et al. (1999) estimated group density and population size of large ungulates in the south-western Gobi Desert in Mongolia. They observed 277 Wild camels in 27 groups, which leads to a strong reject of the mean-field model (p-value = 0.026). The same is also true for Buffalos that live in herds much larger than the community size predicted by the mean-field model.

In summary, we have presented a mean-field analysis of community structure in tree-derived networks that includes an attachment process to closest vertex deduced from the tree. Our model is reasonably simple, and we have obtained exact results about the typical community sizes and the numbers of communities. While community structure in studied social networks has exhibited weak departures from the perfect clustering mean-field model, predictions of imperfect clustering models with higher clustering rates are consistent with the data. This suggests that stronger interactions than random may be present in these networks. Examples of social animals have provided a better fit to the mean-field model. In populations evolving altruistic behavior, the results suggest that kin-recognition may contribute to shape community structure more significantly than natural selection does itself.

References

- Abramowitz, M. and Stegun, I.A. (1970) Handbook of Mathematical Functions, New York: Dover, 1970
- [2] Albert, R. and Barabási, A.L. (2002) Statistical mechanics of complex systems. Reviews of Modern Physics. 74, 4797

- [3] Aldous, D. J. (1996) Probability distributions on cladograms. Pages 1-18 in Random Discrete Structures (D. J. Aldous, and R. Pemantle, eds.) Springer IMA Volumes Math. Appl. 76.
- [4] Aldous, D. J. (1999) Deterministic and stochastic models for coalescence (aggregation and coagulation): a review of the mean-field theory for probabilists. Bernoulli, 5:3-48.
- [5] Aldous, D. J. (2001) Stochastic models and descriptive statistics for phylogenetic trees, from Yule to Today. Statistical Science 16:23-34.
- [6] Arenas, A., Danon, L., Diaz-Guilera, A., Gleiser P. and Guimera, R. (2004) Community analysis in social networks. European Physics Journal B 38(2):373-380.
- [7] Ballard, W. B., Whitman, J.S. and Gardner, C.L. (1987) Ecology of an exploited wolf population in south-central Alaska. Wildlife Monographs, no. 98. The Wildlife Society, Inc., Bethesda, MD.
- [8] Blum, M.G.B. and François, O. (2005a) Minimal clade size and external branch length under the neutral coalescent. Advances in Applied Probability 37:647-662.
- [9] Blum M.G.B and François, O. (2005b) On statistical tests of phylogenetic imbalance: The Sackin and other indices revisited. Mathematical Biosciences 195:141-153.
- [10] Boguña, M., Pastor-Satorras, R., Diaz-Guilera A. and Arenas A. (2004) Models of social networks based on social distance attachment. Physical Review E 70: 056122.
- [11] Bonabeau, E., Dagorn, L., and Fréon, P. (1999) Scaling in animal group size distribution, Proceedings of the National Academy of Sciences 96:4472-4477.
- [12] Carlson, A.A., Carlson, R. and Bercovitch, F.B. (2004) Kafue National Park African Wild Dog Conservation Project. Kafue National Park, Zambia 2004 Annual Report, Zoological Society of San Diego.
- [13] Caro, T.M. (1994) Cheetahs of the Serengeti plains. University of chicago press.

- [14] Caraco, T. and Wolf, L.L. (1975) Ecological determinants of group sizes of foraging lions. American Naturalist 109:343-352.
- [15] Dawkins, R. (1989) The selfish gene. Oxford University Press.
- [16] Durrett, R. (2006) Book in preparation.
- [17] Foster, K.R., Wenseleers, T. and Ratnieks, F.L.W. (2006) Kin selection is the key to altruism. Trends in Ecology and Evolution, 21 2, 57-60.
- [18] Franck S.A. (1998) The foundation of social evolution, Princeton University Press.
- [19] R. Guimera, R., Danon, L., Diaz-Guilera, A., Giralt, F. and Arenas, A. (2003) Self-similar community structure in organizations. Physical Review E 68:065103.
- [20] Giraldeau, L.A. and Caraco, T. (1993). Genetic relatedness and group size in an aggregation economy. Evolutionary Ecology 7:429-438.
- [21] Girvan and M. E. J. Newman (2002) Community structure in social and biological networks. Proceedings of the National Academy of Sciences USA 99: 7821-7826.
- [22] Hamilton, W.D. (1964). The evolution of social behavior. Journal of Theoretical Biology 7:1-52.
- [23] Harding, E. F. (1971) The probabilities of rooted tree-shapes generated by random bifurcation. Advances in Applied Probability 3:44-77.
- [24] Hwang, H.-K. and Neininger, R. (2002) Phase change of limit laws in the quicksort recurrence under varying toll functions. SIAM Journal of Computing 31:1687-1722.
- [25] Kingman J.F.C. (1982) The coalescent. Stochastic Processes and their Applications 13:235-248.
- [26] Krone, S.M. and Neuhauser, C. (1997) The genealogy of samples in models with selection. Genetics 145:519-534.
- [27] Mech L.D. (1981) The wolf: the ecology and behavior of an endangered species. Minnea-polis: University of Minnesota Press.

- [28] Neuhauser, C. and Krone, S.M. (1997) Ancestral processes with selection. Theoretical population biology 51: 210-237.
- [29] Newman M.E.J. (2003) The structure and function of complex networks, SIAM Reviews 45, 167-256.
- [30] Newman, M.E.J., and Girvan, M. (2004) Finding and evaluating community structure in networks. Physical Review E 69: 026113.
- [31] Newman, M.E.J. (2004) Detecting community structure in networks. European Physical Journal B 38: 321-330.
- [32] Nudds, T. D. (1978) Convergence of group size strategies by mammalian social carnivores. American Naturalist 112:957-960.
- [33] Packer C., Scheel, D., Pusey A.E. (1990) Why lions form groups: food is not enough. American Naturalist 136:1-19
- [34] Packer C., Hilborn R., Mosser A., et al. (2005) Ecological Change, Group Territoriality, and Population Dynamics in Serengeti Lions. Science 307:389-393.
- [35] Price, D.J. de S. (1965) Networks of scientific papers. Science 149:510-515.
- [36] Pulliam, H. R., and Caraco., T. (1978) Living in groups: is there an optimal group size? Pages 122-147 in J. T. Krebs and N. B. Davies, eds. Behavioural ecology: an evolutionary approach. Sinauer, Sunderland, Mass.
- [37] Radicchi, F., Castellano, C., Cecconi, F., Loreto, V. and Parisi, D. (2004) Defining and identifying communities in networks. Proceedings of the National Academy of Sciences USA 101:26582663.
- [38] Rodman, P. S. (1981) Inclusive fitness and group size with a reconsideration of group size in lions and wolves. American Naturalist 118:275-283
- [39] Rösler, U. (2001) On the analysis of stochastic divide and conquer algorithms. Algorithmica 29:238261.
- [40] Scott, J. (2000) Social Network Analysis: A Handbook, Sage Publications, London, 2nd ed.

- [41] Sedgewick, R. and Flajolet, P. (1996) An Introduction to the Analysis of Algorithms, Addison-Wesley.
- [42] Schaller, G.B. (1972) The Serengeti Lion. Chicago: University of Chicago Press.
- [43] Smith, D.W., Stahler, D. G. and Guernsey, D.S. (2004) Yellowstone wolf project annual report, Yellowstone National Park.
- [44] Smith, D.W., Stahler, D. G. and Guernsey, D.S. (2002) Yellowstone wolf project annual report, Yellowstone National Park.
- [45] Spong, G., Stone, J., Creel, S. and Björklund, M. (2002) Genetic structure of lions (*Panthera leo L.*) in the Selous Game reserve. Journal of Evolutionary Biology 15:945-953.
- [46] Wabakken, P., Sand, H., Liberg, O. and Bjärvall, A. (2001) The recovery, distribution, and population dynamics of wolves on the Scandinavian peninsula, 1978-1998, Canadian Journal of Zoology 79(4):710-725.
- [47] Wasserman, S. and Faust, K. (1994) Social Network Analysis. Cambridge University Press, Cambridge.
- [48] White, D.R. and Harary, F. (2001) The cohesiveness of blocks in social networks: node connectivity and conditional density. Sociological Methodology 31:305-359.
- [49] Yule, G. U. (1924) A mathematical theory of evolution, based on the conclusions of Dr J.C. Willis. Philosophical Transactions of the Royal Society London Ser. B 213:21-87.
- [50] Zachary, W.W. (1977) An information flow model for conflict and fission in small groups. Journal of Anthropological Research 33:452-473.

Mathematical Appendix

Results for perfect clustering

Asymptotics of p(x) for large x (Distribution of S_n). We have

$$e^{-1} = \sum_{k=2}^{\infty} (-1)^k / k!$$

and then

$$e^{-1} - e(x) = \sum_{k=x+1}^{\infty} (-1)^k / k!$$

We deduce that

$$e^{-1} - e(x) = (-1)^{x+1}/(x+1)! + o(1/(x+1)!),$$

and plugging this into the formula for p(x), we obtain

$$p(x) \sim \frac{2}{(x-1)(x+1)}, \quad \text{as } x \to \infty$$

Second moment of S_n . Regarding the second order moment $s_n^2 = E[S_n^2]$, we find that the difference $u_{n+1} = s_{n+1}^2 - s_n^2$ satisfies

$$u_{n+1} = -\frac{1}{n}(u_n - 2(2n+1))$$

which can also be solved, and yields $u_n \sim (4A_{n+1} - 2A_n)/nn! \sim 4$ In conclusion we have

$$s_n^2 \sim 4n$$

Higher moments of S_n . Let us denote by $\phi_n(t) = E[e^{tS_n}]$ the moment generating function of S_n . Then using the formula of conditional probabilities we obtain a functional recurrence equation for $\phi_n(t)$

$$\phi_{n+1}(t) = (1 - \frac{1}{n})\phi_n(t) + \phi_{n-1}(t) + \frac{2}{n}e^{tn}(e^t - 1).$$
(4)

Now we set $f_n(t) = 2e^{tn}(e^t - 1)/n$, and see that the derivatives of $f_n(t)$ at t = 0 are equal to

$$f_n^{(k)}(0) = \frac{2(n+1)^{k-1}}{n} + 2((n+1)^{k-1} - n^{k-1})$$

for all $k \ge 1$. The *k*th moment of S_n , noted $s_n^{(k)}$ is equal to $\phi_n^{(k)}(0)$. Thus it solves the equation $s_{n+1}^{(k)} = (1 - s_n^{(k)}/n) + s_{n-1}^{(k)}/n + f_n^{(k)}(0)$. If we denote

 $u_n^{(k)} = s_{n+1}^{(k)} - s_n^k$, then for all $n \ge 2$, $k \ge 1$, we have $u_n^{(k)} = -u_{n-1}^{(k)}/n + f_n^{(k)}(0)$. Using the Newton's binome formula, we check that $f_n^{(k)}(0) \sim 2kn^{k-2}$ for large n. So we have $u_n^{(k)} + u_{n-1}^{(k)}/n = f_n^{(k)}(0) \sim 2kn^{k-2}$. Thus

$$u_n^{(k)} \sim 2kn^{k-2}$$

Finally, when n grows to infinity and $k \ge 2$, we have

$$s_n^{(k)} \sim \frac{2k}{k-1} n^{k-1}$$

as n grows to infinity.

Mean number of communities. The sequence f_n defined by $f_n = e_{n+2}$ satisfies

$$(n+1)f_n = (n-1)f_{n-1} + 2f_{n-2} \tag{5}$$

where the recursion is initialized as $f_0 = f_1 = 1$. Since the equation satisfied by f_n is a linear recurrence equation of order 2, f_n is a linear combination of two independent solutions of eq. (5). One straightforward solution of eq. (5) is

$$u_n = n + 4, \quad n \ge 2$$

with $u_0 = 4$ and $u_1 = 5$.

The rest of the proof is devoted to finding a solution v_n of eq. (5) with initial values $v_0 = 0$ and $v_1 = 1$. Let us denote h the generating function of v_n . Then we have

$$h(x) = \sum_{n=2}^{\infty} v_n x^n.$$

Using equation (5), we find that h is a solution of the following differential equation

$$h(x)(1 - 2x^{2} - x) = h'(x)(x^{2} - x) + 2x^{2} + 2x^{3}$$

Solving the above differential equation leads to

$$h(x) = \frac{e^{-2x} - 1}{(x-1)^2 x} + \frac{-x^4 + 2x^3 - 2x^2 + 2x}{(x-1)^2 x}$$

Using the Taylor expansion of h, we find that

$$v_n = (n+2) - \sum_{k=0}^n \frac{(-2)^k (n+1-k)}{(k+1)!} , n \ge 3$$

Since f_n is a linear combination of u_n and v_n

$$f_n = \frac{1}{4}u_n - \frac{1}{4}v_n,$$

we find that the expected value of the number of communities is given by

$$e_n = \frac{1}{2} + \frac{1}{2} \sum_{k=0}^{n-2} \frac{(-2)^k (n-1-k)}{(k+1)!}, \quad n \ge 4.$$

This can be rewritten as

$$e_n = \frac{1}{2} + \frac{1}{2} \left((n-1) \sum_{k=0}^{n-2} \frac{(-2)^k}{(k+1)!} - \sum_{k=0}^{n-2} \frac{(-2)^k k}{(k+1)!} \right)$$

Since the rest (beginning with term n) of convergent alternating series is dominated by the absolute value of the $(n + 1)^{th}$ of the series, we have

$$e_n = \frac{1}{2} - \frac{1}{4} \left((n-1) \sum_{k=0}^{\infty} \frac{(-2)^k}{(k+1)!} - \sum_{k=0}^{\infty} \frac{(-2)^k k}{(k+1)!} + O(2^n/(n-1)!) \right).$$

For large n, this leads to

$$e_n = \frac{1 - e^{-2}}{4}(n-1) + \frac{3(1 - e^{-2})}{4} + O(2^n/(n-1)!).$$

Results for imperfect clustering

Here the results are presented in a reversed order compared to the text. We first prove results for the mean number of communities (easier), and give a sketch of proof for the mean community size.

Mean number of communities. Assuming imperfect clustering at rate p, the expected number of communities solves the following equation:

$$(n+1)e_{n+2} = ne_{n+1} + 2qe_n + p \tag{6}$$

with the initial values $e_2 = e_3 = 1$. For $p \neq \frac{1}{2}$ we set $f_n = e_{n+2} - p/(2p-1)$, and obtain that

$$(n+1)f_n = nf_{n-1} + 2qf_n (7)$$

Let us denote by $h_f(x)$ the generating function of f_n

$$h_f(x) = \sum_{n=2}^{\infty} f_n x^n.$$

We first investigate a solution f_n to equation (7) with $f_0 = 0$ and $f_1 = 1$. The generating function solves the following differential equation

$$(1 - x - 2qx^2)y = (x^2 - x)y' + 2x^2 + 2qx^3$$
(8)

The analytical solution of equation (8) is given by

$$h(x) = \frac{(x-1)^{-2q}e^{-2qx}}{x}\frac{e^{-2i\pi p}}{q} + \frac{-qx^2 - 1}{qx}$$

A series expansion leads to

$$f_n = \frac{1}{q} \frac{\Gamma(n+1+2q)}{\Gamma(2q)(n+1)!} + \frac{1}{q} \sum_{i=0}^n \frac{\Gamma(n-i+2q)}{\Gamma(2q)(n-i)!} \frac{(2q)^{i+1}}{(i+1)!}$$

for all $n \ge 2$. Using the fact that $\frac{\Gamma(n+2q)}{n!} \sim n^{1-2p}$, we find that

$$f_n \sim \frac{e^{-2q}}{q\Gamma(2q)} n^{1-2p}$$

Now we seek a solution to equation (7) with $f_0 = 1$ and $f_1 = 0$. The generating function can be involved in the following differential equation

$$(1 - x - 2qx^2)y = (x^2 - x)y' + 2qx^2$$
(9)

The analytical solution of equation (9) is

$$h(x) = \frac{1}{x} \int_0^x 2(y-1)^{1-2p} y^2(p-1) e^{2yq} dy \frac{e^{-2xq}}{(x-1)^{2q}}$$

Using Darboux' result, Theorem 4.12 in (Sedgewick and Flageolet, 1996), we find that

$$f_n \sim e^{-2q} n^{1-2p} \int_0^1 2(1-y)^{1-2p} y^2 q e^{-2yq} dy$$

Finally, adding the two previous solutions, we find that the solution of the original problem is equivalent to

$$e_n \sim \begin{cases} \frac{e^{-2q}}{\Gamma(2q)} \left(\frac{1}{q} + qI(p)\right) n^{1-2p} & \text{if } p < 1/2\\ \frac{p}{2p-1} & \text{if } p > 1/2 \end{cases}$$

where we have set

$$I(p) = 2 \int_0^1 (1-y)^{1-2p} y^2 e^{2qy} dy.$$

In the case p = 1/2, e_n satisfies the equation

$$(n+1)e_{n+2} = ne_{n+1} + e_n + \frac{1}{2}$$

Denoting $u_n = e_{n+1} - e_n$, we obtain that $u_n \sim 1/2n$ and thus we have $e_n \sim \log n/2$.

Community size. Assuming imperfect clustering at rate p, the mean community size s_n satisfies the following recursive equation

$$s_{n+1} = (1 - \frac{1}{n})s_n + \frac{q}{n}s_{n-1} + 2p + \frac{2q}{n}$$

Let us denote

$$u_n = \frac{2p}{1+p}n,$$

and

$$f_n = s_n - u_n.$$

We remark that u_n satisfies the following equation

$$u_{n+1} = (1 - \frac{1}{n})u_n + \frac{q}{n}u_{n-1} + 2p + \frac{2pq}{n(1+p)}.$$

Thus, we have

$$nf_{n+1} = (n-1)f_n + qf_{n-1} + (2q - \frac{2pq}{1+p})$$

Applying the same method as in the previous paragraph for p > 0, we obtain that

$$f_n = s_n - u_n \sim K$$

where K is a constant term. Then this is routine to conclude that

$$s_n \sim u_n = \frac{2p}{1+p}n,$$

which is also in good agreement with numerical values for moderate n.