

# A NON-LINEAR DYNAMICAL SYSTEMS' PROOF OF KRAFT-MCMILLAN INEQUALITY AND ITS CONVERSE

Nithin Nagaraj

School of Natural Sciences and Engineering  
National Institute of Advanced Studies

**Email:** nithin\_nagaraj@yahoo.com

October 31, 2007

In this short paper, we shall provide a dynamical systems' proof of the famous Kraft-McMillan inequality and its converse. Kraft-McMillan inequality is a basic result in information theory which gives a necessary and sufficient condition for the lengths of the codewords of a code to be uniquely decodable [1, 2, 3].

## 1 Kraft-McMillan Inequality

Given a binary prefix code set  $C$  for an alphabet set  $A$ , the codewords  $c_1, c_2, \dots, c_N$  with lengths  $l_1, l_2, \dots, l_N$  necessarily satisfy:

$$\sum_{i=1}^N 2^{-l_i} \leq 1 \quad (1)$$

where  $N = |A|$ , the cardinality of set  $A$ . A binary prefix code  $C$  is a set of binary codewords such that no codeword is a prefix of another. Prefix codes are known to be uniquely decodable and easy to decode. A famous example of prefix codes are the Huffman codes which have minimum redundancy.

### The Binary map

Consider the binary map (Fig. 1)  $T : [0, 1) \rightarrow [0, 1)$ :

$$\begin{aligned} x &\mapsto 2x, & 0 \leq x < \frac{1}{2} \\ &\mapsto 2x - 1, & \frac{1}{2} \leq x < 1. \end{aligned}$$

It is well known that the binary map is a non-linear chaotic dynamical system, which preserves the Lebesgue measure (ordinary length measure). We shall prove two simple lemmas regarding the binary map which will be used to prove the Kraft-McMillan's inequality.

*Lemma 1:*

Given any sequence (or string)  $S$  of 0s and 1s of length  $m$ , there exists a unique interval on the binary map of length  $2^{-m}$  such that all initial conditions in that interval will have  $S$  as the binary symbolic sequence corresponding to the first  $m$  iterations.

*Proof:*

Consider the given string  $S$  of length  $m$  as a binary prefix in  $[0, 1)$  (i.e. think of  $S$  as  $0.S$  in binary). The interval  $[0.S\bar{0}, 0.S\bar{1})$ , where the overline indicates infinite repetition, consists of all possible binary numbers in  $[0, 1)$  which have  $S$  as the desired prefix. All these binary numbers when fed as initial conditions to the binary map will yield  $S$  as the symbolic sequence in  $m$  iterations (this is because the binary map can be thought of as a shift map which spits out the leading bits of the binary representation of the initial condition). The length of this interval is  $0.S\bar{1} - 0.S\bar{0}$  which is  $2^{-m}$ .  $\square$

*Lemma 2:*

Two symbolic sequences  $S_1$  and  $S_2$  which are not prefixes of each other correspond to two **disjoint** intervals of lengths  $2^{-m_1}$  and  $2^{-m_2}$  respectively, where  $m_1$  and  $m_2$  are the lengths of  $S_1$  and  $S_2$  respectively.

*Proof:*

The proof is obvious.  $\square$

### *Proof of Kraft-McMillan Inequality*

Since  $c_1, c_2, \dots, c_N$  with lengths  $l_1, l_2, \dots, l_N$  are prefix codes, using Lemma 1 and 2, these can be seen as symbolic sequences of **disjoint** intervals on  $[0, 1)$  with lengths  $2^{-l_1}, 2^{-l_2}, \dots, 2^{-l_N}$  respectively. Any collection of disjoint intervals on  $[0, 1)$  necessarily satisfy Equation 1.  $\square$

## **2 Converse of Kraft-McMillan inequality**

Given a set of codeword lengths that satisfy Equation 1, there exists a uniquely decodable binary prefix code with these codeword lengths.

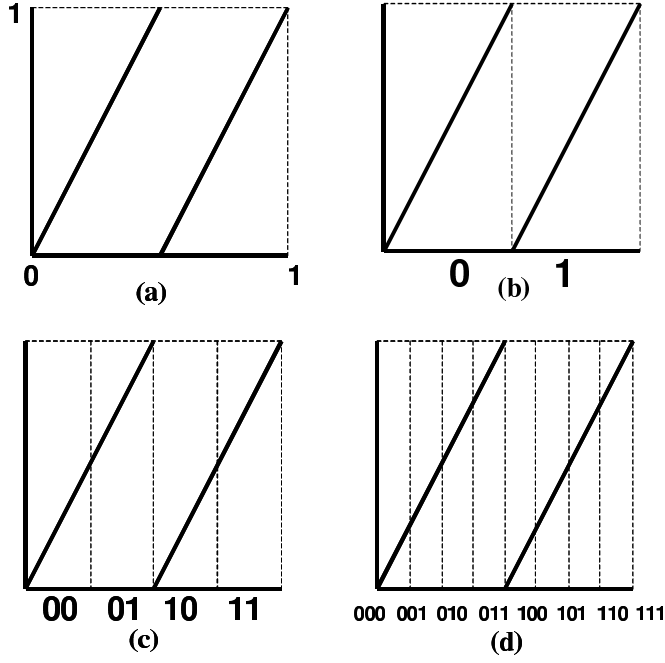


Figure 1: (a) Binary Map. (b) Symbolic sequences of length 1. (c) Symbolic sequences of length 2. (d) Symbolic sequences of length 3.

*Proof:*

Let  $l_1, l_2, \dots, l_M$  be the specified **distinct** codeword lengths such that they satisfy Equation 1. Without loss of generality, let us assume that  $l_1 < l_2 < \dots < l_M$ . Let there be  $a_1$  codewords of length  $l_1$ ,  $a_2$  codewords of length  $l_2$  and so on up to  $a_M$  codewords of length  $l_M$ . Kraft-McMillan inequality can be re-written as:

$$\sum_{i=1}^M a_i 2^{-l_i} \leq 1, \quad \sum_{i=1}^M a_i = N. \quad (2)$$

where  $N = |A|$  as before. Let us determine the maximum number of codewords that can have a particular codeword length  $l_i$  while still satisfying Equation 2. If there are  $2^{l_i} + 1$  or more codewords with length  $l_i$ , then  $(2^{l_i} + 1)2^{-l_i} = 1 + 2^{-l_i} > 1$  violating Equation 2. Thus there can at most be  $2^{l_i}$  codewords of length  $l_i$ .

Let us begin with  $l_1$ . We know that there are exactly  $2^{l_1}$  disjoint intervals with length  $2^{-l_1}$  on the binary map which have symbolic sequence of length  $l_1$ . Since the intervals are disjoint, the symbolic sequences are necessarily prefix codewords. We first assign the symbolic sequences of  $a_1$  of these disjoint intervals as codewords. Once  $a_1$  disjoint intervals of length  $2^{-l_1}$  were used up, we have lost  $a_1 2^{l_2-l_1}$  intervals of length  $2^{-l_2}$ . The number of available disjoint intervals of length  $2^{-l_2}$  is  $2^{l_2} - a_1 2^{l_2-l_1}$ . If  $a_2 < 2^{l_2} - a_1 2^{l_2-l_1}$  then we can allocate disjoint intervals to  $a_2$  codewords of length  $l_2$ . This requires  $a_2 < 2^{l_2}(1 - a_1 2^{-l_1})$ , which reduces to  $a_1 2^{-l_1} + a_2 2^{-l_2} < 1$  which is necessarily true from Equation 2. Thus we can use the symbolic sequence of  $a_2$  disjoint intervals as prefix codewords (of length

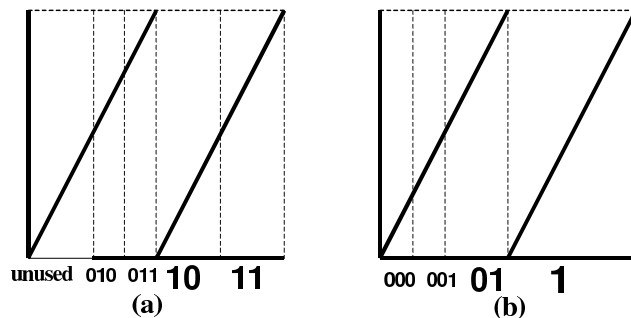


Figure 2: Converse of Kraft-McMillan inequality. (a) Assigning intervals to codewords of lengths  $\{3, 3, 2, 2\}$  which satisfies the Kraft-McMillan inequality. (b) Assigning intervals to codewords of lengths  $\{3, 3, 2, 1\}$  which satisfies Kraft-McMillan inequality with equality. This is known as a *complete* code.

$l_2$ ). This argument is repeated for  $a_3$  and so on until we have allocated unique disjoint intervals to all codewords (see example in Fig. 2). We have thus proved the converse of Kraft-McMillan inequality by construction of prefix codewords using symbolic sequences of disjoint intervals on the binary map.  $\square$

The arguments above can be extended in a straightforward manner for ternary and higher bases. In the case of codewords of base- $B$ , the  $B$ -ary dynamical system is used ( $x \mapsto Bx \bmod 1$  for all  $x \in [0, 1)$ ).

## References

- [1] L.G. Kraft, A device for quantizing, grouping and coding amplitude modulated pulses, M.S. thesis, Dept. of Electrical Engg., MIT, Cambridge, Mass., 1949.
- [2] B. McMillan, Two inequalities implied by unique decipherability, IEEE Trans. Information Theory, vol. IT-2, pp. 115-116, 1956.
- [3] J. Karush, A simple proof of an inequality of McMillan, IRE Trans. Inform. Theory, vol IT-7, pp. 118, 1961.