

Solving the Maximum Agreement SubTree and the Maximum Compatible Tree problems on many bounded degree trees*

Sylvain Guillemot

François Nicolas[†]

November 8, 2021

Abstract

Given a set of leaf-labeled trees with identical leaf sets, the well-known MAXIMUM AGREEMENT SUBTREE problem (MAST) consists of finding a subtree homeomorphically included in all input trees and with the largest number of leaves. Its variant called MAXIMUM COMPATIBLE TREE (MCT) is less stringent, as it allows the input trees to be refined. Both problems are of particular interest in computational biology, where trees encountered have often small degrees.

In this paper, we study the parameterized complexity of MAST and MCT with respect to the maximum degree, denoted by D , of the input trees. Although MAST is polynomial for bounded D [1, 6, 3], we show that the problem is W[1]-hard with respect to parameter D . Moreover, relying on recent advances in parameterized complexity we obtain a tight lower bound: while MAST can be solved in $O(N^{O(D)})$ time where N denotes the input length, we show that an $O(N^{o(D)})$ bound is not achievable, unless $\text{SNP} \subseteq \text{SE}$. We also show that MCT is W[1]-hard with respect to D , and that MCT cannot be solved in $O(N^{o(2^{D/2})})$ time, unless $\text{SNP} \subseteq \text{SE}$.

1 Introduction

Throughout this paper, \mathbb{N} denotes the set of non-negative integers and, for all $n \in \mathbb{N}$, the set $\{1, 2, \dots, n\}$ is denoted by $[1, n]$.

1.1 Agreement subtree and compatible tree

1.1.1 Trees

All trees considered in this paper are *rooted evolutionary trees*, *i.e.* trees representing the evolutionary history of a set of species. Such trees are unordered, bijectively leaf-labeled

*The paper is a revised version of the conference paper [9].

[†]Corresponding author. E-mail address: nicolas@cs.helsinki.fi.

and their internal nodes have at least two children each. Labels are species under study and the branching pattern of the tree describes the way in which speciation events lead from ancestral species to more recent ones.

Leaf labels. For convenience, we will identify the leaves with their labels when the tree is understood. Let T be a (rooted evolutionary) tree. The leaf label set of T is denoted by $L(T)$. We say that T is a tree *on* $L(T)$. The *size* of a tree is defined as the cardinality of its leaf set.

Degree. The (*out-*)*degree* of a node in T is the number of its children. The *maximum degree* of T , denoted by $\Delta(T)$, is the largest degree over all nodes of T .

Parenthetical notation. Parenthetical notation is a convenient way to represent evolutionary trees. Given d non-empty trees T_1, T_2, \dots, T_d with pairwise disjoint leaf sets, $\langle T_1, T_2, \dots, T_d \rangle$ denotes the tree whose root has degree d and admits as child subtrees T_1, T_2, \dots, T_d .

Restriction. For each subset $X \subseteq L(T)$, the (*topological*) *restriction* of T to X is denoted by $T \upharpoonright X$. Colloquially, $T \upharpoonright X$ is the tree on X displaying the branching information of T relevant to X . Restriction is formally defined by induction as follows.

(*Basis*). For each leaf-tree ℓ , $\ell \upharpoonright \{\ell\} = \ell$ and $\ell \upharpoonright \emptyset$ is the empty tree.

(*Inductive step*). Assume that T is of size at least two: $T = \langle T_1, T_2, \dots, T_d \rangle$ with $d \geq 2$. If X is a subset of $L(T_i)$ for some $i \in [1, d]$ then $T \upharpoonright X = T_i \upharpoonright X$, otherwise, $T \upharpoonright X$ is the tree on X whose root admits as child subtrees all non-empty trees of the form $T_i \upharpoonright (L(T_i) \cap X)$ with $i \in [1, d]$.

1.1.2 MAST and MCT

Let \mathcal{T} be a collection of trees on a common leaf set.

Agreement subtree. An *agreement subtree* of \mathcal{T} is a tree T such that, $\forall T_i \in \mathcal{T}$, $T = T_i \upharpoonright L(T)$. The MAXIMUM AGREEMENT SUBTREE problem (MAST) consists of finding an agreement subtree of \mathcal{T} of largest size. In phylogenetics, the maximum size of an agreement subtree of \mathcal{T} is a useful measure of the similarity of the trees in \mathcal{T} [7]. From the point of view of the MAST problem, a node ν of degree d in an input evolutionary tree represents the simultaneous creation of d descendant from the ancestral species represented by ν . As such events are rare if d is greater than two, the trees that people want to calculate maximum agreement subtree for have usually small maximum degrees.

Compatible tree. Let T and T' be two trees on a common leaf set. We say that T *refines* T' if T' can be obtained by collapsing a selection of edges of T . A tree *compatible* with \mathcal{T} is a tree T such that, $\forall T_i \in \mathcal{T}$, T refines $T_i \upharpoonright L(T)$. Obviously, agreement implies compatibility. The converse is usually false for collections including at least a non-binary tree. The MAXIMUM COMPATIBLE TREE problem (MCT) consists of finding a tree of largest size compatible with \mathcal{T} . The MCT problem is more relevant than the MAST problem when comparing reconstructed evolutionary trees [10, 8]. From the point of view of MCT, a non-binary node is usually interpreted as a lack of decision with respect to the relative grouping of its children rather than as a multi-speciation event. As data sequences are getting longer and phylogenetic methods more accurate, the maximum degree of indecision in reconstructed trees is expected to decrease to a small constant.

1.1.3 Previous results

MAST is polynomial on two trees (see [13] for the latest algorithm) but becomes NP-hard on three input trees [1]. MCT is NP-hard on two trees even if one of them is of maximum degree three [11] (see also [10]).

Consider now the general setting of an arbitrary number, denoted by k , of input trees. Let $\mathcal{T} = \{T_1, T_2, \dots, T_k\}$ be the input collection. Let n be the cardinality of the common leaf set of the T_i 's, let $d := \min_{i=1}^k \Delta(T_i)$ and let $D := \max_{i=1}^k \Delta(T_i)$. Above, we argued about the relevance of solving MAST and MCT on bounded maximum degree trees. Three different algorithms were proposed to solve MAST in polynomial time for bounded d [1, 6, 3]. The fastest of these algorithms [6, 3] run in $O(n^d + kn^3)$ time.

Besides, MCT can be solved in $O(4^{kD}n^k)$ time [8]. Hence, for bounded k , MCT is FPT in D . The same result holds for MAST. Assume that a bound p on the number of leaves to be removed from the input set of leaves so that the input trees agree, resp. are compatible, is added to the input. Then MAST, resp. MCT, can be solved in $O(\min\{3^pkn, \alpha^p + kn^3\})$ time, where α is a constant less than three [2]. Thus, both problems are FPT with respect to p .

1.1.4 Our contribution

We prove that both MAST and MCT are W[1]-hard with respect to D . Furthermore, let $\varphi : \mathbb{N} \rightarrow \mathbb{N}$ be an arbitrary recursive function. Note that the input \mathcal{T} is of size $\tilde{O}(kn)$. We prove the following.

(R1). MAST cannot be solved in $\varphi(D)(kn)^{o(D)}$ time, unless $\text{SNP} \subseteq \text{SE}$.

(R2). MCT cannot be solved in $\varphi(D)(kn)^{o(2^{D/2})}$ time, unless $\text{SNP} \subseteq \text{SE}$.

Recall that SE [12] is the class of problems solvable in subexponential time and that SNP [14] contains many NP-hard problems. Hence, the inclusion $\text{SNP} \subseteq \text{SE}$ is unlikely. According to result (R1), the $O(n^d + kn^3)$ time algorithms for MAST [6, 3] are somehow optimum. Results (R1) and (R2) are proved in Sections 2 and 3, respectively.

1.2 Parameterized complexity

In order to clearly prove our intractability results, we recall the main concepts of parameterized complexity [5], together with some recent results. We also introduce the notions of linear FPT-reduction and weak fixed-parameter tractability.

Let Σ be a finite alphabet. The set of all finite words over Σ is denoted by Σ^* , and for each word $x \in \Sigma^*$, $|x|$ denotes the *length* of x . A *parameterized (decision) problem* is a subset $P \subseteq \mathbb{N} \times \Sigma^*$. Each element of $(k, x) \in \mathbb{N} \times \Sigma^*$ is an *instance* of P , k standing for the *parameter*. A *yes-instance* of P is an element of P and a *no-instance* of P is an element of $(\mathbb{N} \times \Sigma^*) - P$.

1.2.1 Fixed-parameter tractability and weak fixed-parameter tractability

The parameterized problem P is called *fixed-parameter tractable* (FPT), if there exist an algorithm A and a recursive function $\varphi : \mathbb{N} \rightarrow \mathbb{N}$ such that, for each $(k, x) \in \mathbb{N} \times \Sigma^*$, A decides whether (k, x) is a yes-instance of P in $\varphi(k)|x|^{O(1)}$ time. The parameterized problem P is called *weakly fixed-parameter tractable* (WFPT) if there exist an algorithm A and a recursive function $\varphi : \mathbb{N} \rightarrow \mathbb{N}$ such that, for each $(k, x) \in \mathbb{N} \times \Sigma^*$, A decides whether (k, x) is a yes-instance of P in $\varphi(k)|x|^{o(k)}$ time.

1.2.2 FPT-reduction and linear FPT-reduction

Let $P, Q \subseteq \mathbb{N} \times \Sigma^*$ be two parameterized problems and let $f : \mathbb{N} \times \Sigma^* \rightarrow \mathbb{N} \times \Sigma^*$.

We say that f is a (many-to-one, strongly uniform) *FPT-reduction* from P to Q if there exist recursive functions $g : \mathbb{N} \times \Sigma^* \rightarrow \Sigma^*$ and $\varphi, \gamma : \mathbb{N} \rightarrow \mathbb{N}$ satisfying, for all $(k, x) \in \mathbb{N} \times \Sigma^*$:

1. $f(k, x)$ is computable in $\varphi(k)|x|^{O(1)}$ time,
2. $f(k, x) \in Q$ if and only if $(k, x) \in P$, and
3. $f(k, x) = (\gamma(k), g(k, x))$.

Moreover, if γ is at most linearly increasing (*i.e.* if $\gamma(k) = O(k)$ as $k \rightarrow \infty$) then we say that f is a *linear FPT-reduction* from P to Q .

FPT-reductions compose, and preserve fixed-parameter tractability. Linear FPT-reductions compose, and preserve weak fixed-parameter tractability. Note that our notion of linear FPT-reduction is slightly different from the one introduced by Chen, Huang, Kanj and Xia [4].

1.2.3 Independent set

Formally, an (undirected) *graph* is an ordered pair $G = (V, E)$ where V is a finite set of *vertices* and where E a set of 2-element subsets of V . The elements of E are the *edges* of G . The elements of an edge are called its *endpoints*. An *independent set* of G is a subset

$I \subseteq V$ such that, for each edge $e \in E$, at least one of its endpoint is not in I . The problem of finding an independent set of maximum cardinality in a given input graph plays a central role in computational complexity theory.

Name: INDEPENDENT SET (IS).

Instance: A positive integer k and a graph $G = (V, E)$.

Question: Is there an independent set of G with cardinality k ?

The version of IS parameterized by k is denoted by $\text{IS}[k]$. This problem is not believed to be FPT as it is complete under FPT-reductions for the class $\text{W}[1]$ [5]. Moreover, $\text{IS}[k]$ is not WFPT either, unless $\text{SNP} \subseteq \text{SE}$ [4, Theorem 5.5].

2 Parameterized complexity of MAST

The decision version of the MAST problem is:

Name: AGREEMENT SUBTREE (AST).

Instance: An integer $q \geq 1$ and a finite collection \mathcal{T} of trees on a common leaf set.

Question: Is there an agreement subtree of \mathcal{T} with size q ?

We denote by $\text{AST}[D]$ the version of AST parameterized by $D := \max_{T \in \mathcal{T}} \Delta(T)$. In this section, we prove: that $\text{AST}[D]$ is $\text{W}[1]$ -hard, and Result (R1) stated in Section 1.1.4. According to Section 1.2, it is sufficient to present a linear FPT-reduction from $\text{IS}[k]$ to $\text{AST}[D]$.

For each integer $p \geq 1$, we introduce the following auxiliary problem:

Name: PARTITIONED INDEPENDENT SET WITH MULTIPLICITY p (PIS_p).

Instance: An integer $k \geq 1$, a graph $G = (V, E)$, and k independent sets V_1, V_2, \dots, V_k of G of equal cardinality partitioning V .

Question: Is there an independent set I of G such that $I \cap V_i$ has cardinality p for all $i \in [1, k]$?

For each instance $(k, G, V_1, V_2, \dots, V_k)$ of PIS_p , the graph G is k -colorable: the V_i 's yield a k -coloring of G . The version of PIS_p parameterized by k is denoted by $\text{PIS}_p[k]$. We reduce $\text{IS}[k]$ to $\text{AST}[D]$ going through $\text{PIS}_1[k]$. In the next section, the decision version of MCT is reduced to IS going through PIS_2 .

Lemma 1. $\text{IS}[k]$ linearly FPT-reduces to $\text{PIS}_1[k]$.

Proof. Reduce $\text{IS}[k]$ to $\text{PIS}_1[k]$ in the same way as Pietrzak reduces CLIQUE to $\text{PARTITIONED CLIQUE}$ [15]. Each instance (k, G) of IS is transformed into an instance $(k, \tilde{G}, \tilde{V}_1, \tilde{V}_2, \dots, \tilde{V}_k)$ of PIS_1 where \tilde{G} and the \tilde{V}_i 's are as follows.

Let V denote the vertex set of G . \tilde{G} is the graph on $V \times [1, k]$ whose edge set is given by: for all $(u, i), (v, j) \in V \times [1, k]$, $\{(u, i), (v, j)\}$ is an edge of \tilde{G} if and only if $i \neq j$ and either $\{u, v\}$ is an edge of G or $u = v$. For each $i \in [1, k]$, \tilde{V}_i is defined as $\tilde{V}_i := V \times \{i\}$. It is clear that $(k, \tilde{G}, \tilde{V}_1, \tilde{V}_2, \dots, \tilde{V}_k)$ is an instance of $\text{PIS}_1[k]$ computable from (k, G) in polynomial time. It remains to check that (k, G) is a yes-instance of IS if and only if $(k, \tilde{G}, \tilde{V}_1, \tilde{V}_2, \dots, \tilde{V}_k)$ is a yes-instance of PIS_1 .

(*if*). Assume there exists an independent set \tilde{I} of \tilde{G} such that $\tilde{I} \cap \tilde{V}_i$ is a singleton for all $i \in [1, k]$. For each $i \in [1, k]$, let $v_i \in V_i$ be such that $\tilde{I} \cap \tilde{V}_i = \{(v_i, i)\}$. The set $I := \{v_1, v_2, \dots, v_k\}$ is an independent set of G with cardinality k .

(*only if*). Conversely, assume that there exists an independent set I of G with cardinality k . Write I in the form $I = \{v_1, v_2, \dots, v_k\}$. The set $\tilde{I} := \{(v_1, 1), (v_2, 2), \dots, (v_k, k)\}$ is an independent set of \tilde{G} and $\tilde{I} \cap \tilde{V}_i = \{(v_i, i)\}$ is a singleton for all $i \in [1, k]$.

□

In order to clearly prove Theorem 1, we first introduce some useful vocabulary.

Definition 1. Let T and T' be two trees and let L be a subset of $L(T) \cap L(T')$. We say that T and T' disagree on L if $T \upharpoonright L$ and $T' \upharpoonright L$ are distinct.

Assume that $L(T) \subseteq L(T')$. If there exists a subset $L \subseteq L(T)$ such that T and T' disagree on L then T is not a restriction of T' . Conversely, if T is not a restriction of T' then T and T' disagree on some 3-element subset of $L(T)$ [3]. This explains the central role played by 3-leaf sets of disagreement in the proofs of Lemmas 2 and 3 below. Note that given three distinct leaf labels a, b and c , there are exactly four distinct trees on $\{a, b, c\}$: the non-binary tree $\langle a, b, c \rangle$, and the three binary trees $\langle\langle b, c \rangle, a \rangle$, $\langle\langle a, c \rangle, b \rangle$ and $\langle\langle a, c \rangle, b \rangle$.

Theorem 1. $\text{IS}[k]$ linearly FPT-reduces to $\text{AST}[D]$.

Proof. According to Lemma 1, it suffices to linearly FPT-reduce $\text{PIS}_1[k]$ to $\text{AST}[D]$. Each instance $(k, G, V_1, V_2, \dots, V_k)$ of PIS_1 is transformed into an instance (q, \mathcal{T}) of AST where $q := k$ and where \mathcal{T} is a collection of trees described below. Without loss of generality, we can assume that all V_i 's ($i \in [1, k]$) have cardinality at least three and that k is at least three.

The collection \mathcal{T} . We construct a collection \mathcal{T} of gadget trees whose leaf set is the vertex set $V := V_1 \cup V_2 \cup \dots \cup V_k$ of G .

For each $i \in [1, k]$, compute an arbitrary *binary* tree B_i on V_i . The tree on V whose root admits B_1, B_2, \dots, B_k as child subtrees is denoted by C : $C = \langle B_1, B_2, \dots, B_k \rangle$. Every tree of \mathcal{T} is obtained by modifying the positions of exactly two leaves of C .

For all $a, b \in V$ with $a \neq b$, $C_{a,b}$ denotes the tree on V obtained from C , by first removing its leaves a and b , and then re-grafting both of them as new children of the root. Formally, $C_{a,b}$ is the tree

$$\langle B_1 \upharpoonright (V_1 - \{a, b\}), B_2 \upharpoonright (V_2 - \{a, b\}), \dots, B_k \upharpoonright (V_k - \{a, b\}), a, b \rangle .$$

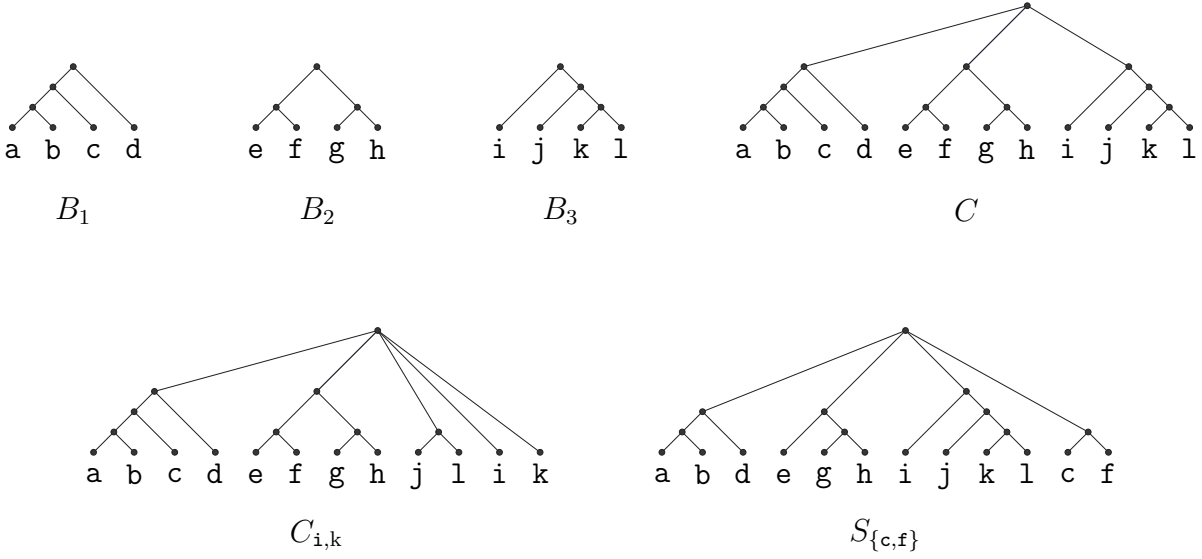


Figure 1: Some of the gadget trees encoding an instance $(k, G, V_1, V_2, \dots, V_k)$ of $\text{PIS}_1[k]$ where $k = 3$, $V_1 = \{a, b, c, d\}$, $V_2 = \{e, f, g, h\}$, $V_3 = \{i, j, k, l\}$ and $\{c, f\}$ is an edge of G .

We set $\mathcal{C} := \{C\} \cup \{C_{a,b} : a, b \in V, a \neq b\}$.

Remark 1. *There exist at most two indices i such that $B_i \upharpoonright (V_i - \{a, b\})$ is distinct from B_i , and since V_i has cardinality at least three, $B_i \upharpoonright (V_i - \{a, b\})$ is a non-empty tree for all i .*

Let E denote the edge set of G : $G = (V, E)$. For each edge $e = \{a, b\} \in E$, S_e denotes the tree on V obtained from C , by first removing its leaves a and b , and then re-grafting $\langle a, b \rangle$ as a new child of the root. Formally, S_e is the tree

$$\langle B_1 \upharpoonright (V_1 - e), B_2 \upharpoonright (V_2 - e), \dots, B_k \upharpoonright (V_k - e), \langle a, b \rangle \rangle .$$

The collection of trees \mathcal{T} is defined as $\mathcal{T} := \mathcal{C} \cup \{S_e : e \in E\}$ (see Figure 1): \mathcal{C} is the *control component* of our gadget and the S_e 's ($e \in E$) are its *selection components*.

Lemma 2 (Control). *Let T be a tree with $L(T) \subseteq V$. Statements (i) and (ii) below are equivalent.*

(i). *T is an agreement subtree of \mathcal{C} with size k .*

(ii). *$T = \langle c_1, c_2, \dots, c_k \rangle$ for some $(c_1, c_2, \dots, c_k) \in V_1 \times V_2 \times \dots \times V_k$.*

Proof. Let $(c_1, c_2, \dots, c_k) \in V_1 \times V_2 \times \dots \times V_k$. Distinct c_i 's appear in distinct child subtrees of the root of C , resp. of $C_{a,b}$. Hence, $\langle c_1, c_2, \dots, c_k \rangle$ is a restriction of C , resp. of $C_{a,b}$. This proves that (ii) implies (i). It remains to show that (i) implies (ii).

Assume (i): T is an agreement subtree of \mathcal{C} with size k .

- We first prove that T has height one. By way of contradiction, suppose that the height of T is greater than one. Then, one can find three distinct leaves $a, b, c \in L(T)$ such that $T \upharpoonright \{a, b, c\} = \langle \langle a, b \rangle, c \rangle$. (Indeed, there exists an internal non-root node ν of T . Pick a leaf c which is not a descendant of ν and two descendant leaves a and b of ν .) However, $C_{a,b} \upharpoonright \{a, b, c\} = \langle a, b, c \rangle$, and thus T and $C_{a,b}$ disagree on $\{a, b, c\}$: contradiction.

Since T has height one, there exist k pairwise distinct leaf labels $c_1, c_2, \dots, c_k \in V$ such that $T = \langle c_1, c_2, \dots, c_k \rangle$.

- We now show that distinct c_j 's belong to distinct V_i 's. By way of contradiction, assume there exist three indices $i, j_1, j_2 \in [1, k]$ satisfying $j_1 \neq j_2$, $c_{j_1} \in V_i$ and $c_{j_2} \in V_i$. Since k is greater than two, there exists $j \in [1, k]$ such that $j \notin \{j_1, j_2\}$. If $c_j \in V_i$ then $C \upharpoonright \{c_{j_1}, c_{j_2}, c_j\} = B_i \upharpoonright \{c_{j_1}, c_{j_2}, c_j\}$ and if $c_j \notin V_i$ then $C \upharpoonright \{c_{j_1}, c_{j_2}, c_j\} = \langle \langle c_{j_1}, c_{j_2} \rangle, c_j \rangle$. In both cases, $C \upharpoonright \{c_{j_1}, c_{j_2}, c_j\}$ is a binary tree unlike $T \upharpoonright \{c_{j_1}, c_{j_2}, c_j\}$. Thus, C and T disagree on $\{c_{j_1}, c_{j_2}, c_j\}$: contradiction.

Up to a permutation of the c_i 's, one has $(c_1, c_2, \dots, c_k) \in V_1 \times V_2 \times \dots \times V_k$. This proves (ii) and concludes the proof of Lemma 2. \square

Lemma 3 (Selection). *Let $e \in E$ be an edge of G and let $(c_1, c_2, \dots, c_k) \in V_1 \times V_2 \times \dots \times V_k$. The tree $\langle c_1, c_2, \dots, c_k \rangle$ is a restriction of S_e if and only if at least one endpoint of e is not in $\{c_1, c_2, \dots, c_k\}$.*

Proof. The “if part” is easy. Let us now show the “only if” part.

Assume that $\langle c_1, c_2, \dots, c_k \rangle$ is a restriction of S_e and that $e \subseteq \{c_1, c_2, \dots, c_k\}$. Let c_{i_1} and c_{i_2} be the two endpoints of e : $e = \{c_{i_1}, c_{i_2}\}$. Since k is greater than two, there exists $i \in [1, k]$ such that $c_i \notin e$. The restriction of S_e to $\{c_{i_1}, c_{i_2}, c_i\}$ equals $\langle \langle c_{i_1}, c_{i_2} \rangle, c_i \rangle$, and thus S_e disagrees with $\langle c_1, c_2, \dots, c_k \rangle$ on $\{c_{i_1}, c_{i_2}, c_i\}$: contradiction. This concludes the proof of Lemma 3. \square

Correctness of the reduction. It is clear that (q, \mathcal{T}) is computable in polynomial time from $(k, G, V_1, V_2, \dots, V_k)$. Moreover, the root of C has degree k , the root of $C_{a,b}$ has degree $k + 2$, the root of S_e has degree $k + 1$, and any non-root internal node of a tree in \mathcal{T} has degree two. Hence, the maximum degree D over all trees in \mathcal{T} is equal to $k + 2$: $D = O(k)$. Eventually, let us derive from Lemmas 2 and 3 that $(k, G, V_1, V_2, \dots, V_k)$ is a yes-instance of PIS_1 if and only if (q, \mathcal{T}) is a yes-instance of AST .

(if). Assume there exists an agreement subtree T of \mathcal{T} with size $q = k$. The tree T is of the form $T = \langle c_1, c_2, \dots, c_k \rangle$ for some $(c_1, c_2, \dots, c_k) \in V_1 \times V_2 \times \dots \times V_k$ by Lemma 2. Furthermore, the set $I := \{c_1, c_2, \dots, c_k\}$ is an independent set of G by Lemma 3, and for every $i \in [1, k]$, $I \cap V_i = \{c_i\}$ is a singleton.

(only if). Conversely, assume that there exists an independent set I of G such that $I \cap V_i$ is a singleton for all $i \in [1, k]$. Write I in the form $I = \{c_1, c_2, \dots, c_k\}$ with $(c_1, c_2, \dots, c_k) \in V_1 \times V_2 \times \dots \times V_k$. The tree $\langle c_1, c_2, \dots, c_k \rangle$ is both an agreement subtree of \mathcal{C} by Lemma 2

and an agreement subtree of $\{S_e : e \in E\}$ by Lemma 3. Therefore, $\langle c_1, c_2, \dots, c_k \rangle$ is an agreement subtree of \mathcal{T} with size q .

□

3 Parameterized complexity of MCT

The decision version of the MCT problem is:

Name: COMPATIBLE TREE (CT).

Instance: An integer $q \geq 1$ and a finite collection \mathcal{T} of trees on a common leaf set.

Question: Is there a tree of size q compatible with \mathcal{T} ?

Let $\text{CT}[2^{\lceil D/2 \rceil}]$ denote the version of CT parameterized by $2^{\lceil D/2 \rceil}$, where $D := \max_{T \in \mathcal{T}} \Delta(T)$. In this section, we linearly FPT-reduce $\text{IS}[k]$ to $\text{CT}[2^{\lceil D/2 \rceil}]$ in order to prove: the $\text{W}[1]$ -hardness of the version of CT parameterized by D , and Result (R2) stated in Section 1.1.4. PIS_2 is used as an auxiliary problem.

Lemma 4. $\text{IS}[k]$ linearly FPT-reduces to $\text{PIS}_2[k]$.

Proof. According to Lemma 1, it suffices to linearly FPT-reduce $\text{PIS}_1[k]$ to $\text{PIS}_2[k]$. We rely on a padding argument. Each instance $(k, G, V_1, V_2, \dots, V_k)$ of PIS_1 is transformed into an instance $(k, \tilde{G}, \tilde{V}_1, \tilde{V}_2, \dots, \tilde{V}_k)$ of PIS_2 where \tilde{G} and the \tilde{V}_i 's are as follows.

Informally, \tilde{G} is obtained by adding k isolated vertices to G , and each \tilde{V}_i is obtained by adding a single one of these new vertices to V_i . More formally, let V denote the vertex set of G and let E denote the edge set of G : $V = V_1 \cup V_2 \cup \dots \cup V_k$ and $G = (V, E)$. Let a_1, a_2, \dots, a_k be k new vertices: for all $i, j \in [1, k]$, a_i is not an element of V , and $i \neq j$ implies $a_i \neq a_j$. Construct $\tilde{G} := (V \cup \{a_1, a_2, \dots, a_k\}, E)$, and $\tilde{V}_i := V_i \cup \{a_i\}$ for each $i \in [1, k]$.

It is clear that $(k, \tilde{G}, \tilde{V}_1, \tilde{V}_2, \dots, \tilde{V}_k)$ is an instance of PIS_2 computable in polynomial time from $(k, G, V_1, V_2, \dots, V_k)$. It remains to check that $(k, G, V_1, V_2, \dots, V_k)$ is a yes-instance of PIS_1 if and only if $(k, \tilde{G}, \tilde{V}_1, \tilde{V}_2, \dots, \tilde{V}_k)$ is a yes-instance of PIS_2 .

(*only if*). Assume that there exists an independent set I of G such that $I \cap V_i$ is a singleton for every $i \in [1, k]$. Then $\tilde{I} := I \cup \{a_1, a_2, \dots, a_k\}$ is an independent set of \tilde{G} , and $\tilde{I} \cap \tilde{V}_i$ is a doubleton for all $i \in [1, k]$.

(*if*). Conversely, assume that there exists an independent set \tilde{I} of \tilde{G} such that $\tilde{I} \cap \tilde{V}_i$ is a doubleton for every $i \in [1, k]$. For each $i \in [1, k]$, pick an element v_i in $\tilde{I} \cap \tilde{V}_i$ distinct from a_i . The set $I := \{v_1, v_2, \dots, v_k\}$ is an independent set of G , and $I \cap V_i = \{v_i\}$ is a singleton for all $i \in [1, k]$.

□

Remark 2. The mapping $(k, G, V_1, V_2, \dots, V_k) \mapsto (k, \tilde{G}, \tilde{V}_1, \tilde{V}_2, \dots, \tilde{V}_k)$, presented in the proof of Lemma 4, induces a linear FPT-reduction from $\text{PIS}_p[k]$ to $\text{PIS}_{p+1}[k]$ for any integer $p \geq 1$. Since $\text{IS}[k]$ linearly FPT-reduces to $\text{PIS}_1[k]$ by Lemma 1, $\text{IS}[k]$ linearly FPT-reduces to $\text{PIS}_p[k]$ for every integer $p \geq 1$.

Definitions 2, 3 and 4 introduce gadgets that are used to reduce PIS_2 to CT in the proof of Theorem 2.

Definition 2. Let n be a positive integer, let T be a tree on $[1, n]$, and let T_1, T_2, \dots, T_n be n non-empty trees with pairwise disjoint leaf sets. The tree on $L(T_1) \cup L(T_2) \cup \dots \cup L(T_n)$, obtained by replacing each leaf i of T with T_i is denoted by $T[T_1, T_2, \dots, T_n]$.

For instance, let $T := \langle \langle 1, 2 \rangle, \langle 3, \langle 4, 5 \rangle \rangle, 6 \rangle$. For any non-empty trees $T_1, T_2, T_3, T_4, T_5, T_6$ with pairwise disjoint leaf sets, we have

$$T[T_1, T_2, T_3, T_4, T_5, T_6] = \langle \langle T_1, T_2 \rangle, \langle T_3, \langle T_4, T_5 \rangle \rangle, T_6 \rangle,$$

and in particular,

$$T[\langle 2, 3 \rangle, 1, \langle 6, 7, 8 \rangle, 4, 5, \langle \langle 9, 11 \rangle, 10 \rangle] = \langle \langle 1, \langle 2, 3 \rangle \rangle, \langle \langle 4, 5 \rangle, \langle 6, 7, 8 \rangle \rangle, \langle \langle 9, 11 \rangle, 10 \rangle \rangle.$$

Definition 3. For each integer $n \geq 1$, R_n denotes the binary tree on $[1, n]$, defined recursively as follows:

- $R_1 = 1$, and
- $R_n = \langle R_{n-1}, n \rangle$ for every integer $n \geq 2$.

For instance, one has $R_2 = \langle 1, 2 \rangle$, $R_3 = \langle \langle 1, 2 \rangle, 3 \rangle$, $R_4 = \langle \langle \langle 1, 2 \rangle, 3 \rangle, 4 \rangle$, $R_5 = \langle \langle \langle \langle 1, 2 \rangle, 3 \rangle, 4 \rangle, 5 \rangle$, etc.

Property 1. Let n be a positive integer. Let v^1, v^2, \dots, v^n be n pairwise distinct labels. A tree with leaf labels in $\{v^1, v^2, \dots, v^n\}$ is compatible with $\{R_n[v^1, v^2, \dots, v^n], R_n[v^n, \dots, v^2, v^1]\}$ if and only if its size is at most two.

Definition 4. For every integer $k \geq 1$, H_k denotes a binary tree on $[1, k]$ with minimum height $\lceil \log k \rceil$; for all $i, j \in [1, k]$, $H_k^{i,j}$ denotes the tree on $[1, k]$ obtained from H_k by collapsing all internal edges on the path connecting i and j ; $\lambda_k^{i,j}$ denotes the least common ancestor of i and j in $H_k^{i,j}$.

For instance, $\langle \langle \langle 1, 2 \rangle, \langle 3, 4 \rangle \rangle, 5 \rangle$ is a suitable tree H_5 , and $\langle \langle \langle \langle 1, 2 \rangle, \langle 3, 4 \rangle \rangle, \langle \langle 5, 6 \rangle, \langle 7, 8 \rangle \rangle \rangle$ is a suitable tree H_8 ; for such trees, one has $H_5^{1,4} = \langle \langle 1, 2, 3, 4 \rangle, 5 \rangle$ and $H_8^{3,5} = \langle \langle 1, 2 \rangle, \langle 3, 4, 5, 6 \rangle, \langle 7, 8 \rangle \rangle$.

Property 2. All internal nodes in $H_k^{i,j}$ are of degree two, except maybe $\lambda_k^{i,j}$ whose degree is at most 2 $\lceil \log k \rceil$.

Theorem 2. $\text{IS}[k]$ linearly FPT-reduces to $\text{CT}[2^{\lceil D/2 \rceil}]$.

Proof. According to Lemma 4, it suffices to linearly FPT-reduce $\text{PIS}_2[k]$ to $\text{CT}[2^{\lceil D/2 \rceil}]$. Each instance $(k, G, V_1, V_2, \dots, V_k)$ of $\text{PIS}_2[k]$ is transformed into an instance (q, \mathcal{T}) of CT where $q := 2k$ and where \mathcal{T} is a collection of trees described below.

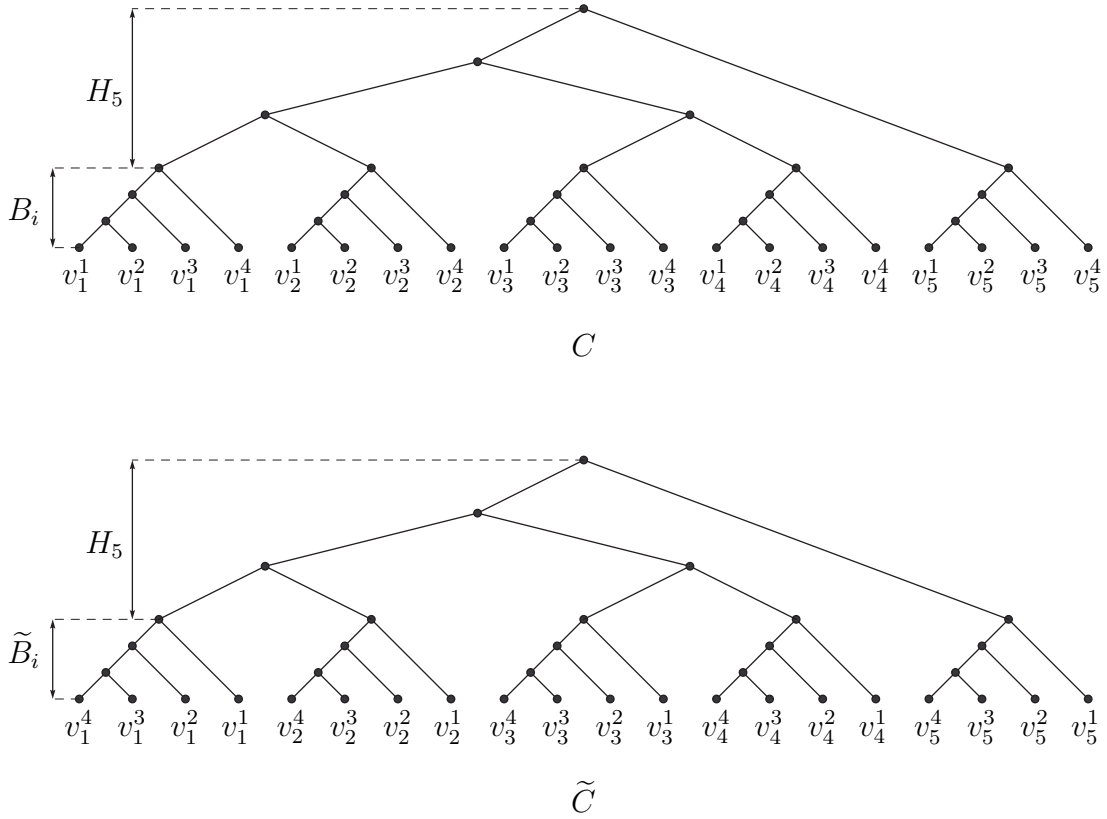


Figure 2: The trees C and \tilde{C} in the case of $k = 5$ and $n = 4$.

The collection \mathcal{T} . We construct a collection \mathcal{T} of gadget trees on the vertex set $V := V_1 \cup V_2 \cup \dots \cup V_k$ of G . Let n be such that V_i has cardinality n for every $i \in [1, k]$. For each $i \in [1, k]$, write V_i in the form $V_i = \{v_i^1, v_i^2, \dots, v_i^n\}$; $B_i := R_n[v_i^1, v_i^2, \dots, v_i^n]$ and $\tilde{B}_i := R_n[v_i^n, \dots, v_i^2, v_i^1]$ encode V_i .

Let $C := H_k[B_1, B_2, \dots, B_k]$ and let $\tilde{C} := H_k[\tilde{B}_1, \tilde{B}_2, \dots, \tilde{B}_k]$ (see Figure 2): C and \tilde{C} are the *control components* of our gadget.

Let E be the edge set of G : $G = (V, E)$. For each edge $e = \{v_i^r, v_j^s\} \in E$, compute the tree S_e obtained from $H_k^{i,j}[B_1, B_2, \dots, B_k]$ by first removing its leaves v_i^r and v_j^s , and then re-grafting $\langle v_i^r, v_j^s \rangle$ as a new child subtree of $\lambda_k^{i,j}$ (see Figure 3). The S_e 's ($e \in E$) are the *selection components* of our gadget.

The collection of trees \mathcal{T} is defined as $\mathcal{T} := \{C, \tilde{C}\} \cup \{S_e : e \in E\}$.

Property 3 below is easily deduced from Property 1.

Property 3 (Control). *Let T be a tree with $L(T) \subseteq V$. Statements (i) and (ii) below are equivalent.*

- (i). T is a tree of size q , compatible with $\{C, \tilde{C}\}$.

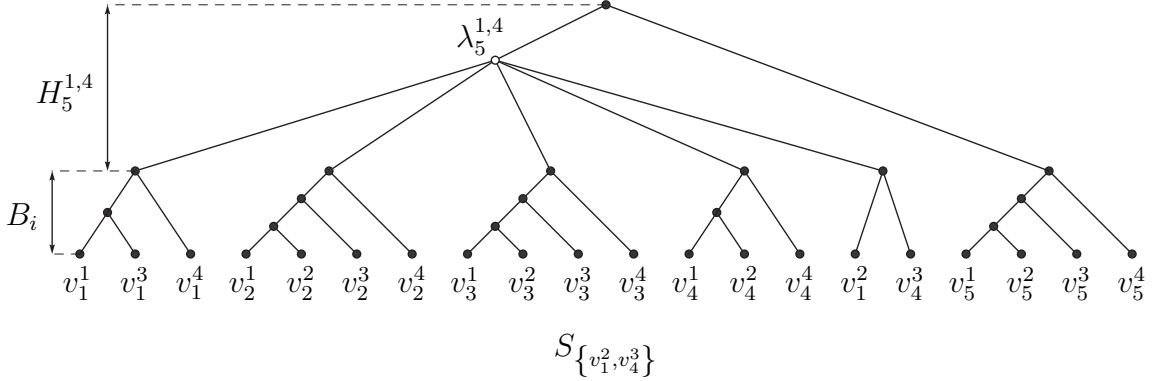


Figure 3: The tree $S_{\{v_1^2, v_4^3\}}$ in the case of $k = 5$ and $n = 4$.

(ii). T is of the form $T = H_k[\langle a_1, b_1 \rangle, \langle a_2, b_2 \rangle, \dots, \langle a_k, b_k \rangle]$ where, for each $i \in [1, k]$, a_i and b_i are two distinct elements of V_i .

Property 4 (Selection). *Let $e \in E$ be an edge of G and let T be a tree of size q compatible with $\{C, \tilde{C}\}$. Then, T refines $S_e \upharpoonright L(T)$ if and only if at least one endpoint of e is not in $L(T)$.*

Correctness of the reduction. It is clear that (q, \mathcal{T}) is computable in polynomial time from $(k, G, V_1, V_2, \dots, V_k)$. Moreover, both C and \tilde{C} are binary trees, and all internal nodes in S_e have degree two, except maybe $\lambda_k^{i,j}$ whose degree is at most $2 \lceil \log k \rceil + 1$ (see Property 2). Hence, the maximum degree D over all trees in \mathcal{T} is at most $2 \lceil \log k \rceil + 1$, and thus $2^{\lfloor D/2 \rfloor} = O(k)$. Eventually, it remains to show that: $(k, G, V_1, V_2, \dots, V_k)$ is a yes-instance of PIS_2 if and only if (q, \mathcal{T}) is a yes-instance of AST .

(if). Assume that there exists a tree T of size q compatible with \mathcal{T} . Let $I := L(T)$. By Property 3 $I \cap V_i$ is a doubleton for every $i \in [1, k]$. By Property 4, I is an independent set of G .

(only if). Conversely, assume that there exists an independent set I of G such that $I \cap V_i$ is a doubleton for all $i \in [1, k]$. For each $i \in [1, k]$, let a_i and b_i be such that $I \cap V_i = \{a_i, b_i\}$. The tree $T := H_k[\langle a_1, b_1 \rangle, \langle a_2, b_2 \rangle, \dots, \langle a_k, b_k \rangle]$ is compatible with $\{C, \tilde{C}\}$ according to Property 3. Furthermore, T is also compatible with $\{S_e : e \in E\}$ according to Property 4. We have thus exhibited a tree T of size q compatible with \mathcal{T} .

Remark 3. $2^{\lfloor D/2 \rfloor} = O(k)$ is enough to obtain Result (R2). But, our construction does not ensure that $2^{\lfloor D/2 \rfloor}$ is a function of k only. Hence, our reduction is not exactly an FPT-reduction yet. Anyway, this can be easily repaired. Collapse $2 \lceil \log k \rceil - 1$ consecutive internal edges in B_1 to obtain a tree B'_1 of maximum degree $2 \lceil \log k \rceil + 1$ and add to \mathcal{T} the tree $C' := H_k[B'_1, B_2, \dots, B_k]$.

□

References

- [1] A. Amir and D. Keselman. Maximum agreement subtree in a set of evolutionary trees: metrics and efficient algorithms. *SIAM Journal on Computing*, 26(6):1656–1669, 1997.
- [2] V. Berry and F. Nicolas. Improved parameterized complexity of the maximum agreement subtree and maximum compatible tree problems. *IEEE/ACM Transactions on Computational Biology and Bioinformatics*, 3(3):289–302, 2006.
- [3] D. Bryant. *Building trees, hunting for trees and comparing trees: theory and method in phylogenetic analysis*. PhD thesis, University of Canterbury, Department of Mathematics, 1997.
- [4] J. Chen, X. Huang, I. A. Kanj, and G. Xia. Strong computational lower bounds via parameterized complexity. *Journal of Computer and System Sciences*, 72(8):1346–1367, 2006.
- [5] R. G. Downey and M. R. Fellows. *Parameterized Complexity*. Monographs in Computer Science. Springer, 1999.
- [6] M. Farach, T. M. Przytycka, and M. Thorup. On the agreement of many trees. *Information Processing Letters*, 55(6):297–301, 1995.
- [7] C. R. Finden and A. D. Gordon. Obtaining common pruned trees. *Journal of Classification*, 2:255–276, 1985.
- [8] G. Ganapathysaravanabavan and T. J. Warnow. Finding a maximum compatible tree for a bounded number of trees with bounded degree is solvable in polynomial time. In O. Gascuel and B. M. E. Moret, editors, *Proceedings of the 1st International Workshop on Algorithms in Bioinformatics (WABI'01)*, volume 2149 of *Lecture Notes in Computer Science*, pages 156–163. Springer-Verlag, 2001.
- [9] S. Guillemot and F. Nicolas. Solving the maximum agreement subtree and the maximum compatible tree problems on many bounded degree trees. In M. Lewenstein and G. Valiente, editors, *Proceedings of the 17th Annual Symposium on Combinatorial Pattern Matching (CPM'06)*, volume 4009 of *Lecture Notes in Computer Science*, pages 165–176. Springer-Verlag, 2006.
- [10] A. M. Hamel and M. A. Steel. Finding a maximum compatible tree is NP-hard for sequences and trees. *Applied Mathematics Letters*, 9(2):55–59, 1996.
- [11] J. Hein, T. Jiang, L. Wang, and K. Zhang. On the complexity of comparing evolutionary trees. *Discrete Applied Mathematics*, 71(1–3):153–169, 1996.
- [12] R. Impagliazzo, R. Paturi, and F. Zane. Which problems have strongly exponential complexity? *Journal of Computer and System Sciences*, 63(4):512–530, 2001.

- [13] M.-Y. Kao, T. W. Lam, W.-K. Sung, and H.-F. Ting. An even faster and more unifying algorithm for comparing trees via unbalanced bipartite matchings. *Journal of Algorithms*, 40(2):212–233, 2001.
- [14] C. H. Papadimitriou and M. Yannakakis. Optimization, approximation, and complexity classes. *Journal of Computer and System Sciences*, 43(3):425–440, 1991.
- [15] K. Pietrzak. On the parameterized complexity of the fixed alphabet shortest common supersequence and longest common subsequence problems. *Journal of Computer and System Sciences*, 67(4):757–771, 2003.