

On the transient nature of localized pipe flow turbulence

MARC AVILA¹, ASHLEY P. WILLIS²
AND BJÖRN HOF¹

¹Max Planck Institute for Dynamics and Self-Organization, 37073 Göttingen, Germany

²Laboratoire d'Hydrodynamique, École Polytechnique, 91128 Palaiseau, France

(Received 4 November 2018)

The onset of turbulence in shear flows is characterized by turbulent patches bounded by regions of laminar flow. At low Reynolds numbers localized turbulence relaminarises, raising the question of whether it is transient in nature or it becomes sustained at a critical threshold. We present extensive numerical simulations and a rigorous statistical analysis of the data, in order to shed light on the sources of the discrepancies present in the literature. The results are in excellent quantitative agreement with recent experiments and show that the probability of relaminarisation remains finite. In addition, we provide evidence for a lower bound in Reynolds number below which there are no meta-stable characteristics of the transients.

1. Introduction

The development of turbulence in shear flows poses a challenge of great theoretical and practical relevance (Grossmann 2000; Eckhardt *et al.* 2007). Since the seminal work of Reynolds (1883) on the onset of turbulent fluid motion in a circular pipe, this system has remained a paradigm for transition without linear instability, i.e. subcritical transition. Here, the boundary that separates the laminar flow from turbulence depends not only on the Reynolds number (Re), but also on the characteristics of ambient and external perturbations. In particular, the threshold in perturbation amplitude that must be exceeded to trigger transition scales as $Re^{-\gamma}$, with $\gamma \in [1, 2]$ depending on the perturbation details (Hof, Juel & Mullin 2003; Peixinho & Mullin 2007; Mellibovsky & Meseguer 2009). Thus, if great care is taken to minimize all sources of disturbances, the flow can be kept laminar up to Re as large as 10^5 (Pfenniger 1961).

At low Re , even long times after turbulence is initially triggered, sudden decay of the turbulent dynamics and subsequent relaminarisation to Hagen-Poiseuille flow may occur (Brosa 1989). Faisst & Eckhardt (2004) systematically studied the probability of a turbulent trajectory surviving up to time t , given by the survivor function

$$S(t) = P(\text{flow is turbulent at } T \geq t). \quad (1.1)$$

They concluded that the process is memoryless, i.e. lifetimes are exponentially distributed with $S(t) = \exp[-t/\tau]$, where τ is the mean turbulent lifetime. This behavior had been previously observed in turbulent relaminarisation experiments in plane Couette flow (Bottin & Chate 1998; Bottin *et al.* 1998). The exponential distribution of lifetimes and sensitive dependence on initial conditions (Darbyshire & Mullin 1995; Faisst & Eckhardt 2004) is consistent with the presence of a repeller in phase space, a strange saddle (see e.g. Eckhardt 2008). The skeleton of the saddle would be constructed from exact unstable

solutions of the Navier–Stokes equations, and the simplest of such solutions correspond to nonlinear travelling waves, discovered numerically by Faisst & Eckhardt (2003) and Wedin & Kerswell (2004). Close visits to such travelling waves in turbulent flows were reported in the experiments of Hof *et al.* (2004) and simulations by Kerswell & Tutty (2007). Recently, new classes of travelling waves solutions and relative periodic orbits have also been found (Pringle & Kerswell 2007; Duguet, Pringle & Kerswell 2008).

Faisst & Eckhardt (2004) investigated the scaling of mean turbulent lifetimes as Re is increased and proposed a divergence of reciprocal form $\tau(Re) \propto (Re_c - Re)^{-1}$, indicating that turbulence becomes self-sustained at $Re_c \simeq 2250$. However, a limitation of the lifetime study of Faisst & Eckhardt (2004) was the length of the periodic pipe used in their simulations ($5D$), chosen to reduce computational costs. At $Re \lesssim 2400$ the experimentally observed flow regimes consist of localized turbulent structures bounded by regions of laminar flow, so-called *puffs* (Wynanski & Champagne 1973). Puffs have a length of about $20D$ and are characterized by a sharp turbulent-laminar interface at the trailing edge and a slowly diffused leading edge. Thus, long periodic pipes are required to fully capture their relevant dynamics. The first experimental study to determine lifetimes in pipe flow was performed by Peixinho & Mullin (2006), who carried out *Re reduction* experiments following the methodology introduced by Bottin *et al.* (1998) in plane Couette flow. Using a constant-mass-flux pipe of $750D$, they perturbed the laminar profile to generate a puff, then reduced Re and measured the downstream distance at which the puff decayed. Their study also supported a divergence of lifetimes of reciprocal form at $Re_c = 1750$. An experimental study performed in a gravity-driven pipe by Hof *et al.* (2006), however, rendered an exponential scaling of τ with Re , indicating that turbulence may be transient for all finite Re .

Willis & Kerswell (2007) performed numerical simulations of a periodic constant-mass-flux $50D$ pipe, which allowed for direct comparison with experiment for the first time. Their results qualitatively supported the critical behavior observed by Peixinho & Mullin (2006), although the extrapolated critical Reynolds number $Re_c = 1870$ was larger than the experimentally measured value. More recently, Hof *et al.* (2008) repeated the experimental study with substantial technical improvements. The implementation of accurate temperature control and automatization of the measurement techniques allowed them to prolong the observational time-span up to 8 orders of magnitude, drastically extending all previous investigations. Their measurements up to $Re = 2050$ still exhibited relaminarisation and indicated a faster than exponential (but non-diverging) scaling of lifetimes with Re . This provides evidence that puff turbulence is of transient nature.

The main goal of this paper is to provide a final discussion on the scaling of turbulent lifetimes in pipe-flows, reconciling previous investigations and clarifying the sources of discrepancy. To this aim, numerical simulations following Willis & Kerswell (2007) have been performed, but with substantially increased statistical significance, i.e. much reduced and accurate confidence intervals. Results are accompanied by a detailed account of the methodology and analysis of the data. We find that a super-exponential increase of the lifetimes with Re is supported, rendering close quantitative agreement with the recent experiments of Hof *et al.* (2008) in relaminarisation probabilities at each Re investigated. The influence of initial conditions on the data is also considered. In addition, it is found that the process is not memoryless for $Re \lesssim 1720$, suggesting a bifurcation event that gives rise to turbulent trajectories.

2. Numerical Method

Consider an incompressible viscous fluid which is driven through a pipe of circular cross-section at a constant flow rate. The Reynolds number is defined as $Re = UD/\nu$, where U is the mean flow-speed, D the pipe diameter and ν the kinematic viscosity of the fluid. It is convenient to scale lengths by $D/2$ and velocities by $2U$ in the Navier-Stokes equations, leading to

$$\partial_t \mathbf{u} + (\mathbf{u} \cdot \nabla) \mathbf{u} + \nabla p = \frac{1}{Re} \Delta \mathbf{u}, \quad \nabla \cdot \mathbf{u} = 0. \quad (2.1)$$

These are supplied with no-slip boundary conditions at the pipe wall, whereas in the axial direction the pipe is periodic.

The Navier–Stokes equations (2.1) are solved in cylindrical coordinates (r, θ, z) using the hybrid spectral finite-difference method. This is based on the velocity-potential formulation of Marques (1990), where the difficulties arising from the coupled boundary conditions on the potentials are resolved with the influence-matrix method (Willis & Kerswell 2009). Variables are expanded in Fourier modes

$$A = \sum_{k=-K, m=-M}^{K, M} A_{k,m}(r) \exp[i(\alpha kz + m\theta)]. \quad (2.2)$$

As the variables are real, their Fourier coefficients satisfy the property $A_{km} = A_{-k, -m}^\dagger$, where \dagger denotes the complex conjugate. In the results presented here $K = 384$ and $M = 24$, corresponding to ± 384 axial and ± 24 azimuthal Fourier modes. In the axial direction the wavelength of the pipe is $16\pi D \simeq 50D$. This is sufficient to avoid the interaction between leading and trailing edge of the localized structure of a puff (of approximately $20D$) which would arise in short domains. In the radial direction the explicit finite-difference method has been used on 9-point stencils in a grid of $N = 40$ points. The time-step was dynamically controlled using information from a predictor-corrector method and was limited to $\Delta t < 0.005D/U$. A resolution test is shown in the following section. Further details on the formulation and method can be found in Willis & Kerswell (2009).

3. Initial conditions

In order to generate the initial conditions for the lifetime simulations, a localized disturbance was applied to the laminar Poiseuille flow at $Re = 2000$. The disturbance quickly evolved into an ‘equilibrium puff’ which remained constant in spatial extent while propagating downstream at approximately the mean flow-speed U . The puff was evolved for $t \sim 5000D/U$ and snapshots of the full velocity field were recorded every $10D/U$, generating a collection of initial conditions. Subsequently, runs at lower Re were performed starting from these initial conditions and were monitored until the flow relaminarised. The criterion for relaminarisation was that the energy of the axially dependent modes drop below $0.005U^2D^3$, at which point turbulent motions had decayed beyond recovery.

Figure 1(a) shows relaminarisation times following a reduction of the Reynolds number to $Re = 1860$ as a function of initial condition. The times from here onwards are shown in D/U units. The large fluctuations in the data indicate that consecutive initial conditions result in uncorrelated lifetimes. From these data, the corresponding survivor function $S(t)$ has been obtained and is plotted as circles in the logarithmic scale of figure 1(b). The approximately constant slope of $S(t)$ implies the memoryless nature of the relaminarisation process. To verify the numerical resolution, the number of modes in the

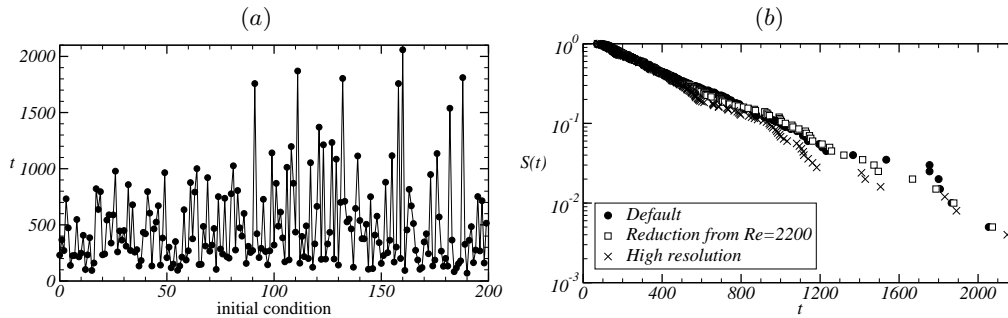


FIGURE 1. (a) Turbulent lifetimes for reduction simulations at $Re = 1860$ as function of initial condition. (b) Survivor function at $Re = 1860$ from (a) (circles), reduction from a puff at $Re = 2200$ (squares) and high numerical resolution (crosses).

azimuthal and axial directions was increased by 33% and the number of finite-difference points by 25%. The number of degrees of freedom is greater than 2.2 times that of the default resolution. The results are plotted in figure 1(b) as crosses and are within statistical uncertainty of the default case. Thus, we conclude that the turbulent puffs are accurately resolved.

The impact of the mechanism to initiate the turbulent state on the relaminarisation probabilities has been object of much debate in the literature (Willis & Kerswell 2007; Schneider & Eckhardt 2008; de Lozar & Hof 2009). Indeed, the reduction procedure of Peixinho & Mullin (2006) was introduced as an attempt to minimise the effect of initial conditions in lifetime measurements. Robustness of the survivor function has been examined here by repeating the reduction simulations from initial conditions of a puff simulation at $Re = 2200$, representing a much greater initial change of the Re over the default reduction from $Re = 2000$. The results, plotted as squares in figure 1(b), show that the same probability distribution, within statistical uncertainty due to sample size, is recovered. This result confirms the experimental findings of de Lozar & Hof (2009), who have demonstrated the invariance of the distributions by using four different experimental protocols to generate the turbulent puffs.

4. Statistical analysis of turbulent lifetimes

An exponential distribution of turbulent lifetimes is one of the main pillars of the strange saddle paradigm for the transition to turbulence in shear flows (Eckhardt 2008). In practice, the distributions are exponential only for $t > t_0 > 0$, where t_0 depends on the procedure to initiate turbulence and Reynolds number in a non-trivial manner (Schneider & Eckhardt 2008; de Lozar & Hof 2009). When Re is suddenly quenched in the reduction experiments, the puff is forced to quickly readjust to the new flow rate and this could cause immediate relaminarisation. In phase space, this is equivalent to a trajectory not having approached the strange saddle. Thus, consistently determining t_0 constitutes a challenge in lifetime studies of shear flows. The problem stems from the difficulties in discriminating between a trajectory that has shown very short turbulent behavior and one that has directly relaminarised. This is especially delicate in the low Re regime, where a large part of the sample features lifetimes shorter than t_0 .

The hazard function of a lifetime distribution, defined as

$$h(t) = -\frac{d}{dt} \log(S(t)), \quad (4.1)$$

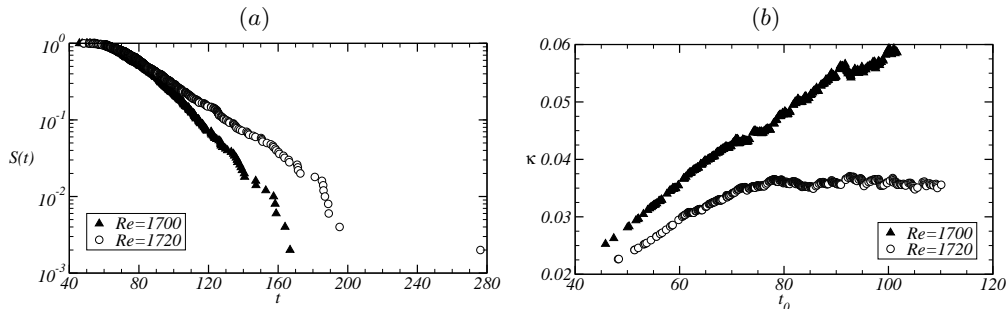


FIGURE 2. (a) Survivor function of turbulent lifetimes at $Re = 1720$ (circles) and 1700 (triangles) obtained with 500 simulations each. (b) Escape rate κ as a function of t_0 .

specifies the instantaneous rate of death at time t , i.e. $h(t)\delta t$ is the approximate probability of death in $[t, t + \delta t]$ given survival up to time t . For an exponential distribution, the hazard function is constant $h(t) = 1/\tau$, where $\tau = \langle t \rangle$ is the mean lifetime of the population. This corresponds to a memoryless process. In the theory of dynamical systems, the escape rate from the saddle is defined as $\kappa = 1/\tau$ (Tél & Lai 2008).

4.1. Determining t_0 : onset of the strange saddle

Figure 2(a) is a logarithmic plot of the lifetime distribution at $Re = 1700$ (triangles) and $Re = 1720$ (circles). Their corresponding escape rates have been computed by subsequently excluding from the sample puffs that have decayed before a given time t_0 , i.e. $\kappa(t_0) = 1/\tau(t_0)$ with $\tau(t_0) = \langle t - t_0 | t > t_0 \rangle$. Figure 2(b) shows the resulting values of $\kappa(t_0)$ as a function of cutoff time t_0 . At about $t_0 = 75$ for $Re = 1720$ the plot approaches a horizontal line, indicating a constant hazard function and thus exponentially distributed lifetimes. Hence, we conclude that at $Re = 1720$ the escape rate of turbulent trajectories from the saddle is $\kappa \simeq 0.037$, whereas trajectories that have decayed before $t_0 \simeq 75$ cannot be counted as having visited the saddle. Overall t_0 increases slightly from 75 at $Re = 1720$ to 95 at $Re = 1820$. Meanwhile, the number of trajectories decaying without visiting the saddle decreases as Re increases, and at $Re = 1860$ almost all trajectories are attracted to the saddle.

No evidence of exponential behaviour in the lifetimes for $Re < 1720$ has been found. This is illustrated by the hazard function at $Re = 1700$, plotted as triangles in figure 2(b). Despite the initial similarity with $Re = 1720$, the escape rate for $Re = 1700$ does not settle to a constant value but increases monotonously. This implies that the probabilities of relaminarisation depend on the history of the turbulent trajectory. Similar results have been found for $Re = 1580$ and 1640 using 500 simulations in each case. Hence, the data at low $Re < 1720$ cannot be used to extrapolate lifetime scaling with Re , at least not under the assumption of a memoryless process corresponding to the escape from a strange saddle.

4.2. Estimation of characteristic turbulent lifetimes

Characteristic turbulent lifetimes are estimated from an exponential distribution,

$$S(t) = \exp[-(t - t_0)/\tau_{\text{true}}], \quad (4.2)$$

with the sample mean, which is the the Maximum Likelihood Estimator (MLE) of the parameter τ_{true} . However, the observation time-span is finite in practice, which implies that the data need to be truncated and therefore the sample mean cannot be obtained. A lifetime sample of size n with truncation after r decays is known as censored data of

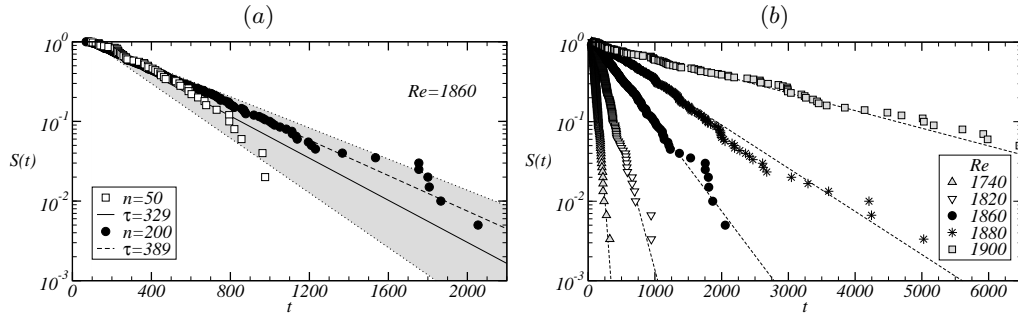


FIGURE 3. (a) Survivor function at $Re = 1860$ obtained from sample sizes $n = 50$ (squares) and 200 (circles). The solid (dashed) line is the curve $\exp[(t - t_0)/\tau]$ for $n = 50$ (200), where τ has been estimated from (4.3). The shaded area between the two dotted lines corresponds to the confidence interval (4.4) for $n = 50$. (b) Survivor function of turbulent lifetimes at several Reynolds numbers. For clarity, only part of the Re investigated are shown.

Type-II (Lawless 2003). In this case, the MLE of τ_{true} is given by

$$\tau = \frac{1}{r} \left[\sum_{i=1}^r t_i + (n - r)t_r \right], \quad (4.3)$$

where $t_0 + t_i$ is the lifetime of the i th puff to decay, hence $t^* = t_0 + t_r$ being the time where the simulations were truncated. The corresponding confidence intervals, at level $1 - \alpha$, are

$$\tau_{\text{true}} \in \tau \times [2r/\chi_{2r, 1-\alpha/2}^2, 2r/\chi_{2r, \alpha/2}^2], \quad (4.4)$$

where $\chi_{m,p}^2$ is the p th quantile of the chi-squared distribution with m degrees of freedom. It is worth noting that for uncensored data ($r = n$), the sample mean is recovered as MLE, and more importantly, that the relative size of the confidence intervals is uniquely determined by the number of runs r that have decayed. In the uncensored case the Central Limit Theorem yields approximate 95% confidence intervals $\tau \times (1 \pm 1.96/\sqrt{n})$, and the need for a large number of observations is a consequence of the slow convergence with n .

Figure 3(a) shows the survivor function at $Re = 1860$ for the first 50 runs in figure 1(a) and for the full sample $n = 200$. The mean lifetimes have been estimated from (4.3) and are plotted as solid and dash lines illustrating the curves $\exp[(t - t_0)/\tau]$. Although the characteristic lifetime from the sub-sample $n = 50$ is shorter, its 95% confidence interval (4.4), spanned by the shaded area in the figure, includes the result from the full sample.

5. Lifetime scaling with Re : the transient nature of puff turbulence

In order to shed light on the discrepancies in scaling of turbulent lifetimes present in the literature, we have extended the Reynolds number range in the numerical simulations up to $Re = 1900$. The results are presented in figure 3(b), showing survivor functions at several Re in a logarithmic scale. The sample sizes have been subsequently increased until each data-set unambiguously showed the exponential distribution. In particular, between 200 and 500 simulations were run for $Re \in [1720, 1880]$, whereas at $Re = 1900$ only 100 cases were simulated due to the computational costs incurred in very long time integrations. In addition, the simulations at $Re = 1900$ were stopped when 96 puffs had decayed, leaving only 4 survivors at $t^* \simeq 6500$.

From the survivor functions in figure 3(b) escape rates $\kappa = 1/\tau$ have been estimated

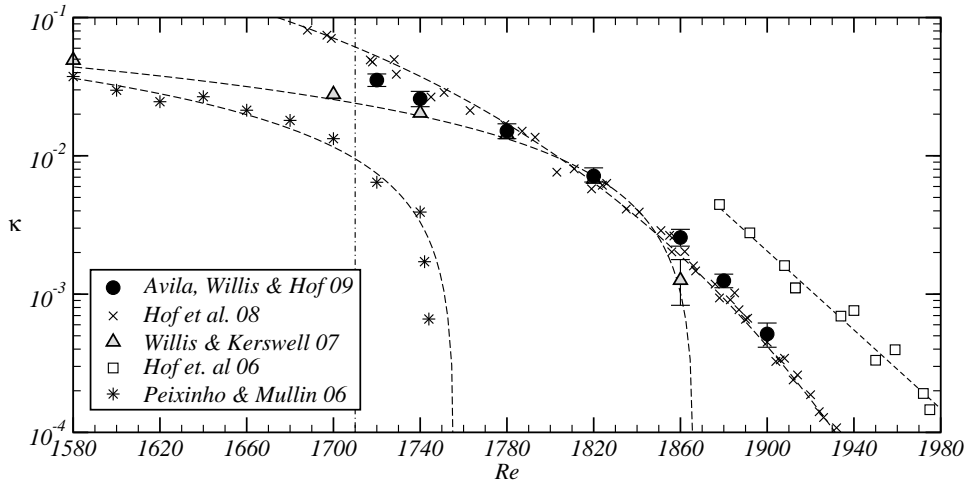


FIGURE 4. Escape rate κ scaling with Re as obtained from the mean lifetimes of the survivor functions in figure 3 (shown in black circles). The experiments of Hof *et al.* (2008), Hof *et al.* (2006) and Peixinho & Mullin (2006) are shown as crosses, squares and stars, respectively. The numerical simulations of Willis & Kerswell (2007) are shown as triangles. The vertical line marks the approximate onset of the strange saddle.

using (4.3) and are shown as black circles in the logarithmic scale of figure 4. Confidence intervals at the 95% level, obtained from (4.4), have been plotted and may be regarded as error bars due to sample size. Overall, the results are in excellent quantitative agreement with the experimental relaminarisation probabilities of Hof *et al.* (2008), shown as crosses. With increasing Re , κ decreases extremely fast, corresponding to a super-exponential increase in turbulent lifetimes. The results of the high resolution runs and reduction from $Re = 2200$ at $Re = 1860$ fall within the 95% confidence intervals of the default case and are not shown in the figure to avoid overlapping.

The agreement with the simulations of Willis & Kerswell (2007) (triangles in figure 4) is very good for $Re = 1740, 1780, 1820$, the data overlaps with the present computations in the latter two. For $Re \lesssim 1720$ we have shown that the lifetimes are not exponentially distributed (vertical line). The discrepancy of the point at $Re = 1860$ for Willis & Kerswell (2007) is attributed mainly to statistical uncertainty. There τ_{true} was estimated with 40 simulations, of which only 28 had decayed when truncated at $t^* \simeq 1000$. We have re-analyzed the data using the MLE (4.3) and provided analogous confidence intervals from (4.4). The upper end of the confidence interval is close to the experimental value of Hof *et al.* (2008) and the present computations, although there is still a small difference. We remark, for example, that had the 40 initial conditions $i \in [90, 130]$ of figure 1(a) been used here to estimate τ_{true} , the result would be compatible with the estimate provided by Willis & Kerswell (2007).

The experiments of Hof *et al.* (2006) (squares in figure 4) appear to be shifted by 2.5% in Re with respect to the numerical simulations and later experiments of Hof *et al.* (2008). Their exponential fit, however, provides a good approximation of the slope of κ over 2 orders of magnitude. The differences between the results presented here and those of Peixinho & Mullin (2006) (stars in figure 4) may be of several origins. The most significant procedural difference is the manner in which the puffs were generated. It has been shown here and by de Lozar & Hof (2009), however, that the initial condition has no influence other than on t_0 . A more likely candidate from which the difference may originate is the difficulty of inferring the lifetime from the data. At high Re , a short

pipe implies very few relaminarisations and therefore a very large range of possible τ according to (4.3). For example, at $Re = 1745$ Peixinho & Mullin (2006) obtained a mean lifetime of $\tau = 1515$. For an observation distance of $500D$ after reducing Re , this corresponds to $r \leq 3$ decays out of $n = 50$ experimental runs, yielding a confidence interval $\tau_{\text{true}} \times [629, 7346]$. Nevertheless, we must acknowledge that Peixinho & Mullin (2006) were first to experimentally demonstrate the very rapid increase in lifetimes over a small range of Reynolds numbers.

6. Conclusion

The transition to turbulence in pipe flow has been recently linked to the presence of a strange saddle in the phase space of the Navier–Stokes equations (see e.g. Eckhardt 2008). One of the predictions of this emerging paradigm is that the turbulent lifetimes, the time prior to escaping the saddle, should be exponentially distributed. We have shown that the distributions are indeed exponential by substantially increasing the sample size and thus reducing statistical uncertainty with respect to previous works. In order to recover the true escape rate, a substantially larger sample size than previously used is necessary.

We have demonstrated that initial conditions from puffs at $Re = 2000$ and 2200 render the same characteristic lifetimes after reduction to $Re = 1860$, which verifies that the same turbulent state is visited. Here, contrary to the possibility that the turbulent state be difficult to reach when changing the Reynolds number, the number of trajectories which fail to approach the saddle is actually low (small t_0). This reflects structural similarity of the initial condition with the state at the final Re .

Interestingly, the onset of the exponential distributions is rather sharp in Re at about $Re \lesssim 1720$. This suggests a bifurcation event that gives rise to the strange saddle. The onset of meta-stable transients has been characterized in plane Couette flow experiments by Bottin & Chate (1998) and Bottin *et al.* (1998), who measured the average turbulent fraction. The change in distributional shape revealed here provides an alternative reliable means of quantifying a lower bound for meta-stable turbulence, and is appropriate when considering single isolated disturbances.

Localized turbulence has been confirmed as a repeller, supporting the experimental evidence provided by Hof *et al.* (2008) that lifetimes increase super-exponentially with Re . A similar scaling has been recently reported by Borrero-Echeverry, Tagg & Schatz (2009) in Taylor–Couette flow with stationary inner cylinder and previously by Schoepe (2004) in super-fluid turbulence. To our knowledge the quantitative agreement of the presented numerical simulations with experiment is unprecedented in transition studies. It validates the use of periodic boundary conditions and testifies the high demands on numerical resolution and domain sizes which are required to faithfully capture the relevant dynamics of turbulence.

We wish to thank many cited authors for interesting and insightful discussions regarding lifetimes in shear flows. M. Avila and B. Hof are supported by the Max Planck Society. A. P. Willis is supported by the E.C., Marie Curie Fellowship PIEF-GA-2008-219223.

REFERENCES

- BORRERO-ECHEVERRY, D., TAGG, R. & SCHATZ, M.F. 2009 Transient Turbulence in Taylor–Couette Flow. *arXiv:0905.0147v1* .
- BOTTIN, S. & CHATE, H. 1998 Statistical analysis of the transition to turbulence in plane Couette flow. *Eur. Phys. J. B* **6** (1), 143–155.

- BOTTIN, S., DAVIAUD, F., MANNEVILLE, P. & DAUCHOT, O. 1998 Discontinuous transition to spatiotemporal intermittency in plane Couette flow. *Europhys. Lett.* **43** (2), 171–176.
- BROSA, U. 1989 Turbulence without strange attractor. *J. Stat. Phys.* **55** (5), 1303–1312.
- DARBYSHIRE, A.G. & MULLIN, T. 1995 Transition to turbulence in constant-mass-flux pipe flow. *J. Fluid Mech.* **289**, 83–114.
- DUGUET, Y., PRINGLE, C.C.T. & KERSWELL, R.R. 2008 Relative periodic orbits in transitional pipe flow. *Physics of Fluids* **20**, 114102.
- ECKHARDT, B. 2008 Turbulence transition in pipe flow: some open questions. *Nonlinearity (London)* **21** (1), T1–T11.
- ECKHARDT, B., SCHNEIDER, T.M., HOF, B. & WESTERWEEL, J. 2007 Turbulence transition in pipe flow. *Annu. Rev. Fluid Mech.* **39**, 447–468.
- FAISST, H. & ECKHARDT, B. 2003 Traveling waves in pipe flow. *Phys. Rev. Lett.* **91** (22), 224502.
- FAISST, H. & ECKHARDT, B. 2004 Sensitive dependence on initial conditions in transition to turbulence. *J. Fluid Mech.* **504**, 343–352.
- GROSSMANN, S. 2000 The onset of shear flow turbulence. *Rev. Mod. Phys.* **72** (2), 603–618.
- HOF, B., VAN DOORNE, C.W.H., WESTERWEEL, J., NIEUWSTADT, F.T.M., FAISST, H., ECKHARDT, B., WEDIN, H., KERSWELL, R.R. & WALEFFE, F. 2004 Experimental observation of nonlinear traveling waves in turbulent pipe flow. *Science* **305** (5690), 1594–1598.
- HOF, B., JUEL, A. & MULLIN, T. 2003 Scaling of the turbulence transition threshold in a pipe. *Phys. Rev. Lett.* **91** (24), 244502.
- HOF, B., DE LOZAR, A., KUIK, D.J. & WESTERWEEL, J. 2008 Repeller or Attractor? Selecting the Dynamical Model for the Onset of Turbulence in Pipe Flow. *Phys. Rev. Lett.* **101** (21), 214501.
- HOF, B., WESTERWEEL, J., SCHNEIDER, T. M. & ECKHARDT, B. 2006 Finite lifetime of turbulence in shear flows. *Nature (London)* **443** (7), 59–62.
- KERSWELL, R. R. & TUTTY, O.R. 2007 Recurrence of travelling waves in transitional pipe flow. *J. Fluid Mech.* **584**, 69–102.
- LAWLESS, J.F. 2003 *Statistical Models and Methods for Lifetime Data*, 2nd edn. New Jersey: Wiley.
- DE LOZAR, A. & HOF, B. 2009 An experimental study of the decay of turbulent puffs in pipe flow. *Phil. Trans. R. Soc. A* **367** (1888), 589–599.
- MARQUES, F. 1990 On boundary conditions for velocity potentials in confined flows. Application to Couette flow. *Phys. Fluids A* **2**, 729–737.
- MELLIBOVSKY, F. & MESEGUER, A. 2009 Critical threshold in pipe flow transition. *Phil. Trans. R. Soc. A* **367** (1888), 545–560.
- PEIXINHO, J. & MULLIN, T. 2006 Decay of Turbulence in Pipe Flow. *Phys. Rev. Lett.* **96** (9), 094501.
- PEIXINHO, J. & MULLIN, T. 2007 Finite-amplitude thresholds for transition in pipe flow. *J. Fluid Mech.* **582**, 169–178.
- PFENNIGER, W. 1961 Transition in the inlet length of tubes at high Reynolds numbers. In *Boundary Layer and flow control* (ed. G. V. Lachman), pp. 970–980. New York: Pergamon.
- PRINGLE, C.C.T. & KERSWELL, R.R. 2007 Asymmetric, helical, and mirror-symmetric traveling waves in pipe flow. *Phys. Rev. Lett.* **99**, 074502.
- REYNOLDS, O. 1883 An Experimental Investigation of the Circumstances Which Determine Whether the Motion of Water Shall Be Direct or Sinuous, and of the Law of Resistance in Parallel Channels. *Proc. R. Soc. London* **35**, 84–99.
- SCHNEIDER, T.M. & ECKHARDT, B. 2008 Lifetime statistics in transitional pipe flow. *Phys. Rev. E* **78** (4), 046310.
- SCHOEPE, W. 2004 Fluctuations and stability of superfluid turbulence at mK temperatures. *Phys. Rev. Lett.* **92** (9), 95301.
- TÉL, T. & LAI, Y.C. 2008 Chaotic transients in spatially extended systems. *Phys. Rep.* **460** (6), 245–275.
- WEDIN, H. & KERSWELL, R.R. 2004 Exact coherent structures in pipe flow: travelling wave solutions. *J. Fluid Mech.* **508**, 333–371.
- WILLIS, A.P. & KERSWELL, R.R. 2007 Critical Behavior in the Relaminarization of Localized Turbulence in Pipe Flow. *Phys. Rev. Lett.* **98** (1), 014501.

- WILLIS, A.P. & KERSWELL, R.R. 2009 Turbulent dynamics of pipe flow captured in a reduced model: puff relaminarization and localized 'edge' states. *J. Fluid Mech.* **619**, 213–233.
- WYGNANSKI, I. J. & CHAMPAGNE, F. H. 1973 On transition in a pipe. Part 1. The origin of puffs and slugs and the flow in a turbulent slug. *J. Fluid Mech.* **59** (02), 281–335.