

Exposing Pseudoweight Layers in Regular LDPC Code Ensembles

Mark F. Flanagan
 University College Dublin
 Belfield, Dublin 4, Ireland
 Email: mark.flanagan@ieee.org

Abstract—A solution is presented for the asymptotic growth rate of the AWGN-pseudoweight distribution of regular low-density parity-check (LDPC) code ensembles for a selected graph cover degree $M \geq 1$. The evaluation of the growth rate requires solution of a system of $2M + 1$ nonlinear equations in $2M + 1$ unknowns. Simulation results for the pseudoweight distribution of two regular LDPC code ensembles are presented for graph covers of low degree.

I. INTRODUCTION

In classical coding theory, the *weight distribution* of a code is a useful tool for measuring a linear code's performance under maximum likelihood (ML) decoding. For codes decoded using modern high-performance suboptimal decoding algorithms such as sum-product (SP) or linear-programming (LP) decoding, the *pseudoweight* is the appropriate analog of the codeword weight. There are different definitions of pseudoweight for different channels; one of primary importance is the *additive white Gaussian noise* (AWGN) pseudoweight. The pseudoweight distribution considers all codewords in all codes derived from finite covers of the Tanner graph, which compete with the codewords to be the best SP decoding solution. The set of pseudocodewords has a succinct characterization in terms of the so-called *fundamental polytope* or equivalently, the *fundamental cone* [3], [4], [5]. Also, pseudocodewords arising from finite covers of the Tanner graph were shown to be equivalent to those responsible for failure of LP decoding [7], [8]. While much of the existing work in this area is concerned with performance characterization of particular codes, the performance of *ensembles of low-density parity-check* (LDPC) codes [1] is also of interest.

In [9], the growth rate of the weight distribution of irregular LDPC codes was derived, and a numerical technique was presented for its approximate evaluation. It was shown in [5, Corollary 50] that (j, k) -regular ensembles with $j \geq 3$ have a ratio of minimum AWGN-pseudoweight to block length n which decreases to zero asymptotically as $n \rightarrow \infty$. Apart from this result, to the author's knowledge no *ensemble* results exist in the literature concerning AWGN-pseudoweight. In this paper, we make a first step in this direction. We define the degree- M *pseudoweight enumerating function* of a linear block code, and use this concept to find an expression for the growth rate of the AWGN-pseudoweight of regular LDPC code ensembles. We also present simulation results for the $(3, 6)$ -regular and $(4, 8)$ -regular LDPC code ensembles.

II. PRELIMINARIES AND NOTATION

We begin by providing some general settings and definitions. For $\mathbf{u} = (u_1 \ u_2 \ \cdots \ u_M)$, we denote the multinomial coefficient by

$$\binom{k}{\mathbf{u}} = \binom{k}{u_1 \ u_2 \ \cdots \ u_M} = \frac{k!}{\left(k - \sum_{r=1}^M u_r\right)! \prod_{r=1}^M u_r!}.$$

For $\boldsymbol{\alpha} = (\alpha_1 \ \alpha_2 \ \cdots \ \alpha_M) \in \mathbb{R}^M$ with $\alpha_r \geq 0$ for each $r = 1, 2, \dots, M$ and $\sum_{r=1}^M \alpha_r \leq 1$, we denote the multivariate entropy function by

$$h(\boldsymbol{\alpha}) = - \sum_{r=1}^M \alpha_r \log \alpha_r - \left(1 - \sum_{r=1}^M \alpha_r\right) \log \left(1 - \sum_{r=1}^M \alpha_r\right). \quad (1)$$

All logarithms in the paper are to the base e .

Let \mathcal{C} be a linear block code of length n over the binary field \mathbb{F}_2 , defined by

$$\mathcal{C} = \{\mathbf{c} \in \mathbb{F}_2^n : \mathbf{c}\mathbf{H}^T = \mathbf{0} \in \mathbb{F}_2^m\} \quad (2)$$

where $\mathbf{H} = (H_{j,i})$ is an $m \times n$ matrix over \mathbb{F}_2 called the *parity-check matrix* of the code \mathcal{C} . Also denote $\mathcal{I} = \{1, 2, \dots, n\}$, $\mathcal{J} = \{1, 2, \dots, m\}$ and for each $j \in \mathcal{J}$

$$\mathcal{I}_j = \{i \in \mathcal{I} : H_{j,i} = 1\}.$$

The *Tanner graph* of a linear block code \mathcal{C} over \mathbb{F}_2 with parity-check matrix \mathbf{H} is an equivalent characterization of \mathbf{H} . The Tanner graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ has vertex set $\mathcal{V} = \{u_1, u_2, \dots, u_n\} \cup \{v_1, v_2, \dots, v_m\}$, and there is an edge between u_i and v_j if and only if $H_{j,i} = 1$. We denote by $\mathcal{N}(v)$ the set of neighbors of a vertex $v \in \mathcal{V}$.

We next define what is meant by a finite cover of a Tanner graph.

Definition 1: ([4]) A graph $\tilde{\mathcal{G}} = (\tilde{\mathcal{V}}, \tilde{\mathcal{E}})$ is a *finite cover* of the Tanner graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ if there exists a mapping $\Pi : \tilde{\mathcal{V}} \rightarrow \mathcal{V}$ which is a graph homomorphism (Π takes adjacent vertices of $\tilde{\mathcal{G}}$ to adjacent vertices of \mathcal{G}), such that for every vertex $v \in \mathcal{V}$ and every $\tilde{v} \in \Pi^{-1}(v)$, the neighborhood $\mathcal{N}(\tilde{v})$ of \tilde{v} is mapped bijectively to $\mathcal{N}(v)$.

Definition 2: ([4]) A cover of the graph \mathcal{G} is said to have degree M , where M is a positive integer, if $|\Pi^{-1}(v)| = M$ for every vertex $v \in \mathcal{V}$. We refer to such a cover graph as an *M-cover* of \mathcal{G} .

Let $\tilde{\mathcal{G}} = (\tilde{\mathcal{V}}, \tilde{\mathcal{E}})$ be an M -cover of the Tanner graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ representing the code \mathcal{C} with parity-check matrix \mathbf{H} . The vertices in the set $\Pi^{-1}(u_i)$ are called *copies* of u_i and are denoted $\{u_{i,1}, u_{i,2}, \dots, u_{i,M}\}$, where $i \in \mathcal{I}$. Similarly, the vertices in the set $\Pi^{-1}(v_j)$ are called *copies* of v_j and are denoted $\{v_{j,1}, v_{j,2}, \dots, v_{j,M}\}$, where $j \in \mathcal{J}$.

Less formally, given a code \mathcal{C} with parity check matrix \mathbf{H} and corresponding Tanner graph \mathcal{G} , an M -cover of \mathcal{G} is a graph whose vertex set consists of M copies of each vertex u_i and M copies of each vertex v_j , such that for each $j \in \mathcal{J}$, $i \in \mathcal{I}_j$, the M copies of u_i and the M copies of v_j are connected in an arbitrary one-to-one fashion.

For any $M \geq 1$, an M -cover *codeword* is a labelling of vertices of the M -cover graph with values from \mathbb{F}_2 such that all parity checks are satisfied. We denote the label of $u_{i,r}$ by $p_{i,r}$ for each $i \in \mathcal{I}$, $r = 1, 2, \dots, M$, and we may then write the M -cover codeword in vector form as

$$\mathbf{p} = (p_{1,1}, p_{1,2}, \dots, p_{1,M}, p_{2,1}, p_{2,2}, \dots, p_{2,M}, \dots, p_{n,1}, p_{n,2}, \dots, p_{n,M}).$$

It is easily seen that \mathbf{p} belongs to a linear code $\tilde{\mathcal{C}}$ of length Mn over \mathbb{F}_2 , defined by an $Mm \times Mn$ parity-check matrix $\tilde{\mathbf{H}}$. To construct $\tilde{\mathbf{H}}$, for $1 \leq i^*, j^* \leq M$ and $i \in \mathcal{I}$, $j \in \mathcal{J}$, we let $i' = (i-1)M + i^*$, $j' = (j-1)M + j^*$, and

$$\tilde{H}_{j',i'} = \begin{cases} 1 & \text{if } u_{i,i^*} \in \mathcal{N}(v_{j,j^*}) \\ 0 & \text{otherwise.} \end{cases}$$

It may be seen that $\tilde{\mathcal{G}}$ is the Tanner graph of the code $\tilde{\mathcal{C}}$ corresponding to the parity-check matrix $\tilde{\mathbf{H}}$.

We next define the concept of *pseudocodeword* as follows.

Definition 3: Let \mathcal{C} be a linear code of length n with parity-check matrix \mathbf{H} . For any positive integer M , a vector $\mathbf{z} = (z_1 z_2 \dots z_n)$ of length n with nonnegative integer entries is said to be a *degree- M pseudocodeword* of the code \mathcal{C} if and only if there exists an M -cover codeword \mathbf{p} with

$$z_i = |\{r \in \{1, 2, \dots, M\} : p_{i,r} = 1\}|$$

for all $i \in \mathcal{I}$.

Definition 4: The *pseudoweight* of a degree- M pseudocodeword \mathbf{z} of the code \mathcal{C} is equal to the vector $\mathbf{u} = (u_1 u_2 \dots u_M)$, where \mathbf{z} has u_r entries equal to r for each $r = 1, 2, \dots, M$.

Note that the pseudoweight as defined here corresponds to the “type” of a pseudocodeword in the notation of [6]. Note also that this notion of pseudoweight is applicable to different channels such as the additive white Gaussian noise (AWGN) channel, binary symmetric channel (BSC) or binary erasure channel (BEC). The AWGN-pseudoweight of a pseudocodeword \mathbf{z} of length n is defined by [2]

$$w(\mathbf{z}) = \frac{(\sum_{i \in \mathcal{I}} z_i)^2}{\sum_{i \in \mathcal{I}} z_i^2} \quad (3)$$

and its BSC-pseudoweight and BEC-pseudoweight are defined in [3] (see also [5, Section 6]).

Definition 5 ([4]): The *fundamental cone* $\mathcal{K}(\mathbf{H})$ of the $m \times n$ parity-check matrix \mathbf{H} is equal to the set of vectors $\boldsymbol{\nu} = (\nu_1 \nu_2 \dots \nu_n) \in \mathbb{R}^n$ such that $\nu_i \geq 0$ for all $i \in \mathcal{I}$, and

$$\sum_{\ell \in \mathcal{I}_j \setminus \{i\}} \nu_\ell \geq \nu_i \quad \forall j \in \mathcal{J}, i \in \mathcal{I}_j.$$

In [4], it was shown that if \mathcal{C} is a binary linear code with an $m \times n$ parity-check matrix \mathbf{H} , then a length- n integer vector \mathbf{z} is a pseudocodeword¹ of \mathbf{H} if and only if $\mathbf{z} \in \mathcal{K}(\mathbf{H})$ and

$$\mathbf{z}\mathbf{H}^T \equiv \mathbf{0} \pmod{2} \quad (4)$$

where $\mathcal{K}(\mathbf{H})$ denotes the fundamental cone of \mathbf{H} , and the matrix \mathbf{H} in (4) is interpreted over the integers.

We next define the concept of pseudoweight enumerating function of a block code.

Definition 6: The *degree- M pseudoweight enumerating function* (PWEF) of a block code \mathcal{C} of length n is equal to

$$B^{(M)}(\mathbf{x}) = \sum_{\mathbf{u}} B_{\mathbf{u}}^{(M)} x_1^{u_1} x_2^{u_2} \dots x_M^{u_M}$$

where $\mathbf{x} = (x_1 x_2 \dots x_M)$, $\mathbf{u} = (u_1 u_2 \dots u_M)$ and $B_{\mathbf{u}}^{(M)}$ denotes the number of degree- M pseudocodewords² of the code with pseudoweight \mathbf{u} .

Proposition 1: The degree- M PWEF of the single parity-check (SPC) code of length k is

$$B^{(M)}(\mathbf{x}) = \frac{1}{2} \left[\left(P^{(M)}(\mathbf{x}) \right)^k + \left(Q^{(M)}(\mathbf{x}) \right)^k \right] - T^{(M)}(\mathbf{x}) \quad (5)$$

where $P^{(M)}(\mathbf{x}) \triangleq 1 + \sum_{r=1}^M x_r$, $Q^{(M)}(\mathbf{x}) \triangleq 1 + \sum_{r=1}^M (-1)^r x_r$, $T^{(1)}(\mathbf{x}) = 0$, and for $M > 1$

$$T^{(M)}(\mathbf{x}) = T^{(M-1)}(\mathbf{x}) + x_M \left(\sum_{\mathbf{v} \in \mathcal{U}^{M-1}} \binom{k}{v_1 v_2 \dots v_{M-1}} x_1^{v_1} x_2^{v_2} \dots x_{M-1}^{v_{M-1}} \right) \quad (6)$$

where the set \mathcal{U}^{M-1} in (6) is the set of integer vectors $\mathbf{v} = (v_1 v_2 \dots v_{M-1})$ satisfying $v_r \geq 0$ for all $r = 1, 2, \dots, M-1$, $\sum_{r=1}^{M-1} r v_r < M$ and where $\sum_{r \text{ odd}} v_r + M$ is even.

Proof: In this case \mathbf{H} is a length- k row vector of ones, so we have

$$B_{\mathbf{u}}^{(M)} = \begin{cases} \binom{k}{\mathbf{u}} & \text{if } \mathbf{u} \in \mathcal{S} \\ 0 & \text{otherwise,} \end{cases}$$

where (using Definition 5) \mathcal{S} is the set of integer vectors \mathbf{u} which satisfy

$$(\mathcal{S}-1) \quad u_r \geq 0 \quad \forall r = 1, 2, \dots, M; \quad \sum_{r=1}^M u_r \leq k, \quad (7)$$

¹Note that the object we call a “pseudocodeword” was called an “unscaled pseudocodeword” in [4].

²Note that this count does *not* consider the multiplicity of M -cover codewords corresponding to a particular pseudocodeword.

$$(S-2) \quad \sum_{r \text{ odd}} u_r \text{ is even, and} \quad (8)$$

(S-3) If there exists $c \in \{1, 2, \dots, M\}$ with $u_c = 1$ and $u_r = 0$ for $c < r \leq M$, then

$$c \leq \sum_{r=1}^{c-1} r u_r. \quad (9)$$

It is straightforward to check that in (5), the term

$$\frac{1}{2} \left[\left(P^{(M)}(\mathbf{x}) \right)^k + \left(Q^{(M)}(\mathbf{x}) \right)^k \right]$$

takes into account all integer vectors \mathbf{u} which satisfy conditions (S-1) and (S-2), and the term $T^{(M)}(\mathbf{x})$ takes into account all those which violate the condition (S-3). ■

In particular $T^{(2)}(\mathbf{x}) = kx_2$, $T^{(3)}(\mathbf{x}) = kx_2 + k(k-1)x_1x_3$, and $T^{(4)}(\mathbf{x}) = kx_2 + k(k-1)x_1x_3 + kx_4 + k(k-1)x_2x_4 + \frac{1}{2}k(k-1)(k-2)x_1^2x_4$. Also note that

$$\frac{\partial B^{(M)}(\mathbf{x})}{\partial x_r} = \frac{k}{2} \left[\left(P^{(M)}(\mathbf{x}) \right)^{k-1} + (-1)^r \left(Q^{(M)}(\mathbf{x}) \right)^{k-1} \right] - \frac{\partial T^{(M)}(\mathbf{x})}{\partial x_r}$$

for $r = 1, 2, \dots, M$.

III. GROWTH RATE OF THE AWGN-PSEUDOWEIGHT DISTRIBUTION OF THE REGULAR LDPC CODE ENSEMBLE

For a positive integer n , we define a (j, k) -regular LDPC code ensemble \mathcal{M}_n as follows. The Tanner graph of an LDPC code from the ensemble consists of n variable nodes of degree j , and $m = nj/k$ check nodes of degree k . The variable and check node sockets are connected by a permutation on the $E = nj = mk$ edges of the graph, each permutation being equiprobable.

The concept of degree- M assignment is defined next. This definition is a generalization of the definition of assignment in [9] (the definition in [9] corresponds to that of a degree-1 assignment).

Definition 7: A *degree- M assignment* is a labelling of the edges of the Tanner graph with numbers from the set $\{0, 1, 2, \dots, M\}$. An assignment is said to have *pseudoweight* $\mathbf{t} = (t_1 t_2 \dots t_M)$ if t_r edges are labelled r for each $r = 1, 2, \dots, M$. An assignment is said to be *M -check-valid* if according to this labelling, every check node recognizes a valid local degree- M pseudocodeword.

For any positive integer M , the growth rate of the degree- M AWGN-pseudoweight distribution of the (j, k) -regular LDPC code ensemble sequence $\{\mathcal{M}_n\}$ is defined by

$$G_M(\alpha) \triangleq \lim_{n \rightarrow \infty} \frac{1}{n} \log \mathbb{E}_{\mathcal{M}_n} \left[N_{\alpha n}^{(M)} \right] \quad (10)$$

where $\mathbb{E}_{\mathcal{M}_n}$ denotes the expectation operator over the ensemble \mathcal{M}_n , and $N_w^{(M)}$ denotes the number of degree- M pseudocodewords of AWGN-pseudoweight w of a randomly

chosen LDPC code in the ensemble \mathcal{M}_n . The limit in (10) assumes the inclusion of only those positive integers n for which $\alpha n \in \mathbb{Z}$ and $\mathbb{E}_{\mathcal{M}_n} [N_{\alpha n}^{(M)}]$ is positive (i.e., where the expression whose limit we seek is well defined).

We next define a notion of *asymptotic goodness* of an LDPC code ensemble sequence.

Definition 8: For each $M \geq 1$, let $G_M(\alpha)$ be the growth rate of the degree- M pseudoweight distribution of an LDPC code ensemble sequence, and let $\alpha_M^* = \inf\{\alpha > 0 \mid G_M(\alpha) \geq 0\}$. The ensemble sequence is said to be *asymptotically good* if and only if $\inf_{M \geq 1} \{\alpha_M^*\} > 0$.

The following theorem constitutes the main result of the paper.

Theorem 1: The growth rate of the degree- M pseudoweight distribution of the (j, k) -regular LDPC code ensemble sequence $\{\mathcal{M}_n\}$ is given by

$$G_M(\alpha) = \frac{j}{k} \log B^{(M)}(\mathbf{x}_0) - j \sum_{i=1}^M q_i \log x_{0,i} - (j-1)h(\mathbf{q}) \quad (11)$$

where $\mathbf{x}_0 = (x_{0,1} x_{0,2} \dots x_{0,M})$, $\mathbf{q} = (q_1 q_2 \dots q_M)$ and λ are the solutions to the system of $2M+1$ equations in $2M+1$ unknowns³

$$x_{0,r} \frac{\partial B^{(M)}(\mathbf{x}_0)}{\partial x_{0,r}} = k q_r B^{(M)}(\mathbf{x}_0) \quad (12)$$

for each $r = 1, 2, \dots, M$,

$$(j-1) \log \left[\frac{q_r}{1 - \sum_{s=1}^M q_s} \right] - j \log x_{0,r} = \lambda \left(2r \sum_{s=1}^M s q_s - \alpha r^2 \right) \quad (13)$$

for each $r = 1, 2, \dots, M$, and

$$g(\mathbf{q}) = \left(\sum_{r=1}^M r q_r \right)^2 - \alpha \sum_{r=1}^M r^2 q_r = 0 \quad (14)$$

satisfying $x_{0,r} > 0$ and $q_r > 0$ for each $r = 1, 2, \dots, M$.

Proof: Consider a degree- M pseudocodeword $\mathbf{z} = (z_1 z_2 \dots z_n)$ with pseudoweight $\mathbf{q}n$, where $\mathbf{q} = (q_1 q_2 \dots q_M)$. This pseudocodeword naturally induces a degree- M assignment of pseudoweight $j\mathbf{q}n$. Using (3), the AWGN-pseudoweight of \mathbf{z} may be written as $w(\mathbf{z}) = \alpha n$ where

$$\alpha = \frac{\left(\sum_{r=1}^M r q_r \right)^2}{\sum_{r=1}^M r^2 q_r}. \quad (15)$$

Rearranging (15), and defining $g(\mathbf{q})$ appropriately, yields (14). The expected number of degree- M pseudocodewords of pseudoweight $\mathbf{q}n$ is then

$$\mathbb{E}_{\mathcal{M}_n} \left[N^{(M)}(\mathbf{q}) \right] = \binom{n}{\mathbf{q}n} \cdot P_{c\text{-valid}}^{(M)}(j\mathbf{q}), \quad (16)$$

³Note that $B^{(M)}(\mathbf{x})$ is given by Proposition 1.

where $P_{c\text{-valid}}^{(M)}(\boldsymbol{\alpha})$ represents the probability that a randomly chosen degree- M assignment with pseudoweight $\boldsymbol{\alpha}n$ is M -check-valid. This probability is given by

$$P_{c\text{-valid}}^{(M)}(j\mathbf{q}) = N_c^{(M)}(j\mathbf{q}) / \binom{jn}{j\mathbf{q}n}, \quad (17)$$

where $N_c^{(M)}(\boldsymbol{\alpha})$ denotes the number of M -check-valid degree- M assignments of pseudoweight $\boldsymbol{\alpha}n$. The numerator of (17) may be written as ⁴

$$N_c^{(M)}(j\mathbf{q}) = \text{Coeff} \left[\left(B^{(M)}(\mathbf{x}) \right)^m, x_1^{jq_1 n} x_2^{jq_2 n} \dots x_M^{jq_M n} \right].$$

We next make use of the following result from [11, Theorem 2]:

Lemma 1: Let $R(\mathbf{x})$ denote a multivariate polynomial with nonnegative coefficients. For a fixed vector of positive rational numbers $\boldsymbol{\xi} = (\xi_1 \xi_2 \dots \xi_M)$, consider the set of positive integers ℓ such that $\xi_r \ell \in \mathbb{Z}$ for each $r = 1, 2, \dots, M$ and $\text{Coeff}(\{R(\mathbf{x})\}^\ell, x_1^{\xi_1 \ell} x_2^{\xi_2 \ell} \dots x_M^{\xi_M \ell}) > 0$. Then either this set is empty, or it has infinite cardinality; if t is one such ℓ , then so is $j t$ for every positive integer j . In the latter case, the following limit is well defined and exists:

$$\begin{aligned} \lim_{\ell \rightarrow \infty} \frac{1}{\ell} \log \text{Coeff} \left[(R(\mathbf{x}))^\ell, x_1^{\xi_1 \ell} x_2^{\xi_2 \ell} \dots x_M^{\xi_M \ell} \right] \\ = \log R(\mathbf{x}_0) - \sum_{r=1}^M \xi_r \log x_{0,r} \end{aligned} \quad (18)$$

where $\mathbf{x}_0 = (x_{0,1} x_{0,2} \dots x_{0,M})$ is the unique positive real solution to the system of equations

$$x_{0,r} \frac{\partial R(\mathbf{x}_0)}{\partial x_{0,r}} = \xi_r R(\mathbf{x}_0) \quad (19)$$

for each $r = 1, 2, \dots, M$.

Applying this lemma by substituting $R(\mathbf{x}) = B^{(M)}(\mathbf{x})$, $\ell = m = nj/k$ and $\xi_r = kq_r$, we obtain that as $n \rightarrow \infty$

$$N_c^{(M)}(j\mathbf{q}) \rightarrow \exp \left\{ n \left(\frac{j}{k} \log B^{(M)}(\mathbf{x}_0) - j \sum_{r=1}^M q_r \log x_{0,r} \right) \right\} \quad (20)$$

where $\mathbf{x}_0 = (x_{0,1} x_{0,2} \dots x_{0,M})$ is the unique positive real solution to the system given by (12) for each $r = 1, 2, \dots, M$. Note that (12) provides an implicit definition of \mathbf{x}_0 as a function of \mathbf{q} .

Using Stirling's formula, the multinomial coefficients in (16) and (17) may be approximated as $n \rightarrow \infty$ as

$$\binom{n}{\mathbf{q}n} \rightarrow \exp \{nh(\mathbf{q})\}; \quad \binom{jn}{j\mathbf{q}n} \rightarrow \exp \{njh(\mathbf{q})\}.$$

⁴Here we use the following result on multivariate generating functions. Let $a_{\mathbf{u}}$ be the number of ways of obtaining an outcome $\mathbf{u} = (u_1 u_2 \dots u_M) \in \mathbb{Z}^M$ in experiment \mathcal{A} , and let $b_{\mathbf{v}}$ be the number of ways of obtaining an outcome $\mathbf{v} = (v_1 v_2 \dots v_M) \in \mathbb{Z}^M$ in experiment \mathcal{B} . Also let $c_{\mathbf{w}}$ be the number of ways of obtaining an outcome (\mathbf{u}, \mathbf{v}) in the combined experiment $(\mathcal{A}, \mathcal{B})$ such that $\mathbf{u} + \mathbf{v} = \mathbf{w}$. Denoting $\mathbf{x} = (x_1 x_2 \dots x_M)$, the generating functions $A(\mathbf{x}) = \sum_{\mathbf{u}} a_{\mathbf{u}} x_1^{u_1} x_2^{u_2} \dots x_M^{u_M}$, $B(\mathbf{x}) = \sum_{\mathbf{v}} b_{\mathbf{v}} x_1^{v_1} x_2^{v_2} \dots x_M^{v_M}$ and $C(\mathbf{x}) = \sum_{\mathbf{w}} c_{\mathbf{w}} x_1^{w_1} x_2^{w_2} \dots x_M^{w_M}$ are related by $C(\mathbf{x}) = A(\mathbf{x})B(\mathbf{x})$.

Therefore as $n \rightarrow \infty$

$$\mathbb{E}_{\mathcal{M}_n} \left[N^{(M)}(\mathbf{q}) \right] \rightarrow \exp \left\{ n \left[\frac{j}{k} \log B^{(M)}(\mathbf{x}_0) - j \sum_{r=1}^M q_r \log x_{0,r} - (j-1)h(\mathbf{q}) \right] \right\} \quad (21)$$

The expected number of degree- M pseudocodewords with AWGN-pseudoweight $\boldsymbol{\alpha}n$ is equal to the sum of the numbers of degree- M pseudocodewords with pseudoweight \mathbf{q} satisfying (14), i.e.

$$\mathbb{E}_{\mathcal{M}_n} \left[N_{\boldsymbol{\alpha}n}^{(M)} \right] = \sum_{\mathbf{q}: g(\mathbf{q})=0} \mathbb{E}_{\mathcal{M}_n} \left[N^{(M)}(\mathbf{q}) \right].$$

Note that the asymptotic expression as $n \rightarrow \infty$ is dominated by that \mathbf{q} satisfying (14) which maximizes the argument of the exponential function⁵. Therefore as $n \rightarrow \infty$

$$\mathbb{E}_{\mathcal{M}_n} \left[N_{\boldsymbol{\alpha}n}^{(M)} \right] \rightarrow \exp \left\{ n \left(\max_{\mathbf{q}: g(\mathbf{q})=0} f(\mathbf{q}) \right) \right\} \quad (22)$$

where

$$f(\mathbf{q}) = \frac{j}{k} \log B^{(M)}(\mathbf{x}_0) - j \sum_{r=1}^M q_r \log x_{0,r} - (j-1)h(\mathbf{q}) \quad (23)$$

and $g(\mathbf{q})$ is given by (14). We solve this constrained optimization problem using Lagrange multipliers. At the maximum, we must have

$$\frac{\partial f(\mathbf{q})}{\partial q_r} = \lambda \frac{\partial g(\mathbf{q})}{\partial q_r}$$

for all $r = 1, 2, \dots, M$, where λ denotes the Lagrange multiplier. This yields

$$\begin{aligned} \frac{j}{k} \left[\frac{1}{B^{(M)}(\mathbf{x}_0)} \sum_{s=1}^M \frac{\partial B^{(M)}(\mathbf{x}_0)}{\partial x_{0,s}} \frac{\partial x_{0,s}}{\partial q_r} \right] \\ - j \left(\sum_{s=1}^M \frac{q_s}{x_{0,s}} \frac{\partial x_{0,s}}{\partial q_r} + \log x_{0,r} \right) \\ - (j-1) \frac{\partial h(\mathbf{q})}{\partial q_r} = \lambda \frac{\partial g(\mathbf{q})}{\partial q_r} \end{aligned} \quad (24)$$

which is equivalent to

$$\begin{aligned} j \sum_{s=1}^M \frac{\partial x_{0,s}}{\partial q_r} \left[\frac{1}{kB^{(M)}(\mathbf{x}_0)} \frac{\partial B^{(M)}(\mathbf{x}_0)}{\partial x_{0,s}} - \frac{q_s}{x_{0,s}} \right] \\ - j \log x_{0,r} + (j-1) \log \left(\frac{q_r}{1 - \sum_{s=1}^M q_s} \right) \\ = \lambda \left(2r \sum_{s=1}^M sq_s - \alpha r^2 \right). \end{aligned} \quad (25)$$

The term in square brackets is equal to zero for each $r = 1, 2, \dots, M$ due to (12); therefore this simplifies to (13) for each $r = 1, 2, \dots, M$. ■

⁵Observe that as $n \rightarrow \infty$, $\sum_t \exp(nZ_t) \rightarrow \exp(n \max_t \{Z_t\})$

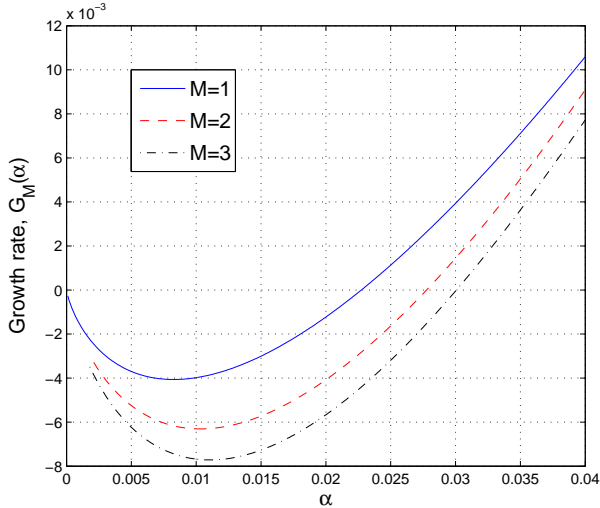


Fig. 1. Growth rate of the degree- M AWGN-pseudoweight distribution for the $(3,6)$ -regular ensemble ($M \leq 3$).

Note that for the case $M = 1$, the maximization in (22) is trivial and therefore the solution may be obtained directly from (23) as

$$G_1(\alpha) = \frac{j}{k} \log \left[\frac{(1+x_0)^k + (1-x_0)^k}{2} \right] - j\alpha \log x_0 - (j-1)h(\alpha) \quad (26)$$

where x_0 is the unique positive real solution to the equation

$$\alpha \left[(1+x_0)^k + (1-x_0)^k \right] = x_0 \left[(1+x_0)^{k-1} - (1-x_0)^{k-1} \right]. \quad (27)$$

Note that $G_1(\alpha)$ is simply the growth rate of the weight distribution in this case, originally obtained in [1]. Also, this solution may be regarded as a special case of Theorem 1 where the solution for λ via (13) is redundant.

IV. EXAMPLES AND DISCUSSION

In this section the growth rates of the AWGN-pseudoweight of two example LDPC code ensembles are evaluated using the solution of Theorem 1. The growth rate curves for the $(3,6)$ -regular LDPC code ensemble and for the $(4,8)$ -regular LDPC code ensemble are shown in Figures 1 and 2 respectively. Note that $0 < \alpha_1^* < \alpha_2^* < \alpha_3^*$ for both ensembles. It is worthwhile to note some distinctions between the present analysis and that of [5, Corollary 50]. In [5, Corollary 50], it is proved that (j,k) -regular ensembles with $j \geq 3$ have a ratio of minimum AWGN-pseudoweight to block length n which decreases to zero asymptotically as $n \rightarrow \infty$. This result is not in conflict with the results of Figures 1 and 2. The detrimental pseudocodewords of [5, Corollary 50] are derived from the ‘‘canonical completion’’ [5, Definition 46] and, asymptotically, have AWGN-pseudoweight *sublinear* in the block length –

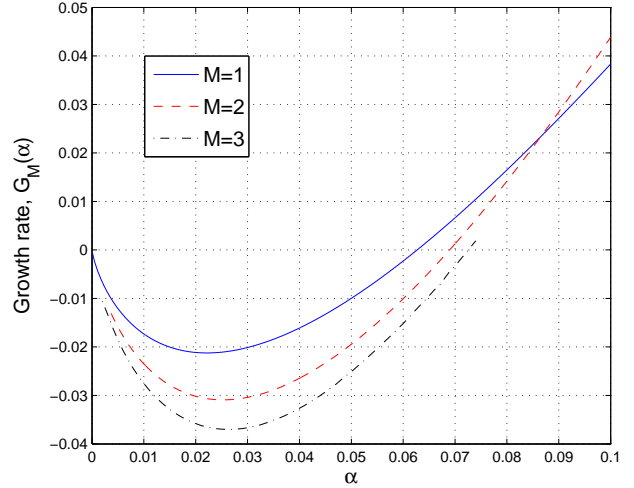


Fig. 2. Growth rate of the degree- M AWGN-pseudoweight distribution for the $(4,8)$ -regular ensemble ($M \leq 3$).

therefore, these pseudocodewords do not appear in the present analysis. Also, note that the analysis of [5, Corollary 50] takes the limit $M \rightarrow \infty$ prior to (or jointly with) the limit $n \rightarrow \infty$, in contrast to the present analysis which takes the limit $n \rightarrow \infty$ for finite M . Finally, the result of [5, Corollary 50] is concerned with *minimum* AWGN-pseudoweight and not with the multiplicities of the corresponding pseudocodewords.

REFERENCES

- [1] R. Gallager, *Low-Density Parity-Check Codes*. Cambridge, Massachusetts: M.I.T. Press, 1963.
- [2] N. Wiberg, *Codes and Decoding on General Graphs*. Ph.D. Thesis, Linköping University, Sweden, 1996.
- [3] G. D. Forney, R. Koetter, F. R. Kschischang, and A. Reznik, ‘‘On the effective weights of pseudocodewords for codes defined on graphs with cycles,’’ vol. 123 of *Codes, Systems, and Graphical Models*, IMA Vol. Math. Appl., ch. 5, pp. 101–112, Springer, 2001.
- [4] R. Koetter, W.-C. W. Li, P. O. Vontobel, and J. L. Walker, ‘‘Characterizations of pseudo-codewords of (low-density) parity-check codes,’’ *Advances in Mathematics*, vol. 213, pp. 205–229, 2007.
- [5] P. O. Vontobel and R. Koetter, ‘‘Graph-cover decoding and finite-length analysis of message-passing iterative decoding of LDPC codes,’’ to appear in *IEEE Transactions on Information Theory*, Arxiv report arXiv:cs.IT/0512078, Dec. 2005.
- [6] R. Smarandache and P. O. Vontobel, ‘‘Pseudo-codeword analysis of Tanner graphs from projective and Euclidean planes,’’ *IEEE Transactions on Information Theory*, vol. 53, no. 7, pp. 2376–2393, July 2007.
- [7] J. Feldman, *Decoding Error-Correcting Codes via Linear Programming*. Ph.D. Thesis, Massachusetts Institute of Technology, Sep. 2003.
- [8] J. Feldman, M. J. Wainwright, and D. R. Karger, ‘‘Using linear programming to decode binary linear codes,’’ *IEEE Transactions on Information Theory*, vol. 51, no. 3, pp. 954–972, March 2005.
- [9] C. Di, R. Urbanke, and T. Richardson, ‘‘Weight distribution of low-density parity-check codes,’’ *IEEE Trans. Inform. Theory*, vol. 52, no. 11, pp. 4839–4855, Nov. 2006.
- [10] P. O. Vontobel and R. Koetter, Lower Bounds on the Minimum Pseudo-Weight of Linear Codes, *Proc. IEEE International Symposium on Information Theory (ISIT), June/July 2004, p.67*, Chicago, USA.
- [11] D. Burshtein and G. Miller, ‘‘Asymptotic enumeration methods for analyzing LDPC codes,’’ *IEEE Trans. Inform. Theory*, vol. 50, no. 6, pp. 1115–1131, June 2004.