

From Single-thread to Multithreaded: An Efficient Static Analysis Algorithm

Jean-Loup Carré Charles Hymans

November 23, 2018

Abstract

A great variety of static analyses that compute safety properties of single-thread programs have now been developed. This paper presents a systematic method to extend a class of such static analyses, so that they handle programs with multiple POSIX-style threads. Starting from a pragmatic operational semantics, we build a denotational semantics that expresses reasoning *à la* assume-guarantee. The final algorithm is then derived by abstract interpretation. It analyses each thread in turn, propagating interferences between threads, in addition to other semantic information. The combinatorial explosion, ensued from the explicit consideration of all interleavings, is thus avoided. The worst case complexity is only increased by a factor n compared to the single-thread case, where n is the number of instructions in the program. We have implemented prototype tools, demonstrating the practicality of the approach.

1 Introduction

Many static analyses have been developed to check safety properties of sequential programs [1, 2, 3, 4, 5] while more and more software applications are multithreaded. Naive approaches to analyze such applications would run by exploring all possible interleavings, which is impractical. Some previous proposals avoid this combinatorial explosion (see Related Work). Our contribution is to show that *every* static analysis framework for single-thread programs extends to one that analyzes multithreaded code with dynamic

thread creation and with only a modest increase in complexity. We ignore concurrency specific bugs, e.g., race conditions or deadlocks, as do some other authors [6]. If any, such bugs can be detected using orthogonal techniques [7, 8].

Outline We describe in Section 2 a toy imperative language. This contains essential features of C with POSIX threads [9] with a thread creation primitive. The main feature of multithreaded code is that parallel threads may *interfere*, i.e., side-effects of one thread may change the value of variables in other threads. To take interference between threads into account, we model the behavior of a program by an infinite transition system: this is the operational semantics of our language, which we describe in Section 2.3. It is common practice in abstract interpretation to go from the concrete to the abstract semantics through an intermediate so-called collecting semantics [10]. In our case a different but similar concept is needed, which we call **G**-collecting semantics, and which we introduce in Section 3. This semantics will discover states, accumulate transitions encountered in the current thread and collect interferences from other threads. The main properties of this semantics—Proposition 2 and Theorem 1—are the technical core of this paper. These properties allow us to overapproximate the **G**-collecting semantics by a denotational semantics. Section 4 then derives an abstract semantics from the **G**-collecting semantics through abstract interpretation. We discuss algorithmic issues, implementation, question of precision, and possible extensions in Section 5, and examine the complexity of our analysis technique in section 6, and conclude in Section 7.

Related Work A great variety of static analyses that compute safety properties of single-thread programs have been developed, e.g., intervals [4], points-to-graph [11, 3], non-relational stores [1, 2] or relational stores such as octagons [5].

Our approach is similar to Rugina and Rinard [12, 13], in the sense that we also use an abstract semantics that derives tuples containing information about current states, transitions of the current thread, and interference from other threads. While their main parallel primitive is *par*, which runs two threads and waits for their completion before resuming computation, we are mostly interested in the more challenging thread creation primitive *create*, which spawns a thread that can survive its father. In Section 6.3, we handle

par to show how they can be dealt with our techniques.

Some authors present generalizations of specific analyses to multithreaded code, e.g., Venet and Brat [14] and Lammich and Müller-Olm [6], while our framework extends any single-threaded code analysis.

Our approach also has some similarities with Flanagan and Qadeer [15]. They use a model-checking approach to verify multi-threaded programs. Their algorithm computes a guarantee condition for each thread; one can see our static analysis framework as computing a guarantee, too. Furthermore, both analyses abstract away both number and ordering of interferences from other threads. Flanagan and Qadeer’s approach still keeps some concrete information, in the form of triples containing a thread id, and concrete stores before and after transitions. They claim that their algorithm takes polynomial time in the size of the computed set of triples. However, such sets can have exponential size in the number of global variables of the program. When the nesting depth of loops and thread creation statements is bounded, our algorithm works in polynomial time. Moreover, we demonstrate that our analysis is still precise on realistic examples. Finally, while Flanagan and Qadeer assume a given, static, set of threads created at program start-up, we handle dynamic thread creation. The same restriction is required in Malkis *et al.* [16].

The 3VMC tool [17] has a more general scope. This is an extension of TVLA designed to do shape analysis and to detect specific multithreaded bugs. However, even without multithreading, TVLA already runs in doubly exponential time [18].

Other papers focus on bugs that arise because of multithreading primitives. This is orthogonal to our work. See [19, 20] for atomicity properties, Locksimth and Goblint tools [7, 21, 22] for data-races and [8] for deadlock detection using geometric ideas.

2 Syntax and Operational Semantics

2.1 Simplified Language.

The syntax of our language is given in Fig. 1. The syntax of the language is decomposed in two parts: commands (*cmd*) and statements (*stmt*). A statement cmd, ℓ' is a command with a return label where it should go after completion. E.g., in Fig 2a, a thread at label ℓ_3 will execute $\ell_3 \text{ create}(\ell_4 x :=$

lv	$::=$	left value	cmd	$::=$	command
		x variable			${}^{\ell}lv := e$ assignment
		$*e$ pointer deref			$cmd_1; cmd_2$ sequence
e	$::=$	expression			$if(cond) then\{cmd_1\} else\{cmd_2\}$ if
		c constant			${}^{\ell}while(cond)\{cmd\}$ while
		lv left value			${}^{\ell}create(cmd)$ new thread
		$o(e_1, e_2)$ operator	$stmt$	$::=$	statement
		$\&x$ address			cmd, ℓ' command
$cond$	$::=$	condition			${}^{\ell}guard(cond), \ell'$ guard
		x variable			${}^{\ell}spawn(\ell''), \ell'$ new thread
		$\neg cond$ negation			

Figure 1: Syntax

${}^{\ell_1}x := 0;$	${}^{\ell_5}x := 0; {}^{\ell_6}y := 0;$
${}^{\ell_2}while(true)$	${}^{\ell_7}create({}^{\ell_8}x = x + y);$
$\{ {}^{\ell_3}create({}^{\ell_4}x := x + 1) \}, \ell_{\infty}$	${}^{\ell_9}y := 3, \ell_{\infty}$
(a) ${}^{\ell_1}example_1, \ell_{\infty}$	(b) ${}^{\ell_5}example_2, \ell_{\infty}$
${}^{\ell_1}y := 0; {}^{\ell_2}z := 0;$	${}^{\ell_{10}}y := 0; {}^{\ell_{11}}z := 0;$
${}^{\ell_3}create({}^{\ell_4}y := y + z);$	${}^{\ell_{12}}create({}^{\ell_{13}}y := 3);$
${}^{\ell_5}z := 3, \ell_{\infty}$	${}^{\ell_{14}}y := 1; {}^{\ell_{15}}z := y, \ell_{\infty}$
(c) ${}^{\ell_1}example_3, \ell_{\infty}$	(d) ${}^{\ell_{10}}example_4, \ell_{\infty}$

Figure 2: Program Examples

$x + 1$), ℓ_2 . Commands and statements are labeled, and we denote by **Labels** the set of labels. Labels represent the control flow: the statement ${}^{\ell}stmt, \ell'$ begins at label ℓ and terminates at label ℓ' , e.g., in Fig 2b, a thread at label ℓ_2 will execute the assignment $x := x + 1$ and go to label ℓ_3 . It is assumed that in a given command or statement each label appears only once. Furthermore, to represent the end of the execution, we assume a special label ℓ_{∞} which never appears in a command, but may appear as the return label of a statement. Intuitively, this label represents the termination of a thread: a thread in this label will not be able to execute any statement.

Notice that sequences $cmd_1; cmd_2$ are not labeled. Indeed, the label of a sequence is implicitly the label of the first command, e.g., the program of

Fig. 2b is a sequence labeled by ℓ_5 . We write ${}^\ell cmd$ when the label of cmd is ℓ and we write ${}^\ell stmt, \ell'$ the statement $stmt$ labeled by ℓ and ℓ' . A program is represented by a statement of the form ${}^\ell cmd, \ell_\infty$. Other statements represent a partial execution of a program. The statements *create*, *while* and *if* are not atomic, there are composed of several basic steps, e.g., to enter in a *while* loop. To model these basic steps, we introduce the statements ${}^{\ell_1} spawn(\ell_2), \ell_3$ and ${}^{\ell_1} guard(cond), \ell_2$. Then, the semantics of *create*, *while* and *if* will be defined using the semantics of ${}^{\ell_1} spawn(\ell_2), \ell_3$ and ${}^{\ell_1} guard(cond), \ell_2$. Local variables are irrelevant to our work. Then, all variables in our language are global. Nevertheless, local variables have been implemented (See Section 5) as a stack.

This is a toy imperative language with dynamic thread creation. It can easily be extended to handle real-world languages like C or Ada, see Sections 2.4 and 5.

2.2 Description of the system.

To represent threads, we use a set **Ids** of *thread identifiers*. During an execution of a program, each thread is represented by a different identifier. We assume a distinguished identifier *main* \in **Ids**, and take it to denote the initial thread.

When a program is executed, threads go from a label to another one independently. A *control point* is a partial function P that maps thread identifiers to labels and that is defined in *main*. A control point associates each thread with its current label. The domain of P is the set of created threads, the other identifiers may be used after in the execution, for new threads. Let \mathbb{P} be the set of control points. We write $Dom(P)$ the domain of P and let $P[i \mapsto \ell]$ be the partial function defined by $P[i \mapsto \ell](j) \stackrel{\text{def}}{=} \begin{cases} \ell & \text{if } i = j \\ P(j) & \text{if } i \in Dom(P) \setminus \{j\} \\ \text{undefined} & \text{else} \end{cases}$

Furthermore, threads may create other threads at any time. A *genealogy* of threads is a finite sequence of tuples $(i, \ell, j) \in \mathbf{Ids} \times \mathbf{Labels} \times \mathbf{Ids}$ such that (a) each two tuples (i_1, ℓ_1, j_1) and (i_2, ℓ_2, j_2) have distinct third component (i.e., $j_1 \neq j_2$), (b) *main* is never the third component of a tuple. Such a tuple (i, ℓ, j) means that thread i created thread j at label ℓ . We write j has been *created* in g to say that a tuple (i, ℓ, j) appears in g . Let **Genealogies**

be the set of genealogies. We write $g \cdot g'$ the *concatenation* of the genealogies g and g' . The hypothesis (a) means that a thread is never created twice, the hypothesis (b) means that the thread **main** is never created: it already exists at the beginning of the execution.

We let **Stores** be the set of *stores*. We leave the precise semantics of stores undefined for now, and only require two primitives $write_{lv:=e}(\sigma)$ and $bool(\sigma, cond)$. Given a store σ , $write_{lv:=e}$ returns the store modified by the assignment $lv := e$. The function $bool$ evaluates a condition $cond$ in a store σ , returning *true* or *false*.

Auple $(i, P, \sigma, g) \in \mathbf{Ids} \times \mathbb{P} \times \mathbf{Stores} \times \mathbf{Genealogies}$ is a *state* if (a) $i \in Dom(P)$, (b) $Dom(P)$ is the disjoint union between $\{\mathbf{main}\}$ and the set of threads created in g . Let **States** be the set of states. A state is a tuple (i, P, σ, g) where i is the currently running thread, P states where we are in the control flow, σ is the current store and g is the genealogy of thread creations. $Dom(P)$ is the set of existing threads. The hypothesis (a) means that the current thread exists, the hypothesis (b) means that the only threads that exist are the initial threads and the thread created in the past.

In the single-threaded case, only the store and the control point of the unique thread is needed. In the case of several threads, the control point of each thread is needed: this is P .

There are two standard ways to model interferences between threads:

- Either all threads are active, and at any time any threads can fire a transition,
- or, in each state there is an “active thread”, a.k.a., a “current thread”, and some so called schedule transitions can change the active thread.

Our model rests on latter choice: this allows us to keep track of a thread during execution. Thread ids do not carry information as to how threads were created. This is the role of the g component of states.

Given a program ${}^{\ell_0}cmd, \ell_\infty$ the set *Init* of initial states is the set of tuples $(\mathbf{main}, P_0, \sigma, \epsilon)$ where $Dom(P_0) = \{\mathbf{main}\}$, $P_0(\mathbf{main}) = \ell_0$, σ is an arbitrary store, and ϵ is the empty word.

A *transition* is a pair of states $\tau = ((i, P, \sigma, g), (i', P', \sigma', g \cdot g'))$ such that $\forall j \in Dom(P) \setminus \{i\}, P(j) = P'(j)$ and if (j, ℓ, j') is a letter of g' , then $j = i$ and $P(i) = \ell$.

We denote by **Tr** the set of all transitions and we denote by *Schedule* $\stackrel{\text{def}}{=} \{((i, P, \sigma, g), (j, P, \sigma, g)) \in \mathbf{Tr} \mid i \neq j\}$ the set of transitions that may appear

$$\begin{array}{c}
\frac{\sigma' = write_{lv:=e}(\sigma)}{\ell_1 lv := e, \ell_2 \vdash (\ell_1, \sigma) \rightarrow (\ell_2, \sigma')} \text{assign} \quad \frac{bool(\sigma, cond) = true}{\ell_1 guard(cond), \ell_2 \vdash (\ell_1, \sigma) \rightarrow (\ell_2, \sigma)} \text{guard} \\
\frac{\ell_1 guard(cond), \ell_2 \vdash t}{\ell_1 while(cond)\{\ell_2 cmd\}, \ell_3 \vdash t} \text{while entry} \quad \frac{\ell_1 guard(\neg cond), \ell_3 \vdash t}{\ell_1 while(cond)\{\ell_2 cmd\}, \ell_3 \vdash t} \text{while exit} \\
\frac{\ell_1 guard(cond), \ell_2 \vdash t}{\ell_1 if(cond)then\{\ell_2 cmd_1\}else\{\ell_3 cmd_2\}, \ell_4 \vdash t} \text{then} \\
\frac{\ell_1 guard(\neg cond), \ell_3 \vdash t}{\ell_1 if(cond)then\{\ell_2 cmd_1\}else\{\ell_3 cmd_2\}, \ell_4 \vdash t} \text{else} \\
\frac{P(i) = \ell \quad \ell_1 stmt, \ell_2 \vdash (\ell, \sigma) \rightarrow (\ell', \sigma')}{\ell_1 stmt, \ell_2 \Vdash (i, P, \sigma, g) \rightarrow (i, P[i \mapsto \ell'], \sigma', g)} \text{parallel} \\
\frac{P(i) = \ell_1 \quad j \text{ is fresh in } (i, P, \sigma, g) \quad P' = P[i \mapsto \ell_3][j \mapsto \ell_2]}{\ell_1 spawn(\ell_2), \ell_3 \Vdash (i, P, \sigma, g) \rightarrow (i, P', \sigma, h \cdot (i, \ell_2, j))} \text{spawn} \\
\frac{\ell_2 cmd, \ell_4 \Vdash \tau}{\ell_1 if(cond)then\{\ell_3 cmd_2\}else\{\ell_3 cmd_2\}, \ell_4 \Vdash \tau} \text{then body} \\
\frac{\ell_2 cmd, \ell_4 \Vdash \tau}{\ell_1 if(cond)then\{\ell_2 cmd_1\}else\{\ell_3 cmd_2\}, \ell_4 \Vdash \tau} \text{else body} \\
\frac{\ell_1 spawn(\ell_2), \ell_3 \Vdash \tau}{\ell_1 create(\ell_2 cmd), \ell_3 \Vdash \tau} \text{create} \quad \frac{\ell_2 cmd, \ell_1 \Vdash \tau}{\ell_1 while(cond)\{\ell_2 cmd\}, \ell_3 \Vdash \tau} \text{while body} \\
\frac{\ell_1 cmd_1, \ell_2 \Vdash \tau}{\ell_1 cmd_1; \ell_2 cmd_2, \ell_3 \Vdash \tau} \text{sequence 1} \quad \frac{\ell_2 cmd_2, \ell_3 \Vdash \tau}{\ell_1 cmd_1; \ell_2 cmd_2, \ell_3 \Vdash \tau} \text{sequence 2} \\
\frac{\ell_2 cmd, \ell_\infty \Vdash \tau}{\ell_1 create(\ell_2 cmd), \ell_3 \Vdash \tau} \text{child} \quad \frac{P(j) \text{ is defined} \quad i \neq j}{\ell stmt, \ell' \Vdash (i, P, \sigma, g) \rightarrow (j, P, \sigma, g)} \text{schedule}
\end{array}$$

Figure 3: Operational semantics rules

in the conclusion of rule “schedule”, respectively. A transition in *Schedule* only changes the identifier of the current thread.

2.3 Evolution.

To model interleavings, we use a small step semantics: each statement gives rise to an infinite transition system over states where edges $s_1 \rightarrow s_2$ correspond to elementary computation steps from state s_1 to s_2 . We define the judgment $\ell_1 stmt, \ell_2 \Vdash s_1 \rightarrow s_2$ to state that $s_1 \rightarrow s_2$ is one of these global computation steps that arise when cmd is executed, returning to label ℓ' on termination. To simplify semantic rules, we use an auxiliary judgment

$\ell_1 \text{stmt}, \ell_2 \vdash (\ell, \sigma) \rightarrow (\ell', \sigma')$ to describe evolutions that are local to a given thread.

Judgments are derived using the rules of Fig. 3. The rule “parallel” transforms local transitions into global transitions. “While body” and “sequence” rules are global because while loop and sequences may contain global sub-commands, e.g., $\ell_1 \text{while}(x)\{\ell_2 \text{create}(\ell_3 x := 0)\}$. In “spawn”, the expression “ j is fresh in (i, P, σ, g) ” means that $i \neq j$ and $P(j)$ is not defined and j never appears in g , i.e., in g , there is no tuples (i, ℓ, i') with i or i' equal to j . Intuitively, a fresh identifier is an identifier that has never been used (we keep track of used identifiers in g).

We define the set of transitions generated by the statement $\ell \text{stmt}, \ell'$:

$$\mathcal{Tr}_{\ell \text{stmt}, \ell'} = \{(s, s') \mid \ell \text{stmt}, \ell' \Vdash s \rightarrow s'\}.$$

Notice that, unlike Flanagan and Qadeer [15], an arbitrary number of threads may be spawned, e.g., with the program $\ell_1 \text{example}_1, \ell_\infty$ of Fig. 2a. Therefore, **Ids** is infinite, and so are \mathbb{P} and $\mathcal{Tr}_{\ell \text{stmt}, \ell'}$. Furthermore, **Stores** may be infinite, e.g., if store maps variables to integers. Therefore, we cannot have a complexity depending of cardinal of $\mathcal{Tr}_{\ell \text{stmt}, \ell'}$.

Example Let us consider stores that are maps from a unique variable to an integer. We write $[x = n]$ the store that maps x to the integer n . The transitions generated by the statements extracted from Fig. 2a are:

$$\begin{aligned} \mathcal{Tr}_{\ell_1 x:=0, \ell_2} = & \{((i, P, [x = n], g), (i, P[i \mapsto \ell_2], [x = 0], g)) \mid P(i) = \ell_1 \\ & \wedge i \in \mathbf{Ids} \wedge n \in \mathbb{Z}\}. \end{aligned}$$

$$\begin{aligned} \mathcal{Tr}_{\ell_4 x:=x+1, \ell_\infty} = & \{((i, P, [x = n], g), (i, P[i \mapsto \ell_\infty], [x = n + 1], g)) \mid P(i) = \ell_4 \\ & \wedge i \in \mathbf{Ids} \wedge n \in \mathbb{Z}\}. \end{aligned}$$

2.4 Properties of the language

Let $Labs(\ell \text{cmd}, \ell_\infty)$ be the set of labels of the statement $\ell \text{cmd}, \ell_\infty$.

We also define by induction on commands, the set of labels of subthreads $Labs_{child}(\cdot)$ by $Labs_{child}(\ell_1 \text{create}(\ell_2 \text{cmd}), \ell_3) = Labs(\ell_2 \text{cmd}, \ell_\infty)$,
 $Labs_{child}(\ell_1 \text{cmd}_1, \ell_2 \text{cmd}_2, \ell_3) = Labs_{child}(\ell_1 \text{cmd}_1, \ell_2) \cup Labs_{child}(\ell_2 \text{cmd}_2, \ell_3)$,
 $Labs_{child}(\ell_1 \text{if}(\text{cond})\text{then}\{\ell_2 \text{cmd}_1\}\text{else}\{\ell_3 \text{cmd}_2\}, \ell_4) =$
 $Labs_{child}(\ell_2 \text{cmd}_1, \ell_4) \cup Labs_{child}(\ell_3 \text{cmd}_2, \ell_4)$,

$Labs_{child}(\ell_1 \mathbf{while}(cond)\{\ell_2 cmd\}, \ell_3) = Labs_{child}(\ell_2 cmd_1, \ell_1)$,
and, for basic commands $Labs_{child}(\ell_1 basic, \ell_2) = \emptyset$.

A statement generates only transitions from its labels and to its labels, this is formalized by the following lemma:

Lemma 1. *If $(s, s') \in \mathcal{Tr}_{\ell stmt, \ell'} \setminus \mathit{Schedule}$ then $label(s) \in Labs(\ell stmt, \ell') \setminus \{\ell'\}$ and $label(s') \in Labs(\ell stmt, \ell')$ and $thread(s) = thread(s')$.*

As a consequence of Lemma 1, we have the following lemma :

Lemma 2. *If $label(s) \notin Labs(\ell stmt, \ell') \setminus \{\ell'\}$ then for all state s' , $(s, s') \notin \mathcal{Tr}_{\ell stmt, \ell'} \setminus \mathit{Schedule}$*

If, during the execution of a statement $\ell stmt, \ell'$, a thread creates another thread, then, the subthread is in a label of the command, furthermore, it is in $Labs_{child}(\ell stmt, \ell')$.

Lemma 3. *If $(s, s') = ((i, P, \sigma, g), (i', P', \sigma', g')) \in \mathcal{Tr}_{\ell stmt, \ell'} \setminus \mathit{Schedule}$ and $j \in Dom(P') \setminus Dom(P)$ then $P'(j) \in Labs_{child}(\ell stmt, \ell') \subseteq Labs(\ell stmt, \ell')$.*

Lemma 4. *If $(s, s') \in \mathcal{Tr}_{\ell stmt, \ell'} \setminus \mathit{Schedule}$ and $label(s) \in Labs_{child}(\ell stmt, \ell') \setminus \{\ell'\}$ then $label(s') \in Labs(\ell stmt, \ell')$.*

Furthermore $\ell \notin Labs(\ell stmt, \ell')$ and $\ell' \notin Labs(\ell stmt, \ell')$.

Notice that in Fig. 3 some statements are “atomic”. We call these statements *basic statements*. Formally, a basic statement is a statement of the form $\ell_1 lv := e, \ell_2, \ell_1 \mathbf{guard}(cond), \ell_2$ or $\ell_1 \mathbf{spawn}(\ell_3), \ell_2$.

On basic statement, we have a more precise lemma on labels:

Lemma 5. *Let $\ell_1 basic, \ell_2$ be a basic statement.*

If $(s, s') = ((i, P, \sigma, g), (i', P', \sigma', g')) \in \mathcal{Tr}_{\ell_1 basic, \ell_2} \setminus \mathit{Schedule}$ then $thread(s) = thread(s')$ and $label(s) = \ell_1$ and $label(s') = \ell_2$.

3 G-collecting Semantics

3.1 Basic Concepts

To prepare the grounds for abstraction, we introduce an intermediate semantics, called G-collecting semantics, which associates a function on configurations with each statement. The aim of this semantics is to associate with

$$\begin{array}{l}
\text{thread}(i, P, \sigma, g) \stackrel{\text{def}}{=} i \\
\text{label}(i, P, \sigma, g) \stackrel{\text{def}}{=} P(i) \\
\text{after}(i, P, \sigma, g) \stackrel{\text{def}}{=} \{(j, P', \sigma', g \cdot g') \in \mathbf{States} \mid j \in \text{desc}_{g'}(\{i\})\} \\
\text{For } X \subseteq \mathcal{P}(\mathbf{Ids}) : \\
\bullet \text{ desc}_\epsilon(X) \stackrel{\text{def}}{=} X \\
\bullet \text{ and } \text{desc}_{(i,\ell,j).g}(X) \stackrel{\text{def}}{=} \begin{cases} \text{desc}_g(X \cup \{j\}) & \text{if } i \in X \\ \text{desc}_g(X) & \text{else} \end{cases}
\end{array}$$

Figure 4: Auxiliary definitions

each statement a transfer function that will be abstracted (see Section 4) as an abstract transfer function.

A *concrete configuration* is a tuple $Q = \langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle$: 1. \mathbf{S} is the current state of the system during an execution, 2. \mathbf{G} , for *guarantee*, represents what the current thread and its descendants can do 3. and \mathbf{A} , for *assume*, represents what the other threads can do.

Formally, \mathbf{S} is a set of states, and \mathbf{G} and \mathbf{A} are sets of transitions containing *Schedule*. The set of concrete configurations is a complete lattice for the ordering $\langle \mathbf{S}_1, \mathbf{G}_1, \mathbf{A}_1 \rangle \leq \langle \mathbf{S}_2, \mathbf{G}_2, \mathbf{A}_2 \rangle \Leftrightarrow \mathbf{S}_1 \subseteq \mathbf{S}_2 \wedge \mathbf{G}_1 \subseteq \mathbf{G}_2 \wedge \mathbf{A}_1 \subseteq \mathbf{A}_2$. Proposition 4 will establish the link between operational and \mathbf{G} -collecting semantics.

Figure 5 illustrates the execution of a whole program. Each vertical line represents the execution of a thread from top to bottom, and each horizontal line represents the creation of a thread. At the beginning (top of the figure), there is only the thread *main* = j_0 .

During execution, each thread may execute transitions. At state s_0 , $\text{thread}(s_0)$ denotes the *currently running thread* (or *current thread*), see Fig. 4. On Fig. 5, the current thread of s_0 is j_0 and the current thread of s is j_2 .

During the program execution given in Fig. 5, j_0 creates j_1 . We say that j_1 is a *child* of j_0 and j_0 is the *parent* of j_1 . Furthermore, j_1 creates j_3 . We then introduce the concept of *descendant*: the thread j_3 is a descendant of j_0 because it has been created by j_1 which has been cre-

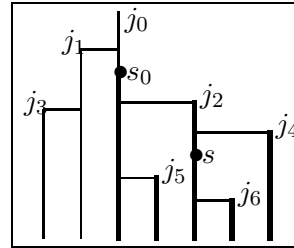


Figure 5: States

ated by j_0 . More precisely, descendants depend on genealogies. Consider the state $s_0 = (j_0, P_0, \sigma_0, g_0)$ with $g_0 = [(j_0, \ell_1, j_1)]$: the set of descendants of j_0 from g_0 (written $desc_{g_0}(\{j_0\})$, see Fig. 4) is just $\{j_0, j_1\}$. The set of descendants of a given thread increases during the execution of the program. In Fig. 5, the genealogy of s is of the form $g_0 \cdot g$ for some g , here $g = [(j_0, \ell_2, j_2), (j_1, \ell_3, j_3), (j_2, \ell_4, j_4)]$. When the execution of the program reaches the state s , the set of descendants of j_0 from $g_0 \cdot g$ is $desc_{g_0 \cdot g}(\{j_0\}) = \{j_0, j_1, j_2, j_3, j_4\}$.

In a genealogy, there are two important pieces of information. First, there is a tree structure: a thread creates children that may create children and so on... Second, there is a global time, e.g., in g , the thread j_2 has been created before the thread j_3 .

Lemma 6. *Let $g \cdot g'$ a genealogy and i, j which are not created in g' . Therefore, either $desc_{g'}(\{j\}) \subseteq desc_{g \cdot g'}(\{i\})$ or $desc_{g'}(\{j\}) \cap desc_{g \cdot g'}(\{i\}) = \emptyset$.*

Proof. We prove this lemma by induction on g' . If $g' = \epsilon$, then $desc_{\epsilon}(\{j\}) = \{j\}$.

Let us consider the case $g' = g'' \cdot (i', \ell, j')$. By induction hypothesis either $desc_{g''}(\{j\}) \subseteq desc_{g \cdot g''}(\{i\})$ or $desc_{g''}(\{j\}) \cap desc_{g \cdot g''}(\{i\}) = \emptyset$.

In the first case, if $i' \in desc_{g''}(\{j\})$, therefore $j' \in desc_{g'' \cdot (i', \ell, j')}(\{j\})$ and $j' \in desc_{g \cdot g'' \cdot (i', \ell, j')}(\{i\})$, else $j' \notin desc_{g'' \cdot (i', \ell, j')}(\{j\})$.

In the second case, let us consider the subcase $i' \in desc_{g''}(\{j\})$. Therefore $i' \notin desc_{g \cdot g''}(\{i\})$. In addition to this, j is not created in $g \cdot g''$ (a thread cannot be created twice in a genealogy), therefore $j \notin desc_{g \cdot g''}(\{i\})$. Hence $j' \in desc_{g'' \cdot (i', \ell, j')}(\{j\})$ and $j' \notin desc_{g \cdot g'' \cdot (i', \ell, j')}(\{i\})$.

The subcase $i' \in desc_{g \cdot g''}(\{i\})$ is similar. Let us consider the subcase $i' \notin desc_{g''}(\{j\}) \cup desc_{g \cdot g''}(\{i\})$. Therefore $desc_{g'' \cdot (i', \ell, j')}(\{i\}) = desc_{g \cdot g''}(\{i\})$ and $desc_{g'' \cdot (i', \ell, j')}(\{j\}) = desc_{g''}(\{j\})$. \square

We also need to consider sub-genealogies such as g . In this partial genealogy, j_1 has not been created by j_0 . Hence $desc_g(\{j_0\}) = \{j_0, j_2, j_4\}$. Notice that $j_3 \notin desc_g(\{j_0\})$ even though the creation of j_3 is in the genealogy g .

During an execution, after having encountered a state $s_0 = (j_0, P_0, \sigma_0, g_0)$ we distinguish two kinds of descendants of j_0 : (i) those which already exist in state s_0 (except j_0 itself) and their descendants, (ii) j_0 and its other descendants. Each thread of kind (i) has been created by a statement executed by j_0 . We call $after(s_0)$ the states from which a thread of kind (ii) can execute a

transition. In Fig. 5, the thick lines describe all the states encountered while executing the program that fall into $after(s_0)$.

The following lemma explicits some properties of $after$:

Lemma 7. *Let T a set of transitions. Let $(s_0, s_1) \in T^*$ therefore:*

1. *If $thread(s_0) = thread(s_1)$ then $s_1 \in after(s_0)$*
2. *If $s_1 \in after(s_0)$ then $after(s_1) \subseteq after(s_0)$*

Proof. Let $(i_0, P_0, \sigma_0, g_0) = s_0$ and $(i_1, P_1, \sigma_1, g_1) = s_1$. By definition of transitions, there exists g'_1 such that $g_1 = g_0 \cdot g'_1$. Because $i_0 \in desc_\epsilon(\{i_0\})$, $i_0 \in desc_{g'_1}(\{i_0\})$. Therefore, if $thread(s) = thread(s')$, i.e., $i_1 = i_0$, then $s_1 \in after(s_0)$ (By definition of $after$).

Let us assume that $s_1 \in after(s_0)$. Let $s_2 = (i_2, P_2, \sigma_2, g_2) \in after(s_1)$. Therefore, there exists g'_2 such that $g_2 = g_1 \cdot g'_2 = g_0 \cdot g'_1 \cdot g'_2$ and $i_2 \in desc_{g'_2}(\{i_1\})$. Because $s_1 \in after(s_0)$, by definition, $i_1 \in desc_{g'_1}(\{i_0\})$. Therefore $i_1 \in desc_{g'_2}(\{i_1\}) \cap desc_{g'_1 \cdot g'_2}(\{i_0\})$. According to Lemma 6, $desc_{g'_2}(\{i_1\}) \subseteq desc_{g'_1 \cdot g'_2}(\{i_0\})$. Hence $i_2 \in desc_{g'_1 \cdot g'_2}(\{i_0\})$ and therefore $s_2 \in after(s_0)$. \square

When a schedule transition is executed, the current thread change. The futur descendants of the past current thread and the new current thread are diffents. This is formalized by the following lemma:

Lemma 8. *If $(s_1, s_2) \in Schedule$ then $after(s_1) \cap after(s_2) = \emptyset$.*

Proof. Let $(i_1, P_1, \sigma_1, g_1) = s_1$ and $i_2 = thread(s_2)$. Therefore $(i_2, P_1, \sigma_1, g_1) = s_2$. Let $s = (i, P, \sigma, g) \in after(s_1) \cap after(s_2)$.

By definition of $after$, there exists g' such that $g = g_1 \cdot g'$, $i \in desc_{g'}(\{i_1\})$ and $i \in desc_{g'}(\{i_2\})$. Furthermore i_1 and i_2 are in $Dom(P_1)$. Therefore i_1 and i_2 are either created in g_1 , or are **main**. Hence, i_1 and i_2 cannot be created in g' . Therefore, $i_2 \notin desc_{g'}(\{i_1\})$ and therefore $desc_{g'}(\{i_2\}) \subseteq desc_{\epsilon \cdot g'}(\{i_1\})$. Using Lemma 6 we conclude that $desc_{g'}(\{i_1\}) \cap desc_{g'}(\{i_2\}) = \emptyset$. This is a contradiction with $i \in desc_{g'}(\{i_1\})$ and $i \in desc_{g'}(\{i_2\})$. \square

During the execution of a set of transition T that do not create threads, the set of descendants does not increase:

Lemma 9. *Let T a set of transitions such that:*

for all $(s, s') = ((i, P, \sigma, g), (i', P', \sigma', g')) \in T, g = g'$.

Let $s_0 = (i_0, P_0, \sigma_0, g_0)$, $s = (i, P, \sigma, g_0 \cdot g)$ and $s' = (i', P', \sigma', g_0 \cdot g \cdot g')$.

If $(s, s') \in (\mathbf{A}_{after(s_0)} \cup T)^$ then $desc_{g \cdot g'}\{i_0\} = desc_g\{i_0\}$.*

Proof. Let s_1, \dots, s_n a sequence of states such that $s_1 = s$, for all $k \in \{1, \dots, n-1\}$, $(s_k, s_{k+1}) \in \mathbf{A}_{\overline{\text{after}(s_0)}} \cup T)^*$, and $s_n = s'$.

Let $(i_k, P_k, \sigma_k, g_0 \cdot g \cdot g_k) = s_k$.

If $g_k \neq g_{k+1}$ then, $(s_k, s_{k+1}) \in \mathbf{A}_{\overline{\text{after}(s_0)}}$ and then $i_k \notin \text{desc}_{g \cdot g_k} \{i_0\}$ and then $\text{desc}_{g \cdot g_k} \{i\} = \text{desc}_{g \cdot g_{k+1}} \{i_0\}$.

Therefore, in all cases $\text{desc}_{g \cdot g_k} \{i\} = \text{desc}_{g \cdot g_{k+1}} \{i\}$ and then, by straightforward induction, $\text{desc}_{g \cdot g'} \{i\} = \text{desc}_g \{i\}$. \square

Lemma 10. *Let T a set of transitions such that:*

for all $(s, s') = ((i, P, \sigma, g), (i', P', \sigma', g')) \in T, g = g'$.

Let $s = (i, P, \sigma, g)$ and $s = (i', P', \sigma', g \cdot g')$.

If $(s, s') \in (\mathbf{A}_{\overline{\text{after}(s_0)}} \cup T)^$ then $\text{desc}_{g'} \{i\} = \{i\}$.*

Proof. Apply Lemma 9 with $s_0 = s$. \square

These lemmas has a consequence on *after*:

Lemma 11. *Let T a set of transitions such that:*

for all $(s, s') = ((i, P, \sigma, g), (i', P', \sigma', g')) \in T, g = g'$.

If $(s_0, s_1) \in (\mathbf{A}_{\overline{\text{after}(s_0)}} \cup T)^$ and $s_1 \in \text{after}(s_0)$ then $\text{thread}(s_1) = \text{thread}(s_0)$.*

Proof. Let $(i_0, P_0, \sigma_0, g_0) = s_0$ and $(i_1, P_1, \sigma, g_0 \cdot g_1) = s_1$. By Lemma 10 $\text{desc}_{g_1} \{i_0\} = \{i_0\}$ and by definition of *after*, $i_1 \in \text{desc}_{g_1} \{i_0\}$. \square

Lemma 12. *Let T_1 a set of transitions such that:*

for all $(s, s') = ((i, P, \sigma, g), (i', P', \sigma', g')) \in T, g = g'$.

Let T_2 a set of transitions.

Let s_0, s_1, s three states such that $(s_0, s_1) \in T_1^$, $\text{thread}(s_0) = \text{thread}(s_1)$ and $(s_1, s) \in T_2^*$.*

If $s \in \text{after}(s_0)$ then $s \in \text{after}(s_1)$.

Proof. Let $(i_0, P_0, \sigma_0, g_0) = s_0$, $(i_1, P_1, \sigma, g_0 \cdot g_1) = s_1$ and $(i, P, \sigma, g_0 \cdot g_1 \cdot g) = s$. By Lemma 10 $\text{desc}_{g_1} \{i_0\} = \{i_0\}$ and by definition of *after*, $i_1 \in \text{desc}_{g_1} \{i_0\}$. Therefore $\text{desc}_{g_1 \cdot g}(\{i_0\}) = \text{desc}_g(\text{desc}_{g_1}(\{i_0\})) = \text{desc}_g(\{i_0\})$.

Because $s \in \text{after}(s_0)$, $i \in \text{desc}_{g_1 \cdot g}(\{i_0\})$, therefore $i \in \text{desc}_g(\{i_0\})$. Hence $s \in \text{after}(s_1)$. \square

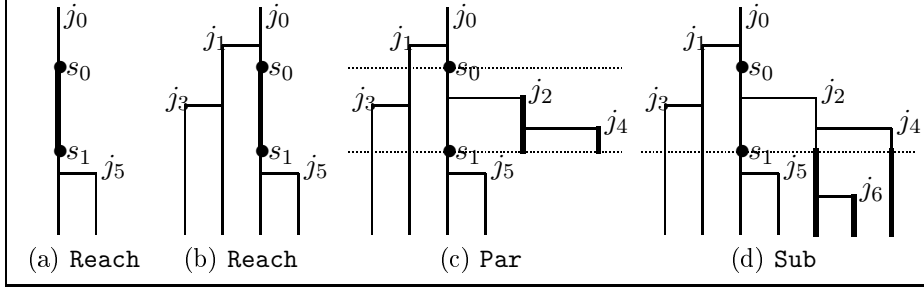


Figure 6: G-collecting semantics

3.2 Definition of the G-collecting Semantics

Let us recall some classical definitions. For any binary relation R on states let $R|_S = \{(s, s') \in R \mid s \in S\}$ be the *restriction* of R to S and $R\langle S \rangle = \{s' \mid \exists s \in S : (s, s') \in R\}$ be the *application* of R on S . $R; R' = \{(s, s'') \mid \exists s' \in \mathbf{States} : (s, s') \in R \wedge (s', s'') \in R'\}$ is the *composition* of R and R' . Let $R^* = \bigcup_{k \in \mathbb{N}} R^k$ where $R^0 = \{(s, s) \mid s \in \mathbf{States}\}$ and $R^{k+1} = R; R^k$. Finally, for any set of states S , let $\overline{S} = \mathbf{States} \setminus S$ be the *complement* of S .

The definition of the G-collecting semantics $\llbracket^\ell stmt, \ell'\rrbracket$ of a statement ${}^\ell stmt, \ell'$ requires some intermediate relations and sets. The formal definition is given by the following definition:

Definition 1.

$$\llbracket^\ell stmt, \ell'\rrbracket \langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle \stackrel{def}{=} \langle \mathbf{S}', \mathbf{G} \cup \mathbf{Self} \cup \mathbf{Par} \cup \mathbf{Sub}, \mathbf{A} \cup \mathbf{Par} \cup \mathbf{Sub} \rangle$$

$$\{\llbracket^\ell stmt, \ell'\rrbracket\} \langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle \stackrel{def}{=} [\mathbf{Reach}, \mathbf{Ext}, \mathbf{Self}, \mathbf{Par}, \mathbf{Sub}]$$

where:

$$\mathbf{Reach} = \left\{ (s_0, s_1) \mid \begin{array}{l} (s_0, s_1) \in [(\mathbf{G}|_{\mathit{after}(s_0)} \cap \mathit{Tr}^\ell_{stmt, \ell'}) \cup \mathbf{A}|_{\overline{\mathit{after}(s_0)}}]^* \\ \wedge \mathit{thread}(s_0) = \mathit{thread}(s_1) \wedge \mathit{label}(s_0) = \ell \end{array} \right\}$$

$$\mathbf{S}' = \{s_1 \mid s_1 \in \mathbf{Reach}\langle \mathbf{S} \rangle \wedge \mathit{label}(s_1) = \ell'\}$$

$$\mathbf{Self} = \{(s, s') \in \mathit{Tr}^\ell_{stmt, \ell'} \mid s \in \mathbf{Reach}\langle \mathbf{S} \rangle\}$$

$$\mathbf{Par} = \{(s, s') \in \mathit{Tr}^\ell_{stmt, \ell'} \mid \exists s_0 \in \mathbf{S} : (s_0, s) \in \mathbf{Reach}; \mathit{Schedule} \wedge s \in \mathit{after}(s_0)\}$$

$$\mathbf{Ext}(s_0, s_1) = [(\mathbf{G}|_{\mathit{after}(s_0)} \cap \mathit{Tr}^\ell_{stmt, \ell'}) \cup \mathbf{A}|_{\overline{\mathit{after}(s_0)}} \cup \mathbf{G}|_{\mathit{after}(s_1)}]^*$$

$$\mathbf{Sub} = \left\{ (s, s') \mid \begin{array}{l} \exists s_0, s_1 \in \mathbf{S} \times \mathbf{S}' : (s_0, s_1) \in \mathbf{Reach} \wedge \\ (s_1, s) \in \mathbf{Ext}(s_0, s_1) \wedge s \in \mathit{after}(s_0) \setminus \mathit{after}(s_1) \end{array} \right\}$$

Let us read together, on some special cases shown in Fig. 6. This will explain the rather intimidating of Definition 1 step by step, introducing the necessary complications as they come along.

The statement is executed between states $s_0 = (j_0, P, \sigma, g)$ and $s_1 = (j_0, P', \sigma', g \cdot g')$.

Figure 6(a) describes the single-thread case: there is no thread interaction during the execution of ${}^\ell stmt, \ell'$. The thread j_5 is spawned after the execution of the statement. E.g., in Fig. 2b, ${}^{\ell_6}y := 0; \ell_7$.

In this simple case, a state s is reachable from s_0 if and only if there exists a path from s_0 to s using only transitions done by the unique thread (these transitions should be in the guarantee \mathbf{G}) and that are generated by the statement. \mathbf{S}' represents the final states reachable from \mathbf{S} . Finally, in this case:

$$\begin{aligned} \text{Reach} &= \{(s_0, s_1) \in [\mathbf{G} \cap \text{Tr}_{\ell stmt, \ell'}]^* \mid \text{label}(s_0) = \ell\} \\ \mathbf{S}' &= \{s_1 \mid s_1 \in \text{Reach}(\mathbf{S}) \wedge \text{label}(s_1) = \ell'\} \\ \text{Self} &= \{(s, s') \in \text{Tr}_{\ell stmt, \ell'} \mid s \in \text{Reach}(\mathbf{S})\} \\ \llbracket {}^\ell stmt, \ell' \rrbracket \langle \mathbf{S}, \mathbf{G}, \text{Schedule} \rangle &= \langle \mathbf{S}', \mathbf{G} \cup \text{Self}, \text{Schedule} \rangle \text{Par} = \text{Sub} = \emptyset \end{aligned}$$

Figure 6(b) is more complex: j_0 interferes with threads j_1 and j_3 . These interferences are assumed to be in \mathbf{A} . Some states can be reached only with such interference transitions. E.g, consider the statement ${}^{\ell_{14}}y := 1; {}^{\ell_{15}}z := y, \ell_\infty$ in Fig. 2d: at the end of this statement, the value of z may be 3, because the statement ${}^{\ell_{13}}y := 3, \ell_\infty$ may be executed when the thread *main* is at label ℓ_{15} . Therefore, to avoid missing some reachable states, transitions of \mathbf{A} are taken into account in the definition of Reach . In Fig. 6(b), the statement ${}^\ell stmt, \ell'$ is executed by descendants of j_0 of kind (ii) (i.e., $\text{after}(s_0)$), and the interferences come from j_1 and j_3 which are descendants of kind (i) (i.e., in $\text{after}(s_0)$). Finally, we find the complete formula of Definition 1:

$$\text{Reach} = \left\{ (s_0, s_1) \mid \begin{array}{l} (s_0, s_1) \in [(\mathbf{G}_{\text{after}(s_0)} \cap \text{Tr}_{\ell stmt, \ell'}) \cup \mathbf{A}_{\text{after}(s_0)}]^* \\ \wedge \text{thread}(s_0) = \text{thread}(s_1) \wedge \text{label}(s_0) = \ell \end{array} \right\}.$$

In Fig. 6(c), when j_0 executes the statement ${}^\ell stmt, \ell'$ it creates subthreads (j_2 and j_4) which execute transitions in parallel of the statement. The guarantee \mathbf{G} is not supposed to contain only transitions executed by the current thread but also these transitions. These transitions, represented by thick lines in Fig. 6(c), are collected into the set Par . Consider such a transition, it is executed in parallel of the statement, i.e., from a state of $\text{Schedule} \circ \text{Reach}(\{s_0\})$.

$\text{interfere}_A(\mathbf{S})$	$\stackrel{\text{def}}{=} \left\{ s' \mid \exists s \in \mathbf{S} : \begin{array}{l} (s, s') \in (A_{\overline{\text{after}(s)}} \cup \text{Schedule})^* \\ \wedge \text{thread}(s) = \text{thread}(s') \end{array} \right\}$
$\text{post}(\ell)$	$\stackrel{\text{def}}{=} \left\{ s' \mid \begin{array}{l} \exists s = (i, P, \sigma, g \cdot (i, \ell, j)) \in \mathbf{States} : \\ s' \in \text{after}(s) \end{array} \right\}$
$\text{schedule-child}(\mathbf{S})$	$\stackrel{\text{def}}{=} \left\{ (j, P, \sigma, g') \mid \exists i, g : \begin{array}{l} (i, P, \sigma, g') \in \mathbf{S} \\ \wedge g' = g \cdot (i, \ell, j) \end{array} \right\}$
$\text{init-child}_\ell(\langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle)$	$\stackrel{\text{def}}{=} \langle \text{interfere}_{A \cup (\mathbf{G}_{\text{post}(\ell)}}) \circ \text{schedule-child}(\mathbf{S}), \text{Schedule}, A \cup (\mathbf{G}_{\text{post}(\ell)}) \rangle$
$\text{combine}_{\langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle}(\mathbf{G}')$	$\stackrel{\text{def}}{=} \langle \text{interfere}_{A \cup \mathbf{G}'}(\mathbf{S}), \mathbf{G} \cup \mathbf{G}', A \cup \mathbf{G}' \rangle$
$\text{execute-thread}_{f, \mathbf{S}, \mathbf{A}}(\mathbf{G})$	$\stackrel{\text{def}}{=} \mathbf{G}' \text{ with } \langle \mathbf{S}', \mathbf{G}', \mathbf{A}' \rangle = f \langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle$
$\text{guarantee}_f \langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle$	$\stackrel{\text{def}}{=} \text{execute-thread}_{f, \mathbf{S}, \mathbf{A}}^{\uparrow \omega}(\mathbf{G})$

Figure 7: Basic semantic functions

Furthermore, this transition came from the statement, and not from an earlier thread, hence from $\text{after}(s_0)$.

$$\text{Par} = \{(s, s') \in \text{Tr}_{\ell \text{stmt}, \ell'} \mid \exists s_0 \in \mathbf{S} : (s_0, s) \in \text{Schedule} \circ \text{Reach} \wedge s \in \text{after}(s_0)\}.$$

The threads created by j_0 when it executes the statement $\ell \text{stmt}, \ell'$ may survive when this statement returns in s_1 , as shown in Fig. 6(d). Such a thread i (here, i is j_4 or j_5 or j_6) can execute transitions that are not in Par . Sub collects these transitions. The creation of i results of a *create* statement executed between s_0 and s_1 . Hence, such a transition (s, s') is executed from a state in $\text{after}(s_0) \setminus \text{after}(s_1)$. The path from s_1 to s is comprised of transitions in $(\mathbf{G}_{\overline{\text{after}(s_0)}} \cap \text{Tr}_{\ell \text{stmt}, \ell'}) \cup A_{\overline{\text{after}(s_0)}}$ (similarly to Reach) and of transitions of j_0 or j_5 under the dotted line, i.e., transitions in $\mathbf{G}_{\overline{\text{after}(s_1)}}$.

3.3 Properties of the G-collecting Semantics

To prepare for our static analysis we provide a compositional analysis of the G-collecting semantics in Theorem 1 below. To this end, we introduce a set of helper functions, see Fig. 7. We define, for any extensive¹ function f , $f^{\uparrow \omega}(X) \stackrel{\text{def}}{=} \bigcup_{n \in \mathbb{N}} f^n(X)$.

¹A function f of domain D is *extensive* if and only if for every set $X \subseteq D$, $X \subseteq f(X)$

The function $\text{interfere}_A(\mathbf{S})$ returns states that are reachable from \mathbf{S} by applying interferences in A . Notice that these interferences do not change the label of the current thread:

Lemma 13. *Let $s = (i, P, \sigma, g)$ and $s' = (i', P', \sigma', g')$. If $(s, s') \in (A_{\overline{\text{after}(s)}} \cup \text{Schedule})^*$ then $P(i) = P'(i)$, i.e., $\text{label}(s) = P'(\text{thread}(s))$.*

If furthermore $\text{thread}(s) = \text{thread}(s')$ then $\text{label}(s) = \text{label}(s')$.

Proof. There exists a sequence of states s_0, \dots, s_n such that $s_0 = s$ and $s_n = s'$ and for all $k \in \{0, \dots, n-1\}$, $(s_k, s_{k+1}) \in A_{\overline{\text{after}(s)}} \cup \text{Schedule}$.

Let $(i_k, P_k, \sigma_k, g_k) = s_k$. Let us prove by induction that $P_k(i) = P(i)$. If $(s_k, s_{k+1}) \in \text{Schedule}$ and $P_k(i) = P(i)$ then $P_{k+1}(i) = P(i)$. If $(s_k, s_{k+1}) \in A_{\overline{\text{after}(s)}}$ and $P_k(i) = P(i)$ then $s_k \notin \text{after}(s_k)$ and then $i_k \neq i$ and then $P_{k+1}(i) = P_k(i) = P(i)$. \square

The function $\text{post}(\ell)$ computes the set of states that may be reached after having created a thread at label ℓ ; schedule-child applies a schedule transition to the last child of the current thread. The function init-child_ℓ computes a configuration for the last child created at ℓ , taking into account interferences with its parent using $\text{post}(\ell)$; notice that we need here the genealogies to define $\text{post}(\ell)$ and then to have Theorem 1. The function execute-thread computes a part of the guarantee (an under-approximation), given the semantics of a command represented as a function f from configuration to configuration. And guarantee iterates execute-thread to compute the whole guarantee.

During the execution of a statement ${}^\ell \text{stmt}, \ell'$, some interference transition may be fired at any time. Nevertheless, the labels of the thread(s) executing the statement are still in a label of the statement:

Lemma 14. *If $(s_0, s) \in (\text{Tr}^{\ell \text{stmt}, \ell'} \cup A_{\overline{\text{after}(s_0)}})^*$, $\text{label}(s_0) \in \text{Labs}({}^\ell \text{stmt}, \ell')$ and $s \in \text{after}(s_0)$ then $\text{label}(s) \in \text{Labs}({}^\ell \text{stmt}, \ell')$.*

Furthermore, if $\text{label}(s) = \ell'$ or $\text{label}(s) = \ell$ then $\text{thread}(s_0) = \text{thread}(s)$.

Proof. There exists a path s_1, \dots, s_n such that $s_n = s$ and for all $k \in \{0, \dots, n-1\}$, $(s_k, s_{k+1}) \in \text{Tr}^{\ell \text{stmt}, \ell'} \cup A_{\overline{\text{after}(s_0)}}$. Let $(i_0, P_0, \sigma_0, g_0) = s_0$ and for $k \geq 1$, let $(i_k, P_k, \sigma_k, g_0 \cdot g_k) = s_k$.

Let us prove by induction on k that $P_k(i) \in \text{Labs}({}^\ell \text{stmt}, \ell')$ and for all $j \in \text{desc}_{g_k}(\{i_0\}) \setminus \{i_0\}$, $P_k(j) \in \text{Labs}_{\text{child}}({}^\ell \text{stmt}, \ell')$.

Let us assume that k satisfy the induction property, and let us show that $k+1$ satisfies the induction property.

In the case $(s_k, s_{k+1}) \in \mathbf{A}_{\overline{\text{after}(s_0)}}$, $i_k \notin \text{desc}_{g_k}(\{i_0\})$ and then for all $j = \text{desc}_{g_k}(\{i_0\}) = \text{desc}_{g_{k+1}}(\{i_0\})$, $P_k(j) = P_{k+1}(j)$.

In the case $(s_k, s_{k+1}) \in \mathcal{Tr}^{\ell \text{ stmt}, \ell'}$ and $i_k = i_0$, by Lemma 1, $P_{k+1}(i_k) \in \text{Labs}(\ell \text{ stmt}, \ell')$. Furthermore, if $j \in \text{desc}_{g_k}(\{i_0\})$ then $P_k(j) = P_{k+1}(j)$. If $j \in \text{desc}_{g_{k+1}}(\{i_0\}) \setminus \text{desc}_{g_k}(\{i_0\})$, then $j \in \text{Dom}(P_{k+1}) \setminus \text{Dom}(P_k)$ and by Lemma 3, $P_{k+1}(j) \in \text{Labs}_{\text{child}}(\ell \text{ stmt}, \ell')$.

In the case $(s_k, s_{k+1}) \in \mathcal{Tr}^{\ell \text{ stmt}, \ell'}$ and $i_k = i_0$, we conclude similarly by Lemma 4. If $s \in \text{after}(s_0)$, then $i_n \in \text{desc}_{g_n}(\{i_0\})$ and therefore $\text{label}(s) \in \text{Labs}(\ell \text{ stmt}, \ell')$.

If $\text{label}(s) = \ell'$ or $\text{label}(s) = \ell$, then, because by Lemma 4, ℓ and ℓ' are not in $\text{Labs}_{\text{child}}(\ell \text{ stmt}, \ell')$, we have $\text{thread}(s_0) = \text{thread}(s)$. \square

The following lemma summarizes the consequences on Reach of Lemmas 7 and 14:

Lemma 15. *Let $[\text{Reach}, \text{Ext}, \text{Self}, \text{Par}, \text{Sub}] = \{\{\ell \text{ stmt}, \ell'\}\} \langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle$.*

If $(s_0, s) \in \text{Reach}$ therefore $s \in \text{after}(s_0)$, $\text{after}(s) \subseteq \text{after}(s_0)$ and $\text{label}(s) \in \text{Labs}(\ell \text{ stmt}, \ell')$.

Proof. $(s_0, s) \in [(\mathbf{G}_{\overline{\text{after}(s_0)}} \cap \mathcal{Tr}^{\ell \text{ stmt}, \ell'}) \cup \mathbf{A}_{\overline{\text{after}(s_0)}}]^*$, then by Lemma 7, $s \in \text{after}(s_0)$ and $\text{after}(s) \subseteq \text{after}(s_0)$. Furthermore, by Lemma 14, $\text{label}(s) \in \text{Labs}(\ell \text{ stmt}, \ell')$. \square

The following proposition show that guarantee collect all transitions generated by a statement.

Proposition 1 (Soundness of guarantee). *Let $\langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle$ a concrete configuration, $\ell \text{ stmt}, \ell'$ a statement and $\mathbf{G}_\infty = \text{guarantee} \llbracket \ell \text{ stmt}, \ell' \rrbracket \langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle$. Let $s_0 \in \mathbf{S}$ and $s \in \text{after}(s_0)$ such that $(s, s') \in \mathcal{Tr}^{\ell \text{ stmt}, \ell'}$.*

If $(s_0, s) \in [(\mathcal{Tr}^{\ell \text{ stmt}, \ell'})_{\overline{\text{after}(s_0)}} \cup \mathbf{A}_{\overline{\text{after}(s_0)}}]^$ then $(s, s') \in \mathbf{G}_\infty$*

Proof. Let $\langle \mathbf{S}_k, \mathbf{G}_k, \mathbf{A}_k \rangle = \text{execute-thread}^k \llbracket \ell \text{ stmt}, \ell' \rrbracket_{\mathbf{S}, \mathbf{A}} \mathbf{G}$

and $[\text{Reach}_k, \text{Ext}_k, \text{Self}_k, \text{Par}_k, \text{Sub}_k] = \llbracket \ell \text{ stmt}, \ell' \rrbracket \langle \mathbf{S}, \mathbf{G}_k, \mathbf{A} \rangle$

and $T = \mathcal{Tr}^{\ell \text{ stmt}, \ell'}$

Let s_0, \dots, s_{n+1} a path such that $s_n = s$, $s_{n+1} = s'$ and for all k , $(s_k, s_{k+1}) \in [T_{\overline{\text{after}(s_0)}} \cup \mathbf{A}_{\overline{\text{after}(s_0)}}]^*$. Let m an arbitrary integer. Then, let k_0 the smallest k (if it exists) such that $(s_k, s_{k+1}) \in T_{\overline{\text{after}(s_0)}} \setminus \mathbf{G}_m$. Then, by definition, $(s_k, s_{k+1}) \in \text{Self}_m \cup \text{Par}_m \subseteq \mathbf{G}_{m+1} \subseteq \mathbf{G}_\infty$. \square

3.4 Basic Statements

Basic statement have common properties, therefore, we will study them at the same time. Proposition 2 explain how to overapproximate the semantics of a basic statement. It will be used in the abstract semantics.

An execution path of a basic statement can be decomposed in interferences, then one transition of the basic statement, and then, some other interferences. The following lemma show this. This lemma will allow us to prove Proposition 2.

Lemma 16. *Let ℓ_1 basic, ℓ_2 be a basic statement, and $[\text{Reach}, \text{Ext}, \text{Self}, \text{Par}, \text{Sub}] = \{\{\ell_1 \text{ basic}, \ell_2\}\langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle\}$. Let $(s_0, s) \in \text{Reach}$ then:*

- *either $s \in \text{interfere}_{\mathbf{A}}(\{s_0\})$ and $\text{label}(s) = \ell_1$,*
- *or $s \in \text{interfere}_{\mathbf{A}}(\text{Tr}_{\ell_1 \text{ basic}, \ell_2} \setminus \text{Schedule}(\text{interfere}_{\mathbf{A}}(\{s_0\})))$ and $\text{label}(s) = \ell_2$*

Proof. Let us consider the case $(s_0, s) \in (\mathbf{A}_{\overline{\text{after}(s_0)}} \cup \text{Schedule})^*$. By definition of Reach , $\text{thread}(s_0) = \text{thread}(s)$. Therefore $s \in \text{interfere}_{\mathbf{A}}(\{s_0\})$. By Lemma 13, $\text{label}(s_0) = \text{label}(s)$, hence, $\text{label}(s) = \ell_1$.

Let us consider the case $(s_0, s) \notin (\mathbf{A}_{\overline{\text{after}(s_0)}} \cup \text{Schedule})^*$ Because $(s_0, s) \in \text{Reach}$, $(s_0, s) \in [(\mathbf{G}_{\text{after}(s_0)} \cap \text{Tr}_{\ell_1 \text{ basic}, \ell_2}) \mathbf{A}_{\overline{\text{after}(s_0)}}]^*$. So $(s_0, s) \in (\mathbf{A}_{\overline{\text{after}(s_0)}} \cup \text{Schedule})^*$; $[\mathbf{G}_{\text{after}(s_0)} \cap \text{Tr}_{\ell_1 \text{ basic}, \ell_2} \setminus \text{Schedule}]$; $[(\mathbf{G}_{\text{after}(s_0)} \cap \text{Tr}_{\ell_1 \text{ basic}, \ell_2}) \mathbf{A}_{\overline{\text{after}(s_0)}}]^*$.

Let $s_1, s_2, s_3, \dots, s_n$ a sequence of states such that $(s_1, s_2) \in (\mathbf{A}_{\overline{\text{after}(s_0)}} \cup \text{Schedule})^*$ and $(s_2, s_3) \in \mathbf{G}_{\text{after}(s_0)} \cap \text{Tr}_{\ell_1 \text{ basic}, \ell_2} \setminus \text{Schedule}$ and for all $k \in \{3, \dots, n\}$, $(s_k, s_{k+1}) \in (\mathbf{G}_{\text{after}(s_0)} \cap \text{Tr}_{\ell_1 \text{ basic}, \ell_2}) \mathbf{A}_{\overline{\text{after}(s_0)}}$.

Notice that $(s_1, s_2) \in \mathbf{G}_{\text{after}(s_0)}$ and therefore $s_1 \in \text{after}(s_0)$. By Lemma 11, $\text{thread}(s_0) = \text{thread}(s_1)$. Therefore $s_1 \in \text{interfere}_{\mathbf{A}}(\{s_0\})$.

By Lemma 5, $\text{label}(s_2) = \ell_2$.

Let k_0 the smallest (if it exists) $k \geq 2$ such that $(s_k, s_{k+1}) \in \text{Tr}_{\ell_1 \text{ basic}, \ell_2} \setminus \text{Schedule}$. Therefore $(s_2, s_{k_0}) \in (\mathbf{A}_{\overline{\text{after}(s_0)}} \cup \text{Schedule})^*$. By Lemma 13, $\text{label}(s_{k_0}) = \text{label}(s_2) = \ell_2$. According to Lemma 5, this is a contradiction. Therefore, for all $k \in \{3, \dots, n\}$, $(s_k, s_{k+1}) \in \text{Schedule} \cup \mathbf{A}_{\overline{\text{after}(s_0)}}$.

By Lemma 1, $\text{thread}(s_1) = \text{thread}(s_2)$, hence $\text{thread}(s_2) = \text{thread}(s)$. Therefore $s_2 \in \text{interfere}_{\mathbf{A}}(\{s_2\})$ \square

Now, we introduce some claims on the semantics of basic statements. Claims 1 and 2 say that when a basic statement is executed, only one thread

is executed. Notice that *spawn* creates a subthread, but does not execute it. The Claim 3 characterizes the transitions done by the current thread. The Claim 4 gives an overapproximation of \mathbf{S}' , the set of states reached at the end of the execution of a basic statement.

Claim 1. *Let ℓ_1 basic, ℓ_2 a basic statement and $[\text{Reach}, \text{Ext}, \text{Self}, \text{Par}, \text{Sub}] = \{\{\ell_1\text{basic}, \ell_2\}\langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle\}$. Therefore, $\text{Par} = \emptyset$.*

Proof. Let $(s, s') \in \text{Par}$. Therefore, $(s, s') \in \text{Reach}; \text{Schedule}\langle \mathbf{S} \rangle$. So, there exists $s_0 \in \mathbf{S}_0$ and s_1 such that $(s_0, s_1) \in \text{Reach}$, $(s_1, s) \in \text{Schedule}$ and $s \in \text{after}(s_0)$. Hence, by Lemma 7, $\text{thread}(s) = \text{thread}(s')$. Given that $(s, s_1) \in \text{Reach}$, $\text{thread}(s) = \text{thread}(s_1)$. But, because $(s_1, s) \in \text{Schedule}$, $\text{thread}(s) \neq \text{thread}(s_1)$. There is a contradiction. Hence $\text{Par} = \emptyset$. \square

Claim 2. *Let ℓ_1 basic, ℓ_2 a basic statement and $[\text{Reach}, \text{Ext}, \text{Self}, \text{Par}, \text{Sub}] = \{\{\ell_1\text{basic}, \ell_2\}\langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle\}$. Therefore, $\text{Sub} = \emptyset$.*

Proof. Let $(s, s') \in \text{Sub}$. There exists $s_0 \in \mathbf{S}$ and s_1 such that $(s_0, s_1) \in \text{Reach}$, $(s_2, s) \in \text{Ext}(s_0, s_1)$ and $s \in \text{after}(s_0) \setminus \text{after}(s_1)$.

Let $(i_0, P_0, \sigma_0, g_0) = s_0$ and $(i_1, P_1, \sigma_1, g_0 \cdot g_1) = s_1$. Because $(s_0, s_1) \in \text{Reach}$, $\text{thread}(s_0) = \text{thread}(s_1)$. Let $j \in \text{desc}_{g_1}(\{i_0\})$. Let $s'_1 = (j, P_1, \sigma_1, g_0 \cdot g_1)$. Therefore $s'_1 \in \text{after}(s_0)$ and $(s_0, s'_1) \in (\text{Tr}_{\ell_1\text{basic}, \ell_2} \cup \mathbf{A}_{\text{after}(s_0)}^*)^*; (\text{Schedule}^*)$. By lemma 11, $j = \text{thread}(s'_1) = \text{thread}(s_0) = i_0$. Hence $\text{desc}_{g_1}(\{i_0\}) = \{i_0\}$.

Let $(i, P, \sigma, g_0 \cdot g_1 \cdot g) = s$. By definition of *desc* and a straightforward induction on g , $\text{desc}_{g_1 \cdot g}(\{i_0\}) = \text{desc}_g(\{i_0\})$.

Because $s \in \text{after}(s_0)$, then $i \in \text{desc}_{g_1 \cdot g}(\{i_0\})$. Therefore $i = i_0$. By Lemma 7, $s \in \text{after}(s_1)$. This is contradictory with $s \in \text{after}(s_0) \setminus \text{after}(s_1)$. Hence $\text{Sub} = \emptyset$. \square

Claim 3. *Let ℓ_1 basic, ℓ_2 a basic statement and $[\text{Reach}, \text{Ext}, \text{Self}, \text{Par}, \text{Sub}] = \{\{\ell_1\text{basic}, \ell_2\}\langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle\}$.*

Therefore, $\text{Par} \subseteq \{(s, s') \in \text{Tr}_{\ell_1\text{basic}, \ell_2} \mid s \in \text{interfere}_{\mathbf{A}}(\mathbf{S})\} \cup \text{Schedule}$.

Proof. Let $(s, s') \in \text{Self} \setminus \text{Schedule}$. Then $(s, s') \in \text{Tr}_{\ell_1\text{basic}, \ell_2}$ and $s \in \text{Reach}\langle \mathbf{S} \rangle$. Then, there exists $s_0 \in \mathbf{S}$ such that $(s_0, s) \in \text{Reach}$. Because $(s_0, s) \in \text{Tr}_{\ell_1\text{basic}, \ell_2} \setminus \text{Schedule}$, by Lemma 5, $\text{label}(s) = \ell_1 \neq \ell_2$. By Lemma 16, $s \in \text{interfere}_{\mathbf{A}}(\{s_0\}) \subseteq \text{interfere}_{\mathbf{A}}(\mathbf{S})$. Because $\text{thread}(s_0) = \text{thread}(s)$, $(s, s') \in \text{Self}$. \square

Claim 4. *Let ℓ_1 basic, ℓ_2 a basic statement, $\langle \mathbf{S}', \mathbf{G}', \mathbf{A}' \rangle = \llbracket \ell_1\text{basic}, \ell_2 \rrbracket \langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle$ and $[\text{Reach}, \text{Ext}, \text{Self}, \text{Par}, \text{Sub}] = \{\{\ell_1\text{basic}, \ell_2\}\langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle\}$.*

Therefore, $\mathbf{S}' \subseteq \text{interfere}_{\mathbf{A}}(\text{Tr}_{\ell_1\text{basic}, \ell_2} \setminus \text{Schedule}\langle \text{interfere}_{\mathbf{A}}(\mathbf{S}) \rangle)$.

Proof. Let $s \in S'$. Therefore, $label(s) = \ell_2$ and there exists $s_0 \in S$ such that $(s_0, s) \in \text{Reach}$.

Because $label(s) = \ell_2 \neq \ell_1$, according to Lemma 16, $s \in \text{interfere}_A(\mathcal{Tr}_{\ell_1 \text{ basic}, \ell_2} \setminus \text{Schedule}\langle \text{interfere}_A(\{s_0\}) \rangle) \subseteq \text{interfere}_A(\mathcal{Tr}_{\ell_1 \text{ basic}, \ell_2} \setminus \text{Schedule}\langle \text{interfere}_A(S) \rangle)$ \square

Proposition 2 (Basic statements). *Let $\ell_1 \text{ basic}, \ell_2$ be a basic statement, then:*

$$\llbracket \ell_1 \text{ basic}, \ell_2 \rrbracket \langle S, G, A \rangle \leq \langle S'', G \cup G_{\text{new}}, A \rangle$$

where $S'' = \text{interfere}_A(\mathcal{Tr}_{\ell_1 \text{ basic}, \ell_2} \setminus \text{Schedule}\langle \text{interfere}_A(S) \rangle)$
and $G_{\text{new}} = \{(s, s') \in \mathcal{Tr}_{\ell_1 \text{ basic}, \ell_2} \mid s \in \text{interfere}_A(S)\}$

Proof. This proposition is a straightforward consequence of Claims 1, 2, 3 and 4. \square

3.5 Overapproximation of the G-collecting Semantics

The next theorem shows how the G-collecting semantics can be over-approximated by a denotational semantics, and is the key point in defining the abstract semantics.

- Theorem 1.**
1. $\llbracket \ell_1 \text{ cmd}_1; \ell_2 \text{ cmd}_2, \ell_3 \rrbracket (Q) \leq \llbracket \ell_2 \text{ cmd}_2, \ell_3 \rrbracket \circ \llbracket \ell_1 \text{ cmd}_1, \ell_2 \rrbracket (Q)$
 2. $\llbracket \ell_1 \text{ if}((\text{cond}) \text{ then}\{\ell_2 \text{ cmd}_1\} \text{ else}\{\ell_4 \text{ cmd}_2\}, \ell_3 \rrbracket (Q) \leq \llbracket \ell_2 \text{ cmd}_1, \ell_3 \rrbracket \circ \llbracket \ell_1 \text{ guard}(\text{cond}), \ell_2 \rrbracket (Q) \sqcup \llbracket \ell_4 \text{ cmd}_2, \ell_3 \rrbracket \circ \llbracket \ell_1 \text{ guard}(\neg \text{cond}), \ell_4 \rrbracket (Q)$
 3. $\llbracket \ell_1 \text{ while}(\text{cond})\{\ell_2 \text{ cmd}\}, \ell_3 \rrbracket (Q) \leq \llbracket \ell_1 \text{ guard}(\neg \text{cond}), \ell_3 \rrbracket \circ \text{loop}^{\uparrow \omega}(Q)$
with $\text{loop}(Q') = (\llbracket \ell_2 \text{ cmd}, \ell_1 \rrbracket \circ \llbracket \ell_1 \text{ guard}(\text{cond}), \ell_2 \rrbracket (Q')) \sqcup Q'$
 4. $\llbracket \ell_1 \text{ create}(\ell_2 \text{ cmd}), \ell_3 \rrbracket (Q) \leq \text{combine}_{Q'} \circ \text{guarantee} \llbracket \ell_2 \text{ cmd}, \ell_\infty \rrbracket \circ \text{init-child}_{\ell_2}(Q')$
with $Q' = \llbracket \ell_1 \text{ spawn}(\ell_2), \ell_3 \rrbracket (Q)$

While points 1 and 3 are as expected, the overapproximation of semantics of $\ell_1 \text{ create}(\ell_2 \text{ cmd}), \ell_3$ (point 4) computes interferences which will arise from executing the child and its descendants with `guarantee` and then combines this result with the configuration of the current thread. This theorem will be proved later.

The following proposition consider a statement $\ell \text{ stmt}$, ℓ' set of transition T . The only constraint on T is on the use of labels of $\ell \text{ stmt}, \ell'$.

The proposition consider an execution of the statement from a state s_0 to a state s_1 , and, after, an execution s_2, \dots, s_n of other commands. The labels of ${}^\ell stmt, \ell'$ may only be used :

- for interferences,
- or by the statement,
- after having applied the statement, i.e., after s_1 .

. This Proposition ensures us that any transition executed by a thread created during the execution of ${}^\ell stmt, \ell'$ (i.e., between s_0 and s_1) is a transition generated by the statement ${}^\ell stmt, \ell'$.

Proposition 3. *Let ${}^\ell stmt, \ell'$ a statement, $[\text{Reach}, \text{Ext}, \text{Self}, \text{Par}, \text{Sub}] = \{\{\ell stmt, \ell'\}\} \langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle$. Let $(s_0, s_1) \in \text{Reach}$ and T a set of transitions such that for all $(s, s') \in T$, if $\text{label}(s) \in \text{Labs}({}^\ell stmt, \ell')$ then $(s, s') \in \text{Tr}_{\ell stmt, \ell'}$ or $s \in \text{after}(s_1) \cup \text{after}(s_0)$.*

Let s_2, \dots, s_n a sequence of states such that for all $k \in \{1, \dots, n-1\}$, $(s_k, s_{k+1}) \in T$. Therefore, if $s_k \in \text{after}(s_0)$ then either $s_k \in \text{after}(s_1)$ or $(s_k, s_{k+1}) \in \text{Tr}_{\ell stmt, \ell'}$

Proof. Let for all $k \geq 1$, let $(i_k, P_k, \sigma_k, g_0 \cdot g_k) = s_k$.

Let us show by induction on $k \geq 1$ that for all j , if $j \in \text{desc}_{g_0 \cdot g_k}(\{i_1\}) \setminus \text{desc}_{g_k}(\{i_1\})$ then $P_k(j) \in \text{Labs}({}^\ell stmt, \ell')$.

Let $j_0 \in \text{desc}_{g_0 \cdot g_k}(\{i_1\}) \setminus \text{desc}_{g_0}(\{i_1\})$ and $s'_1 = (j_0, P_1, \sigma_1, g_0 \cdot g_1)$. Therefore $s'_1 \in \text{after}(s_0)$. Given that $(s_0, s'_1) \in \text{Reach}; \text{Schedule}$, by Lemma 15, $P_1(j_1) = \text{label}(s'_1) \in \text{Labs}({}^\ell stmt, \ell')$.

By induction hypothesis, for all j , if $j \in \text{desc}_{g_0 \cdot g_{k-1}}(\{i_1\}) \setminus \text{desc}_{g_{k-1}}(\{i_1\})$ then $P_{k-1}(j) \in \text{Labs}({}^\ell stmt, \ell')$.

Let $j \in \text{desc}_{g_0 \cdot g_k}(\{i_1\}) \setminus \text{desc}_{g_k}(\{i_1\})$.

If $\text{thread}(s_{k-1}) = j$, therefore, $s_{k-1} \in \text{after}(s_0) \setminus \text{after}(s_1)$. Furthermore, by induction hypothesis, $P_{k-1}(j) = \text{label}(s_{k-1}) \in \text{Labs}({}^\ell stmt, \ell')$. By definition of T , $(s_{k-1}, s_k) \in \text{Tr}_{\ell stmt, \ell'}$. By Lemma 1, $P_k(j) = \text{label}(s_k) \in \text{Labs}({}^\ell stmt, \ell')$.

If $j \in \text{Dom}(P_k) \setminus \text{Dom}(P_{k-1})$, then, $\text{thread}(s_{k-1}) \in \text{desc}_{g_0 \cdot g_{k-1}}(\{i_1\}) \setminus \text{desc}_{g_{k-1}}(\{i_1\})$. Hence, as above, $(s_{k-1}, s_k) \in \text{Tr}_{\ell stmt, \ell'}$. Hence, according to Lemma 3, $P_k(j) = \text{label}(s_k) \in \text{Labs}({}^\ell stmt, \ell')$.

Else, by definition of a transition, $P_{k-1}(j) = P_k(j)$.

Let k such that $s_k \in \text{after}(s_0)$, hence, either $s_k \in \text{after}(s_1)$, or $s_k \notin \text{after}(s_1)$. In the last case $i_k \in \text{desc}_{g_0 \cdot g_{k-1}}(\{i_1\}) \setminus \text{desc}_{g_{k-1}}(\{i_1\})$, and therefore $\text{label}(s_k) \in \text{Labs}(\ell \text{stmt}, \ell')$. Hence, by definition of T , $(s_k, s_{k+1}) \in \mathcal{Tr}_{\ell \text{stmt}, \ell'}$. \square

3.5.1 Proof of Property 1 of Theorem 1

Lemma 17. $\mathcal{Tr}_{\ell_1 \text{cmd}_1; \ell_2 \text{cmd}_2, \ell_3} = \mathcal{Tr}_{\ell_1 \text{cmd}_1, \ell_2} \cup \mathcal{Tr}_{\ell_2 \text{cmd}_2, \ell_3}$

In this section, we consider an initial configuration : $Q_0 = \langle S_0, G_0, A_0 \rangle$ and a sequence $\ell_1 \text{cmd}_1; \ell_2 \text{cmd}_2, \ell_3$. We write $\mathcal{Tr}_1 = \mathcal{Tr}_{\ell_1 \text{cmd}_1, \ell_2}$ and $\mathcal{Tr}_2 = \mathcal{Tr}_{\ell_2 \text{cmd}_2, \ell_3}$ and $\mathcal{Tr} = \mathcal{Tr}_{\ell_1 \text{cmd}_1; \ell_2 \text{cmd}_2, \ell_3}$

Define:

$$\begin{aligned} Q' &= \langle S', G', A' \rangle = \llbracket \ell_1 \text{cmd}_1; \ell_2 \text{cmd}_2, \ell_3 \rrbracket(Q_0) \\ K &= [\text{Reach}, \text{Ext}, \text{Self}, \text{Par}, \text{Sub}] = \{\{\ell_1 \text{cmd}_1; \ell_2 \text{cmd}_2, \ell_3\}\}(Q_0) \\ Q_1 &= \langle S_1, G_1, A_1 \rangle = \llbracket \ell_1 \text{cmd}_1, \ell_2 \rrbracket(Q_0) \\ K_1 &= [\text{Reach}_1, \text{Ext}_1, \text{Self}_1, \text{Par}_1, \text{Sub}_1] = \{\{\ell_1 \text{cmd}_1, \ell_2\}\}(Q_0) \\ Q_2 &= \langle S_2, G_2, A_2 \rangle = \llbracket \ell_2 \text{cmd}_2, \ell_3 \rrbracket(Q_1) \\ K_2 &= [\text{Reach}_2, \text{Ext}_2, \text{Self}_2, \text{Par}_2, \text{Sub}_2] = \{\{\ell_2 \text{cmd}_2, \ell_3\}\}(Q_1) \end{aligned}$$

Lemma 18. *If $(s, s') \in \mathcal{Tr}$ and $\text{label}(s) \in \text{Labs}(\ell_1 \text{cmd}_1, \ell_2) \setminus \{\ell_2\}$ then $(s, s') \in \mathcal{Tr}_1$.*

If $(s, s') \in \mathcal{Tr}$ and $\text{label}(s) \in \text{Labs}(\ell_2 \text{cmd}_2, \ell_3)$ then $(s, s') \in \mathcal{Tr}_2$.

Proof. Let us consider that $\text{label}(s) \in \text{Labs}(\ell_1 \text{cmd}_1, \ell_2) \setminus \{\ell_2\}$. Hence because labels of $\ell_1 \text{cmd}_1; \ell_2 \text{cmd}_2, \ell_3$ are pairwise distinct, $\text{label}(s) \notin \text{Labs}(\ell_2 \text{cmd}_2, \ell_3)$. By Lemma 2, $(s, s') \notin \mathcal{Tr}_2$. Hence, by Lemma 17, $(s, s') \in \mathcal{Tr}_1$

The case $\text{label}(s) \in \text{Labs}(\ell_2 \text{cmd}_2, \ell_3)$ is similar. \square

Lemma 19. *Using the above notations, for every $(s_0, s) \in \text{Reach}$ such that $s_0 \in S_0$,*

- *either $(s_0, s) \in \text{Reach}_1$ and $\text{label}(s) \neq \ell_2$*
- *or there exists $s_1 \in S_1$ such that $(s_0, s_1) \in \text{Reach}_1$, $(s_1, s) \in \text{Reach}_2$*

Proof. Let $(s_0, s) \in \text{Reach}$. Either $(s_0, s) \in \text{Reach}_1$ or $(s_0, s) \notin \text{Reach}_1$.

In the first case, either $\text{label}(s) \neq \ell_2$, or $\text{label}(s) = \ell_2$. If $\text{label}(s) = \ell_2$, then, by definition, $s \in S_1$. By definition, $(s, s) \in \text{Reach}_2$ and $(s, s) \in \text{Ext}_1(s_0, s)$. We just have to choose $s_1 = s$.

In the second case, $(s_0, s) \notin \mathbf{Reach}_1$. Let $T_0 = (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_1) \cup \mathbf{A}_0|_{\overline{\mathit{after}(s_0)}}$. Since $(s, s') \in \mathbf{Reach}'$, $\mathit{thread}(s_0) = \mathit{thread}(s)$ and $\mathit{label}(s_0) = \ell_1$. Furthermore $(s_0, s) \notin \mathbf{Reach}_1$, so $(s_0, s) \notin T_0^*$. Since $(s, s') \in \mathbf{Reach}' \subseteq [(\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r) \cup \mathbf{A}_0|_{\overline{\mathit{after}(s_0)}}]^*$, $\mathcal{T}r = \mathcal{T}r_1 \cup \mathcal{T}r_2$ (using Lemma 17) and $\mathcal{T}r_1 \supset \mathit{Schedule}$, therefore $(s_0, s) \in [T_0 \cup (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2 \setminus \mathit{Schedule})]^*$.

Recall $(s_0, s) \notin T^*$, hence $(s_0, s) \in T_0^*; (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2 \setminus \mathit{Schedule}); [T_0 \cup (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2)]^*$. Therefore, there exists s_1, s_2 such that:

- $(s_0, s_1) \in T_0^*$
- $(s_1, s_2) \in \mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2 \setminus \mathit{Schedule}$
- $(s_2, s) \in [T_0 \cup (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2)]^*$

Since $s_0 \in \mathbf{S}_0$, $\mathit{label}(s_0) = \ell_1 \in \mathit{Labs}(\ell_1 \mathit{cmd}_1, \ell_2)$. Since $(s_1, s_2) \in \mathbf{G}_0|_{\mathit{after}(s_0)}$, $s_1 \in \mathit{after}(s_0)$. Furthermore $(s_0, s_1) \in T_0^* \subseteq \mathcal{T}r_1 \cup \mathbf{A}_0|_{\overline{\mathit{after}(s_0)}}$, so, according to Lemma 14, $\mathit{label}(s_1) \in \mathit{Labs}(\ell_1 \mathit{cmd}_1, \ell_2)$.

Given that $(s_1, s_2) \in \mathcal{T}r_2 \setminus \mathit{Schedule}$, according to Lemma 2, $\mathit{label}(s_1) \in \mathit{Labs}(\ell_2 \mathit{cmd}_2, \ell_3)$. Hence $\mathit{label}(s_1) \in \mathit{Labs}(\ell_2 \mathit{cmd}_2, \ell_3) \cap \mathit{Labs}(\ell_1 \mathit{cmd}_1, \ell_2)$. Because the labels of $\ell_1 \mathit{cmd}_1; \ell_2 \mathit{cmd}_2, \ell_3$ are pairwise distincts, $\mathit{label}(s_1) = \ell_2$. Using Lemma 14, we conclude that $\mathit{thread}(s_0) = \mathit{thread}(s_1)$.

Given that $\mathit{thread}(s_0) = \mathit{thread}(s)$ and $\mathit{label}(s_0) = \ell_1$ and $(s_0, s_1) \in T_0^*$, we conclude that $(s_0, s_1) \in \mathbf{Reach}_1$. Furthermore $\mathit{label}(s_1) = \ell_2$ and $s_0 \in \mathbf{S}_0$, therefore $s_1 \in \mathbf{S}_1$.

$(s_1, s) \in [T_0 \cup (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2)]^*$. Therefore, by proposition 3, $(s_1, s) \in [T_0 \cup (\mathbf{G}_0|_{\mathit{after}(s_1)} \cap \mathcal{T}r_2)]^* \subseteq \mathbf{Ext}_1(s_0, s_1)$.

Recall that $(s_2, s) \in [T_0 \cup (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2)]^*$, then there exists s_3, \dots, s_n such that for all $k \in \{3, \dots, n-1\}$, $(s_k, s_{k+1}) \in T_0 \cup (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2)$. By definition, if $(s_k, s_{k+1}) \in \mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_1$, then $(s_k, s_{k+1}) \in \mathbf{Sub}_1$.

We show by induction on k that if $(s_k, s_{k+1}) \in \mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_1 \setminus \mathit{Schedule}$, then $s_k \notin \mathit{after}(s_1)$. By induction hypothesis, $(s_2, s_k) \in (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_1)|_{\overline{\mathit{after}(s_1)}} \cup \mathbf{A}_0|_{\overline{\mathit{after}(s_0)}} \cup (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2)]^*$. Therefore, by Lemma 14, if $s_k \in \mathit{after}(s_2)$, then $\mathit{label}(s_k) \in \mathit{Labs}(\ell_2 \mathit{cmd}_2, \ell_3)$. Therefore, because labels are pairwise distinct, if $s_k \in \mathit{after}(s_2)$, then $\mathit{label}(s_k) \notin \mathit{Labs}(\ell_1 \mathit{cmd}_1, \ell_2) \setminus \{\ell_2\}$. Therefore, by Lemma 2, if $s_k \in \mathit{after}(s_2)$, then $(s_k, s_{k+1}) \notin \mathcal{T}r_1$.

Hence, $(s_1, s) \in [\mathbf{Sub}_1|_{\overline{\mathit{after}(s_1)}} \cup \mathbf{A}_0|_{\overline{\mathit{after}(s_0)}} \cup (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2)]^*$. By Lemma 7, $\mathit{after}(s_1) \subseteq \mathit{after}(s_0)$, hence $(s_1, s) \in [(\mathbf{Sub}_1 \cup \mathbf{A}_0)|_{\overline{\mathit{after}(s_0)}} \cup (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2)]^* \subseteq [\mathbf{A}_1|_{\overline{\mathit{after}(s_0)}} \cup (\mathbf{G}_0|_{\mathit{after}(s_0)} \cap \mathcal{T}r_2)]^*$. Therefore $(s_1, s) \in \mathbf{Reach}_2$. \square

Lemma 20. *Using the above notations, for every $(s_0, s) \in \text{Reach}$ such that $s_0 \in \mathbf{S}_0$ and $s' \in \mathbf{S}'$, there exists $s_1 \in \mathbf{S}_1$ such that $(s_0, s_1) \in \text{Reach}_1$, $(s_1, s) \in \text{Reach}_2$ and $(s_1, s) \in \text{Ext}_1(s_0, s_1)$.*

Proof. If $(s_0, s) \in \text{Reach}_1$, then, according to Lemma 15, $\text{label}(s) \in \text{Labs}(\ell_1 \text{cmd}_1, \ell_2)$. In this case $\text{label}(s) \neq \ell_3$. This is not possible because $s \in \mathbf{S}'$.

Therefore, according to Lemma 19 there exists $s_1 \in \mathbf{S}_1$ such that $(s_0, s_1) \in \text{Reach}_1$, $(s_1, s) \in \text{Reach}_2$ and $(s_1, s) \in \text{Ext}_1(s_0, s_1)$ \square

Lemma 21. *Using the notations of this section, let $s_0 \in \mathbf{S}_0$, $s_1 \in \mathbf{S}_1$, $s_2 \in \mathbf{S}_2$, s such that $(s_0, s_1) \in \text{Reach}_1$, $(s_1, s_2) \in \text{Reach}_2 \cap \text{Ext}_1(s_0, s_1)$ and $(s_2, s) \in \text{Ext}(s_0, s_2)$. Therefore $(s_1, s) \in \text{Ext}_1(s_0, s_1)$.*

Proof. Notice that, by Lemma 7, $\text{after}(s_2) \subseteq \text{after}(s_1) \subseteq \text{after}(s_0)$.

Recall that:

$$\text{Ext}(s_0, s_2) = [(\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{T}r) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}} \cup \mathbf{G}_0|_{\text{after}(s_2)}]^*$$

$$\text{Ext}_1(s_0, s_1) = [(\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{T}r_1) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}} \cup \mathbf{G}_0|_{\text{after}(s_1)}]^*$$

By Lemma 17, $\text{Ext}(s_0, s_2) = [(\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{T}r_1) \cup (\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{T}r_2) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}} \cup \mathbf{G}_0|_{\text{after}(s_2)}]^*$. Let $T = (\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{T}r_2) \cup \mathbf{G}_0|_{\text{after}(s_2)}$. Therefore, because $\text{after}(s_2) \subseteq \text{after}(s_0)$, $\text{Ext}(s_0, s_2) = [(\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{T}r_1) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}} \cup T|_{\text{after}(s_0)}]^*$.

By Proposition 3, $(s_2, s) \in [(\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{T}r_1) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}} \cup T|_{\text{after}(s_1)}]^*$. Because $\text{after}(s_2) \subseteq \text{after}(s_1) \subseteq \text{after}(s_0)$, $T|_{\text{after}(s_1)} = (\mathbf{G}_0|_{\text{after}(s_1)} \cap \mathcal{T}r_2) \cup \mathbf{G}_0|_{\text{after}(s_2)}$. Hence $(s_2, s) \in \text{Ext}_1(s_0, s_1)$. Hence $(s_1, s) \in \text{Ext}_1(s_0, s_1)$; $\text{Ext}_1(s_0, s_1) = \text{Ext}_1(s_0, s_1)$. \square

Lemma 22. *Using the notations of this section, let $s_0 \in \mathbf{S}_0$, $s_1 \in \mathbf{S}_1$, $s_2 \in \mathbf{S}_2$, s such that $(s_0, s_1) \in \text{Reach}_1$, $(s_1, s_2) \in \text{Reach}_2 \cap \text{Ext}_1(s_0, s_1)$ and $(s_2, s) \in \text{Ext}(s_0, s_2)$. Therefore $(s_2, s) \in \text{Ext}_2(s_1, s_2)$.*

Proof. Notice that, by Lemma 7, $\text{after}(s_2) \subseteq \text{after}(s_1) \subseteq \text{after}(s_0)$.

Recall that

$$\text{Ext}(s_0, s_2) = [(\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{T}r) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}} \cup \mathbf{G}_0|_{\text{after}(s_2)}]^*$$

$$\text{Ext}_2(s_1, s_2) = [(\mathbf{G}_1|_{\text{after}(s_1)} \cap \mathcal{T}r_2) \cup \mathbf{A}_1|_{\overline{\text{after}(s_1)}} \cup \mathbf{G}_1|_{\text{after}(s_2)}]^*$$

Since $(s_2, s) \in \text{Ext}(s_0, s_2)$, $\mathbf{A}_0 \subseteq \mathbf{A}_1$, $\mathbf{G}_0 \subseteq \mathbf{A}_1$, and $\text{after}(s_1) \subseteq \text{after}(s_0)$, there exists s_3, \dots, s_n such that $s_n = s$ and for all $k \in \{3, \dots, n-1\}$, $(s_k, s_{k+1}) \in (\mathbf{G}_1|_{\text{after}(s_0)} \cap \mathcal{T}r) \cup \mathbf{A}_1|_{\overline{\text{after}(s_1)}} \cup \mathbf{G}_1|_{\text{after}(s_2)}$.

Due to Lemma 17, for all $k \in \{3, \dots, n-1\}$, $(s_k, s_{k+1}) \in (\mathbf{G}_1|_{\text{after}(s_0)} \cap \mathcal{T}r_1) \cup (\mathbf{G}_1|_{\text{after}(s_0)} \cap \mathcal{T}r_2) \cup \mathbf{A}_1|_{\overline{\text{after}(s_1)}} \cup \mathbf{G}_1|_{\text{after}(s_2)}$.

Because $(s_1, s_2) \in \mathbf{Reach}_2$, $(s_1, s_2) \in [(\mathbf{G}_1|_{\text{after}(s_1)} \cap \mathcal{T}r_2) \mathbf{A}_1|_{\overline{\text{after}(s_1)}}]^* \subseteq [(\mathbf{G}_1|_{\text{after}(s_0)} \cap \mathcal{T}r_2) \cup (\mathbf{G}_1|_{\text{after}(s_0)} \cap \mathcal{T}r_2) \cup \mathbf{A}_1|_{\overline{\text{after}(s_1)}} \cup \mathbf{G}_1|_{\text{after}(s_2)}]^*$.

Hence, by Proposition 3 applied on the statement ${}^{\ell_1}cmd_1, \ell_2$, for all $k \in \{3, \dots, n-1\}$, $(s_k, s_{k+1}) \in (\mathbf{G}_1|_{\text{after}(s_0)} \cap \mathcal{T}r_1) \cup (\mathbf{G}_1|_{\text{after}(s_1)} \cap \mathcal{T}r_2) \cup \mathbf{A}_1|_{\overline{\text{after}(s_1)}} \cup \mathbf{G}_1|_{\text{after}(s_2)}$.

Given that $(\mathbf{G}_1|_{\text{after}(s_0)} \cap \mathcal{T}r_1) = (\mathbf{G}_1|_{\text{after}(s_0) \setminus \text{after}(s_0)} \cap \mathcal{T}r_1) \cup (\mathbf{G}_1|_{\text{after}(s_1)} \cap \mathcal{T}r_1)$ and $\mathbf{G}_1|_{\text{after}(s_2)} \cap \mathcal{T}r_1 \subseteq \mathbf{G}_1|_{\text{after}(s_2)}$, by Proposition 3 applied on the statement ${}^{\ell_2}cmd_2, \ell_3$, we conclude that for all $k \in \{3, \dots, n-1\}$, $(s_k, s_{k+1}) \in (\mathbf{G}_1|_{\text{after}(s_0) \setminus \text{after}(s_1)} \cap \mathcal{T}r_1) \cup (\mathbf{G}_1|_{\text{after}(s_1)} \cap \mathcal{T}r_2) \cup \mathbf{A}_1|_{\overline{\text{after}(s_1)}} \cup \mathbf{G}_1|_{\text{after}(s_2)}$. Let k_0 such that $(s_{k_0}, s_{k_0+1}) \in (\mathbf{G}_1|_{\text{after}(s_0) \setminus \text{after}(s_1)} \cap \mathcal{T}r_1) \setminus \mathbf{G}_1|_{\text{after}(s_2)}$. By Lemma 21, $(s_1, s_{k_0}) \in \mathbf{Ext}_1(s_0, s_1)$. Therefore $(s_{k_0}, s_{k_0+1}) \in \mathbf{Sub}_1$.

Hence $(s_2, s) \in [\mathbf{Sub}_1|_{\text{after}(s_0) \setminus \text{after}(s_1)} \cup (\mathbf{G}_1|_{\text{after}(s_1)} \cap \mathcal{T}r_2) \cup \mathbf{A}_1|_{\overline{\text{after}(s_0)}} \cup \mathbf{G}_1|_{\text{after}(s_2)}]^*$. Because $\mathbf{Sub}_1|_{\text{after}(s_0) \setminus \text{after}(s_1)} \subseteq \mathbf{A}_1|_{\overline{\text{after}(s_1)}}$, we conclude that $(s_2, s) \in \mathbf{Ext}_2(s_1, s_2)$. \square

To prove the Property 1 of Theorem 1, we have to prove that $\mathbf{Q}_2 \geq \mathbf{Q}'$. We claim that (a) $\mathbf{S}' \subseteq \mathbf{S}_2$ (b) $\mathbf{Self}' \subseteq \mathbf{Self}_1 \cup \mathbf{Self}_2$ (c) $\mathbf{Par}' \subseteq \mathbf{Par}_1 \cup \mathbf{Par}_2 \cup \mathbf{Sub}_1$ (d) $\mathbf{Sub}' \subseteq \mathbf{Sub}_1 \cup \mathbf{Sub}_2$. Using this claims and the definition of the semantics $\llbracket \cdot \rrbracket$, we conclude that $\mathbf{Q}_2 \geq \mathbf{Q}'$.

Now, we prove these claims:

Claim 5. *Using the notations of this section, $\mathbf{S}' \subseteq \mathbf{S}_2$.*

Proof. Let $s \in \mathbf{S}'$, so there exists $s_0 \in \mathbf{S}$ such that $(s_0, s) \in \mathbf{Reach}'$ and $\text{label}(s) = \ell_3$. According to Lemma 20 there exists $s_1 \in \mathbf{S}_1$ such that $(s_1, s) \in \mathbf{Reach}_2$. Therefore $s \in \mathbf{S}_2$. \square

Claim 6. *Using the notations of this section, $\mathbf{Self}' \subseteq \mathbf{Self}_1 \cup \mathbf{Self}_2$.*

Proof. Let $(s, s') \in \mathbf{Self}'$. So $(s, s') \in \mathcal{T}r$, and there exists $s_0 \in \mathbf{S}$ such that $(s_0, s) \in \mathbf{Reach}'$.

According to Lemma 19 either $(s_0, s) \in \mathbf{Reach}_1$ and $\text{label}(s) \neq \ell_2$, or there exists $s_1 \in \mathbf{S}_1$ such that $(s_0, s_1) \in \mathbf{Reach}_1$ and $(s_1, s) \in \mathbf{Reach}_2$.

In the first case, according to Lemma 15, $\text{label}(s) \in \mathbf{Labs}({}^{\ell_1}cmd_1, \ell_2)$. Since $\text{label}(s) \neq \ell_2$ and by Lemma 18, $(s, s') \in \mathcal{T}r_1$. Hence, by definition, $(s, s') \in \mathbf{Self}_1$.

In the second case, by Lemma 14, $\text{label}(s') \in \mathbf{Labs}({}^{\ell_2}cmd_2, \ell_3)$. Since $(s, s') \in \mathcal{T}r$, by Lemma 18 $(s, s') \in \mathcal{T}r_2$. Given that $s \in \mathbf{Reach}(\mathbf{S}_1)$ and $(s, s') \in \mathcal{T}r_2$, we conclude that $(s, s') \in \mathbf{Self}_2$. \square

Claim 7. *Using the notations of this section* $\text{Par}' \subseteq \text{Par}_1 \cup \text{Par}_2 \cup \text{Sub}_1$.

Proof. Let $(s, s') \in \text{Par}'$. Therefore, $(s, s') \in \mathcal{T}r$ and there exists $s_0 \in \mathbf{S}_0$ and s_2 such that $(s_0, s_2) \in \text{Reach}'$, $(s_2, s) \in \text{Schedule}$ and $s \in \text{after}(s_0)$. According to Lemma 19 there are two cases:

First case: $(s_0, s_2) \in \text{Reach}_1$ and $\text{label}(s_2) \neq \ell_2$. Then, using the fact that $\text{Schedule} \subseteq \mathcal{T}r_1$, $(s_0, s) \in (\mathcal{T}r_1 \cup \mathbf{A}_0|_{\text{after}(s_0)})^*$. Because $s \in \text{after}(s_0)$, by Lemma 14, $\text{label}(s) \in \text{Labs}(\ell_1 \text{cmd}_1, \ell_2) \setminus \{\ell_2\}$. Hence, according to Lemma 18, $(s, s') \in \mathcal{T}r_1$. We conclude that $(s, s') \in \text{Par}_1$.

Second case: There exists $s_1 \in \mathbf{S}_1$ such that $(s_0, s_1) \in \text{Reach}_1$, $(s_1, s_2) \in \text{Reach}_2$ and $(s_1, s_2) \in \text{Ext}_1(s_0, s_1)$. Hence $(s_1, s) \in \text{Ext}_1(s_0, s_1)$; $\text{Schedule} = \text{Ext}_1(s_0, s_1)$.

If $s \in \text{after}(s_1)$, then, because $(s_1, s) \in \text{Reach}_2$; Schedule , by Lemma 14, $\text{label}(s) \in \text{Labs}(\ell_2 \text{cmd}_2, \ell_3)$. So, in this case, by Lemma 18, $(s, s') \in \mathcal{T}r_2$ and then $(s, s') \in \text{Par}_2$.

Let us consider the case $s \notin \text{after}(s_1)$. Given that $(s_0, s_1) \in \text{Reach}$, $(s_1, s) \in \text{Ext}_1(s_1, s_2)$, so by Proposition 3, $(s, s') \in \mathcal{T}r_1$. Hence, $(s, s') \in \text{Sub}_1$. \square

Claim 8. *Using the notations of this section* $\text{Sub}' \subseteq \text{Sub}_1 \cup \text{Sub}_2$.

Proof. Let $(s, s') \in \text{Sub}'$. Then, there exists s_0 and s_2 such that $(s_0, s_2) \in \text{Reach}'$ and $(s_2, s) \in \text{Ext}(s_0, s_2)$. According to Lemma 20, there exists $s_1 \in \mathbf{S}_1$ such that $(s_0, s_1) \in \text{Reach}_1$ and $(s_1, s_2) \in \text{Reach}_2$ and $(s_1, s_2) \in \text{Ext}_1(s_0, s_1)$.

By Lemma 21 and Lemma 22, $(s_1, s) \in \text{Ext}_1(s_0, s_1)$ and $(s_2, s) \in \text{Ext}_2(s_1, s_2)$.

Let us consider the case $s \notin \text{after}(s_1)$. Because $s \in \text{after}(s_0)$, then $s \in \text{after}(s_0) \setminus \text{after}(s_1)$. Furthermore, given that $(s_0, s_1) \in \text{Reach}_1$ and $(s_1, s) \in \text{Reach}_2$, by Proposition 3, $(s, s') \in \mathcal{T}r_1$. We conclude that $(s, s') \in \text{Sub}_1$.

Let us consider the case $s \in \text{after}(s_1)$. Because $s \in \text{after}(s_0) \setminus \text{after}(s_2)$, $s \in \text{after}(s_1) \setminus \text{after}(s_2)$. By Lemma 14, $\text{label}(s) \in \text{Labs}(\ell_2 \text{cmd}_2, \ell_2)$. Hence, by Lemma 18, $(s, s') \in \mathcal{T}r_2$ and therefore, $(s, s') \in \text{Sub}_2$. \square

3.5.2 Proof of Property 2 of Theorem 1

In this section, we consider a command $\ell_1 \text{if}(\text{cond}) \text{then} \{\ell_2 \text{cmd}_1\} \text{else} \{\ell_3 \text{cmd}_2\}$, ℓ_4 and an initial configuration $\mathbf{Q}_0 = \langle \mathbf{S}_0, \mathbf{G}_0, \mathbf{A}_0 \rangle$

Let $\langle S', G', A' \rangle = \llbracket^{\ell_1} \text{if}(cond) \text{then}\{\ell_2 \text{cmd}\} \text{else}\{\ell_3 \text{cmd}\}, \ell_4 \rrbracket \langle S, G, A \rangle$.
 Let $\langle S_+, G_+, A_+ \rangle = \llbracket^{\ell_1} \text{guard} \text{cond}, \ell_2 \rrbracket \langle S, G, A \rangle$.
 Let $\langle S_1, G_1, A_1 \rangle = \llbracket^{\ell_2} \text{cmd}_1, \ell_4 \rrbracket \langle S_+, G_+, A_+ \rangle$.
 Let $\langle S_-, G_-, A_- \rangle = \llbracket^{\ell_1} \text{guard} \neg \text{cond}, \ell_3 \rrbracket \langle S, G, A \rangle$.
 Let $\langle S_2, G_2, A_2 \rangle = \llbracket^{\ell_3} \text{cmd}_1, \ell_4 \rrbracket \langle S_-, G_-, A_- \rangle$.
 Let $\mathcal{Tr} = \mathcal{Tr}^{\ell_1 \text{if}(cond) \text{then}\{\ell_2 \text{cmd}\} \text{else}\{\ell_3 \text{cmd}\}, \ell_4}$.

Lemma 23. $\mathcal{Tr}^{\ell_1 \text{if}(cond) \text{then}\{\ell_2 \text{cmd}\} \text{else}\{\ell_3 \text{cmd}\}, \ell_4} = \mathcal{Tr}^{\ell_1 \text{guard} \text{cond}, \ell_2} \cup \mathcal{Tr}^{\ell_2 \text{cmd}_1, \ell_4} \cup \mathcal{Tr}^{\ell_1 \text{guard} \neg \text{cond}, \ell_3} \cup \mathcal{Tr}^{\ell_3 \text{cmd}_1, \ell_4}$.

Lemma 24. *If $(s_0, s) \in \text{Reach}$ and $s_0 \in S_0$, then, one of the three following properties hold:*

1. $s \in \text{interfere}_{A_0}(\{s_0\})$,
2. *or there exists $s_1 \in S_+$ such that $(s_1, s) \in \text{Reach}_1 \cap \text{Ext}_+(s_0, s_1)$*
3. *or there exists $s_1 \in S_-$ such that $(s_1, s) \in \text{Reach}_2 \cap \text{Ext}_-(s_0, s_1)$*

Proof. Let us consider the case $s \notin \text{interfere}_{A_0}(\{s_0\})$. Because $(s_0, s) \in \text{Reach}$, $(s_0, s) \in [(\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{Tr}) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}}]^*$.

Therefore, there exists s'_0 and s_1 such that $(s_0, s'_0) \in (\mathbf{A}_0|_{\overline{\text{after}(s_0)}} \cup \text{Schedule})^*$, $(s'_0, s_1) \in \mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{Tr}$ and $(s_1, s) \in [(\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{Tr}) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}}]^*$. Because $(s'_0, s_1) \in \mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{Tr}$, $s \in \text{after}(s_0)$. By Lemma 11, $\text{thread}(s_0) = \text{thread}(s'_0)$. By Lemma 13, $\text{label}(s_0) = \text{label}(s'_0) = \ell_1$. Therefore, due to Lemmas 1 and 23, $(s'_0, s_1) \in \mathcal{Tr}^{\ell_1 \text{guard} \text{cond}, \ell_2} \cup \mathcal{Tr}^{\ell_1 \text{guard} \neg \text{cond}, \ell_3}$. Either $(s'_0, s_1) \in \mathcal{Tr}^{\ell_1 \text{guard} \text{cond}, \ell_2}$ or $(s'_0, s_1) \in \mathcal{Tr}^{\ell_1 \text{guard} \neg \text{cond}, \ell_3}$.

In the first case, by Lemma 1, $\text{thread}(s_0) = \text{thread}(s_1)$ and $\text{label}(s_1) = \ell_2$. Therefore, $(s_0, s_1) \in \text{Reach}_+$ and $s_1 \in S_+$. There exists a sequence s_2, s_n such that $s_n = s$ and $\forall k \in \{1, \dots, n-1\}$, $(s_k, s_{k+1}) \in (\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{Tr}) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}}$.

Let us prove by induction on k , that $\forall k \in \{1, \dots, n\}$, $(s_k, s_{k+1}) \in (\mathbf{G}_0|_{\text{after}(s_1)} \cap \mathcal{Tr}^{\ell_2 \text{cmd}, \ell_4}) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}}$. Let us consider the case $(s_k, s_{k+1}) \in \mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{Tr}$. By induction hypothesis $(s_1, s_k) \in [(\mathbf{G}_0|_{\text{after}(s_1)} \cap \mathcal{Tr}^{\ell_2 \text{cmd}, \ell_4}) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}}]^*$. Hence, by Proposition 3, either $(s_k, s_{k+1}) \in \mathcal{Tr}^{\ell_1 \text{guard}(cond), \ell_2}$ or $s_k \in \text{after}(s_1)$. If $(s_k, s_{k+1}) \in \mathcal{Tr}^{\ell_1 \text{guard}(cond), \ell_2}$ and $s_k \in \text{after}(s_1)$ then $(s_k, s_{k+1}) \in \text{Sub}_+$. This is contradictory with Claim 2. Therefore $s_k \in \text{after}(s_1)$. By Lemma 14, $\text{label}(s_k) \in \text{Labs}(\ell_2 \text{cmd}_1, \ell_4)$. Hence, by Lemmas 1 and 23, $(s_1, s_k) \in \mathcal{Tr}^{\ell_2 \text{cmd}, \ell_4}$.

We conclude that $(s_1, s) \in [(\mathbf{G}_0|_{\text{after}(s_1)} \cap \mathcal{Tr}^{\ell_2 \text{cmd}, \ell_4}) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}}]^* \subseteq \text{Reach}_1 \cap \text{Ext}_+(s_0, s_1)$.

The second case is similar. \square

Claim 9. $S' \subseteq S_1 \cup S_2$

Proof. Let $s \in S'$. Therefore there exists $s_0 \in S_0$ such that $(s_0, s) \in \text{Reach}$ and $\text{label}(s) = \ell_4 \neq \ell_1$. Hence, due to Lemma 13, $s \notin \text{interfere}_{A_0}\{s_0\}$.

According to Lemma 24, there exists s_1 such that either (1) $s_1 \in S_+$ and $(s_1, s) \in \text{Reach}_1 \cap \text{Ext}_+(s_0, s_1)$, (2) or, $s_1 \in S_-$ and $(s_1, s) \in \text{Reach}_2 \cap \text{Ext}_-(s_0, s_1)$.

In the first case, by definition, $s \in S_1$ and in the second case $s \in S_2$ \square

Claim 10. $\text{Self} \subseteq \text{Self}_+ \cup \text{Self}_1 \cup \text{Self}_- \cup \text{Self}_2$.

Proof. Let $(s, s') \in \text{Self}$. Then, there exists $s_0 \in S_0$ such that $(s_0, s) \in \text{Reach}$.

Let us consider the case $s \in \text{interfere}_{A_0}(\{s_0\})$. By Lemma 13, $\text{label}(s) = \ell_1$. Hence, by Lemmas 1 and 23, $(s, s') \in \mathcal{Tr}^{\ell_1 \text{guard cond}, \ell_2} \cup \mathcal{Tr}^{\ell_1 \text{guard } \neg \text{cond}, \ell_3}$. Hence, $(s, s') \in \text{Self}_+ \cup \text{Self}_-$.

According to Lemma 24, if $s \notin \text{interfere}_{A_0}(\{s_0\})$, then, there exists s_1 such that either (1) $s_1 \in S_+$ and $(s_1, s) \in \text{Reach}_1 \cap \text{Ext}_+(s_0, s_1)$, (2) or, $s_1 \in S_-$ and $(s_1, s) \in \text{Reach}_2 \cap \text{Ext}_-(s_0, s_1)$.

In the first case, by Lemma 14, $\text{label}(s_k) \in \text{Labs}(\ell_2 \text{cmd}_1, \ell_4)$. Hence, by Lemmas 1 and 23, $(s_1, s_k) \in \mathcal{Tr}^{\ell_2 \text{cmd}, \ell_4}$ and therefore $(s, s') \in \text{Self}_1$.

In the second case, we similarly conclude that $(s, s') \in \text{Self}_2$. \square

Claim 11. $\text{Par} \subseteq \text{Par}_1 \cup \text{Par}_2$.

Proof. Let $(s, s') \in \text{Par}$. Therefore, there exists $s_0 \in S_0$ and s_2 such that $(s_0, s_2) \in \text{Reach}$ and $(s_2, s) \in \text{Schedule}$ and $s \in \text{after}(s_0)$. Notice that $\text{thread}(s_0) = \text{thread}(s_2) \neq \text{thread}(s)$.

Assume by contradiction that $s_2 \in \text{interfere}(\{s_0\})$. Hence, due to Lemma 11, $\text{thread}(s) = \text{thread}(s_0)$. This is contradictory.

Therefore, according to Lemma 24, there exists s_1 such that either (1) $s_1 \in S_+$ and $(s_1, s) \in \text{Reach}_1 \cap \text{Ext}_+(s_0, s_1)$, (2) or, $s_1 \in S_-$ and $(s_1, s) \in \text{Reach}_2 \cap \text{Ext}_-(s_0, s_1)$. In the two cases, by Lemma 12, $s \in \text{after}(s_1)$.

In the first case, by Lemma 14, $\text{label}(s) \in \text{Labs}(\ell_2 \text{cmd}_1, \ell_4)$ and therefore, by Lemmas 23 and 1, $(s, s') \in \mathcal{Tr}^{\ell_2 \text{cmd}_1, \ell_4}$. Hence, $(s, s') \in \text{Par}_1$

In the second case, we similarly conclude that $(s, s') \in \text{Par}_2$. \square

Claim 12. $\text{Sub} \subseteq \text{Sub}_1 \cup \text{Sub}_2$.

Proof. Let $(s, s') \in \text{Sub}$. Therefore, there exists $s_0 \in \mathbf{S}_0$ and $s_2 \in \mathbf{S}'$ such that $(s_0, s_2) \in \text{Reach}$ and $(s_2, s) \in \text{Ext}(s_0, s_2)$ and $s \in \text{after}(s_0) \setminus \text{after}(s_2)$. Notice that $\text{thread}(s_0) = \text{thread}(s_2) \neq \text{thread}(s)$.

Assume by contradiction that $s_2 \in \text{interfere}(\{s_0\})$. Hence, due to Lemma 13, $\text{label}(s_2) = \ell_1$. This is contradictory with $s_2 \in \mathbf{S}'$.

Therefore, according to Lemma 24, there exists s_1 such that either (1) $s_1 \in \mathbf{S}_+$ and $(s_1, s) \in \text{Reach}_1 \cap \text{Ext}_+(s_0, s_1)$, (2) or, $s_1 \in \mathbf{S}_-$ and $(s_1, s) \in \text{Reach}_2 \cap \text{Ext}_-(s_0, s_1)$. In the two cases, by Lemma 12, $s \in \text{after}(s_1)$.

In the first case, because $s \notin \text{after}(s_2)$, by Proposition 3, $(s, s') \in \text{Tr}_{\ell_1 \text{cmd}_1, \ell_2}$. Hence, $(s, s') \in \text{Sub}_1$

In the second case, we similarly conclude that $(s, s') \in \text{Sub}_2$. \square

Property 2 of Theorem 1 is a straightforward consequence of Claims 9, 10, 11, 12.

3.5.3 Proof of Property 3 of Theorem 1

In this section, we consider a command $\ell_1 \text{while}(\text{cond})\{\ell_2 \text{cmd}\}, \ell_3$ and an initial configuration $\mathbf{Q}_0 = \langle \mathbf{S}_0, \mathbf{G}_0, \mathbf{A}_0 \rangle$.

Let $\mathbf{Q}' = \langle \mathbf{S}', \mathbf{G}', \mathbf{A}' \rangle = \llbracket \ell_1 \text{while}(\text{cond})\{\ell_2 \text{cmd}\}, \ell_3 \rrbracket \mathbf{Q}_0$.

Let $\mathbf{Q}_\omega = \langle \mathbf{S}_\omega, \mathbf{G}_\omega, \mathbf{A}_\omega \rangle = \text{loop}^{\uparrow \omega}(\mathbf{Q}_0)$.

Let $\mathbf{Q}'' = \langle \mathbf{S}'', \mathbf{G}'', \mathbf{A}'' \rangle = \llbracket \ell_1 \text{while}(\text{cond})\{\ell_2 \text{cmd}\}, \ell_3 \rrbracket \mathbf{Q}_\omega$.

Let $\mathbf{K} = [\text{Reach}, \text{Ext}, \text{Self}, \text{Par}, \text{Sub}] = \llbracket \ell_1 \text{while}(\text{cond})\{\ell_2 \text{cmd}\}, \ell_3 \rrbracket \mathbf{Q}_\omega$.

Let $\mathbf{Q}_+ = \langle \mathbf{S}_+, \mathbf{G}_+, \mathbf{A}_+ \rangle = \llbracket \ell_1 \text{guard}(\text{cond}), \ell_2 \rrbracket (\mathbf{Q}_\omega)$.

Let $\mathbf{K}_+ = [\text{Reach}_+, \text{Ext}_+, \text{Self}_+, \text{Par}_+, \text{Sub}_+] = \llbracket \ell_1 \text{guard}(\text{cond}), \ell_2 \rrbracket (\mathbf{Q}_\omega)$.

Let $\mathbf{K}_{\text{cmd}} = [\text{Reach}_{\text{cmd}}, \text{Ext}_{\text{cmd}}, \text{Self}_{\text{cmd}}, \text{Par}_{\text{cmd}}, \text{Sub}_{\text{cmd}}] = \llbracket \ell_2 \text{cmd}, \ell_1 \rrbracket (\mathbf{Q}_+)$.

Let $\mathbf{Q}_- = \langle \mathbf{S}_-, \mathbf{G}_-, \mathbf{A}_- \rangle = \llbracket \ell_1 \text{guard}(\neg \text{cond}), \ell_3 \rrbracket \mathbf{Q}_\omega$.

Let $\mathbf{K}_- = [\text{Reach}_-, \text{Ext}_-, \text{Self}_-, \text{Par}_-, \text{Sub}_-] = \llbracket \ell_1 \text{guard}(\neg \text{cond}), \ell_3 \rrbracket \mathbf{Q}_\omega$.

Let $\text{Tr} = \text{Tr}_{\ell_1 \text{while}(\text{cond})\{\ell_2 \text{cmd}\}, \ell_3}$.

Lemma 25.

$$\text{Tr}_{\ell_1 \text{while}(\text{cond})\{\ell_2 \text{cmd}\}, \ell_3} = \text{Tr}_{\ell_1 \text{guard}(\neg \text{cond}), \ell_3} \cup \text{Tr}_{\ell_1 \text{guard}(\text{cond}), \ell_2} \cup \text{Tr}_{\ell_2 \text{cmd}, \ell_1}$$

Notice that, by definition, $\mathbf{Q}_0 \leq \mathbf{Q}_\omega$

Lemma 26. *We use the above notations. Let $s_0, s_1, \dots, s_n, \dots, s_m$ a sequence of states such that $(s_0, s_m) \in \text{Reach}_\omega$, $(s_0, s_n) \in \text{Reach}_\omega$, $s_n \in \mathbf{S}_\omega$ and for all $k \in \{0, \dots, m-1\}$, $(s_k, s_{k+1}) \in (\mathbf{G}_\omega|_{\text{after}(s_0)} \cap \text{Tr}) \cup \mathbf{A}_\omega|_{\overline{\text{after}(s_0)}}$.*

Therefore, $(s_n, s_m) \in \text{Reach}_\omega$.

Proof. For all k , $(s_k, s_{k+1}) \in (\mathbf{G}_{\omega|after(s_n)} \cap \mathcal{Tr}) \cup (\mathbf{G}_{\omega|after(s_0) \setminus after(s_n)} \cap \mathcal{Tr}) \cup \mathbf{A}_{\omega|after(s_0)}$.

Let $k_0 \geq n$ such that $(s_{k_0}, s_{k_0+1}) \in (\mathbf{G}_{\omega|after(s_0) \setminus after(s_n)} \cap \mathcal{Tr})$. Notice that $(s_n, s_{k_0}) \in \mathbf{Ext}_{\omega}(s_0, s_n)$ and $s_{k_0} \in after(s_0) \setminus after(s_n)$. Hence, $(s_{k_0}, s_{k_0+1}) \in \mathbf{Sub}_{\omega} \subseteq \mathbf{A}_{\omega}$. Therefore $(s_{k_0}, s_{k_0+1}) \in \mathbf{A}_{\omega|after(s_1)}$.

In addition to this, according to Lemma 15, $after(s_n) \subseteq after(s_0)$, so, for all $k \geq n$, $(s_k, s_{k+1}) \in (\mathbf{G}_{\omega|after(s_n)} \cap \mathcal{Tr}) \cup \mathbf{A}_{\omega|after(s_0)}$. \square

Lemma 27. *Using the notations of this section, if $s \in \mathbf{Reach}\langle \mathbf{S}_0 \rangle$, then, there exists $s_0 \in \mathbf{S}_{\omega}$ such that:*

1. either $(s_0, s) \in \mathbf{Reach}_{-}$,
2. or there exists $s_1 \in \mathbf{S}_{+}$ such that $(s_0, s_1) \in \mathbf{Reach}_{+}$ and $(s_1, s) \in \mathbf{Reach}_{cmd}$ and $label(s) \neq \ell_1$.

Proof. Let $s \in \mathbf{Reach}\langle \mathbf{S}_0 \rangle$. We consider a sequence s_0, \dots, s_n of minimal length such that the following properties hold: (1) $s_n = s$, (2) $s_0 \in \mathbf{S}_{\omega}$, (3) for all $k \in \{0, \dots, n-1\}$, $(s_k, s_{k+1}) \in (\mathbf{G}_{\omega|after(s_0)} \cap \mathcal{Tr}) \cup \mathbf{A}_{\omega|after(s_0)}$. A such sequence exists because $\mathbf{S}_0 \subseteq \mathbf{S}_{\omega}$.

If for all $k \in \{0, \dots, n-1\}$, $(s_k, s_{k+1}) \in \mathbf{Schedule} \cup \mathbf{A}_{\omega|after(s_0)}$ then $(s_0, s) \in \mathbf{Reach}_{+} \cap \mathbf{Reach}_{-} \subseteq \mathbf{Reach}_{-}$.

Let us assume, from now, that there exists $k \in \{0, \dots, n-1\}$ such that $(s_k, s_{k+1}) \in \mathbf{G}_{\omega|after(s_0)} \cap \mathcal{Tr}^{\ell_1 \text{ while}(cond)\{\ell_2 \text{ cmd}\}, \ell_3} \setminus \mathbf{Schedule}$. Let k_0 the smallest such k .

Therefore $(s_{k_0}, s_{k_0+1}) \in \mathbf{G}_{\omega|after(s_0)}$, so, $s_{k_0} \in after(s_0)$. According to Lemma 11, $thread(s_0) = thread(s_{k_0})$. By Lemma 13, $label(s_0) = label(s_{k_0})$. But $label(s_0) = \ell_1$, therefore, by Lemma 2, $(s_{k_0}, s_{k_0+1}) \notin \mathcal{Tr}^{\ell_2 \text{ cmd}, \ell_1}$. Therefore, by Lemma 25, either $(s_{k_0}, s_{k_0+1}) \in \mathcal{Tr}^{\ell_1 \text{ guard}(\neg cond), \ell_3}$ or $(s_{k_0}, s_{k_0+1}) \in \mathcal{Tr}^{\ell_1 \text{ guard}(cond), \ell_2}$.

In the first case, by Lemma 5, $label(s_{k_0+1}) = \ell_3$. Let us prove by induction on k that for all $k > k_0$, $(s_k, s_{k+1}) \in \mathbf{A}_{\omega|after(s_0)} \cup \mathbf{Schedule}$. By induction hypothesis $(s_{k_0}, s_k) \in [\mathbf{A}_{\omega|after(s_0)} \cup \mathbf{Schedule}]^*$. Let us consider the case $(s_k, s_{k+1}) \in \mathbf{G}_{\omega|after(s_0)} \cap \mathcal{Tr}$. Therefore $s_k \in after(s_0)$, then by Lemma 11, $thread(s_k) = thread(s_{k_0+1})$. By Lemma 13, $label(s_k) = label(s_{k_0+1}) = \ell_3$. So, by Lemma 2, $(s_k, s_{k+1}) \in \mathbf{Schedule}$. Hence $(s_0, s) \in \mathbf{Reach}_{-}$.

In the second case, $(s_0, s_{k_0+1}) \in \mathbf{Reach}_{+}$ and therefore, by Lemma 5, $s_{k_0+1} \in \mathbf{S}_{+}$. Either there exists $k_1 > k_0$ such that $(s_{k_1}, s_{k_1+1}) \in \mathbf{G}_{\omega|after(s_0)} \cap (\mathcal{Tr}^{\ell_1 \text{ guard}(\neg cond), \ell_3} \cup \mathcal{Tr}^{\ell_1 \text{ guard}(cond), \ell_3})$ or there does not exist a such k_1 .

Assume by contradiction that k_1 exists, therefore, by Lemma 5, $label(s_{k_0}) = \ell_1$. According to Lemma 14, $thread(s) = thread(s_0)$. Hence, $(s_0, s_{k_1}) \in \mathbf{Reach}_\omega$. So, by Lemma 26, $(s_{k_1}, s_n) \in \mathbf{Reach}_\omega$. This is contradictory with the minimality of the path s_1, \dots, s_n . Therefore k_1 does not exist.

Hence, for all $k > k_0$, $(s_k, s_{k+1}) \in (\mathbf{G}_\omega|_{after(s_0)} \cap \mathcal{T}r^{\ell_2 cmd, \ell_1}) \cup \mathbf{A}_\omega \overline{after(s_0)}$. According to proposition 3, for all $k > k_0$, $(s_k, s_{k+1}) \in (\mathbf{G}_\omega|_{after(s_1)} \cap \mathcal{T}r^{\ell_2 cmd, \ell_1}) \cup \mathbf{A}_\omega \overline{after(s_0)}$. Therefore, $(s_{k_0}, s) \in \mathbf{Reach}_\omega$ \square

Claim 13. *Using the notation of this section $\mathbf{S}' \subseteq \mathbf{S}_-$.*

Proof. Let $s \in \mathbf{S}'$, therefore, $s \in \mathbf{Reach}\langle \mathbf{S}_0 \rangle$. Furthermore, $label(s) = \ell_3$. Hence, according to Lemma 15, for all s_1 , $(s_1, s) \notin \mathbf{Reach}_\omega$. Therefore, according to Lemma 27, there exists $s_0 \in \mathbf{S}_\omega$ such that $(s_0, s) \in \mathbf{Reach}_-$. Hence $s \in \mathbf{S}_-$. \square

Claim 14. $\mathbf{Self} \subseteq \mathbf{Self}_- \cup \mathbf{Self}_+ \cup \mathbf{Self}_{cmd}$

Proof. Let $(s, s') \in \mathbf{Self}$. According to Lemma 25, $(s, s') \in \mathcal{T}r^{\ell_1 guard(\neg cond), \ell_3} \cup \mathcal{T}r^{\ell_1 guard(cond), \ell_2} \cup \mathcal{T}r^{\ell_2 cmd, \ell_1}$.

Let us consider the case $(s, s') \in \mathcal{T}r^{\ell_1 guard(\neg cond), \ell_3} \cup \mathcal{T}r^{\ell_1 guard(cond), \ell_2}$. Due to Lemma 5, $label(s) = \ell_1$. Hence, according to Lemma 27, either $(s_0, s) \in \mathbf{Reach}_-$ or there exists $s_1 \in \mathbf{S}_+$ such that $(s_1, s) \in \mathbf{Reach}_{cmd}$ (contradiction with Lemma 15 and $label(s) = \ell_1$). According to Lemma 16, either $label(s) = \ell_2 \neq \ell_1$ (contradiction) or $s \in \mathbf{interfere}_{A_0}(\mathbf{S}_0) \subseteq \mathbf{Reach}_-\langle \mathbf{S}_\omega \rangle \cap \mathbf{Reach}_+\langle \mathbf{S}_\omega \rangle$. Therefore either $(s, s') \in \mathbf{Self}_-$ or $(s, s') \in \mathbf{Self}_+$.

Let us consider the case $(s, s') \in \mathcal{T}r^{\ell_2 cmd, \ell_1}$. Therefore, according to Lemma 1, $label(s) \in \mathbf{Labs}(\ell_2 cmd, \ell_1) \setminus \{\ell_1\}$. If $s'' \in \mathbf{Reach}_-\langle \mathbf{S}_\omega \rangle$, then, by Lemma 16, $label(s'') \in \{\ell_1, \ell_3\}$. Hence, $s \notin \mathbf{Reach}_-\langle \mathbf{S}_\omega \rangle$. So, by Lemma 27, there exists $s \in \mathbf{S}_0$ and $s_1 \in \mathbf{S}_+$ such that $(s_0, s_1) \in \mathbf{Reach}_+$ and $(s_1, s) \in \mathbf{Reach}_{cmd}$. According to Proposition 3, $(s, s') \in after(s_1)$ and therefore $(s, s') \in \mathbf{Self}_{cmd}$. \square

Claim 15. $\mathbf{Par} \subseteq \mathbf{Par}_{cmd}$

Proof. Let $(s, s') \in \mathbf{Par}$. There exists s_0 and s_2 such that $(s_0, s_2) \in \mathbf{Reach}_\omega$. By Lemma 16, either $(s_0, s_2) \in \mathbf{Reach}_-$ or there exists $s_1 \in \mathbf{S}_+$ such that $(s_0, s_1) \in \mathbf{Reach}_+$ and $(s_1, s_2) \in \mathbf{Reach}_{cmd}$ and $label(s_2) \neq \ell_2$.

In the first case, because $s \in after(s_0)$, by Lemma 11, $thread(s) = thread(s_0)$. But, by definition of *Schedule* and \mathbf{Reach}_- , $thread(s_2) \neq thread(s)$ and $thread(s_0) = thread(s_2)$. This is contradictory.

In the second case, by Proposition 3, $s \in \text{after}_{s_1}$. Because $\text{thread}(s) \neq \text{thread}(s_0) = \text{thread}(s_2)$, by Lemma 14, $\text{label}(s) \in \text{Labs}(\ell_2 \text{ cmd}, \ell_1) \setminus \{\ell_2\}$. Therefore, by Lemmas 25 and 5, $(s, s') \in \mathcal{Tr}_{\ell_2 \text{ cmd}, \ell_1}$. Hence $(s, s') \in \text{Par}_{\text{cmd}}$ \square

Claim 16. $\text{Sub} \subseteq \text{Sub}_-$

Proof. Let $(s, s') \in \text{Sub}$. Therefore, there exists $s_0 \mathbf{S}_\omega$ and $s_1 \in \mathbf{S}'$ such that $(s_0, s_1) \in \text{Reach}$ and $(s_1, s) \in \text{Ext}(s_0, s_1)$.

Notice that $\text{label}(s_1) = \ell_3$, therefore, according to Lemma 15, $s_1 \notin \text{Reach}_+; \text{Reach}_{\text{cmd}}(\mathbf{S}_\omega)$. hence, by Lemma 27, $(s_0, s_1) \in \text{Reach}_-$.

$(s_1, s) \in \text{Ext}(s_0, s_1) \subseteq (\mathbf{G}_\omega|_{\text{after}(s_0)} \cap \mathcal{Tr}) \cup \mathbf{A}_\omega|_{\text{after}(s_0)} \cup \mathbf{G}_\omega|_{\text{after}(s_1)}$. By Proposition 3, $(s_1, s) \in (\mathbf{G}_\omega|_{\text{after}(s_0)} \cap \mathcal{Tr}_{\ell_1 \text{ guard}(\neg \text{cond}), \ell_2}) \cup (\mathbf{G}_\omega|_{\text{after}(s_1)} \cap \mathcal{Tr} \setminus \mathcal{Tr}_{\ell_1 \text{ guard}(\neg \text{cond}), \ell_2}) \cup \mathbf{A}_\omega|_{\text{after}(s_0)} \cup \mathbf{G}_\omega|_{\text{after}(s_1)} = \text{Ext}_-(s_1, s_2)$. \square

Property 3 of Theorem 1 is a straightforward consequence of Claims 13, 14, 15 and 16.

3.5.4 Proof of Property 4 of Theorem 1

Let $\mathbf{Q}_0 = \langle \mathbf{S}_0, \mathbf{G}_0, \mathbf{A}_0 \rangle$ a configuration.

Let $\mathbf{Q}' = \langle \mathbf{S}', \mathbf{G}', \mathbf{A}' \rangle = \llbracket^{\ell_1} \text{create}(\ell_2 \text{ cmd}), \ell_3 \rrbracket(\mathbf{Q}_0)$

Let $\mathbf{K} = [\text{Reach}, \text{Ext}, \text{Self}, \text{Par}, \text{Sub}] = \{ \llbracket^{\ell_1} \text{create}(\ell_2 \text{ cmd}), \ell_3 \rrbracket \}(\mathbf{Q}_0)$

Let $\mathbf{Q}_1 = \langle \mathbf{S}_1, \mathbf{G}_1, \mathbf{A}_1 \rangle = \llbracket^{\ell_1} \text{spawn}(\ell_2), \ell_3 \rrbracket(\mathbf{Q}_0)$

Let $\mathbf{K}_1 = [\text{Reach}_1, \text{Ext}_1, \text{Self}_1, \text{Par}_1, \text{Sub}_1] = \{ \llbracket^{\ell_1} \text{spawn}(\ell_2), \ell_3 \rrbracket \}(\mathbf{Q}_0)$

Let $\mathbf{Q}_2 = \langle \mathbf{S}_2, \mathbf{G}_2, \mathbf{A}_2 \rangle = \text{init-child}_{\ell_2}(\mathbf{Q}_1)$

Let $\mathbf{G}_\infty = \text{guarantee}_{\ell_2 \text{ cmd}, \ell_\infty}(\mathbf{Q}_2)$

Let $\mathbf{K}_3 = [\text{Reach}_3, \text{Ext}_3, \text{Self}_3, \text{Par}_3, \text{Sub}_3] = \{ \llbracket^{\ell_2} \text{cmd}, \ell_\infty \rrbracket \} \langle \mathbf{S}_2, \mathbf{G}_\infty, \mathbf{A}_2 \rangle$

Let $\mathbf{Q}_3 = \langle \mathbf{S}_3, \mathbf{G}_3, \mathbf{A}_3 \rangle = \text{combine}_{\mathbf{Q}_0}(\mathbf{G}_\infty)$ Let $\mathcal{Tr} = \mathcal{Tr}_{\ell_1 \text{ create}(\ell_2 \text{ cmd}), \ell_3}$

Lemma 28. $\mathcal{Tr}_{\ell_1 \text{ create}(\ell_2 \text{ cmd}), \ell_3} = \mathcal{Tr}_{\ell_1 \text{ spawn}(\ell_2), \ell_3} \cup \mathcal{Tr}_{\ell_2 \text{ cmd}, \ell_\infty}$

Lemma 29. Let T a set of transitions. Let s_0, s_1, s_2, s and s' such that $(s_0, s_1) \in \text{Reach}_1$, $s_2 \in \text{schedule-child}\{s_1\}$, $\text{label}(s_1) = \ell_3$, $(s_2, s) \in T^*$ and $s \in \text{after}(s_0)$.

Therefore, $s \in \text{after}(s_1) \cup \text{after}(s_2)$.

Proof. According to Lemma 16, there exists s'_0 and s'_1 such that, $s'_0 \in \text{interfere}_{\mathbf{A}_0}\{s_0\}$, $(s'_0, s'_1) \in \mathcal{Tr}_{\ell_1 \text{ spawn}(\ell_2), \ell_3} \setminus \text{Schedule}$, and $s_1 \in \text{interfere}_{\mathbf{A}_0}\{s'_1\}$.

By Lemmas 11 and 1, $\text{thread}(s_0) = \text{thread}(s'_0) = \text{thread}(s'_1) = \text{thread}(s_1)$.

Let $i_0 = \text{thread}(s_0)$ and $i = \text{thread}(s)$.

Let g_0, g'_0, j, g_1 and g such that, respectively, the genealogy of $s_0, s'_0, s''_0, s_1, s_2, s$ is $g_0, g_0 \cdot g'_0, g_0 \cdot g'_0 \cdot (i_0, \ell_2, j), g_0 \cdot g'_0 \cdot (i_0, \ell_2, j) \cdot g_1, g_0 \cdot g'_0 \cdot (i_0, \ell_2, j) \cdot g_1, g_0 \cdot g'_0 \cdot (i_0, \ell_2, j) \cdot g_1 \cdot g$. Notice that s_1 and s_2 have the same genealogy.

Because $(s_0, s'_0) \in [\mathbf{A}_0|_{\text{after}(s_0)} \cup \text{Schedule}]^*$, by Lemma 10, $\text{desc}_{g'_0}\{i_0\} = \{i_0\}$.

Because $(s''_0, s_1) \in [\mathbf{A}_0|_{\text{after}(s_0)} \cup \text{Schedule}]^*$, by Lemma 10, $\text{desc}_{(i_0, \ell_2, j) \cdot g_1}\{i_0\} = \text{desc}_{(i_0, \ell_2, j)}\{i_0\} = \{i_0, j\}$.

By definition of desc , $\text{desc}_{g'_0 \cdot (i_0, \ell_2, j) \cdot g_1 \cdot g}(\{i_0\}) = \text{desc}_g[\text{desc}_{(i_0, \ell_2, j) \cdot g_1}(\text{desc}_{g'_0}\{i_0\})] = \text{desc}_g\{i_0, j\}$. By definition of desc , $\text{desc}_{g'_0 \cdot (i_0, \ell_2, j) \cdot g_1 \cdot g}(\{i_0\}) = \text{desc}_g(\{i_0\}) \cup \text{desc}_g(\{j\})$.

Because $s \in \text{after}(s_0)$, $i \in \text{desc}_{g'_0 \cdot (i_0, \ell_2, j) \cdot g_2 \cdot g}(\{i_0\})$. Therefore either $i \in \text{desc}_g(\{i_0\})$ or $i \in \text{desc}_g(\{j\})$. If $i \in \text{desc}_g(\{i_0\})$ then $s \in \text{after}(s_1)$. If $i \in \text{desc}_g(\{j\})$ then $s \in \text{after}(s_2)$. \square

Lemma 30. *Let s_0, s_1, s_2, s and s' such that $(s_0, s_1) \in \text{Reach}_1$, $s_2 \in \text{schedule-child}\{s_1\}$, $\text{label}(s_1) = \ell_3$, $(s_2, s) \in (\mathbf{G}_0 \cup \mathbf{A}_0)|_{\text{after}(s_1)}^*$ and $(s, s') \in \mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{Tr}$.*

Therefore, $s \in \text{after}(s_2)$ (i.e., $(s, s') \in \mathbf{G}_0|_{\text{after}(s_2)} \cap \mathcal{Tr}$).

Proof. Due to Lemma 29, $s \in \text{after}(s_1) \cup \text{after}(s_2)$. Assume by contradiction that $s \in \text{after}(s_1)$. Therefore, by Lemma 11, $\text{thread}(s) = \text{thread}(s_1)$ and by Lemma 13, $\text{label}(s) = \text{label}(s_1) = \ell_3$. This is contradictory with Lemma 1 which implies $\text{label}(s) \neq \ell_3$. \square

Lemma 31. *If $(s_0, s) \in \text{Reach}$ then:*

- *either $s \in \text{interfere}_{\mathbf{A}_0}(s_0)$ and $\text{label}(s) = \ell_1$*
- *or there exists s_1, s_2, s_3 such that $(s_0, s_1) \in \text{Reach}_1$, $(s_1, s_2) \in \text{Schedule}$, $(s_2, s_3) \in \text{Reach}_3 \cap \text{Ext}_1(s_0, s_1)$, $(s_3, s) \in \text{Schedule}$ and $s_2 \in \text{schedule-child}\{s_1\}$. Furthermore $\text{label}(s_1) = \text{label}(s) = \ell_3$ and $s \in \text{interfere}_{\mathbf{G}_0 \cup \mathbf{A}_0}\{s_1\}$.*

Proof. If $(s_0, s) \in [\mathbf{A}_0|_{\text{after}(s_0)} \cup \text{Schedule}]^*$ then $s \in \text{interfere}_{\mathbf{A}_0}(s_0)$ and by Lemma 13, $\text{label}(s) = \ell_1$.

Then, let us consider the other case: $(s_0, s) \notin [\mathbf{A}_0|_{\text{after}(s_0)} \cup \text{Schedule}]^*$. Therefore, there exists s'_0 and s_1 such that $(s_0, s'_0) \in [\mathbf{A}_0|_{\text{after}(s_0)} \cup \text{Schedule}]^*$, $(s'_0, s_1) \in (\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{Tr})$ and $(s_1, s) \in [(\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{Tr}) \cup \mathbf{A}_0|_{\text{after}(s_0)}]^*$.

Due to Lemma 11, because $s'_0 \in \text{after}(s_0)$, $\text{thread}(s'_0) = \text{thread}(s_0)$. According to Lemma 5, $\text{thread}(s_1) = \text{thread}(s'_0) = \text{thread}(s_0)$ and $\text{label}(s_1) = \ell_3$. Therefore $(s_0, s_1) \in \text{Reach}_1$.

Let $(i_1, P_1, \sigma_1, g_1) = s_1$. Let g'_1 and j such that $g'_1 \cdot (i, \ell_2, j) = g_1$. Let $s_2 = (j, P_1, \sigma_1, g_1)$. Therefore, $s_2 \in \text{schedule-child}\{s_1\}$ and $(s_1, s_2) \in \text{Schedule}$. Let $(i, P, \sigma, g) = s$ and $s_3 = (j, P, \sigma, g)$. Therefore, $(s_3, s) \in \text{Schedule}$.

Given that $\text{Schedule} \subseteq \mathbf{A}_0 \cap \mathbf{G}_0 \cap \mathcal{Tr}$, we conclude that $(s_2, s_3) \in [(\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{Tr}) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}}]^*$. Using Lemma 30 and a straightforward induction, $(s_2, s_3) \in [(\mathbf{G}_0|_{\text{after}(s_2)} \cap \mathcal{Tr}) \cup \mathbf{A}_0|_{\overline{\text{after}(s_0)}}]^*$. Then $(s_2, s_3) \in \text{Ext}_1(s_0, s_1)$. Furthermore by Lemma 7, $\text{after}(s_2) \subseteq \text{after}(s_0)$. Hence $(s_2, s_3) \in [(\mathbf{G}_0|_{\text{after}(s_2)} \cap \mathcal{Tr}) \cup \mathbf{A}_0|_{\overline{\text{after}(s_2)}}]^*$. Therefore, by Proposition 1, $(s_2, s_3) \in \text{Reach}_3$. \square

Claim 17. $\mathbf{S}' \subseteq \text{interfere}_{\mathbf{G}_0 \cup \mathbf{A}_0}(\mathbf{S}_1)$.

Proof. Let $s \in \mathbf{S}'$. Therefore there exists $s_0 \in \mathbf{S}_0$ such that $(s_0, s) \in \text{Reach}$ and $\text{label}(s) = \ell_3 \neq \ell_1$. According to Lemma 31 there exists s_1 such that $(s_0, s_1) \in \text{Reach}_1$, $\text{label}(s_1) = \ell_3$ and $s \in \text{interfere}_{\mathbf{G}_0 \cup \mathbf{A}_0}\{s_1\}$. Therefore $s_1 \in \mathbf{S}_1$ and $s \in \text{interfere}_{\mathbf{G}_0 \cup \mathbf{A}_0}(\mathbf{S}_1)$. \square

Claim 18. $\text{Self} \subseteq \text{Self}_1$.

Proof. Let $(s, s') \in \text{Self}$. According to Lemma 1, $\text{label}(s) \neq \ell_3$. There exists $s_0 \in \mathbf{S}_0$ such that $(s_0, s) \in \text{Reach}$. Therefore, according to lemma 31, $s \in \text{interfere}_{\mathbf{A}_0}\{s_0\}$. Therefore $(s_0, s) \in \text{Reach}_1$ and, by Lemma 13, $\text{label}(s) = \ell_1$. Due to Lemmas 2 and 28, $(s, s') \in \mathcal{Tr}^{\ell_1 \text{spawn}(\ell_2, \ell_3)}$. Hence $(s, s') \in \text{Self}_1$. \square

Claim 19. $\text{Par} \subseteq \text{Self}_3 \cup \text{Par}_3$.

Proof. Let $(s, s') \in \text{Par}$. Therefore, there exists $s_0 \in \mathbf{S}_0$ such that $(s_0, s) \in \text{Reach}; \text{Schedule}$ and $s \in \text{after}(s_0)$. Notice that by definition of Schedule , $\text{thread}(s_0) \neq \text{thread}(s)$.

Assume by contradiction, that $s \in \text{Schedule}(\text{interfere}_{\mathbf{A}_0}\{s_0\})$. Due to Lemma 11, $\text{thread}(s_0) = \text{thread}(s)$. This is contradictory.

Hence, by Lemma 31, there exists s_1, s_2, s_3 such that $(s_0, s_1) \in \text{Reach}_1$, $(s_1, s_2) \in \text{Schedule}$, $(s_2, s_3) \in \text{Reach}_3$, $(s_3, s) \in \text{Schedule}$, $s_2 \in \text{schedule-child}\{s_1\}$, and $\text{label}(s_1) = \text{label}(s) = \ell_3$.

Hence, $s_1 \in \mathbf{S}_1$, $s_2 \in \mathbf{S}_2$.

According to Lemma 8 $\text{after}(s_1) \cap \text{after}(s_2) = \emptyset$. Given that $(s_2, s) \in \text{Reach}; \text{Schedule}; \text{Schedule}$, $(s_2, s) \in (\mathbf{G}_0 \cup \mathbf{A}_0)|_{\overline{\text{after}(s_1)}}^*$. Hence, due to Lemma 26, $s \in \text{after}(s_2)$.

If $\text{thread}(s) = \text{thread}(s_2)$, then $(s_2, s) \in \text{Reach}_3$ and $(s, s') \in \text{Self}_3$. If $\text{thread}(s) \neq \text{thread}(s_2)$, then $(s, s') \in \text{Par}_3$. \square

Claim 20. $\text{Sub} \subseteq \text{Self}_3 \cup \text{Par}_3$.

Proof. Let $(s, s') \in \text{Sub}$. There exists s_0, s_4 such that $(s_0, s_4) \in \text{Reach}$ and $(s_4, s) \in \text{Ext}(s_0, s_4)$ and $s_4 \in S'$. By Lemma 31, there exists s_1, s_2, s_3 such that $(s_0, s_1) \in \text{Reach}_1$, $s_2 \in \text{schedule-child}_A(\{s_1\})$, $(s_2, s_3) \in \text{Reach}_3 \cap \text{Ext}_1(s_0, s_1)$ and $(s_3, s_4) \in \text{Schedule}$.

Furthermore, $s \in \text{after}(s_0) \setminus \text{after}(s_4)$. Due to Lemma 29, either $s \in \text{after}(s_1) \setminus \text{after}(s_4)$ or $s \in \text{after}(s_2) \setminus \text{after}(s_4)$.

Assume by contradiction that $s \in \text{after}(s_1) \setminus \text{after}(s_4)$. Therefore $(s, s') \in \text{Sub}_1$. But, by Claim 2, $\text{Sub}_1 = \emptyset$. Therefore $s \in \text{after}(s_2) \setminus \text{after}(s_4)$.

Let $(i, P, \sigma, g) = s$ and $s_5 = (\text{thread}(s_2), P_5, \sigma_5, g_5)$.

Given that $(s_4, s) \in \text{Ext}(s_0, s_4)$, $(s_4, s) \in [(\mathbf{G}_0|_{\text{after}(s_0)} \cap \mathcal{Tr}) \cup \mathbf{A}_2|_{\overline{\text{after}(s_0)}}]^*$ and by Lemma 29, $(s_4, s) \in [(\mathbf{G}_0|_{\text{after}(s_1) \cup \text{after}(s_2)} \cap \mathcal{Tr}) \cup \mathbf{A}_2|_{\overline{\text{after}(s_0)}}]^*$.

By definition of post , $\text{after}(s_1) \subseteq \text{post}(\ell_2)$. Furthermore by Lemma 8, $\text{after}(s_1) \cap \text{after}(s_2) = \emptyset$. Therefore $\text{after}(s_1) \subseteq \text{post}(\ell_2) \setminus \text{after}(s_2)$. Hence, $(s_4, s) \in [(\mathbf{G}_0|_{\text{after}(s_2)} \cap \mathcal{Tr}) \cup \mathbf{A}_2|_{\overline{\text{after}(s_0)}} \cup \mathbf{G}_0|_{\text{post}(\ell_2) \setminus \text{after}(s_2)}]^*$. By Lemma 7, $\text{after}(s_2) \subseteq \text{after}(s)$, therefore $(s_4, s) \in [(\mathbf{G}_0|_{\text{after}(s_2)} \cap \mathcal{Tr}) \cup (\mathbf{A}_2 \cup \mathbf{G}_0|_{\text{post}(\ell_2)})|_{\overline{\text{after}(s_0)}}]^*$. By Proposition 1, $(s_4, s) \in [(\mathbf{G}_\infty|_{\text{after}(s_2)} \cap \mathcal{Tr}) \cup (\mathbf{A}_2 \cup \mathbf{G}_0|_{\text{post}(\ell_2)})|_{\overline{\text{after}(s_0)}}]^*$.

Let $(i, P, \sigma, g) = s$ and $s_5 = (\text{thread}(s_2), P, \sigma, g)$. Therefore, $(s_2, s_5) \in \text{Reach}_3$.

If $i = \text{thread}(s_2)$, then $s_5 = s$ and $(s, s') \in \text{Self}_3$. If $i \neq \text{thread}(s_2)$, then $(s_5, s) \in \text{Schedule}$ and $(s, s') \in \text{Par}_3$. \square

3.6 Overapproximation of the Execution of a Program

Lemma 32. For all P and σ , $\text{after}((\text{main}, P, \sigma, \epsilon)) = \text{States}$.

In particular, if Init is the set of initial states of a program and $s \in \text{Init}$, then $\text{after}(s) = \text{States}$.

The following proposition shows the connection between the operational and the G-collecting semantics.

Proposition 4 (Connection with the operational semantics). Consider a program ${}^\ell \text{cmd}, \ell_\infty$ and its set of initial states Init . Let:

$$\langle S', G', A' \rangle \stackrel{\text{def}}{=} \llbracket {}^\ell \text{cmd}, \ell_\infty \rrbracket \langle \text{Init}, \mathbf{G}_\infty, \text{Schedule} \rangle$$

with $\mathbf{G}_\infty = \text{guarantee} \llbracket \ell_{cmd, \ell_\infty} \rrbracket \langle \text{Init}, \text{Schedule}, \text{Schedule} \rangle$

Then:

$$\begin{aligned} \mathbf{S}' &= \{(\mathbf{main}, P, \sigma, g) \in \mathcal{Tr}_{\ell_{cmd, \ell_\infty}}^* \langle \text{Init} \rangle \mid P(\mathbf{main}) = \ell_\infty\} \\ \mathbf{G}' &= \mathbf{G}_\infty = \{(s, s') \in \mathcal{Tr}_{\ell_{cmd, \ell_\infty}} \mid s \in \mathcal{Tr}_{\ell_{cmd, \ell_\infty}}^* \langle \text{Init} \rangle\} \cup \text{Schedule} \\ \mathbf{A}' &= \{(s, s') \in \mathcal{Tr}_{\ell_{cmd, \ell_\infty}} \mid s \in \mathcal{Tr}_{\ell_{cmd, \ell_\infty}}^* \langle \text{Init} \rangle \wedge \text{thread}(s) \neq \mathbf{main}\} \\ &\quad \cup \text{Schedule} \end{aligned}$$

Proof. We only have to prove that $\text{Reach} = \{s \in \mathcal{Tr}_{\ell_{cmd, \ell_\infty}}^* \langle \text{Init} \rangle \mid \text{thread}(s) = \mathbf{main}\}$. \square

Proof. Let $s_1 \in \{s \in \mathcal{Tr}_{\ell_{cmd, \ell_\infty}}^* \langle \text{Init} \rangle \mid \text{thread}(s) = \mathbf{main}\}$.

There exists $s_0 \in \mathbf{S}$ such that $(s_0, s) \in \mathcal{Tr}_{\ell_{cmd, \ell_\infty}}^*$. By proposition 1, $(s_0, s) \in \mathbf{G}_\infty \cap \mathcal{Tr}_{\ell_{cmd, \ell_\infty}}^*$.

By Lemma 32, $(s_0, s)(\mathbf{G}_\infty|_{\text{after}(s_0)} \cap \mathcal{Tr}_{\ell_{cmd, \ell_\infty}}^*) \cup \text{Schedule}_{\overline{\text{after}(s_0)}}$. Hence (s_0, s) .

It is straightforward to check that $\text{Reach} \subseteq \{s \in \mathcal{Tr}_{\ell_{cmd, \ell_\infty}}^* \langle \text{Init} \rangle \mid \text{thread}(s) = \mathbf{main}\}$. \square

Recall that $\mathcal{Tr}_{\ell_{cmd, \ell_\infty}}^* \langle \text{Init} \rangle$ is the set of states that occur on paths starting from *Init*. \mathbf{S}' represents all final states reachable by the whole program from an initial state. \mathbf{G}' represents all transitions that may be done during any execution of the program and \mathbf{A}' represents transitions of children of *main*.

4 Abstract Semantics

4.1 Abstraction

Recall from the theory of abstract interpretation [4] that a *Galois connection* [23] between a concrete complete lattice X and an abstract complete lattice Y is a pair of monotonic functions $\alpha : X \rightarrow Y$ and $\gamma : Y \rightarrow X$ such that $\forall x \in X, \forall y \in Y, \alpha(x) \leq y \Leftrightarrow x \leq \gamma(y)$; α is called the *abstraction* function and γ the *concretization* function. Product lattices are ordered by the product ordering and sets of functions from X to a lattice L are ordered by the pointwise ordering $f \leq g \Leftrightarrow \forall x \in X, f(x) \leq g(x)$. A monotonic function f^\sharp is an *abstraction* of a monotonic function f^b if and only if $\alpha \circ f^b \circ \gamma \leq f^\sharp$. It is a classical result [23] that an adjoint uniquely determines the other in a Galois connection; therefore, we sometimes omit the abstraction function (lower adjoint) or the concretization function (upper adjoint).

Our concrete lattices are the powersets $\mathcal{P}(\mathbf{States})$ and $\mathcal{P}(\mathbf{Tr})$ ordered by inclusion. Remember, our goal is to adapt any given single-thread analysis in a multithreaded setting. Accordingly, we are given an abstract complete lattice \mathcal{D} of abstract states and an abstract complete lattice \mathcal{R} of abstract transitions. These concrete and abstract lattices are linked by two Galois connections, respectively $\alpha_{\mathcal{D}}, \gamma_{\mathcal{D}}$ and $\alpha_{\mathcal{R}}, \gamma_{\mathcal{R}}$. We assume that abstractions of states and transitions depend only on stores and that all the transitions that leave the store unchanged are in $\gamma_{\mathcal{R}}(\perp)$. This assumption allows us to abstract *guard* and *spawn* as the least abstract transition \perp .

We also assume we are given the abstract operators of Table 1, which are correct abstraction of the corresponding concrete functions. We assume $\ell_{\star} \in \mathbf{Labels}$ a special label which is never used in statements. Furthermore, we define $\mathbf{post}(\ell_{\star}) \stackrel{\text{def}}{=} \mathbf{States}$.

We define a Galois connection between $\mathcal{P}(\mathbf{States})$ and $\mathcal{P}(\mathbf{Labels})$: $\alpha_{\mathbf{L}}(\mathbf{S}) = \{\ell \in \mathbf{Labels} \mid \mathbf{S} \cap \mathbf{post}(\ell) \neq \emptyset\}$

and $\gamma_{\mathbf{L}}(\mathcal{L}) = \bigcap_{\ell \in \mathbf{Labels} \setminus \mathcal{L}} \mathbf{post}(\ell)$ (by convention, this set is \mathbf{States} when $\mathcal{L} = \mathbf{Labels}$). The set $\alpha_{\mathbf{L}}(\mathbf{S})$ represents the set of labels that may have been encountered before reaching this point of the program.

Note that we have two distinct ways of abstracting states (i, P, σ, g) , either by using $\alpha_{\mathcal{D}}$, which only depends on the store σ , or by using $\alpha_{\mathbf{L}}$ which only depends on the genealogy g and the current thread i . The latter is specific to the multithreaded case, and is used to infer information about possible interferences.

Just as $\alpha_{\mathcal{D}}$ was not enough to abstract states in the multithreaded setting, $\alpha_{\mathcal{R}}$ is not enough, and lose the information that a given transition is or not in a given $\mathbf{post}(\ell)$. This information is needed because $\mathbf{G}_{|\mathbf{post}(\ell)}$ is used in Theorem 1 and Fig. 7. Let us introduce the following Galois connection between the concrete lattice $\mathcal{P}(\mathbf{Tr})$ and the abstract lattice $\mathcal{R}^{\mathbf{Labels}}$, the product of $|\mathbf{Labels}|$ copies of $\mathcal{P}(\mathbf{Tr})$, to this end: $\alpha_{\mathbf{K}}(\mathbf{G}) = \lambda \ell. \alpha_{\mathcal{R}}(\mathbf{G}_{|\mathbf{post}(\ell)})$
 $\gamma_{\mathbf{K}}(\mathcal{K}) = \{(s, s') \in \mathbf{Tr} \mid \forall \ell \in \mathbf{Labels}, s \in \mathbf{post}(\ell) \Rightarrow (s, s') \in \gamma_{\mathcal{R}}(\mathcal{K}(\ell))\}$.

Concrete function	Abstract function
$\lambda(i, P, \sigma, g).(i, P, \text{write}_{lv:=e}(\sigma))$	$\text{write}_{lv:=e} : \mathcal{D} \rightarrow \mathcal{D}$
$\lambda \mathbf{A}, \mathbf{S}. \text{interfere}_{\mathbf{A}}(\mathbf{S})$	$\text{inter} : \mathcal{R} \times \mathcal{D} \rightarrow \mathcal{D}$
$\lambda \mathbf{S}. \{(i, P, \sigma, g), (i, P', \sigma', g') \in \mathbf{Tr} \mid (i, P, \sigma, g) \in \mathbf{S} \wedge \sigma' \in \text{write}_{lv:=e}(\mathbf{S})\}$	$\text{write-inter}_{lv:=e} : \mathcal{D} \rightarrow \mathcal{R}$
$\lambda \mathbf{S}. \{(i, P, \sigma, h) \in \mathbf{S} \mid \text{bool}(\sigma, \text{cond}) = \text{true}\}$	$\text{enforce}_{\text{cond}} : \mathcal{D} \rightarrow \mathcal{D}$

Table 1: Given abstractions

$\mathcal{K} = \alpha_K(\mathbf{G})$ is an abstraction of the “guarantee condition”: $\mathcal{K}(\ell_*)$ represents the whole set \mathbf{G} , and $\mathcal{K}(\ell)$ represents the interferences of a child with its parent, i.e., abstracts $\mathbf{G}_{|\text{post}(\ell)}$.

Abstract configurations are tuples $\langle C, \mathcal{L}, \mathcal{K}, I \rangle \in \mathcal{D} \times \mathcal{P}(\mathbf{Labels}) \times \mathcal{R}^{\mathbf{Labels}} \times \mathcal{R}$ such that $\text{inter}_I C = C$ and $\ell_* \in \mathcal{L}$. The meaning of each component of an abstract configuration is given by the Galois connection $\alpha_{\text{cfg}}, \gamma_{\text{cfg}}$:

$$\begin{aligned} \alpha_{\text{cfg}} \langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle &\stackrel{\text{def}}{=} \langle \text{inter}_{\alpha_{\mathcal{R}}(\mathbf{A})}(\alpha_{\mathcal{D}}(\mathbf{S})), \alpha_{\mathcal{L}}(\mathbf{S}), \alpha_K(\mathbf{G}), \alpha_{\mathcal{R}}(\mathbf{A}) \rangle \\ \gamma_{\text{cfg}} \langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle &\stackrel{\text{def}}{=} \langle \gamma_{\mathcal{D}}(C) \cap \gamma_{\mathcal{L}}(\mathcal{L}), \gamma_K(\mathcal{K}), \gamma_{\mathcal{R}}(I) \rangle \end{aligned}$$

C abstracts the possible current stores \mathbf{S} . \mathcal{L} abstracts the labels encountered so far in the execution. I is an abstraction of interferences \mathbf{A} .

4.2 Applications: Non-Relational Stores and Gen/Kill Analyses

As an application, we show some concrete and abstract stores that can be used in practice. We define a Galois connection $\alpha_{\text{store}}, \gamma_{\text{store}}$ between concrete and abstract stores and encode both *abstract states* and *abstract transitions* as abstract stores, i.e., $\mathcal{D} = \mathcal{R}$. Abstract states are concretized by:

$$\gamma_{\mathcal{D}}(\sigma^\#) \stackrel{\text{def}}{=} \{(i, P, \sigma, g) \mid \sigma \in \gamma_{\text{store}}(\sigma^\#)\}.$$

Non-relational store Such a store is a map from the set of variables \mathcal{Var} to some set \mathcal{V}^b of *concrete values*, and abstract stores are maps from \mathcal{Var} to some complete lattice $\mathcal{V}^\#$ of *abstract values*. Given a Galois connection α_V, γ_V between \mathcal{V}^b and $\mathcal{V}^\#$, the following is a classical, so called non-relational abstraction of stores:

$$\alpha_{\text{store}}(\sigma) \stackrel{\text{def}}{=} \lambda x. \alpha_{\mathcal{D}}(\sigma(x)) \text{ and } \gamma_{\text{store}}(\sigma^\#) \stackrel{\text{def}}{=} \{\sigma \mid \forall x, \sigma(x) \in \gamma_{\mathcal{D}}(x)\}.$$

Let $\text{val}_C(e)$ and $\text{addr}_C(lv)$ be the abstract value of the expression e and the set of variables that may be represented by lv , respectively, in the context

\mathcal{C} .

$$\begin{aligned}
\gamma_{\mathcal{R}}(\sigma^\#) &\stackrel{\text{def}}{=} \{((i, P, \sigma, h), (i', P', \sigma', h')) \mid \forall x, \sigma'(x) \in \gamma_{\mathcal{D}}(\sigma^\#(x)) \cup \{\sigma(x)\}\} \\
\text{write}_{x:=e}(\mathcal{C}) &\stackrel{\text{def}}{=} \mathcal{C}[x \mapsto \text{val}_{\mathcal{C}}(e)] \\
\text{write}_{lv:=e}(\mathcal{C}) &\stackrel{\text{def}}{=} \bigcup_{x \in \text{addr}_{\mathcal{C}}(lv)} \text{write}_{x:=e}(\mathcal{C}) \\
\text{write-inter}_{lv:=e}(\mathcal{C}) &\stackrel{\text{def}}{=} \lambda x. \text{if } x \in \text{addr}_{\mathcal{C}}(lv) \text{ then } \text{val}_{\mathcal{C}}(e) \text{ else } \perp \\
\text{inter}_I(\mathcal{C}) &\stackrel{\text{def}}{=} I \sqcup \mathcal{C} \\
\text{enforce}_x(\sigma) &\stackrel{\text{def}}{=} \sigma[x \mapsto \text{true}^\#] \text{ and } \text{enforce}_{\neg x}(\sigma) = \sigma[x \mapsto \text{false}^\#]
\end{aligned}$$

Gen/kill analyses In such analyses [6], stores are sets, e.g., sets of initialized variables, sets of edges of a point-to graph. The set of stores is $\mathcal{P}(X)$ for some set X , $\mathcal{D} = \mathcal{R} = \mathcal{P}(X)$, and the abstraction is trivial $\alpha_{\text{store}} = \gamma_{\text{store}} = \text{id}$. Each gen/kill analysis gives, for each assignment, two sets: $\text{gen}(lv := e, \sigma)$ and $\text{kill}(lv := e, \sigma)$. These sets may take the current store σ into account (e.g. Rugina and Rinard’s “strong flag” [12, 13]); gen (resp. kill) is monotonic (resp. decreasing) in σ . We define the concretization of transitions and the abstract operators:

$$\begin{aligned}
\gamma_{\mathcal{R}}(\sigma^\#) &\stackrel{\text{def}}{=} \{(i, P, \sigma, h) \rightarrow (i', P', \sigma', h') \mid \sigma' \subseteq \sigma \cup \sigma^\#\} \\
\text{write}_{lv:=e}(\mathcal{C}) &\stackrel{\text{def}}{=} (\mathcal{C} \setminus \text{kill}(lv := e, \sigma)) \cup \text{gen}(lv := e, \sigma) \\
\text{write-inter}_{lv:=e}(\mathcal{C}) &\stackrel{\text{def}}{=} \text{gen}(lv := e, \sigma) \\
\text{inter}_I(\mathcal{C}) &\stackrel{\text{def}}{=} I \cup \mathcal{C} \\
\text{enforce}_x(\sigma) &\stackrel{\text{def}}{=} \sigma
\end{aligned}$$

4.3 Semantics of Commands

Lemma 33. $\alpha_L(\mathbf{S}) = \alpha_L(\text{interfere}_A(\mathbf{S}))$.

Lemma 34. $\alpha_L(\text{schedule-child}(\mathbf{S})) = \lambda \ell. \perp$.

Lemma 35. Let \mathbf{G}_1 and \mathbf{G}_2 two set of transitions and $\mathbf{S}_2 = \{s \mid \exists s' : (s, s') \in \mathbf{G}_2\}$.

Hence, $\alpha_K(\mathbf{G}_1 \cup \mathbf{G}_2) \leq \lambda \ell. \text{if } \ell \in \alpha_L(\mathbf{S}_2) \text{ then } \mathcal{K}(\ell) \sqcup \text{write-inter}_{lv:=e}(\mathcal{C}) \text{ else } \mathcal{K}(\ell)$

$assign_{lv:=e} \langle C, \mathcal{L}, \mathcal{K}, I \rangle$	$\stackrel{\text{def}}{=} \langle inter_I \circ write_{lv:=e}(C), \mathcal{L}, \mathcal{K}', I \rangle$
with $\mathcal{K}'' = \lambda \ell. \text{if } \ell \in \mathcal{L} \text{ then } \mathcal{K}(\ell) \sqcup write_inter_{lv:=e}(C) \text{ else } \mathcal{K}(\ell)$	
$guard_{cond} \langle C, \mathcal{L}, \mathcal{K}, I \rangle$	$\stackrel{\text{def}}{=} \langle inter_I \circ enforce_{cond}(C), \mathcal{L}, \mathcal{K}, I \rangle$
$spawn_{\ell} \langle C, \mathcal{L}, \mathcal{K}, I \rangle$	$\stackrel{\text{def}}{=} \langle C, \mathcal{L} \cup \{\ell\}, \mathcal{K}, I \rangle$
$child_spawn_{\ell} \langle C, \mathcal{L}, \mathcal{K}, I \rangle$	$\stackrel{\text{def}}{=} \langle inter_{I \sqcup \mathcal{K}(\ell)}(C), \mathcal{L}, \lambda \ell. \perp, I \sqcup \mathcal{K}(\ell) \rangle$
$combine_{\langle C, \mathcal{L}, \mathcal{K}, I \rangle}(\mathcal{K}')$	$\stackrel{\text{def}}{=} \langle inter_{I \sqcup \mathcal{K}'(\ell_*)}(C), \mathcal{L}, \mathcal{K} \sqcup \mathcal{K}', I \sqcup \mathcal{K}'(\ell_*) \rangle$
$execute_thread_{\ell_{cmd}, \ell', C, \mathcal{L}, I}(\mathcal{K})$	$\stackrel{\text{def}}{=} \mathcal{K}'$
with $\langle C', \mathcal{L}', \mathcal{K}', I' \rangle$	$= \llbracket^{\ell} cmd, \ell' \rrbracket \langle C, \mathcal{L}, \mathcal{K}, I \rangle$
$guarantee_{\ell_{cmd}, \ell'}(\langle C, \mathcal{L}, \mathcal{K}, I \rangle)$	$\stackrel{\text{def}}{=} execute_thread_{\ell_{cmd}, \ell', C, \mathcal{L}, I}^{\uparrow \omega}(\mathcal{K})$

Figure 8: Basic abstract semantic functions

The functions of Fig. 8 abstract the corresponding functions of the G-collecting semantics (See Fig. 7).

Proposition 5. *The abstract functions $assign_{lv:=e}$, $guard_{cond}$, $spawn_{\ell_2}$, $child_spawn_{\ell_2}$, $combine$ and $guarantee_{\ell_{cmd}}$ are abstractions of the concrete functions $\llbracket^{\ell} lv := e, \ell' \rrbracket$, $\llbracket^{\ell} guard(cond), \ell' \rrbracket$, $\llbracket^{\ell_1} spawn(\ell_2), \ell_3 \rrbracket$, $init_child_{\ell_1} \circ \llbracket^{\ell_1} spawn(\ell_2), \ell_3 \rrbracket$, $combine$ and $guarantee_{\llbracket^{\ell} cmd, \ell_{\infty} \rrbracket}$ respectively.*

Proof. The cases of $combine$ and $guarantee_{\ell_{cmd}}$ are straightforward. The case of $child_spawn_{\ell_2}$ is a straightforward consequence of Lemma 34.

Let $\langle C, \mathcal{L}, \mathcal{K}, I \rangle$ an abstract configuration and $\langle \mathbf{S}, \mathbf{G}, \mathbf{A} \rangle = \gamma_{\text{cfg}} \langle C, \mathcal{L}, \mathcal{K}, I \rangle$. Therefore $\mathbf{S} = \text{interfere}_{\mathbf{A}}(\mathbf{S})$.

Let $\langle \mathbf{S}', \mathbf{G}', \mathbf{A}' \rangle = \llbracket^{\ell} lv := e, \ell' \rrbracket$ and $\langle C', \mathcal{L}', \mathcal{K}', I' \rangle = assign_{lv:=e} \langle C, \mathcal{L}, \mathcal{K}, I \rangle$.

Therefore, by definition, $inter_I \circ write_{lv:=e, \ell'} \circ inter_I$. By Proposition 2, $\mathbf{S}' = \text{interfere}_{\mathbf{A}}(\text{Tr}_{\ell_{lv:=e, \ell'}} \setminus \text{Schedule}(\text{interfere}_{\mathbf{A}}(\mathbf{S})))$. Hence $\alpha_{\mathcal{Q}}(\mathbf{S}') \leq C'$.

According to Proposition 2, $\mathbf{G}' \subseteq \mathbf{G} \cup \mathbf{G}_{\text{new}}$ with $\mathbf{G}_{\text{new}} = \{(s, s') \in \text{Tr}_{\ell_1 \text{basic}, \ell_2} \mid s \in \text{interfere}_{\mathbf{A}}(\mathbf{S})\} = \{(s, s') \in \text{Tr}_{\ell_1 \text{basic}, \ell_2} \mid s \in \mathbf{S}\}$. Hence $\alpha_{\mathcal{Q}}(\mathbf{G}_{\text{new}}) \leq write_inter_{\ell_{lv:=e, \ell'}}(C)$.

Therefore by Lemma 35:

$\alpha_{\mathbf{K}}(\mathbf{G}') \leq \lambda \ell. \text{if } \ell \in \mathcal{L} \text{ then } \mathcal{K}(\ell) \sqcup write_inter_{lv:=e}(C) \text{ else } \mathcal{K}(\ell)$

If $(s, s') \in \text{Tr}_{\ell_{lv:=e, \ell'}}$ then, $s' \in \text{post}(\ell) \Leftrightarrow s \in \text{post}(\ell)$. Therefore, by Lemma 33, $\alpha_{\mathbf{L}}(\mathbf{S}) = \alpha_{\mathbf{L}}(\mathbf{S}')$.

Hence $\alpha_{\text{cfg}}(\langle \mathbf{S}', \mathbf{G}', \mathbf{A}' \rangle) \leq \langle C', \mathcal{L}', \mathcal{K}', I' \rangle$. Given that $\alpha_{\mathcal{Q}}(\text{Tr}_{\ell_{guard(cond), \ell'}}) = \perp$ and $\forall (s, s') \in \text{Tr}_{\ell_{guard(cond), \ell'}}$, $s' \in \text{post}(\ell) \Leftrightarrow s \in \text{post}(\ell)$, we prove in the same way that $guard_{cond}$ is an abstraction of $\llbracket^{\ell} guard(cond), \ell' \rrbracket$.

$(\ell lv := e)Q$	$\stackrel{\text{def}}{=} \text{assign}_{lv:=e}Q$
$(\ell^1 cmd_1; \ell^2 cmd_2)Q$	$\stackrel{\text{def}}{=} (\ell^2 cmd_2) \circ (\ell^1 cmd_1)Q$
$(\ell^1 \text{while}(cond)\{\ell^2 cmd\})Q$	$\stackrel{\text{def}}{=} \text{guard}_{\neg cond} \text{loop}^{\uparrow\omega} Q$
with $\text{loop}(Q')$	$\stackrel{\text{def}}{=} ((\ell cmd) \circ \text{guard}_{cond} Q') \sqcup Q'$
$(\ell^1 \text{create}(\ell^2 cmd))Q$	$\stackrel{\text{def}}{=} \text{combine}_{Q'} \circ \text{guarantee}_{\ell^2 cmd}^{\uparrow\omega} \circ \text{child-spawn}_{\ell^2}(Q)$
with Q'	$\stackrel{\text{def}}{=} \text{spawn}_{\ell^2}(Q)$

Figure 9: Abstract semantics

Given that $\alpha_{\mathcal{A}}(\text{Tr}_{\ell^1 \text{spawn}(\ell_2), \ell_3}) = \perp$ and $\forall (s, s') \in \text{Tr}_{\ell^1 \text{spawn}(\ell_2), \ell_3}, s' \in \text{post}(\ell) \Leftrightarrow s \in \text{post}(\ell) \vee \ell = \ell_2$, we prove in the same way that spawn_{ℓ_2} is an abstraction of $\llbracket \ell^1 \text{spawn}(\ell_2), \ell_3 \rrbracket$. \square

The $\text{assign}_{lv:=e}$ function updates \mathcal{K} by adding the modification of the store to all labels encountered so far (those which are in \mathcal{L}). It does not change \mathcal{L} because no thread is created. Notice that in the case of a non-relational store, we can simplify function assign using the fact that $\text{inter}_I \circ \text{write}_{x:=e}(C) = C[x \mapsto \text{val}_C(e) \sqcup I(x)]$.

The abstract semantics is defined by induction on syntax, see Fig. 9, and, with Prop.5, it is straightforward to check the soundness of this semantics:

Theorem 2 (Soundness). $(\ell cmd, \ell)$ is an abstraction of $\llbracket cmd, \ell \rrbracket$.

4.4 Example

Consider Fig. 10 and the non-relational store of ranges [4]. We will apply our algorithm on this example.

Our algorithm computes a first time *execute-thread*, then, the fixpoint is not reached, and then, *execute-thread* is computed another time.

1. Initial configuration : $\mathbf{Q}_0 = \langle \mathcal{C}_0, \{\ell_\star\}, \mathcal{K}_0, \perp \rangle$ where $\mathcal{C}_0 = [y = ?, z = ?]$ and $\mathcal{L}_0 = \{\ell_\star\}$ and $\mathcal{K}_0 = \lambda \ell. \perp$ and $I_0 = \perp$.
2. The configuration $\mathbf{Q}_1 = \llbracket \ell^1 y := 0; \ell^2 z := 0, \ell_3 \rrbracket(\mathbf{Q}_0)$ is computed. $\mathbf{Q}_1 = \langle \mathcal{C}_1, \{\ell_\star\}, \mathcal{K}_1, \perp \rangle$ where $\mathcal{C}_1 = [y = 0, z = 0]$ and $\mathcal{K}_1 = \ell_\star \mapsto [y = 0, z = 0]$. The \mathcal{L} and I components are not changed because no new thread is created.

3. The configuration $Q_2 = \mathit{child}\text{-}\mathit{spawn}_{\ell_3}(Q_1)$ is computed. $Q_2 = \langle C_2, \{\ell_\star\}, \mathcal{K}_2, \perp \rangle$ where $C_2 = C_1$ and $\mathcal{K}_2 = \lambda l.\perp$. Notice that because $\mathcal{K}_1(\ell_3) = \perp$ the equality $C_2 = C_1$ holds.
4. The configuration $Q_3 = \llbracket^{\ell_4} y := y + z, \ell_\infty \rrbracket(Q_2)$ is computed. $Q_3 = \langle C_3, \{\ell_\star\}, \mathcal{K}_3, \perp \rangle$ where $C_3 = [y = 0, z = 0]$ and $\mathcal{K}_3 = \ell_\star \mapsto [y = 0]$.
5. The configuration $Q_4 = \mathit{combine}\text{-}\mathit{spawn}_{\ell_3}(Q_3)$ is computed. $Q_4 = \langle C_4, \{\ell_\star, \ell_3\}, \mathcal{K}_4, I_4 \rangle$. $C_4 = [y = 0, z = 0]$ and $\mathcal{K}_4 = [\ell_\star \mapsto [y = 0, z = 0]]$ and $I_4 = [y = 0]$.
6. The configuration $Q_5 = \llbracket^{\ell_5} z := 3, \ell_\infty \rrbracket Q_4$ is computed. $Q_5 = \langle C_5, \{\ell_\star, \ell_3\}, \mathcal{K}_5, I_5 \rangle$. $C_5 = [y = 0, z = 3]$ and $\mathcal{K}_5 = [\ell_\star \mapsto [y = 0, z = [0, 3]]]$ and $I_5 = I_4$.

Then, we compute a second time *execute-thread*, on a new initial configuration $\langle C_0, \mathcal{L}_0, \mathcal{K}_5, I_0 \rangle$.

Nothing change, except at the step 3, when *child-spawn* is applied. The configuration obtained is then $Q'_2 = \langle C'_2, \{\ell_\star\}, \mathcal{K}_5, I'_2 \rangle$ where $C'_2 = [y = 0, z = [0, 3]]$ and $I'_2 = [z = 3]$. Then, the algorithm discovers that the value of y may be 3.

The details of the execution of the algorithm is given in the following tabular:

$\ell_1 y := 0; \ell_2 z := 0;$ $\ell_3 \mathit{create}(\ell_4 y := y + z);$ $\ell_5 z := 3, \ell_\infty$

Figure 10: Example

	\mathcal{C}	\mathcal{L}	\mathcal{K}	I
Initial configuration	$y = ?$ $z = ?$	$\{l_\star\}$	$\lambda l. \perp$	\perp
$\llbracket^{\ell_1} y := 0, \ell_2 \rrbracket$	$y = 0$ $z = ?$	$\{l_\star\}$	$l_\star \mapsto y = 0$	\perp
$\llbracket^{\ell_2} z := 0, \ell_3 \rrbracket$	$y = 0$ $z = 0$	$\{l_\star\}$	$l_\star \mapsto y = 0, z = 0$	\perp
$child\text{-}spawn_{\ell_3}$	$y = 0$ $z = 0$	$\{l_\star\}$	$\lambda l. \perp$	\perp
$\llbracket^{\ell_4} y := y + z, \ell_\infty \rrbracket$	$y = 0$ $z = 0$	$\{l_\star\}$	$l_\star \mapsto y = 0$	\perp
$combine_{spawn_{\ell_3}(\cdot)}$	$y = 0$ $z = 0$	$\{l_\star, \ell_3\}$	$l_\star \mapsto y = 0, z = 0$	$y = 0$
$\llbracket^{\ell_5} z := 3, \ell_\infty \rrbracket$	$y = 0$ $z = 3$	$\{l_\star, \ell_3\}$	$l_\star \mapsto y = 0, z = [0, 3]$ $l_3 \mapsto z = 3$	$y = 0$
Initial configuration	$y = ?$ $z = ?$	$\{l_\star\}$	$l_\star \mapsto y = 0, z = [0, 3]$ $l_3 \mapsto z = 3$	\perp
$\llbracket^{\ell_1} y := 0, \ell_2 \rrbracket$	$y = 0$ $z = ?$	$\{l_\star\}$	$l_\star \mapsto y = 0, z = [0, 3]$ $l_3 \mapsto z = 3$	\perp
$\llbracket^{\ell_2} z := 0, \ell_3 \rrbracket$	$y = 0$ $z = 0$	$\{l_\star\}$	$l_\star \mapsto y = 0, z = [0, 3]$ $l_3 \mapsto z = 3$	\perp
$child\text{-}spawn_{\ell_3}$	$y = 0$ $z = [0, 3]$	$\{l_\star\}$	$\lambda l. \perp$	$z = 3$
$\llbracket^{\ell_4} y := y + z, \ell_\infty \rrbracket$	$y = [0, 3]$ $z = [0, 3]$	$\{l_\star\}$	$l_\star \mapsto y = [0, 3]$	$z = 3$
$combine_{spawn_{\ell_3}(\cdot)}$	$y = [0, 3]$ $z = 0$	$\{l_\star, \ell_3\}$	$l_\star \mapsto y = [0, 3], z = [0, 3]$ $l_3 \mapsto z = 3$	$y = [0, 3]$
$\llbracket^{\ell_5} z := 3, \ell_\infty \rrbracket$	$y = [0, 3]$ $z = 3$	$\{l_\star, \ell_3\}$	$l_\star \mapsto y = [0, 3], z = [0, 3]$ $l_3 \mapsto z = 3$	$y = [0, 3]$

5 Practical Results

The abstract semantics is denotational, so we may compute it recursively. This requires to compute fixpoints and may fail to terminate. For this reason, each time we have to compute $f^{\uparrow\omega}(X)$ we compute instead the over-approximation $f^{\uparrow\triangleright}$, where \triangleright is a widening operator, in the following way: 1. Assign $X_1 := X$ 2. Compute $X_2 := f(X_1)$ 3. If $X_2 \leq X_1$ then returns X_2 ,

otherwise, 4. Assign $X_1 := X_1 \nabla X_2$ and go back to 2. Our final algorithm is to compute recursively $guarantee_{\ell_{cmd}, \ell_{\infty}}$ applied to the initial configuration $\langle \top, \{\ell_{\star}\}, \lambda \ell. \perp, \perp \rangle$, overapproximating all fixpoint computations.

We have implemented two tools, Parint and MT-Penjili, in Ocaml with the front-end C2newspeak, with two different abstract stores. The first one maps variables to integer intervals and computes an overapproximation of the values of the variables. The

second one extends the analysis of Allamigeon et al. [2], which focuses on pointers, integers, C-style strings and structs and detects array overflows. It analyzes programs in full fledged C (except for dynamic memory allocation library routines) that use the Pthreads multithread library. We ignore mutexes and condition variables in these implementations. This is sound because mutexes and condition variables only restrict possible transitions. We lose precision if mutexes are used to create atomic blocks, but not if they are used only to prevent data-races.

In Table 2 we show some results on benchmarks of different sizes. L.o.C. means “Lines of Code”. “Message” is a C file, with 3 threads: one thread sends an integer message to another through a shared variable. “Embedded” is extracted from embedded C code with two threads. “Test 12” and “Test 15” are sets of 12 and 15 files respectively, each one focusing on a specific thread interaction.

To give an idea of the precision of the analysis, we indicate how many false alarms were raised. Our preliminary experiments show that our algorithm loses precision in two ways: 1. through the (single-thread) abstraction on stores 2. by abstraction on interferences. Indeed, even though our algorithm takes the order of transitions into account for the current thread, it considers that interference transitions may be executed in an arbitrary order and arbitrary many times. This does not cause any loss in “Message”, since the thread which send the message never put an incorrect value in the shared variable. Despite the fact that “Embedded” is a large excerpt of an actual industrial code, the loss of precision is moderate: 7 false alarms are reported

	L.o.C.	Parint	MT-Penjili	
		time	time	false alarms
Message	65	0.05	0.20s	0
Embedded	27 100	-	0.34s	7
Test 12	342	-	3.7s	1
Test 15	414	3.8	-	-

Table 2: Benchmarks

on a total of 27 100 lines. Furthermore, because of this arbitrary order, our analysis straightforwardly extends to models with "relaxed-consistency" and "temporary" view of thread memory due to the use of cache, e.g., OpenMP.

6 Complexity

The complexity of our algorithm greatly depends on widening and narrowing operators. Given a program ${}^{\ell_0}prog, \ell_\infty$, the *slowness* of the widening and narrowing in an integer w such that: widening-narrowing stops in always at most w steps on each loop and whenever *guarantee* is computed (which also requires doing an abstract fixpoint computation). Let the *nesting depth* of a program be the nesting depth of *while* and of *create* which² have a subcommand *create*.

Proposition 6. *Let d be the nesting depth, n the number of commands of our program, and, w the slowness of our widening. The time complexity of our analysis is $O(nw^{d+1})$ assuming operations on abstract stores are done in constant time.*

This is comparable to the $O(nw^d)$ complexity of the corresponding single-thread analysis, and certainly much better than the combinatorial explosion of interleaving-based analyses. Furthermore, this is better than polynomial in an exponential number of states [15].

Proof. Let $c({}^\ell cmd, \ell')$, $n({}^\ell cmd, \ell')$ and $d({}^\ell cmd, \ell')$ and $w({}^\ell cmd, \ell')$ be the complexity of analyzing ${}^\ell cmd, \ell'$, the size of ${}^\ell cmd, \ell'$ and the nesting depth of ${}^\ell cmd, \ell'$, the slowness of the widening and narrowing on ${}^\ell cmd, \ell'$ respectively. Let a and k the complexity of assign and of reading $\mathcal{K}(\ell)$ respectively.

Proposition 6 is a straightforward consequence of the following lemma³:

Lemma 36. *The complexity of computing $({}^\ell cmd, \ell')Q$ is $O(an(w+k)w^{d-1})$*

This lemma is proven by induction.

$$c(lv := e) = a$$

$$c({}^{\ell_1} cmd_1; {}^{\ell_2} cmd_2, \ell_3) = c({}^{\ell_1} cmd_1, \ell_2) + c({}^{\ell_2} cmd_2, \ell_3)$$

²In our Semantics, each *create* needs a fixpoint computation, except *create* with no subcommand *create*.

³The functions arguments are omitted in the name of simplicity.

$$c(\ell_1 \mathbf{while}(\mathit{cond})\{\ell_2 \mathit{cmd}\}, \ell_3) \leq w(\ell_1 \mathbf{while}(\mathit{cond})\{\ell_2 \mathit{cmd}\}, \ell_3) \times c(\ell_2 \mathit{cmd}, \ell_1)$$

If $\ell_2 \mathit{cmd}$ does not contain any subcommand *create*, then the fixpoint computation terminates in one step: $c(\ell_1 \mathbf{create}(\ell_2 \mathit{cmd}), \ell_3) = k + c(\ell_2 \mathit{cmd})$
 Else: $c(\ell_1 \mathbf{create}(\ell_2 \mathit{cmd}), \ell_3) = k + w(\ell_1 \mathbf{create}(\ell_2 \mathit{cmd}), \ell_3) \times c(\ell_2 \mathit{cmd})$ \square \square

6.1 Complexity of Operations on $\mathcal{R}^{\mathbf{Labels}}$

Notice that we have assumed that operation on $\mathcal{R}^{\mathbf{Labels}}$ are done in constant time in Proposition 6. This abstract store may be represented in different ways. The main problem is the complexity of the *assign* function, which computes a union for each element in \mathcal{L} . The naive approach is to represent $\mathcal{K} \in \mathcal{R}^{\mathbf{Labels}}$ as a map from $\mathcal{P}(\mathbf{Labels})$ to \mathcal{R} . Assuming that operations on maps are done in constant time, this approach yields a $O(tnw^d)$ complexity where t is the number⁴ of *creates* in the program. We may also represent $\mathcal{K} \in \mathcal{R}^{\mathbf{Labels}}$ as some map \mathcal{K}_M from $\mathcal{P}(\mathbf{Labels})$ to \mathcal{R} such that $\mathcal{K}(\ell) = \bigcup_{\mathcal{L} \ni \ell} \mathcal{K}_M(\mathcal{L})$ and the function *assign* is done in constant time : $\mathit{assign}_{lv:=e} \langle C, \mathcal{L}, \mathcal{K}, I \rangle \stackrel{\text{def}}{=} \langle \mathit{inter}_I \circ \mathit{write}_{lv:=e}(C), \mathcal{L}, \mathcal{K}_M[\mathcal{L} \mapsto \mathcal{K}_M(\mathcal{L}) \sqcup \mathit{write}\text{-}\mathit{inter}_{lv:=e}(C)], I \rangle$. Nevertheless, to access to the value $\mathcal{K}(\ell)$ may need up to t operations, which increases the complexity of *child-spawn* and *combine*. The complexity is then $O(n(w+t)w^{d-1})$.

6.2 Complexity of Widdening

The slowness of the widening and narrowing operators, w , depends on the abstraction. Nevertheless, a widening is supposed to be fast.

Consider the naive widening on intervals : $[x, x'] \nabla [y, y'] = [z', z']$ where

$$z = \begin{cases} x & \text{if } y \geq x \\ -\infty & \text{else} \end{cases} \text{ and } z' = \begin{cases} x' & \text{if } y \leq x \\ +\infty & \text{else} \end{cases}.$$

This widening never widen more than two times on the same variable. Therefore this naive widening is linear in the worst case.

⁴This is different to the number of threads since an arbitrary number of threads may be created at the same location.

$$\begin{array}{l}
(\ell_0 \text{ par} \{\ell_1 \text{ cmd}_1 | \ell_2 \text{ cmd}_2\})(Q) \stackrel{\text{def}}{=} \langle C_1 \sqcap C_2, \mathcal{L}, \mathcal{K}', I_1 \sqcup I_2 \rangle \\
\text{with } \langle C_1, \mathcal{L}_1, \mathcal{K}_1, I_1 \rangle = \text{guarantee}_{\ell_1 \text{ cmd}_1, \ell_\infty} \circ \text{child-spawn}_{\ell_1}(Q) \\
\text{and } \langle C_2, \mathcal{L}_2, \mathcal{K}_2, I_2 \rangle = \text{guarantee}_{\ell_2 \text{ cmd}_2, \ell_\infty} \circ \text{child-spawn}_{\ell_2}(Q) \\
\text{and } \mathcal{K}' = \mathcal{K}[\ell_1 \mapsto \mathcal{K}_2(\ell_\star) \sqcup \mathcal{K}(\ell_1)][\ell_2 \mapsto \mathcal{K}_1(\ell_\star) \sqcup \mathcal{K}(\ell_2)]
\end{array}$$

Figure 11: Extended syntax

6.3 Other form of parallelism

Our technique also applies to other forms of concurrency, Fig. 11 displays how Rugina and Rinard’s *par* constructor [12, 13] would be computed with our abstraction. Correctness is a straightforward extension of the techniques described in this paper.

Our model handle programs that use *create* and *par*. Then, it can handle OpenMP programs with “parallel” and “task” constructors.

7 Conclusion

We have described a generic static analysis technique for multithreaded programs parametrized by a single-thread analysis framework and based on a form of rely-guarantee reasoning. To our knowledge, this is the first such *modular* framework: all previous analysis frameworks concentrated on a particular abstract domain. Such modularity allows us to leverage any static analysis technique to the multithreaded case. We have illustrated this by applying it to two abstract domains: an interval based one, and a richer one that also analyzes array overflows, strings, pointers [2]. Both have been implemented.

We have shown that our framework only incurred a moderate (low-degree polynomial) amount of added complexity. In particular, we avoid the combinatorial explosion of all interleaving based approaches.

Our analyses are always correct, and produce reasonably precise information on the programs we tested. Clearly, for some programs, taking locks/mutexes and conditions into account will improve precision. We believe that is an orthogonal concern: the non-trivial part of our technique is already present *without* synchronization primitives, as should be manifest from the correctness proof of our G-collecting semantics. We leave the in-

tegration of synchronisation primitives with our technique as future work. However, locks whose sole purpose are to prevent data races (e.g. ensuring that two concurrent accesses to the same variable are done in some arbitrary sequential order) have no influence on precision. Taking locks into account may be interesting to isolate atomic blocks.

8 Acknowledgment

We thank Jean Goubault-Larrecq for helpful comments.

References

- [1] A. Miné, Field-sensitive value analysis of embedded C programs with union types and pointer arithmetics, in: ACM SIGPLAN LCTES'06, ACM Press, 2006, pp. 54–63, <http://www.di.ens.fr/~mine/publi/article-mine-lctes06.pdf>.
- [2] X. Allamigeon, W. Godard, C. Hymans, Static Analysis of String Manipulations in Critical Embedded C Programs, in: K. Yi (Ed.), Static Analysis, 13th International Symposium (SAS'06), Vol. 4134 of Lecture Notes in Computer Science, Springer Verlag, Seoul, Korea, 2006, pp. 35–51.
- [3] B. Steensgaard, Points-to analysis in almost linear time, in: POPL '96: Proceedings of the 23rd ACM SIGPLAN-SIGACT symposium on Principles of programming languages, ACM Press, New York, NY, USA, 1996, pp. 32–41. doi:<http://doi.acm.org/10.1145/237721.237727>.
- [4] P. Cousot, R. Cousot, Basic Concepts of Abstract Interpretation, Kluwer Academic Publishers.
- [5] A. Miné, A new numerical abstract domain based on difference-bound matrices, in: PADO II, Vol. 2053 of LNCS, Springer-Verlag, 2001, pp. 155–172, <http://www.di.ens.fr/~mine/publi/article-mine-padoII.pdf>.
- [6] P. Lammich, M. Müller-Olm, Precise fixpoint-based analysis of programs with thread-creation and procedures, in: L. Caires, V. T. Vasconcelos

- (Eds.), *CONCUR*, Vol. 4703 of Lecture Notes in Computer Science, Springer, 2007, pp. 287–302.
- [7] P. Pratikakis, J. S. Foster, M. Hicks, Locksmith: context-sensitive correlation analysis for race detection, in: *PLDI '06: Proceedings of the 2006 ACM SIGPLAN conference on Programming language design and implementation*, ACM Press, New York, NY, USA, 2006, pp. 320–331. doi:<http://doi.acm.org/10.1145/1133981.1134019>.
- [8] L. Fajstrup, E. Goubault, M. Raußen, Detecting deadlocks in concurrent systems, in: *CONCUR '98: Proceedings of the 9th International Conference on Concurrency Theory*, Springer-Verlag, London, UK, 1998, pp. 332–347.
- [9] D. R. Butenhof, *Programming with POSIX Threads*, Addison-Wesley, 2006.
- [10] P. Cousot, R. Cousot, Abstract interpretation and application to logic programs, *Journal of Logic Programming '92*.
- [11] L. O. Andersen, Program analysis and specialization for the C programming language, Ph.D. thesis, DIKU, University of Copenhagen (May 1994).
URL <http://repository.readscheme.org/ftp/papers/topps/D-203.ps.gz>
- [12] R. Rugina, M. C. Rinard, Pointer analysis for multithreaded programs, in: *PLDI, 1999*, pp. 77–90.
URL citeseer.ist.psu.edu/rugina99pointer.html
- [13] R. Rugina, M. C. Rinard, Pointer analysis for structured parallel programs, *ACM Trans. Program. Lang. Syst.* 25 (1) (2003) 70–116. doi:<http://doi.acm.org/10.1145/596980.596982>.
- [14] A. Venet, G. Brat, Precise and efficient static array bound checking for large embedded C programs, in: *PLDI '04: Proceedings of the ACM SIGPLAN 2004 conference on Programming language design and implementation*, ACM Press, New York, NY, USA, 2004, pp. 231–242. doi:<http://doi.acm.org/10.1145/996841.996869>.

- [15] C. Flanagan, S. Qadeer, Thread-modular model checking, in: T. Ball, S. K. Rajamani (Eds.), SPIN, Vol. 2648 of Lecture Notes in Computer Science, Springer, 2003, pp. 213–224.
- [16] A. Malkis, A. Podelski, A. Rybalchenko, Precise thread-modular verification, in: H. R. Nielson, G. Filé (Eds.), SAS, Vol. 4634 of Lecture Notes in Computer Science, Springer, 2007, pp. 218–232.
- [17] E. Yahav, Verifying safety properties of concurrent java programs using 3-valued logic, in: POPL '01: Proceedings of the 28th ACM SIGPLAN-SIGACT symposium on Principles of programming languages, ACM Press, New York, NY, USA, 2001, pp. 27–40. doi:<http://doi.acm.org/10.1145/360204.360206>.
- [18] T. W. Reps, Personal communication (2008).
- [19] C. Flanagan, S. N. Freund, M. Lifshin, Type inference for atomicity, in: TLDI '05, ACM Press, 2005, pp. 47–58.
- [20] R. J. Lipton, Reduction: a method of proving properties of parallel programs, *Commun. ACM* 18 (12) (1975) 717–721.
- [21] V. Vojdani, V. Vene, Goblint: Path-sensitive data race analysis, in: SPLST, 2007.
- [22] V. Vene, M. Muller-olm, Global invariants for analyzing multi-threaded applications, in: In Proc. of Estonian Academy of Sciences: Phys., Math, 2003, pp. 413–436.
- [23] G. Gierz, K. Hofmann, K. Keimel, J. Lawson, M. Mislove, D. Scott, *Continuous Lattices and Domains*, Cambridge University Press, 2003.