(will be inserted by the editor)

Radium ion: A possible candidate for measuring atomic parity violation

P. Mandal · A. Sen · M. Mukherjee

Received: date / Accepted: date

Abstract Single trapped and laser cooled Radium ion as a possible candidate for measuring the parity violation induced frequency shift has been discussed here. Even though the technique to be used is similar to that proposed by Fortson [1], Radium has its own advantages and disadvantages. The most attractive part of Radium ion as compared to that of Barium ion is its mass which comes along with added complexity of instability as well as other issues which are discussed here.

Keywords atomic parity violation \cdot ion trapping \cdot laser cooling \cdot light-shift \cdot nuclear anapole moment

PACS 12.15.Ji · 37.10.Ty · 37.10.Rs · 42.50.Ct · 32.60.+i

1 Introduction

Weak interaction between atomic electron and the nucleus through the exchange of Z_0 boson leads to parity violation in atomic systems [2]. Atomic parity violation (APV) has become a subject of keen interest as it has the potential to test the Standard Model (SM) of particle Physics and to search for new Physics beyond it [3]. Several experiments have been performed over the last three decades on some heavy elements like Cs [4,5], Pb [6], Tl [7], Bi [8] etc. There are also some proposals with promising prospects on elements like Yb [9], Fr [10] and atomic ions like Ba⁺ [1] and Ra⁺ [11]. One of the most promising candidates is Yb whose parity non-conserving (PNC) amplitude $E1_{PNC}$ so far the largest. This point has also been verified experimentally [12] but the experimental precision needs to be improved in order to compete with the present bench mark value of Cs PNC experiment [4]. The experiment on Cs with an accuracy of 0.35%, has successfully explained the SM of particle Physics [4]. Higher precision (0.1%) is required to search for new Physics beyond SM [13]. The physical parameter that one

Raman Center for Atomic Molecular and Optical Sciences Indian Association for the Cultivation of Science 2A & 2B Raja S. C. Mullick Road, Kolkata 700032, India

 $Tel.: +91-33-24734971 \\ E-mail: drupm@iacs.res.in$

P. Mandal

Table 1 Different techniques for PNC measurement and their advantages and disadvantages. *Proposed techniques, yet to demonstrate.

Techniques	Advantages	Disadvantages	
Optical rotation in atomic vapor [6,7,8]	No electric and magnetic fields are involved, no frequency measurements	Unavoidable systematic effects, poor signal to noise ratio at zero crossing in the dispersion curve	
Stark interference in atomic vapor [14]	Measurement procedure is relatively simple	Measured transitions are Doppler broadened	
Stark interference in atomic beams [4,5,12]	Doppler broadening is reduced, signal to noise ratio is larger due to large no. of atoms	Limited by volume and time of interaction, coherence time is short due to collision	
*Light-shift in single trapped and laser cooled ion [1,11]	Absence of Doppler broadening, tractable systematic, long coherence time, large signal to noise ratio	Accurate determination of the electric field of the light at the position of the ion in the trap	
*Stark interference with small number of atoms [10]	Large signal to noise ratio	Less systematic from collision broadening	

seeks by combining these experiments and theory is the PNC transition amplitude $E1_{PNC}$. In Table 1 presently available techniques have been mentioned along with their advantages and respective challenges. A single trapped and laser cooled ion is free from unknown perturbations and it has long coherence time. Systematic uncertainties are easily tractable and therefore, the system is more favored for such experiment [1] even though this has not yet been experimentally demonstrated.

2 Experimental Idea

Single ion trapping and laser cooling are routinely done in radio frequency Paul traps [15]. The possibility of APV experiment based on such a system was first put forward by Fortson [1]. The overall idea has been reviewed here in brief focusing Ra⁺ as a possible candidate. In Fig. 1 the relevant energy levels of singly charged Radium (Ra⁺) and Barium (Ba⁺) have been shown. After confining Radium ion in an RF Paul trap, it can be laser cooled by exciting the $S_{1/2} - P_{1/2}$ transition at 468 nm. A repumping laser at 1080 nm is necessary to bring the ion back to the cooling cycle from the metastable $6D_{3/2}$ state. Atomic parity violation leads to mixing of different parity states with the ground $7S_{1/2}$ state. Thus the ground state has a small contribution from $7P_{1/2}$ state resulting in a non-zero probability of dipole transition between $7S_{1/2}$ and $6D_{3/2}$ states which is normally a forbidden electric dipole transition.

A transitional dipole interacts with the electric field while a quadrupole interacts with the field gradient. In an experimental setup as shown in Fig. 2, it is possible to induce both a dipole transition (due to APV) as well as a quadrupole transition between $7S_{1/2}$ and $6D_{3/2}$ states. The interference term of these two leads to a measurable frequency change of the Larmor frequency between the ground state Zeeman sublevels in presence, as compared to, in absence of the laser fields. One of the suitable laser field configurations that produce the needed APV frequency shift is

$$E' = \hat{x}E_0'\cos kz \tag{1}$$

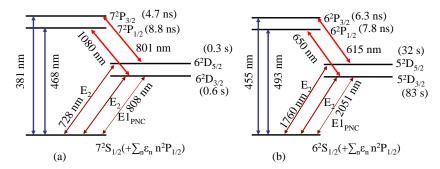


Fig. 1 Relevant energy levels of (a) Ra⁺ and (b) Ba⁺

$$E'' = i\hat{z}E_0''\sin kx,\tag{2}$$

where E_0' and E_0'' are the electric field amplitudes of the two lasers. An ion placed at the antinode of E' field will suffer PNC induced electric dipole light-shift while the ion placed at the node of E'' field, will show electric quadrupole light-shift. The quadrupole light-shifts of the Zeeman sublevels in the ground state due to the E'' field are of the same magnitude and direction. Therefore, E'' field will not lead to any change of the ground state Larmor frequency defined by the energy difference between the Zeeman sublevels of the ground state. On the contrary, the shifts due to E' field will increase the Larmor frequency. This change in Larmor frequency is proportional to the magnitude of the E' field.

In the experiment one measures the Larmor frequency with and without these laser fields. The difference of these two frequencies therefore, gives directly the APV light-shift $\Delta\omega_m^{PNC}$ which can be expressed as [1]

$$\Delta\omega_{m}^{PNC} \cong -Re \sum_{m'} (\Omega_{m'm}^{PNC*} \Omega_{m'm}^{quad} / \Omega_{m}^{quad}), \tag{3}$$

where $\Omega_{m'm}^{PNC*}$ and $\Omega_{m'm}^{quad}$ are the Rabi frequencies for PNC and quadrupole induced transitions which are respectively proportional to the electric field amplitude and field gradient of the standing wave lasers, $(\Omega_m^{quad})^2 \equiv \sum_{m'} |\Omega_{m'm}^{quad}|^2$; m,m' are the Zeeman sublevels of $S_{1/2}$ and $D_{3/2}$ states respectively. The distinguished advantage of this technique is that measurement of $\Delta\omega_m^{PNC}$ is free from any fluctuation in the laser frequency and other sources of quadrupole shift $(\Delta\omega_Q)$. The statistical uncertainty in the measurement of $E1_{PNC}$ is given by

$$\delta E1_{PNC} = \frac{\hbar}{E_0' f \sqrt{Nt\tau}} \tag{4}$$

where f is an efficiency factor that depends on experimental conditions, N and τ are the number of ions and coherence time respectively and t is the time of observation. Though N=1 in this experiment, longer coherence time improves the uncertainty in the measurement. Accurate determination of $E1_{PNC}$ from measured $\Delta\omega_m^{PNC}$ depends on precise determination of the electric fields E' and E'' at the position of the ion in

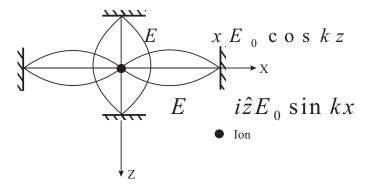


Fig. 2 A schematic diagram of a possible standing wave laser configuration to produce detectable APV light-shift on a single trapped Ra ion. The laser wave anti-node along z-axis generates a APV light-shift while the x-axis node produces a light-shift due to a quadrupole transition amplitude. These two light-shifts interfere to give the APV signal.

the trap which is a challenge of this experiment and is a major source of systematic uncertainty. Also placing the ion at the antinode of E' field or node of E'' field is a difficult task. Since PNC induced light-shift $(\Delta \omega_m^{PNC})$ is very small $(2\pi \times 5.3 \text{ cycles/s} \text{ for } E'_0 = 2 \times 10^6 \text{ V/m for Ra}^+)$, little fluctuations of the magnetic field resolving Zeeman sublevels, will worsen the accuracy of the result.

However, in the past decades several experimental techniques have been developed by which the above problems can be solved. One can manipulate the ion position with respect to the standing wave. Recently, a technique has been reported [16] by which the nodal point or the nodal line of the trap can be shifted upto few micrometers. Thus the ion can be placed on the geometrical line of the standing wave. Systematic uncertainty originating from inaccurate positioning of the ion with respect to the electric field of the laser has been determined in the following. Since the ion is cooled to Lamb - Dicke regime, its motion is confined within its de Broglie wavelength (λ_{de}), typically 50 nm for Ra⁺ and Ba⁺. The uncertainty in E' and E'' fields for antinodal and nodal positions respectively are

$$\frac{\Delta E'}{E'_0} \approx (1 - \cos k\lambda_{de}) \tag{5}$$

and

$$\frac{\Delta E''}{E_0''} \approx \sin k \lambda_{de} \tag{6}$$

These systematic uncertainties tabulated in Table 2, have been estimated from the Lamb - Dicke parameter. There are also some techniques for controlling magnetic field fluctuations. Recent improvement of high precision RF spectroscopic techniques [11, 17, 18, 19] opens up the possibility of success of the desired experiment in near future.

3 Radium ion as favored candidate and challenges

Atomic parity violation effect scales little faster than Z^3 [2] for heavier element. In $^{226}\mathrm{Ra}^+$ it is 20 times larger as compared to $^{137}\mathrm{Ba}^+$ [20] and 50 times larger than that of atomic Cesium [21]. That is why at first sight $^{226}\mathrm{Ra}^+$ is seemed to be a promising candidate though there are other advantages over Ba^+ . The most recent

Table 2 Some atomic properties and features of Ba⁺ and Ra⁺ related to APV experiment with single trapped and laser cooled ion. *Approximate Calculation for $Q_W/N = 0.9$, $E_0' = 2 \times 10^6$ V/m, f = 0.1, t = 24 hrs. †Calculated for $\lambda_{de} = 50$ nm.

Atomic properties	¹³⁸ Ba ⁺	$^{226}{ m Ra}^{+}$
Stability (neutral specis)	stable	1620 years $(T_{1/2})$
$E1_{PNC}$ in $iea_0(-Q_W/N) \times 10^{-11}$	2.46[20]	46.4 [22]
PNC light-shift $(\Delta \omega_m^{PNC}/2\pi)$ (Hz)	0.3	5.3
Coherence time (τ) (s)	82	0.6
*Statistical uncertainty $(\frac{\delta E1_{PNC}}{E1_{PNC}})$	0.1%	0.03%
†Systematic uncertainty from E' field (Eq. 5)	1.2%	7.1%
†Systematic uncertainty from E'' field (Eq. 6)	16%	37%
Quenching rate of $S_{1/2}(m = 1/2)[25]$	0.002	0.04
Quenching rate of $D_{3/2}(m=1/2)[25]$	0.0033	3.36
Quenching rate of $D_{3/2}(m = 3/2)[25]$	0.0004	0.48

calculation shows that the PNC amplitude present in ²²⁶Ra⁺ is 46.4 in the unit of $iea_0(-Q_W/N) \times 10^{-11}$ [22], where Q_W is the weak charge. In Table 2 the relevant atomic properties of ¹³⁸Ba⁺ and ²²⁶Ra⁺ have been compared. The lasers required for $^{226}\mathrm{Ra}^+$ are in visible and near infra-red region. Thus these lasers are available commercially as solid state diode lasers. Radium being a heavier element may be confined within smaller orbit than Barium as the Lamb - Dicke parameter is inversely proportional to the square root of mass of the ion. In addition, the known relative systematic uncertainties for Ra⁺ are three times smaller as compared to Ba⁺. The element has a large number of isotopes with significant stability, thus opening up the possibility of the experiment to extract the effect of nuclear structure in APV [23]. PNC amplitude $E1_{PNC}$ contains both nuclear spin dependent (NSD) and independent (NSI) parts [2]. From NSD part of $E1_{PNC}$, nuclear anapole moment can be measured [4]. However, in $S_{1/2} - D_{3/2}$ transition in Ra⁺ or Ba⁺, the contribution of NSD part is smaller by few orders than NSI part and hence determination of anapole moment is difficult. To avoid NSI part, a similar experiment explained above can be performed using $S_{1/2} - D_{5/2}$ transition of nuclear spin non-zero $(I \neq 0)$ isotopes of Ra⁺ or Ba⁺. PNC allowed $S_{1/2} - D_{5/2}$ transition in these isotopes contains only NSD part and may lead to a direct measurement of nuclear anapole moment. $^{227}\mathrm{Ra}^+$ is more favored candidate for an APV experiment than 137 Ba⁺ as PNC amplitude for $7S_{1/2} - 6D_{5/2}$ transition is 8 times larger in this isotope [24].

However, there are several disadvantages of choosing Ra^+ as a possible candidate. Trapping and cooling of Ra^+ has not been demonstrated so far. The lack of spectroscopic data on Ra^+ is also a problem. Theoretical calculation needs to be more accurate (below 1 %) in order to compare with the experimentally obtained data. The atomic structure of Radium is not well studied. Coherence time is smaller for Ra^+ (0.6s) which will reduce the signal to noise ratio. The systematic uncertainties originating from the determination of E' and E'' at the ion position are too large for Ra^+ and demand some special experimental techniques to eliminate those. The production of various isotopes of Radium for the study of nuclear structure effects on APV demands well established facilities.

At the KVI, Groningen such a facility has been developed [22,26] where some isotopes of Radium may be produced with an aim for performing APV experiment based on single trapped and laser cooled Ra $^+$. Atomic Ra has been successfully trapped

in a MOT and laser cooled [27] at Argonne National Laboratory in search of permanent electric dipole moment (EDM) in atoms. Thus there is hope for details spectroscopic data on Ra to be available shortly which will lead towards the implementation of APV experiment on Ra⁺.

4 Present status in our group

With an aim to perform high precision RF spectroscopy in search of APV, work has been started by our group RCAMOS at IACS. ¹³⁸Ba⁺ has been chosen initially as Barium is available commercially. A linear Paul trap has been designed. The repumping laser at 650 nm has been frequency stabilized using Pound - Drever - Hall locking technique [28] and frequency doubling of 986 nm laser [29] to produce cooling laser at 493 nm is processing.

Acknowledgements Part of this work is being supported by DST - SERC, India. P. Mandal and A. Sen are thankful to CSIR, India for entertaining fellowship during the research work. P. Mandal acknowledges the organizing committee of Laser 2009 Workshop, Poznan for sponsoring financial support to participate in the workshop.

References

- 1. Fortson, N.: Phys. Rev. Lett. 70, 2383 (1993)
- Bouchait, M. A., Bouchait, C.: Phys. Lett. B 48, 111 (1974), Rep. Prog. Phys. 60, 1351 (1997)
- Ginges, J. S. M., Flambaum, V. V.: Phys. Rep. 397, 63 (2004), Marciano, W. J., J. L. Rosner, J. L.: Phys. Rev. Lett. 65, 2963 (1990)
- Wood, C. S., Bennett, S. C., Cho, D., Masterson, B. P., Roberts, J. L., Tanner, C. E., Wieman, C. E.: Science 275, 1759 (1997)
- 5. Bennett, S. C., Wieman, C. E.: Phys. Rev. Lett. 82, 2484 (1999)
- Meekohof, D. M., Vetter, P., Majumdar, P. K., Lamoreaux, S. K., Fortson, E. N.: Phys. Rev. Lett. 71, 3442 (1993)
- Vetter, P. A., Meekhof, D. M., Majumder, P. K., Lamoreaux, S. K., Fortson, E. N.: Phys. Rev. Lett. 74, 2658 (1995)
- Macpherson, M. J. D., Zetie, K. P., Warrington, R. B., Stacey, D. N., Hoare, J. P.: Phys. Rev. Lett. 67, 2784 (1991)
- 9. DeMille, David: Phys. Rev. Lett. 74, 4165 (1995)
- 10. Bouchait, M. A.: Phys. Rev. Lett. 100, 123003 (2008)
- Koerber, T. W., Schacht, M., Nagourney, W., Fortson, E. N.: J. Phys. B: At. Mol. Opt. Phys. 36, 637 (2003)
- Tsigutkin, K., Dounas-Frazer, D., Family, A., Stalnaker, J. E., Yashchuk, V. V., Budker, D.: Phys. Rev. Lett. 103, 071601 (2009)
- 13. Langacker, P., Luo, M., Mann, A. K.: Rev. Mod. Phys. **64**, 87 (1992)
- 14. Majumdar, P. K., Tsai, L. L.: Phys. Rev. A 60, 267 (1999)
- 15. Leibfried, D., Blatt, R., Monroe, C., Wineland, D.: Rev. Mod. Phys. 75, 281 (2003)
- Herskind, P. F., Dantan, A., Albert, M., Marler, J. P., Drewsen, M.: J. Phys. B: At. Mol. Opt. Phys. 42, 154008 (2009)
- Sherman, J. A., Andalkar, A., Nagourney, W., Fortson, E. N.: Phys. Rev. A 78, 052514 (2008)
- Sherman, J. A., Koerber, T. W., Markhotok, A., Nagourney, W., Fortson, E. N.: Phys. Rev. Lett. 94, 243001 (2005)
- Koerber, T. W., Schacht, M. H., Hendrickson, K. R. G., Nagourney, W., Fortson, E. N.: Phys. Rev. Lett. 88, 143002 (2002)
- Sahoo, B. K., Chaudhuri, R., Das, B. P., Mukherjee, D.: Phys. Rev. Lett. 96, 163003 (2006)

- Dzuba, V. A., Flambaum, V. V., Ginges, J. S. M.: Phys. Rev. D 66, 076013 (2002)
 Wansbeek, L. W., Sahoo, B. K., Timmermans, R. G. E., Jungmann, K., Das, B. P., Mukherjee, D.: Phys. Rev. A 78, 050501(R) (2008)
- 23. Fortson, E. N., Pang, Y., Wilets, L.: Phys. Rev. Lett. 65, 2857 (1990)
- 24. Geetha, K. P., Singh, A. D., Das, B. P.: Phys. Rev. A 58, R16 (1998)
- 25. Koerber, T. W., Thesis, Doctor of Philosophy, University of Washington (2003)
 26. Shidling, P. D., Giri, G.S., vanderHoek, D.J., Jungmann, K., Kruithof, W., Onderwater, C.J.G., Sohani, M., Versolato, O.O., Willmann, L., Wilschut, H.W.: Nucl. Instrum. Meth. A 606, 305 (2009)
- 27. Guest, J. R., Scielzo, N. D., Ahmad, I., Bailey, K., Greene, J. P., Holt, R. J., Lu, Z. T., O'Connor, T. P., Potterveld, D. H.: Phys. Rev. Lett. 98, 093001 (2007)
- 28. Drever, R. W. P., Hall, J. L., Kowalski, F. V., Appl. Phys. B 31, 97 (1983)
- 29. Raab, C., Bolle, J., Oberst, H., Eschner, J., Schmidt-Kaler, F., Blatt, R.: Appl. Phys. B 67, 683 (1998)