

CONTEXT DIRECTED REVERSALS AND THE CILIATE DECRYPTOME

C.L. JANSEN, M. SCHEEPERS, S.L. SIMON AND E. TATUM

ABSTRACT. Prior studies of the efficiency of the block interchange (swap) and the reversal sorting operations on (signed) permutations identified specialized versions of these operations. These specialized operations are here called context directed reversal, abbreviated **cdr**, and context directed swap, abbreviated **cds**. Prior works have also characterized which (signed) permutations are sortable by **cdr** or by **cds**.

It is now known that when a permutation π is **cds** sortable in n steps, then any application of n consecutive applicable **cds** operations will sort π . Examples show that this is not the case for **cdr**. This phenomenon is the focus of this paper. It is proven that if a signed permutation is **cdr** sortable, then any **cdr** fixed point of it is **cds** sortable (the **cds** Rescue Theorem). The **cds** Rescue Theorem is discussed in the context of a mathematical model for ciliate micronuclear decryption.

It is also proven that though for a given permutation the number of **cdr** operations leading to different **cdr** fixed points may be different from each other, the parity of these two numbers is the same (the **cdr** Parity Theorem). This result provides a solution to two previously formulated decision problems regarding certain combinatorial games.

1. INTRODUCTION

The scope, efficiency and robustness of sorting algorithms are of high interest since sorting is used to prepare data for application of various information processing algorithms. The mathematical study of permutation sorting correspondingly has a long history.

Applications of permutation sorting in biological studies have been stimulated by the discovery that often the positions of genes on the chromosomes of an organism A is a permutation of the positions of the corresponding genes on the chromosomes of another organism B. Dobzhansky and Sturtevant [17] proposed using the minimum number of reversals required to sort the gene order of organism A to that of organism B as a measure of the evolutionary distance between A and B. Hannenhalli and Pevzner [11] found an efficient algorithm for determining the minimum number of reversals when a signed permutation describes this relation between genes in A and in B. That work identified a particular class of reversals, named *oriented reversals*, as instrumental to finding that minimum number. Other advances in the study of (oriented) reversals may be found in [2, 3, 18]. In an independent line of investigation this specific type of reversal has been postulated as one of the two sorting operations executed in ciliates during the process of converting a micronuclear precursor of a gene to its functional form. In [8] and other ciliate literature this special reversal operation has been denoted *hi*, an abbreviation for *hairpin inverted repeat*. We shall call this special reversal operation *context directed reversal*, abbreviated **cdr**.

Date: June 15, 2019.

2010 Mathematics Subject Classification. 05A05, 68P10, 91A46, 92D15, 97A20.

Key words and phrases. Permutation sorting, context directed reversals, context directed block interchanges, normal play game, misere game, ciliate decryptome.

Also block interchanges, and the special case of transpositions, have been studied as permutation sorting operations. In [5] Christie studied the problem of finding the minimum number of block interchanges required to sort one permutation to another. A certain constrained class of block interchanges, called *minimal block interchanges* in [5], emerged as instrumental for efficient sorting by block interchanges. Again, independently, the model for ciliate micronuclear decryption postulates a constrained block interchange operation as a sorting operation towards accomplishing decryption of micronuclear precursors of genes. In ciliate literature, see for example [8], these constrained block interchanges are called **dlad** operations. Some instances of the minimal block interchanges identified by Christie are indeed **dlad** operations. We shall refer to a **dlad** operation as a *context directed swap*, abbreviated **cds**.

The **cds** *Inevitability Theorem*, a result from [1], shows that if a permutation is **cds** sortable, then in fact indiscriminate applications of **cds** will successfully sort the permutation. The advantage for the ciliate decryptome is that such a sorting operation does not require additional resources to direct strategic choices for successful sorting by **cds**. However, the **cdr** sorting operation does not have this inevitability feature: Indiscriminately applying **cdr** sorting operations to a **cdr** sortable (or reverse **cdr** sortable) signed permutation may terminate in an unsuccessful sorting. This fact motivates several questions, including: (1) Do signed permutations that are **cdr** sortable, but not indiscriminately **cdr** sortable, actually occur in ciliates? (2) If “yes”, how does the ciliate decryptome succeed in sorting such signed permutations? and (3) What are the strategic features of the **cdr** sorting operation?

Regarding Question (1): [7] reports the DNA sequences for the micronuclear precursors of the Actin I gene for the ciliate species *Uroleptus pisces* 1 and *Uroleptus pisces* 2. The first is available from [9] under Accession Number AF508053.1, and is representable by the signed permutation [1, 3, -7, -5, 14, 2, 4, 6, 9, 12, -11, -8, 13, 15, -10]. The second is available from [9] under Accession Number AY373659.1, and is representable by the signed permutation [2, 4, 6, 9, 12, -11, -8, 13, 15, -10, 1, 3, -7, -5, 14]. Both of these are **cdr** sortable, yet some sequences of applications of **cdr** result in a **cdr** fixed point different from the identity. This fact would seem to suggest that unless the applications of **cdr** operations during micronuclear decryption follow a strategy not yet discovered in the laboratory, it should be expected that **cdr** fixed points other than the identity are encountered results of the decryption process.

Regarding Question (2): We prove the perhaps surprising result, Theorem 9.5, named the **cds** *Rescue Theorem*, that any **cdr** fixed point other than the identity permutation of a **cdr** sortable signed permutation is a **cds** sortable permutation. Thus, the **cds** Inevitability Theorem of [1] implies that the **cds** sorting operation plays a rescue role in the ciliate decryptome.

Regarding Question (3): In prior work [2, 11, 18], advances towards finding the minimal number of reversals to sort a permutation included finding an efficient strategy to select **cdr** operations that will sort a **cdr** sortable signed permutation. The **cds** Inevitability Theorem plus the **cds** Rescue Theorem provide yet another approach: Theorem 9.6 - the **cdr** *Steps Theorem*, describes how to determine the number of **cdr** applications required to sort a **cdr** sortable signed permutation without regard to making strategic sorting operation choices.

Different **cdr** fixed points of a given signed permutation are not necessarily reached in the same number of **cdr** sorting steps. We prove that the parity of the number of **cdr** operations required to reach a **cdr** fixed point is an invariant of each signed permutation - the **cdr** *Parity*

Theorem, Theorem 10.1. Using this result we find a linear time solution for the **cdr** Misere and the **cdr** Normal Play decision problems for combinatorial games featuring **cdr** that were defined in [1].

Our paper is organized as follows. After introducing basic terminology and the theoretical background information from prior work we prove the **cdr** Rescue Theorem and the **cdr** Steps Theorem in Section 9, and the **cdr** Parity Theorem in Section 10. Finally we discuss our results in the context of the ciliate micronuclear decryption model proposed in [14, 15].

2. NOTATION AND TERMINOLOGY

We consider both signed permutations and unsigned permutations. An unsigned permutation will simply be called a permutation. In either case we consider these as one-to-one and onto functions from the appropriate finite set to itself. For a permutation π the notation

$$(1) \quad \pi = [a_1, \dots, a_n]$$

denotes that the permutation π maps a_i to i . For a signed permutation π the notation in (1) denotes that the signed permutation π maps a_i to i and $-a_i$ to $-i$.

The definitions of the *context directed* sorting operations use the notion of a *pointer*: Consider a (signed) permutation $\alpha = [p_1, p_2, \dots, p_i, \dots, p_j, \dots, p_n]$. Consider the entry p_i of α and say p_i is the integer k . Then the *head pointer*, or simply *head* of p_i is the ordered pair $(|k|, |k| + 1)$, while the *tail pointer*, or simply *tail*, of p_i is the ordered pair $(|k| - 1, |k|)$.

In displays where pointer locations are emphasized we will use notation as follows $\alpha = [p_1, p_2, \dots, (k-1, k) p_i (k, k+1), \dots, p_j, \dots, p_n]$ when $p_i = |p_i| = k$, and

$$\alpha = [p_1, p_2, \dots, (k, k+1) p_i (k-1, k), \dots, p_j, \dots, p_n]$$

or alternately

$$\alpha = [p_1, p_2, \dots, {}^h p_i^t, \dots, p_j, \dots, p_n]$$

when $-p_i = |p_i| = k$.

3. THE ORIENTED OVERLAP GRAPH OF A SIGNED PERMUTATION

Consider a signed permutation $\alpha \in \mathbf{S}_n^\pm$. For each pointer $(i, i + 1)$ appearing in α , draw an arc between the head and the tail occurrence of this pointer. One possible scenario is depicted in Figure 1.



FIGURE 1. An arc between the head and tail occurrences of a pointer in α

The overlap graph $\mathcal{O}(\alpha) = (V, \mathcal{E})$ of signed permutation α has

- vertex set V , the set of pointers of α , and
- edge set \mathcal{E} , the set of pairs $\{p, q\}$ of vertices p and q for which the arcs associated with p and q have nonempty intersection.

Following [11, 18] we designate a vertex of $\mathcal{O}(\alpha)$ as *oriented* if the corresponding arc is between pointers of entries of opposite sign in α . In figures oriented vertices are denoted by filled circles, while unoriented vertices are denoted by unfilled circles.

Example 3.1. Constructing the overlap graph of the signed permutation $T = [1, -5, -2, 4, -3, 6]$.

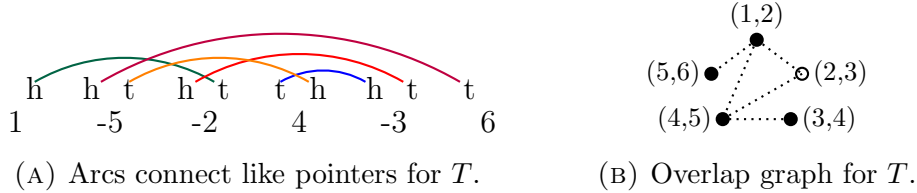


FIGURE 2. Construction of the overlap graph for T .

Let $\mathcal{G} = (V, \mathcal{E})$ be a graph. Declare vertices x and y of \mathcal{G} *in reach* if there are vertices x_0, x_1, \dots, x_m such that $x = x_0$ and $y = x_m$, and for each $i < m$ we have $\{x_i, x_{i+1}\} \in \mathcal{E}$. The “in reach” relation is an equivalence relation on the vertex set of \mathcal{G} . If an equivalence class of this relation has more than one element it is called a *component* of \mathcal{G} . If this equivalence relation has only one equivalence class, we say that \mathcal{G} is a *connected* graph. If (\mathcal{G}, f) is an oriented graph, then a component of \mathcal{G} is said to be an *oriented component* if some vertex belonging to the component is oriented. The member of an equivalence class with only one element is said to be an *isolated* vertex.

Example 3.2. The signed permutation $S = [-6, 3, -4, 2, 5, -1, 7, 9, 8, 10]$. The overlap graph of S follows:




FIGURE 3. Overlap graph for S .

The oriented graph in Figure 3 has an isolated vertex (that is oriented), an unoriented component, and an oriented component.

4. CONTEXT DIRECTED REVERSALS

Let a signed permutation α with entries x and y as well as a pointer $(i, i+1)$ be given. Suppose that the entries x and y of α each is associated with the pointer $(i, i+1)$ ¹. We define $\beta = \mathbf{cdr}_{(i,i+1)}(\alpha)$ by cases:

Case 1: $\alpha = [\dots, (i, i+1)x, \dots, y_{(i, i+1)}, \dots]$ or $\alpha = [\dots, x_{(i, i+1)}, \dots, (i, i+1)y, \dots]$

In this case $x \cdot y > 0$ ², and we define $\beta = \alpha$.

¹Thus, $(i, i+1)$ is the head pointer of one, and the tail pointer of the other, and $\{i, i+1\} = \{|x|, |y|\}$.

²In other words, x and y have the same sign.

Case 2: $\alpha = [\cdots, a, (i, i+1)\mathbf{x}, \dots, \mathbf{b}, (i, i+1)y, \cdots]$.

In this case β is obtained from α by reversing the order of all entries starting at x and ending at b , and changing the signs of these entries. Thus,

$$\beta = \mathbf{cdr}_{(i, i+1)}(\alpha) = [\cdots, a, -\mathbf{b}, \dots, -\mathbf{x}_{(i, i+1)}, (i, i+1)y, \cdots]$$

Case 3: $\alpha = [\cdots, x_{(i, i+1)}, \mathbf{a}, \dots, \mathbf{y}_{(i, i+1)}, b, \cdots]$.

In this case β is obtained from α by reversing the order of all entries starting at a and ending at y , and changing the signs of these entries. Thus,

$$\beta = \mathbf{cdr}_{(i, i+1)}(\alpha) = [\cdots, x_{(i, i+1)}, (i, i+1) - \mathbf{y}, \dots, -\mathbf{a}, b, \cdots]$$

Example 4.1. In the signed permutation $\pi = [-2, 1, -4, 3]$ the pointer (2, 3) is the head pointer of -2 and the tail pointer of 3 , entries with opposite sign. Thus the context directed reversal $\mathbf{cdr}_{(2,3)}$ is applicable to π , and $\mathbf{cdr}_{(2,3)}(\pi) = [4, -1, 2, 3]$.

Context directed reversals have been called *oriented reversals* in [11, 18], and **hi**, the hairpin inversion in [8] and related literature. A fundamental theorem from [11] implies

Theorem 4.2 (Hannenhalli-Pevzner). *If the overlap graph of the signed permutation α has no unoriented components, then α is sortable by applications of \mathbf{cdr} .*

Another fundamental theorem from [11] implies (see the remarks around [18] Theorem 2):

Theorem 4.3 (Hannenhalli-Pevzner). *If the signed permutation α is sortable by applications of \mathbf{cdr} , then all sequences of successive \mathbf{cdr} operations that sort α are of the same length.*

5. LOCAL COMPLEMENTATION OF ORIENTED GRAPHS, AND THE OPERATION \mathbf{gcdr}

The operation \mathbf{cdr} on a signed permutation can be simulated by a corresponding operation on the overlap graph of the signed permutation. This operation on arbitrary graphs, introduced in the prior work [2, 11, 18], is described next.

For a graph $\mathcal{G} = (V, \mathcal{E})$ and a vertex two-coloring $f : V \rightarrow \{0, 1\}$ the pair (\mathcal{G}, f) is said to be an *oriented graph*. Vertices v with $f(v) = 0$ are said to be *oriented vertices*, while the vertices v with $f(v) = 1$ are called *unoriented vertices*. For a given set S and an oriented graph (\mathcal{G}, f) we define the oriented graph

$$(\mathcal{G}', f') = \text{lc}((\mathcal{G}, f), S)$$

as follows:

- (1) $\mathcal{G}' = (V', \mathcal{E}')$, where $V' = V$ and $\mathcal{E}' = (\mathcal{E} \setminus [S]^2) \cup ([V \cap S]^2 \setminus \mathcal{E})$.
- (2) $f' : V' \rightarrow \{0, 1\}$ is defined by

$$f'(v) = \begin{cases} 1 - f(v) & \text{if } v \in S \\ f(v) & \text{otherwise} \end{cases}$$

The oriented graph (\mathcal{G}', f') is said to be the *S-local complement* of oriented graph (\mathcal{G}, f) . It is evident that when $S \cap V = \emptyset$, then $(\mathcal{G}, f) = \text{lc}((\mathcal{G}, f), S)$. Thus we may assume that $S \subseteq V$. An example of an oriented graph on seven vertices is given in Figure 4a. The resulting graph $\text{lc}((\mathcal{G}, f), S)$ is displayed in Figure 4b.

Let (\mathcal{G}, f) be an oriented graph. Consider a vertex p of \mathcal{G} . If p is not an oriented vertex of \mathcal{G} , then declare $(\mathcal{G}', f') = (\mathcal{G}, f)$. However, if p is an oriented vertex of \mathcal{G} , then define:

$$\mathbf{N}(p) = \{q : \{p, q\} \text{ is an edge of } \mathcal{G}\} \cup \{p\}.$$

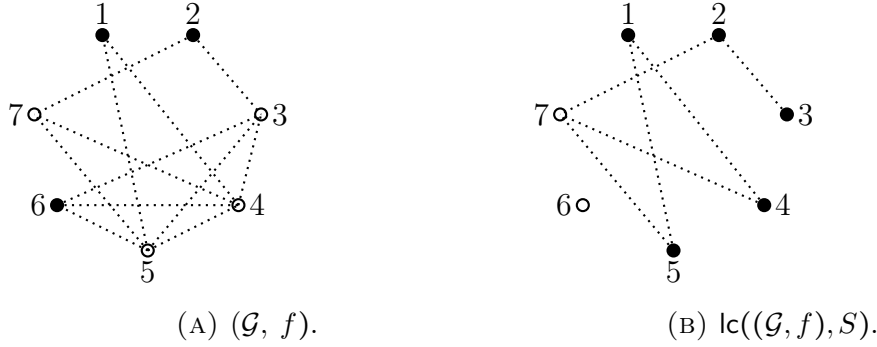


FIGURE 4. Oriented vertices marked in black. S is the set $\{3, 4, 5, 6\}$.

Finally, define

$$\mathbf{gcdr}((\mathcal{G}, f), p) = \text{lc}((\mathcal{G}, f), \mathbf{N}(p)).$$

In [18] the authors use the notation \mathcal{G}/p for $\mathbf{gcdr}((\mathcal{G}, f), p)$. Observe that if in \mathcal{G} the vertex p is oriented, then in $\mathbf{gcdr}((\mathcal{G}, f), p)$ the vertex p is unoriented and isolated.

6. SIMULATING **cdr** ON THE ORIENTED OVERLAP GRAPH OF A SIGNED PERMUTATION

We next relate an application of the **cdr** sorting operation on a signed permutation α to an application of **gcdr** on the oriented overlap graph of α .

Example 6.1. The signed permutation $\alpha = [3, -8, -2, 5, 1, -7, 4, 6]$.

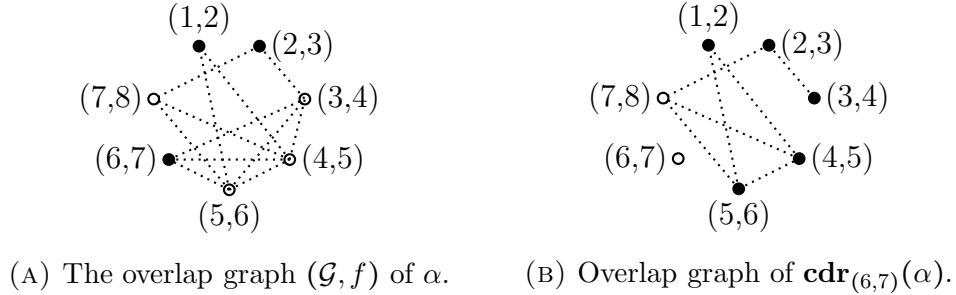


FIGURE 5. $\mathbf{cdr}_{(6,7)}(\alpha)$ in Figure 5b agrees with $\mathbf{gcdr}((G, f), (6, 7))$.

Consider \mathcal{M}_n , the set of oriented graphs on the set of n pointers associated with elements of S_n^\pm . Let

$$\Xi_n : S_n^\pm \longrightarrow \mathcal{M}_n$$

denote the map that associates with each signed permutation $\alpha \in S_n^\pm$ its corresponding oriented overlap graph. The following theorem has been proven in [11], and it shows that the diagram in Figure 6 commutes:

Theorem 6.2. *Let n be a positive integer and let α be a signed permutation in S_n^\pm and let p be a pointer of α . Then $\Xi_n(\mathbf{cdr}_p(\alpha)) = \mathbf{gcdr}(\Xi_n(\alpha), p)$.*

A good exposition of this result is given in Section 2 of [18].

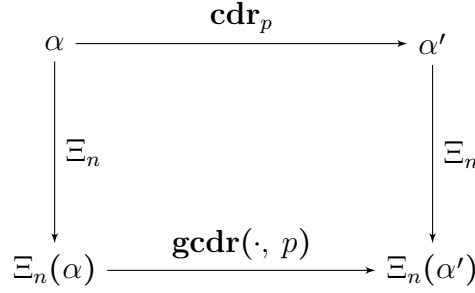


FIGURE 6

7. ORIENTED COMPONENTS OF GRAPHS AND \mathbf{gcdr} .

The following result, Theorem 1 of [18], generalizes Theorem 4 of [11] from the context of oriented graphs arising from signed permutations, to the general context of oriented graphs.

Theorem 7.1 (Fundamental Theorem of Oriented Graphs). *If each component of the oriented graph (\mathcal{G}, f) is oriented, then there exists an oriented vertex v of \mathcal{G} such that each component of $\mathbf{gcdr}((\mathcal{G}, f), v)$ is oriented.*

Let (\mathcal{G}, f) be a finite oriented graph, and let (v_1, \dots, v_k) be a sequence of vertices of \mathcal{G} . Define $(\mathcal{G}_1, f_1) = \mathbf{gcdr}((\mathcal{G}, f), v_1)$ and for $i < k$, $(\mathcal{G}_{i+1}, f_{i+1}) = \mathbf{gcdr}((\mathcal{G}_i, f_i), v_{i+1})$. Following [18] we say that (v_1, \dots, v_k) is a *sequence of oriented vertices* if v_1 is an oriented vertex of (\mathcal{G}, f) and for each $i < k$, v_{i+1} is an oriented vertex of (\mathcal{G}_i, f_i) . An oriented sequence of vertices is a *maximal sequence* if (\mathcal{G}_k, f_k) has no oriented vertices. It is a *total sequence* if (\mathcal{G}_k, f_k) has only isolated, unoriented, vertices.

Observe that a total sequence is a maximal sequence, but a maximal sequence need not be a total sequence. Theorem 7.1 implies

Corollary 7.2. *If each component of the oriented finite graph (\mathcal{G}, f) is oriented, then there is a total sequence of oriented vertices in \mathcal{G} .*

Problem 7.3. *Let (\mathcal{G}, f) be a connected oriented graph with an oriented vertex. Are all total sequences of oriented vertices for \mathcal{G} of the same length?*

8. THE \mathbf{cdr} REVISION THEOREM.

We now reformulate Theorem 3 from [18], named here the \mathbf{cdr} *Revision Theorem*, for our purposes. Throughout this section we assume that (\mathcal{G}, f) is an oriented graph. We also allow for the presence of a number of isolated vertices. The vertex set of \mathcal{G} is V , while the edge set is E .

Theorem 8.1 (\mathbf{cdr} Revision Theorem, [18]). *Let (\mathcal{G}, f) be a graph which has a unique component. Assume that this component is oriented. If $(v_1, v_2, \dots, v_{m-1}, v_m)$ is a maximal, but not total, sequence of oriented vertices for the graph (\mathcal{G}, f) , then there exists an $\ell < m$ and a sequence (r_1, r_2) of vertices of \mathcal{G} such that:*

- (1) $(v_1, \dots, v_\ell, r_1, r_2, v_{\ell+1}, \dots, v_m)$ is a maximal oriented sequence in (\mathcal{G}, f) , and
- (2) for each j such that $\ell < j \leq m$ neither r_1 , nor r_2 is an oriented vertex in any of the graphs $\mathbf{gcdr}(\mathbf{gcdr}(\dots \mathbf{gcdr}((\mathcal{G}, f), v_1), \dots, v_{j-1}), v_j)$.

Repeated applications of the \mathbf{cdr} Revision Theorem then leads to

Corollary 8.2. *Let (\mathcal{G}, f) be a graph that has a unique component. If this component is oriented and $(v_1, v_2, \dots, v_{m-1}, v_m)$ is a maximal, but not total, sequence of oriented vertices for (\mathcal{G}, f) , then there exists an $\ell < m$ and a sequence $(r_1, r_2, \dots, r_{2k-1}, r_{2k})$ of vertices of \mathcal{G} such that $(v_1, \dots, v_\ell, r_1, r_2, \dots, r_{2k-1}, r_{2k}, v_{\ell+1}, \dots, v_m)$ is a total oriented sequence in (\mathcal{G}, f) .*

Example 8.3. Consider the signed permutation $\pi = [1, 3, 5, -2, -6, 4]$. The oriented se-

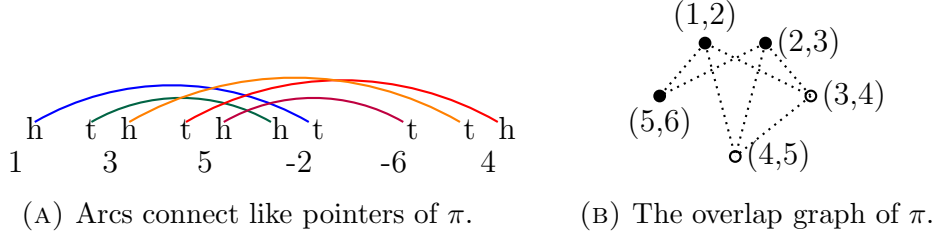


FIGURE 7. Constructing the overlap graph of π

quence $((5, 6))$ is maximal. Each two-term sequence in the first column of Figure 8 is an oriented sequence in the overlap graph of π , while the corresponding three term sequence in the second column is maximal. By Theorem 8.1, for each of these maximal three-term

$((1, 2), (2, 3))$	$((1, 2), (2, 3), (5, 6))$
$((1, 2), (3, 4))$	$((1, 2), (3, 4), (5, 6))$
$((1, 2), (4, 5))$	$((1, 2), (4, 5), (5, 6))$
$((2, 3), (1, 2))$	$((2, 3), (1, 2), (5, 6))$
$((2, 3), (3, 4))$	$((2, 3), (3, 4), (5, 6))$
$((2, 3), (4, 5))$	$((2, 3), (4, 5), (5, 6))$

FIGURE 8. Oriented, and corresponding maximal sequences for π .

sequences there is a pair of vertices of the overlap graph that can be inserted right before the term $(5, 6)$ to produce a five-term maximal oriented sequence. One example of such a five-term maximal sequence, $((1, 2), (3, 4), (4, 5), (2, 3), (5, 6))$, is a total sequence for the overlap graph of π . By Theorem 4.3 all total sequences for the overlap graph of π are of length 5.

9. THE **cds** RESCUE THEOREM.

As can be gleaned from Example 8.3, even when a signed permutation is **cdr**-sortable, not all applications of **cdr**-sorting operations successfully sort the permutation. A failed sorting during micronuclear decryption in a ciliate could have devastating consequences for the organism. In this section we prove that the hypothesized presence of also the **cds** sorting operation is highly advantageous for accomplishing successful sorting of signed permutations in the organism.

For the reader's convenience we review information regarding **cds**. Suppose α has a pair of pointers $p = (x, x + 1)$, $q = (y, y + 1)$. Then $\beta = \mathbf{cds}_{p, q}(\alpha)$, the result of the sorting operation is as follows:

Case 1: If the pointers do not appear in the order $p \dots q \dots p \dots q$, or in the order $q \dots p \dots q \dots p$ we define $\beta = \mathbf{cds}_{p, q}(\alpha) = \alpha$.

Case 2: If $\alpha = [\dots, a, \mathbf{p}\mathbf{x} + \mathbf{1}, \mathbf{b}, \dots, \mathbf{c}, \mathbf{y}_q, d, \dots, e, x_p, \mathbf{f}, \dots, \mathbf{g}, qy + 1, h, \dots]$, define

$$\beta = \mathbf{c}\mathbf{d}\mathbf{s}_{p,q}(\alpha) = [\dots, a, \mathbf{f}, \dots, \mathbf{g}, d, \dots, e, x_p, \mathbf{p}\mathbf{x} + \mathbf{1}, \mathbf{b}, \dots, \mathbf{c}, \mathbf{y}_q, qy + 1, h, \dots]$$

Case 3: If $\alpha = [\dots, a, x_p, \mathbf{b}, \dots, \mathbf{c}, \mathbf{y}_q, d, \dots, e, \mathbf{p}\mathbf{x} + \mathbf{1}, \mathbf{f}, \dots, \mathbf{g}, qy + 1, h, \dots]$, define

$$\beta = \mathbf{c}\mathbf{d}\mathbf{s}_{p,q}(\alpha) = [\dots, a, x_p, \mathbf{p}\mathbf{x} + \mathbf{1}, \mathbf{f}, \dots, \mathbf{g}, d, \dots, e, \mathbf{b}, \dots, \mathbf{c}, \mathbf{y}_q, qy + 1, h, \dots]$$

Case 4: If $\alpha = [\dots, a, x_p, \mathbf{b}, \dots, \mathbf{c}, qy + 1, d, \dots, e, \mathbf{p}\mathbf{x} + \mathbf{1}, \mathbf{f}, \dots, \mathbf{g}, \mathbf{y}_q, h, \dots]$, define

$$\beta = \mathbf{c}\mathbf{d}\mathbf{s}_{p,q}(\alpha) = [\dots, a, x_p, \mathbf{p}\mathbf{x} + \mathbf{1}, \mathbf{f}, \dots, \mathbf{g}, \mathbf{y}_q, qy + 1, d, \dots, e, \mathbf{b}, \dots, \mathbf{c}, h, \dots]$$

Case 5: If $\alpha = [\dots, a, \mathbf{p}\mathbf{x} + \mathbf{1}, \mathbf{b}, \dots, \mathbf{c}, qy + 1, d, \dots, e, x_p, \mathbf{f}, \dots, \mathbf{g}, \mathbf{y}_q, h, \dots]$, define

$$\beta = \mathbf{c}\mathbf{d}\mathbf{s}_{p,q}(\alpha) = [\dots, a, \mathbf{f}, \dots, \mathbf{g}, \mathbf{y}_q, qy + 1, d, \dots, e, x_p, \mathbf{p}\mathbf{x} + \mathbf{1}, \mathbf{b}, \dots, \mathbf{c}, h, \dots]$$

Example 9.1. We perform $\mathbf{c}\mathbf{d}\mathbf{s}_{(3,4),(6,7)}$ on $\alpha = [3, 6, 5, 2, 4, 8, 1, 7]$: Label α with the relevant pointers: $\alpha = [3_{(3,4)}, \mathbf{6}_{(6,7)}, 5, 2, \mathbf{4}_{(3,4)}, \mathbf{8}, \mathbf{1}_{(6,7)}, 7]$. Performing the swap yields $\beta = [3, \mathbf{4}, \mathbf{8}, \mathbf{1}, 5, 2, \mathbf{6}, 7]$. Both 3, 4 and 6, 7 are now adjacent in β .

Lemma 9.2 (The $\mathbf{cdr}\text{-}\mathbf{c}\mathbf{d}\mathbf{s}$ Lemma). *Let a , b , and c be pointers in a signed permutation π . Assume that $\beta = \mathbf{cdr}_c \circ \mathbf{cdr}_b \circ \mathbf{cdr}_a(\pi)$. Also assume that neither \mathbf{cdr}_a , nor \mathbf{cdr}_b applies to $\gamma = \mathbf{cdr}_c(\pi)$. Then $\mathbf{c}\mathbf{d}\mathbf{s}_{(a,b)}$ applies to γ and $\beta = \mathbf{c}\mathbf{d}\mathbf{s}_{(a,b)}(\gamma)$.*

Proof. By hypothesis neither \mathbf{cdr}_a nor \mathbf{cdr}_b applies to $\gamma = \mathbf{cdr}_c(\pi)$. Thus in γ all occurrences of the pointer a are of the same sign, and similarly for the pointer b . As \mathbf{cdr}_a applies to the signed permutation π , the two occurrences of pointer a in π have opposite signs. Thus in π one of these occurrences, and not both, of a is flanked by pointer c , as depicted in Figure 9.




FIGURE 9. Pointers a and c in signed permutation π .

Figure 9 depicts one of eight configurations regarding placement of and signs on a and c . We shall give the argument for this depiction, leaving the similar arguments for the other cases to the reader. Now consider the possible placements of the pointer b . There are three cases, depicted in Figure 10. We explain the first case, leaving the other two to the reader.

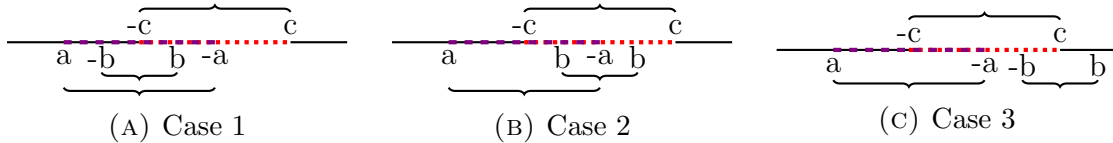


FIGURE 10. Three general cases for placement of pointers a , b and c in π .

Case 1 of Figure 10: We write π as the concatenation

$$\pi = \pi_1 \frown \pi_2 \frown \pi_3 \frown \pi_4 \frown \pi_5 \frown \pi_6 \frown \pi_7$$

where: π_1 is the segment up to and including pointer a , π_2 is the segment from pointer a up to and including pointer $-b$, π_3 is the segment from pointer $-b$ up to and including pointer $-c$, π_4 is the segment from pointer $-c$ up to and including pointer b , π_5 is the segment

from pointer b up to and including pointer $-a$, π_6 is the segment from pointer $-a$ up to and including pointer c , and π_7 is the final segment.

Applying \mathbf{cdr}_a produces $\pi_1 \frown -\pi_5 \frown -\pi_4 \frown -\pi_3 \frown -\pi_2 \frown \pi_6 \frown \pi_7$. Then applying \mathbf{cdr}_b produces $\pi_1 \frown -\pi_5 \frown \pi_3 \frown \pi_4 \frown -\pi_2 \frown \pi_6 \frown \pi_7$. Finally applying \mathbf{cdr}_c produces

$$\beta = \pi_1 \frown -\pi_5 \frown \pi_3 \frown -\pi_6 \frown \pi_2 \frown -\pi_4 \frown \pi_7.$$

On the other hand, first applying \mathbf{cdr}_c to π produces

$$\gamma = \pi_1 \frown \pi_2 \frown \pi_3 \frown -\pi_6 \frown -\pi_5 \frown -\pi_4 \frown \pi_7.$$

By tracking the movement of the pointers a and b and their signs in this step, we see that the segments π_2 and π_5 are exchanged when $\mathbf{cds}_{a,b}$ is applied to γ , producing β .

Cases 2 and 3 of Figure 10 are treated similarly: Partition π into the seven corresponding segments, and then track the movement of the pointers as the sorting operations are applied. \square

Example 8.3 continued. Application of $\mathbf{cdr}_{(5,6)}$ to $\pi = [1, 3, 5, -2, -6, 4]$ produces $\gamma = [1, 3, 5, 6, 2, 4]$, to which no further context directed reversals can be applied. This corresponds to $((5,6))$ being a maximal oriented sequence in the overlap graph of π . The three term oriented sequence $((1,2), (2,3), (5,6))$ is also maximal, and applying \mathbf{cdr} for these pointers in the order listed in the sequence produces $\delta = [1, 2, 3, 5, 6, 4]$. Observe that $\mathbf{cds}_{(1,2),(2,3)}$ is applicable to γ , and that $\delta = \mathbf{cds}_{(1,2),(2,3)}(\gamma)$.

Lemma 9.2 combined with the \mathbf{cdr} Revision Theorem, Theorem 8.1, and its corollary, leads to the \mathbf{cds} Rescue Theorem. In preparation for the proof of this theorem we first give the following two lemmas:

Lemma 9.3. *Let $w \in V$ be an oriented vertex of (\mathcal{G}, f) . The following are equivalent:*

- (1) *(w) is a maximal oriented sequence.*
- (2) *A vertex v of (\mathcal{G}, f) is oriented if, and only if, $\{w, v\}$ is an edge of (\mathcal{G}, f) .*

Proof. (1) \Rightarrow (2): Assume that (w) is a maximal oriented sequence. Consider any $v \notin N(w)$. Then the orientation of v in the graph $(\mathcal{G}_1, f_1) = \mathbf{gcdr}((\mathcal{G}, f), w)$ is unchanged from its orientation in (\mathcal{G}, f) . As (w) is a maximal sequence of oriented vertices, it follows that v is unoriented in (\mathcal{G}_1, f_1) , and thus in (\mathcal{G}, f) . For the rest of (2), we assume that vertex v is not oriented in (\mathcal{G}, f) . If v were an element of $N(w)$, then in (\mathcal{G}_1, f_1) v would be an oriented vertex. But this contradicts the maximality of (w) .

(2) \Rightarrow (1): Assume that, contrary to (2), there is an oriented vertex v of (\mathcal{G}, f) such that $\{v, w\}$ is not an edge of \mathcal{G} . Then v is still an oriented vertex in (\mathcal{G}_1, f_1) , whence the oriented sequence (w) is not maximal. \square

It follows that if (w) is a maximal sequence in an oriented graph, then no sequence of the form (a, w) of vertices of the oriented graph can be an oriented sequence. Moreover, if an oriented graph has a maximal sequence (w) , then only one of its components is oriented.

Lemma 9.4. *Let w be a vertex in the oriented graph (\mathcal{G}, f) . If (w) is a maximal sequence, then any oriented sequence of the form (u, v, w) of (\mathcal{G}, f) is maximal.*



Proof. Assume that there is an oriented sequence (u, v, w) that is not maximal. Choose a vertex x such that (u, v, w, x) is an oriented sequence. Put $(\mathcal{G}_1, f_1) = \mathbf{gcdr}((\mathcal{G}, f), u)$, $(\mathcal{G}_2, f_2) = \mathbf{gcdr}((\mathcal{G}_1, f_1), v)$, $(\mathcal{G}_3, f_3) = \mathbf{gcdr}((\mathcal{G}_2, f_2), w)$. As u is an oriented vertex of (\mathcal{G}, f) (by hypothesis) Lemma 9.3 implies:

$$(2) \quad w \in N(u) \text{ in } (\mathcal{G}, f).$$

But then w is unoriented in (\mathcal{G}_1, f_1) , while it is oriented in (\mathcal{G}_2, f_2) , implying

$$(3) \quad w \in N(v) \text{ in } (\mathcal{G}_1, f_1).$$

Suppose that $v \notin N(u)$ in (\mathcal{G}, f) . Then as the orientation of v in (\mathcal{G}_1, f_1) is the same as its orientation in (\mathcal{G}, f) , we find that v is an oriented vertex of (\mathcal{G}, f) and thus in $N(w)$, by Lemma 9.3. If, on the other hand, $v \in N(u)$ in (\mathcal{G}, f) , then as the orientation of v in (\mathcal{G}_1, f_1) is opposite to its orientation in (\mathcal{G}, f) , we find that v is an unoriented vertex of (\mathcal{G}, f) and thus not a member of $N(w)$, by Lemma 9.3. Thus, we must consider the following two cases, (A) and (B):



Case (A), $v \notin N(u)$: There are two subcases regarding x :

Case 1: $x \in N(w)$: By Lemma 9.3 x is an oriented vertex in (\mathcal{G}, f) . We consider the four possibilities $x \notin N(u) \cup N(v)$, $x \in N(u) \setminus N(v)$, $x \in N(v) \setminus N(u)$ and $x \in N(v) \cap N(u)$.

- (1) $x \notin N(u) \cup N(v)$: In this case x is oriented in (\mathcal{G}_2, f_2) and still has an edge with w , so that x is unoriented in (\mathcal{G}_3, f_3) .
- (2) $x \in N(u) \setminus N(v)$: Now u , w and x are oriented and pairwise have an edge, so that in (\mathcal{G}_1, f_1) these three vertices are unoriented and x has no edge with any of u , v or w . But then x is unoriented also in (\mathcal{G}_3, f_3) .
- (3) $x \in N(v) \setminus N(u)$: In this case in (\mathcal{G}_1, f_1) the vertices x , v and w pairwise have edges, w is unoriented and v and x are oriented. But then in (\mathcal{G}_2, f_2) there is no edge among any two of the vertices x , w and v , and x is unoriented. It follows that x is unoriented also in (\mathcal{G}_3, f_3) .
- (4) $x \in N(u) \cap N(v)$: In this case the sets of vertices $\{u, x, w\}$ and $\{v, x, w\}$ each pairwise has edges in (\mathcal{G}, f) , and all are oriented vertices. Then in (\mathcal{G}_1, f_1) the edges $\{x, v\}$ and $\{w, v\}$ are still present, but x and w are both unoriented while v is oriented. Thus in (\mathcal{G}_2, f_2) w and x are oriented and there is an edge $\{w, x\}$. But then x is unoriented in (\mathcal{G}_3, f_3) .

Case 2: $x \notin N(w)$ Similarly, a consideration of cases shows that also in this case we would have a contradiction with the assumption that (u, v, w, x) is an oriented sequence.

- (1) $x \notin N(u) \cup N(v)$: In this case x is unoriented in (\mathcal{G}_3, f_3) .

- (2) $x \in N(u) \setminus N(v)$: Then x is oriented in (\mathcal{G}_1, f_1) and a member of $N(w)$ of the now unoriented w . As we are in case (A), also $v \in N(w)$ and v is oriented. But then in (\mathcal{G}_2, f_2) both w and x are oriented and $\{w, x\}$ is an edge in (\mathcal{G}_2, f_2) . It follows that x is unoriented in (\mathcal{G}_3, f_3) .
- (3) $x \in N(v) \setminus N(u)$: Now in (\mathcal{G}_1, f_1) x is still a member of $N(v)$ and unoriented, so that in (\mathcal{G}_2, f_2) both x and w are oriented and $\{w, x\}$ is an edge. But then x is unoriented in (\mathcal{G}_3, f_3) .
- (4) $x \in N(u) \cap N(v)$: In (\mathcal{G}_1, f_1) x and v are oriented while w is unoriented, and there is an edge between any two of $\{w, x, v\}$. But then in (\mathcal{G}_2, f_2) x is unoriented, and there is no edge between w and x . It follows that in (\mathcal{G}_3, f_3) , x is unoriented.

This analysis shows that when v is not in $N(u)$ in (\mathcal{G}, f) , then (u, v, w, x) is not an oriented sequence.

Also in Case (B) a similar case analysis exhibits a contradiction with the assumption that (u, v, w, x) is an oriented sequence.

Thus, existence of a non-maximal oriented sequence (u, v, w) leads to a contradiction. \square

Theorem 9.5 (The **cds** Rescue Theorem). *Let π be a **cds**-sortable signed permutation. Then all **cds** fixed points of π are **cds**-sortable.*

Proof. Let π be a **cds** sortable signed permutation. Then the overlap graph of π has no unoriented components. We prove this result by induction on the positive integer n for which π is a member of \mathbf{S}_n^\pm . For $n = 1$ there is nothing to prove.

Thus, assume $n > 1$ and that the statement of the theorem has been confirmed for all $k < n$. Let $\pi \in \mathbf{S}_n^\pm$ be a **cds**-sortable permutation with no adjacencies, and with some (non-sorted) **cds**-fixed point β . Consider an oriented sequence (a_1, \dots, a_m) of pointers used successively to obtain β from π .

Case 1: $m = 1$. Then (a_1) is a maximal oriented sequence for the oriented overlap graph (\mathcal{G}, f) associated with π . Now by the Fundamental Theorem of Oriented Graphs, Theorem 7.1, choose an oriented vertex r_1 of π such that the overlap graph of $\gamma_1 = \mathbf{cds}_{r_1}(\pi)$ has no unoriented components, and then choose an oriented vertex r_2 of γ_1 so that the overlap graph of $\gamma_2 = \mathbf{cds}_{r_2}(\gamma_1)$ has no unoriented components. Then γ_2 is **cds** sortable and by Lemma 9.4 (r_1, r_2, a_1) is a maximal oriented sequence of pointers for π , whence (a_1) is a maximal oriented sequence of pointers for γ_2 . Now γ_2 has at least two adjacencies. Collapsing these adjacencies produces a signed permutation γ_2^* which has a maximal oriented sequence (a_1^*) of pointers, and is a member of \mathbf{S}_k^\pm for a $k < n$. Applying $\mathbf{cds}_{a_1^*}$ to γ_2^* produces a **cds** fixed point δ^* of γ_2^* which, by the induction hypothesis, is **cds** sortable. Reinstating the adjacencies we find that δ is a **cds** fixed point of $\mathbf{cds}_{a_1}(\gamma_2)$, and is **cds** sortable. However, with $\beta = \mathbf{cds}_{a_1}(\pi)$, we have by Lemma 9.2 that $\delta = \mathbf{cds}_{r_1, r_2}(\beta)$, and it follows that β is **cds** sortable.

Case 2: $m > 1$. The induction hypothesis is that the statement is true for permutations δ in \mathbf{S}_k^\pm , $k < n$, and all oriented sequences.

Subcase 2 (a): The overlap graph of $\pi_1 = \mathbf{cds}_{a_1}(\pi)$ has no unoriented component. In this case, as π_1 has an adjacency, we may reduce π_1 through collapsing the adjacency, to an equivalent permutation π_1^* in \mathbf{S}_{n-1}^\pm in which the oriented sequence corresponding to (a_2, \dots, a_m) sorts the equivalent permutation to the fixed point β^* corresponding to β under the same collapse of the same adjacency. By the induction hypothesis β^* is **cds**-sortable, and thus β is **cds**-sortable.

Subcase 2 (b): The overlap graph of $\pi_1 = \mathbf{cdr}_{a_1}(\pi)$ has an unoriented component. Restrict attention to the set of those vertices of the overlap graph of π that appear in the unoriented components of the overlap graph of π_1 , together with the vertex a_1 . Let this set of vertices be V_1 . The vertex subgraph of (\mathcal{G}_1, f_1) the oriented graph of π induced by the set of vertices V_1 is an oriented graph which has no unoriented components, and (a_1) is a maximal sequence in this subgraph. By the Fundamental Theorem of Oriented Graphs, Theorem 7.1, we find an oriented vertex $r_1 \in V_1$ such that $(\mathcal{G}_2, f_2) = \mathbf{gcdr}((\mathcal{G}_1, f_1), r_1)$ has no unoriented components. Observe that $r_1 \neq a_1$, and that in the latter graph a_1 is an unoriented vertex. By yet another application of the Fundamental Theorem of Oriented graphs we find a second vertex $r_2 \in V_1 \setminus \{r_1\}$, oriented in (\mathcal{G}_2, f_2) , such that $\mathbf{gcdr}((\mathcal{G}_2, f_2), r_2)$ has no unoriented components.

By Lemma 9.4 the sequence (r_1, r_2, a_1) is maximal in (\mathcal{G}_1, f_1) . Since the sequence (r_1, r_2) produces no unoriented components in this graph, the argument in the proof of Theorem 3 of [18] shows that this sequence, also oriented in the overlap graph of π , produces no unoriented components from the overlap graph of π .

Consider $\gamma_1 = \mathbf{cdr}_{r_1}(\pi)$. Then γ_1 is an element of \mathbf{S}_n^\pm with an adjacency, and the overlap graph of γ_1 has no unoriented components. By the induction hypothesis, and the argument in Subcase 2 (a), the \mathbf{cdr} fixed point of γ_1 arising from applications of \mathbf{cdr} using the sequence of pointers (r_2, a_1, \dots, a_m) is \mathbf{cds} -sortable. By Lemma 9.2 the result of applying the sequence of \mathbf{cdr} operations corresponding to $(r_1, r_2, a_1, \dots, a_m)$ to π results in $\mathbf{cds}_{r_1, r_2}(\beta)$. As the latter is \mathbf{cds} -sortable, so is β .

This completes the proof. \square

Example 8.3 continued. We illustrate Theorem 9.5 with $\pi = [1, 3, 5, -2, -6, 4]$.

As noted earlier, π is \mathbf{cdr} sortable and application of $\mathbf{cdr}_{(5,6)}$ to π produces $\gamma = [1, 3, 5, 6, 2, 4]$ to which no further \mathbf{cdr} can be applied. Observe that $\mathbf{cds}_{(1,2),(2,3)}$ is applicable to γ , and that $\delta = [1, 2, 3, 5, 6, 4] = \mathbf{cds}_{(1,2),(2,3)}(\gamma)$. Next, $\mathbf{cds}_{(3,4),(4,5)}$ is applicable to δ and produces the identity permutation. The \mathbf{cdr} fixed point γ of the signed permutation π is \mathbf{cds} sortable.

As a second application of these methods and results we find:

Theorem 9.6 (cdr Steps Theorem). *Let π be a \mathbf{cdr} sortable signed permutation. Suppose that k applications of \mathbf{cdr} produces a \mathbf{cds} fixed point β of π , and that m applications of \mathbf{cds} to β results in the identity permutation. Then π is \mathbf{cdr} sortable by $k + 2m$ applications of \mathbf{cdr} .*

Thus, the number of applications of \mathbf{cdr} required to sort a \mathbf{cdr} sortable signed permutation can be computed by indiscriminate applications of \mathbf{cdr} and \mathbf{cds} .

Theorem 9.6 also finally explains the 2-to-1 ratio in \mathbf{cdr} and \mathbf{cds} operations observed in [13] in constructing phylogenies among different Muller elements for several species of fruitflies, and justifies using this ratio in constructing distance matrices towards the phylogenetic analysis - see pp. 14-15, footnote 11 and for example Figures 9 and 10 of [13].

10. THE \mathbf{cdr} PARITY THEOREM AND COMBINATORIAL GAMES

It has been proven in [1] that for each permutation, if two sequences of applications of \mathbf{cds} lead to a \mathbf{cds} fixed point, then these two sequences have the same length. This fails for the sorting operation \mathbf{cdr} . However, for \mathbf{cdr} the parity of the lengths of sequences of applications of \mathbf{cdr} leading to \mathbf{cdr} fixed points of a given permutation π is an invariant.

Theorem 10.1 (The **cdr** Parity Theorem). *For each signed permutation π , the lengths of maximal sequences of pointers are of the same parity.*

Proof. Let a signed permutation $\alpha \in S_n^\pm$ be given.

Case 1: α is **cdr** sortable: First note that any two total sequences of oriented vertices of the corresponding overlap graph are of the same length, by Theorem 4.3. Consider two sequences of pointers, say S_1, S_2 , that each is maximal. Applications of **cdr** for these pointers thus result in **cdr**-fixed points β_1 and β_2 respectively. By Corollary 8.2 we can extend each of S_1 and S_2 individually by two pointers at a time until a total sequence of pointers is reached, meaning the identity permutation results from applications of **cdr**. By adding an even number of terms to a sequence, we do not change the parity of the lengths of these sequences. Thus, as the two sequences S_1', S_2' which sort the permutation are the same length, and thus these lengths have same parity, also the lengths of S_1 and S_2 are the same parity.

Case 2: α is not **cdr**-sortable. By Theorem 4.2 the overlap graph of α has unoriented components. The only pointers to which **cdr** can be applied are vertices in the oriented components of the overlap graph of α . Consider some α' that has the same move graph as α without the unoriented component. Then α' has the same sequences of moves possible as α . As α' does not have an unoriented component, Case 1 applies, whence lengths of all sequences for α' are of the same parity. \square

Example 8.3 provides an illustration of the **cdr** parity phenomenon: **cdr** fixed points are reached after 1, 3 or 5 applications of **cdr**. The **cdr** Parity Theorem can also be applied to a question about combinatorial games based on **cdr**, defined for signed permutations in [1].

In the oriented graph context these games are defined as follows: Let an oriented graph (\mathcal{G}, f) on a finite set of vertices be given. Player ONE starts the game by selecting an oriented vertex o_1 and computing the graph $(\mathcal{G}_1, f_1) = \mathbf{gcdr}((\mathcal{G}, f), o_1)$. Then player TWO selects an oriented vertex t_1 of (\mathcal{G}_1, f_1) and computes the graph $(\mathcal{G}_2, f_2) = \mathbf{gcdr}((\mathcal{G}_1, f_1), t_1)$, and so on. The game continues until no more legal moves are possible - *i.e.*, there are no more oriented vertices left in the graph.

The *normal play* rule version of the game is denoted $\mathbf{N}((\mathcal{G}, f), \mathbf{gcdr})$. In this game, the player able to make the last legal move wins. In the special case when the graph (\mathcal{G}, f) is the oriented overlap graph of a signed permutation α , this game is denoted $\mathbf{N}(\alpha, \mathbf{cdr})$. In the *misere play* version, the player making the last legal move loses. The corresponding notation for the misere play games is $\mathbf{M}((\mathcal{G}, f), \mathbf{gcdr})$ or $\mathbf{M}(\alpha, \mathbf{cdr})$.

Thus, the normal and misere version of the **cdr** game on signed permutations are solved: In order to determine who has the winning strategy, just determine the length of a single play of the game. This shows that decision problems **D.6** and **D.7** of [1] are linear time decision problems.

11. THE CILIATES

According to the model described in [15] the micronuclear precursors of genes in ciliates should be sortable or reverse sortable by **cdr** or **cdr**s to produce functional genes. For some indication of the scope of sorting required during ciliate micronuclear decryption, consider the following data: Findings reported in [4] indicate that at least 3593 genes on 2818 MAC

chromosomes of the ciliate *Sterkiella histriomuscorum* have encrypted micronuclear precursors. Among these encrypted precursors, 1676 contain at least one inverted element. An example of an encrypted precursor organized into 245 precursor segments is also reported in [4].

Sample genes from ciliates show that both the **cdr** and the **cds** operations are necessary to sort or reverse sort signed permutations representing micronuclear precursors of genes in ciliates. We discuss a small sample of micronuclear precursors, and their sortability by **cdr** and **cds**. More examples can be found at the ciliate genome rearrangement database [6].

Example: The Actin I gene

Oxytricha nova: Decryption of the micronuclear precursor of the Actin I gene in the ciliate species *Oxytricha nova*, reported in [10] (see Fig. 3 there), requires sorting of the signed permutation $\alpha = [3, 5, 4, 6, 8, -2, 1, 7]$. The overlap graph of α , shown in Figure 11, has an unoriented component. α is neither **cdr** sortable, nor **cds**-sortable, but requires both **cdr** and **cds** for sorting. Applications of **cdr** terminate in the permutation

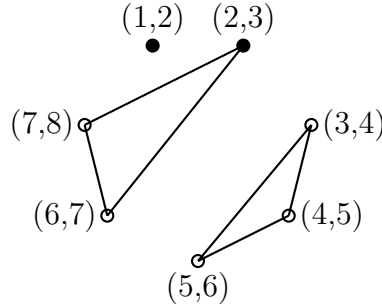


FIGURE 11. The overlap graph of the Actin I micronuclear precursor in *O. nova*

$[-8, -7, -6, -4, -5, -3, -2, -1]$, which has item -5 out of order. An application of **cds** produces the permutation $[-8, -7, -6, -5, -4, -3, -2, -1]$, which represents a functional Actin I gene in the organism.

Uroleptus pisces: The structures of the micronuclear precursors of the Actin I gene for *U. pisces* 1 and *U. pisces* 2, reported in [7], were given in the introduction. We treat $\alpha_1 = [1, 3, -7, -5, 14, 2, 4, 6, 9, 12, -11, -8, 13, 15, -10]$, the precursor for *U. pisces* 1. To determine **cdr** sortability of α_1 we construct the overlap graph of α_1 , shown in Figure 12.

The overlap graph of α_1 is an oriented graph and its only component is oriented. By Theorem 4.2 α_1 is **cdr** sortable. As the reader may verify, applying **cdr** in order for the following ordered length 14 sequence of pointers accomplishes such a sorting:

(4,5) (3,4) (2,3) (5,6) (6,7) (1,2) (7,8) (8,9) (9,10) (11,12) (12,13) (13,14) (14,15) (10,11)

By Theorem 4.3 any sequence of applications of **cdr** that sorts permutation α_1 will use exactly fourteen pointers. But innocent-looking deviations from a sequence of pointers supporting a successful **cdr** sorting of α_1 may result in a failed sorting. For example, if in the sequence of pointers above right after **cdr** has been applied to pointer (12,13) it is applied to pointer (10,11) (supporting a legitimate **cdr** application at that stage), the result will be the unsorted permutation

$$\beta = [1\ 2\ 3\ 4\ 5\ 6\ 7\ 8\ 9\ 10\ 11\ 12\ 13\ 15\ 14]$$

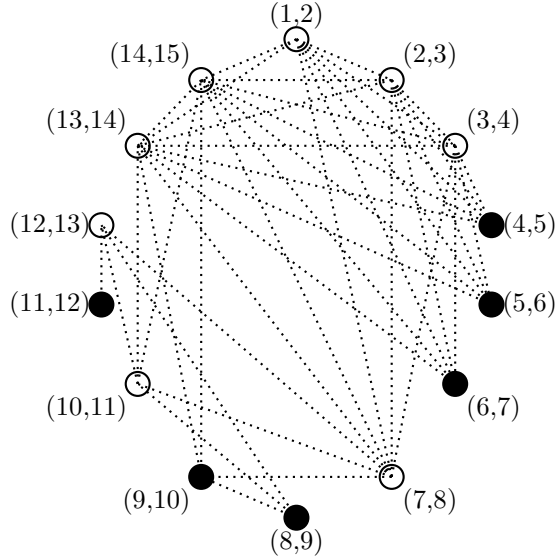


FIGURE 12. Overlap graph for α_1 . Filled vertices are oriented.

How does the ciliate decryptome resolve this problem? The **cds Rescue Theorem**, Theorem 9.5, proves that the **cdr** fixed points encountered are in fact **cds** sortable. In this particular example, $\mathbf{c}ds_{(13,14),(14,15)}(\beta)$ is the identity permutation. Thus the **cds** sorting operation assures that decryption of α_1 does not fail. Moreover, this theorem and the **cds** Inevitability Theorem imply that *indiscriminate* applications of **cdr** and of **cds** will succeed in sorting α_1 (and any **cdr** sortable micronuclear gene pattern).

Example: α TBP gene in *O. trifallax*

For some permutations that have been reported in extant ciliate species, **cds** is both necessary and sufficient: For example the micronuclear precursor of α Telomere Binding Protein gene in *Oxytricha trifallax* is represented by the permutation $[1, 3, 5, 7, 9, 11, 2, 4, 6, 8, 10, 12]$ has this feature. This permutation was reported in [16].

DNA polymerase α gene in *O. trifallax*

Likewise, for some signed permutations **cdr** is both necessary and sufficient to sort or reverse sort the corresponding permutation, and no application of **cds** would contribute to its sorting or reverse sorting. For this discussion, define for each n the signed permutations

$$\sigma_n = [-2n, \dots, -2, 1, 3, \dots, 2n-1, 2n+1].$$

and

$$\tau_n = [-2n, \dots, -2, 1, 3, \dots, 2n-1].$$

The oriented overlap graph of σ_n consists of $2n$ isolated oriented vertices, while the oriented overlap graph of τ_n consists of $2n-1$ isolated oriented vertices. Observe that any pointer is eligible for a **cdr** move, and that this oriented graph has isolated vertices only. Thus, no applications of **cds** to any intermediaries contributes to the sorting process. The signed permutations σ_n and τ_n also have the feature that for any selection of a pointer, a corresponding application of **cdr** can be performed. Each σ_n is **cdr** sortable, while each τ_n is **cdr** reverse-sortable.

These permutations, intriguingly, occur in the micronuclear precursors of macro nuclear genes of certain ciliate species. For some species of *Uroleptus*, the DNA polymerase α gene is σ_{16} , while for *Paraurystola weissei* the same precursor is σ_{20} . In *Oxytricha nova* the micronuclear precursor is τ_{21} . In *Oxytricha trifallax* the micronuclear precursor is σ_{21} . Accession numbers for these DNA polymerase α macronuclear and corresponding micronuclear precursors in [9] are

Species	Macronuclear	Micronuclear
Uroleptus	AY293852	AY293850
Paraurystola weissei	Y293806	AY293805
Oxytricha trifallax	EF693893.1	DQ525914.1

12. CONCLUDING REMARKS

Unless the applications of **cdr** operations during micronuclear decryption follow a strategy not yet discovered in the laboratory, it should be expected that **cdr** fixed points other than the identity are often encountered among intermediates of the decryption process. It would be interesting to determine whether **cdr** fixed points of **cdr** sortable micronuclear gene patterns actually do occur among intermediates of the decryption process.

Results reported in [4] (see Figure 3 A, B and C of [4]) suggests that the model of [14, 15] based on just the **cdr** and **cds** sorting operations might require an additional operation to successfully sort newly observed encryption patterns. The permutation representing the red micronuclear precursor in Figure 3 B, and the permutation representing the gold micronuclear precursor in Figure 3 C are **cds** fixed points. It would be interesting to learn how these two particular micronuclear precursors are in fact processed by the ciliate decryptome. In [8] and some earlier papers it is assumed that besides **cdr** and **cds**, there is an additional sorting operation, *boundary ld*, that would sort a **cds** fixed point to the identity permutation. To our knowledge it has not been experimentally confirmed that this operation occurs during ciliate micronuclear decryption, nor has a satisfactory molecular mechanism for this operation in combination with **cdr** and **cds** been described.

REFERENCES

- [1] K. Adamyk, E. Holmes, G. Mayfield, D.J. Moritz, M. Scheepers, B.E. Tenner and H. Wauck, *Sorting permutations: Games, genomes and cycles*, arXiv1410.2353
- [2] A. Bergeron, *A very elementary presentation of the Hannenhalli-Pevzner theory*, **Discrete Applied Mathematics** 146:2 (2005), 134 - 145
- [3] A. Bergeron, S. Heber and J. Stoye, *Common intervals and sorting by reversals: a marriage of necessity*, **Bioinformatics** 18:2 (2002), S54 - S63.
- [4] X. Chen, J.R. Bracht, A.D. Goldman, E. Dolzhenko, D.M. Clay, E.C. Swart, D.H. Perlman, T.G. Doak, A. Stuart, C.T. Amemiya, R.P. Sebra, and L.F. Landweber, *The Architecture of a Scrambled Genome Reveals Massive Levels of Genomic Rearrangement during Development*, **Cell** 158 (2014), 1187–1198
- [5] D.A. Christie, *Sorting permutations by block-interchanges*, **Information Processing Letters** 60 (1996), 165 - 169.
- [6] Ciliate Genome Rearrangement Database, http://oxytricha.princeton.edu/mds_ies_db/index.html.
- [7] A.B. Dalby and D.M. Prescott, *The scrambled Actin I gene in Uroleptus pisces*, **Chromosoma** 112 (2004) , 247 - 254.
- [8] A. Ehrenfeucht, T. Harju, I. Petre, D. M. Prescott, and G. Rozenberg, *Computation in Living Cells: Gene Assembly in Ciliates*, **Springer: Natural Computing Series**, 2003.

- [9] GenBank, a database of the National Center for Biotechnology Information, maintained electronically at <http://www.ncbi.nlm.nih.gov/genbank/>
- [10] A.F. Greslin, D.M. Prescott, Y. Oka, S.H. Loukin and J.C. Chappell, *Reordering of nine exons is necessary to for a functional Actin gene in Oxytricha nova*, **Proceedings of the National Academies of Science of the United States of America** 86:16 (1989), 6264 - 6268.
- [11] S. Hannenhalli and P.A. Pevzner, *Transforming cabbage into turnip: Polynomial algorithm for sorting signed permutations by reversals*, **Journal of the ACM** 46:1 (1999), 1 - 27.
- [12] I. Harju, T. Petre and G. Rozenberg, *Two models for gene assembly in ciliates*, **Turku Centre for Computer Science Technical Reports** 406, 2004
- [13] J. Herlin, A. Nelson and M. Scheepers, *Using Ciliate Operations to construct Chromosome Phylogenies*, **Involve** 9:1 (2016), 1 - 26.
- [14] D.M. Prescott, A. Ehrenfeucht and G. Rozenberg, *Molecular operations for DNA processing in hypotrichous ciliates*, **European Journal of Protistology** 37 (2001), 241 - 260.
- [15] D.M. Prescott, A. Ehrenfeucht and G. Rozenberg, *Template-guided recombination for IES elimination and unscrambling of genes in stichotrichous ciliates*, **Journal of Theoretical Biology** 222 (2003), 323 - 330.
- [16] J.D. Prescott, M.L. DuBois and D.M. Prescott, *Evolution of the scrambled germline germline gene encoding α -telomere binding protein in three hypotrichous ciliates*, **Chromosoma** 107 (1998), 293 - 303.
- [17] A.H. Sturtevant and Th. Dobzhansky, *Inversions in the third chromosome of wild races of Drosophila pseudoobscura, and their use in the study of the history of the species*, *Proceedings of the National Academy of Sciences* 22 (1936) 448 - 450.
- [18] E. Tannier, A. Bergeron and M-F. Sagot, *Advances on sorting by reversals*, **Discrete Applied Mathematics** 155 (2007), 881 - 888.