

**The reliable solution and computation time of variable parameters Logistic  
model**

**Wang Pengfei<sup>1,2</sup> Pan Xinnong<sup>3,4</sup>**

1. Center for Monsoon System Research, Institute of Atmospheric Physics (CMSR), Chinese Academy of Sciences, Beijing 100190, China
2. State Key Laboratory of Numerical Modeling for Atmospheric Sciences and Geophysical Fluid Dynamics (LASG), Institute of Atmospheric Physics, Chinese Academy of Sciences, Beijing 100029, China
3. University of Chinese Academy of Sciences, Beijing 100049, China
4. Key Laboratory for Atmosphere and Global Environment Observation (LAGEO), Institute of Atmospheric Physics, Chinese Academy of Sciences, Beijing 100029, China

Corresponding author address: Dr. Pengfei Wang, CMSR&LASG/IAP/CAS, P. O.  
Box 9804,  
Beijing 100029, China. Email: wpf@mail.iap.ac.cn

## Abstract

The reliable computation time (RCT, marked as  $T_c$ ) when applying a double precision computation of a variable parameters logistic map (VPLM) is studied. First, using the method proposed, the reliable solutions for the logistic map are obtained. Second, for a time-dependent non-stationary parameters VPLM, 10000 samples of reliable experiments are constructed, and the mean  $T_c$  is then computed. The results indicate that for each different initial value, the  $T_c$ s of the VPLM are generally different. However, the mean  $T_c$  trends to a constant value once the sample number is large enough. The maximum, minimum and probable distribution function of  $T_c$  is also obtained, which can help us to identify the robustness of applying a nonlinear time series theory to forecasting while using the VPLM output. In addition, the  $T_c$  of the fixed parameter experiments of the logistic map was obtained, and the results suggested that this  $T_c$  matches the theoretical formula predicted value.

**Keywords:** Reliable computation time, Logistic map, non-stationary time series

## 1 introduction

The logistic map was originally introduced to study biological growth in ecology, and, currently, it has become a classical chaotic system in the study of chaotic dynamics and nonlinear prediction(May 1976). In recent years, along with the development of non-stationary theory, the variable parameters logistic map (VPLM) was introduced and used to study the effects of non-stationary forcings and their predictability(Wang 2010). Studies indicate that many climate systems have non-stationary phenomena; therefore, the investigation of this simple driven forcing model is valuable for helping to understand the rules of the real climate system.

The classical logistic model is  $x_{i+1} = ax_i(1-x_i)$ . When this model is applied to investigations, the influence of rounding errors is often ignored. Oteo(2007) studied the influence of a double-precision floating-point computation for a fixed parameter ( $a=4$ ) logistic map. He found that when  $i$  is above 50, the result of double precision deviates from the correct result. Oteo's work suggests that we can use a quantitative experiment to study the effects of rounding errors for a discrete dynamical system. In addition, this experiment can be used to analyze the reliable computation time of the logistic map in a double precision computation environment.

Previous studies mainly focus on the fixed parameters logistic map system (i.e.,  $a$  is constant). However, in practical applications, we will consider a logistic map that controls parameters that are time-varying when considering the external driving force (Wang et al. 2010,2011).

$$x_{i+1} = u_i x_i (1 - x_i), \quad (1)$$

$$u_i = 3.95 - 0.4e^{-2.5i \frac{4\pi}{25000}}, \quad (i=1,2,\dots,2000) \quad (2)$$

This type of VPLM system will also be affected by rounding errors when simulated in a double precision environment; however, generally the changing rule of this map is more complicated than that of the fixed parameters map. If we do not achieve the reliable numerical solution and know its effective computing time, we may misunderstand the conclusions deduced from the VPLM output. In this study, we apply the reliable computation method to obtain its reliable solutions, and then we obtain its mean effective computation time using 10000 samples for a double-precision float-point computation.

## 2 method

To address the lack of float-point computation accuracy, researchers have developed a software library named 'MP' (multiple precision)(Brent 1978; Oyanarte 1990). Wang et al.(Wang et al. 2006; Wang et al. 2012) applied this MP tool to investigate the Lorenz equation, and their results indicate that increasing the float-point precision is valuable to obtain the reliable solution for a chaotic system. To obtain the reliable solution for the VPLM system, we use the 2000 bits (or above) precision MP program for computation. This procedure is the same as the procedure we applied for the fixed parameters logistic map. Once we obtain the reliable solution for the VPLM, we then apply it to evaluate the reliable computation time ( $T_c$ ) in a double precision computation environment.

There are two ways to obtain the reliable computation time of a chaotic system. One is the theoretical analysis, and the other is by numerical experiments. The previous studies indicate that when  $a=4.0$ , the Lyapunov exponent of the logistic map ( $x_{i+1} = ax_i(1 - x_i)$ ) is 0.693[9]. The analytical solution for this map(Oteo et al. 2007) is  $x_n = \sin^2\left(2^n \arcsin \sqrt{x_0}\right)$ , which can be regarded as the cross-point of the continuous functions  $x(t) = \sin^2\left(2^t \arcsin \sqrt{x_0}\right)$  and  $y(t)=t$  for positive integer numbers. The subscript  $i$  in function  $x$  can be regarded as time (unit: second). Once we know the above relations, we can apply the theoretical formula between the reliable computation time  $T_c$  and the Lyapunov exponents to compute the  $T_c$  of the logistic map. Wang, etc. (Wang et al. 2014) show that the relationship of  $T_c$  and the Lyapunov exponents is  $T_c \approx \frac{\ln B}{\lambda} K$ , where  $B$  is the base number of the float-point computation. For example,  $B=2$  is binary,  $B=10$  is decimal and  $K$  is the number of significant digits in each system. For a double precision computation in which  $B=2$  and  $K=53$ , after substituting these values into the formula, we obtain  $T_c \approx \frac{\ln 2}{0.693} 53 \approx 53$ , which indicates that the maximum effective computation time of the logistic map is approximately 53 seconds in a double precision computation. We will validate its correctness in an experiment in section 3.

Different from the fixed parameters logistic map, the difficulty in calculating  $T_c$  in the VPLM system is that the Lyapunov exponents of this system vary with time; therefore, we cannot obtain their values from the theoretical formula, but we can obtain them from numerical experiments. For the result to have statistical meaning, we ran 10000 experiments as individual samples. Because the solution range of the

VPLM is within  $[0, 1]$ , we can obtain 10000 initial values, which are uniformly distributed in this interval. For each initial value, we compute the solution by a double precision (DP) and multi-precision (MP) computation simultaneously. The difference between the DP and MP solutions begins at zero and increases over time. When the error reaches the tolerance  $\delta = 0.1$ , we denote this time as the reliable computation time, corresponding to this initial value. Finally, we obtain 10000  $T_c$  values for 10000 samples and then can obtain the mean reliable computation time.

### 3 result

We use the initial value  $x_0 = 0.1$  to compute the logistic map

$$x_{i+1} = 4x_i(1 - x_i). \quad (3)$$

First, we apply a double precision computation to obtain a series of  $x$  ( $i= 1, 2, \dots, 2000$ ) and then, using the MP program, compute the corresponding reliable solution as the reference solution. In this experiment, the computation precision is set as 4096, which is sufficient to theoretically obtain the first 2000 reliable data (in Table 1, we only listed the first 100 values. All of our programs are written in C language and run on a Linux system. The DP solution was computed by C language internal functions, and the MP solution was computed by the MP library).

As shown in table 1, when  $i = 51, 52, 53$ , the solution of the DP computation is significantly different than the MP solution. This fact indicates that after that moment, the double precision solution is no longer reliable, and, thus,  $T_c$  can be regarded as 53. This value matches the theoretical result well. In Figure 1b, we plotted an instance of

the first 100 steps for DP and MP. The blue curve represents the DP computation, and the red curve represents the MP computation. The absolute error between DP and MP is shown in figure 1a, and it continues to increase from  $10^{-15}$  to  $10^{-1}$  and then oscillates at approximately  $10^{-1}$ .

When  $a$  is a constant smaller than 4.0, the Lyapunov exponent of the logistic map is generally smaller than 0.693. However, as long as the system is in the chaotic region, the maximum Lyapunov exponent is generally a positive constant. Thus, we can address these cases with a similar procedure as for  $a=4$ .

The methods referenced in section 2 are applied to obtain the reliable computing time of the non-stationary time series outputted by the VPLM (equation 1-2). The solutions for the two different initial values (from 10000 initial values) are listed in table 2 and 3. From these results, we found that by using different initial values, the  $T_c$  values of the VPLM are different as well. Thus, to obtain a statistically meaningful result, we should use sufficient samples to calculate the mean  $T_c$ . In figure 2, we have plotted the first 300 steps of the DP and MP computations for the VPLM (see FIG. 2b and 2d for the different initial values). The absolute error between the DP and MP computation is shown in figure 2a and 2c. The error reaches  $10^{-15}$  after 50 steps and then increases to  $10^{-1}$  slowly. In addition, the error curve in figure 2a and 2c are not exactly the same, which means that they have different  $T_c$  values.

The PDF distribution of  $T_c$  for 10000 samples is shown in figure 3, in which most of the  $T_c$  values are located in [190-270]. The maximum  $T_c$  is 303, the minimum  $T_c$  is 168 and the statistical mean of  $T_c$  is 231.66 (the author used  $10^5$  samples to compute

the mean  $T_c$ , and the result is 231.10, which is almost same as that of the  $10^4$  samples. Therefore, we can conclude that 10000 samples are sufficient). The mean  $T_c$  (231.66) indicates that when the computation time is beyond 231.66, the double precision solution is no longer credible. In other words, the 231 (at most 303) continuous steps in the solution series follow the VPLM rules, and once the data is beyond, these steps tend to become unrelated (although we know they are not accurate, we still cannot determine the error at each step, and the only way to estimate the error is using a numerical experiment). Therefore, using these 2000 double precision solutions as time series to study nonlinear prediction problems will cause the data quality to be questionable.

In summary, for any initial value of the VPLM map, we can obtain two series of data by the DP and MP method. One series is a not very accurate double precision solution (accurate data is obtained only when using continuous 231 steps, and data is generally accurate beyond 303 steps as shown in figure 3), and another is a reliable series for all 2000 steps. We hope researchers apply this reliable series of the VPLM to further research and make the results more reliable and convincing.

## **Acknowledgements**

This work is supported by the National Natural Sciences Foundation of China (41375112 and 41530426) and the CAS Key Technology Talent Program.

## References

- May, R. M.. 1976. "*Simple mathematical models with very complicated dynamics*".  
Nature 261: 459-467.
- Wang, G., and P. Yang. 2010. "*A recent approach incorporating external forces to predict nonstationary processes*". Atmos. Oceanic Sci. Lett 3: 151-154.
- Oteo, J. and J. Ros. 2007. "*Double precision errors in the logistic map: Statistical study and dynamical interpretation*". Physical Review E 76:036214.
- Wang, G., P. Yang, et al.. 2011. "*A novel approach in predicting non-stationary time series by combining external forces*". Chinese Science Bulletin 56: 3053-3056.
- Brent, R.P..1978. "*A Fortran multiple-precision arithmetic package*". ACM Transactions on Mathematical Software (TOMS) 4: 57-70.
- Oyanarte, P., 1990. "*MP-A multiple precision package*". Computer Physics Communications 59: 345-358.
- Wang, P.F., G. Huang, and Z.Z. Wang, 2006. "*Analysis and application of multiple-precision computation and round-off error for nonlinear dynamical systems*". Advances in Atmospheric Sciences 23: 758-766.
- Wang, P. F., J.P. Li, and Q. Li. 2012. "*Computational uncertainty and the application of a high-performance multiple precision scheme to obtaining the correct reference solution of Lorenz equations*". Numerical Algorithms 59: 147-159.
- Wolf, A., et al.. 1985. "*Determining Lyapunov exponents from a time series*". Physica D: Nonlinear Phenomena 16: 285-317.
- Wang, P. and J. Li, 2014. "*On the relation between reliable computation time,*

*float-point precision and the Lyapunov exponent in chaotic systems". arXiv preprint*

arXiv:1410.4919.

**Table 1. The first 100 steps of Logistic map for  $x_0 = 0.1$  and  $a=4$ .**

$i$	DP	MP	$i$	DP	MP
0	0.1000000000000000	0.1000000000000000	50	0.560036763222377	0.539205854891865
1	0.3600000000000000	0.3600000000000000	51	0.985582348247121	0.993851603768792
2	0.9216000000000000	0.9216000000000000	52	0.056839132283247	0.024442373819968
3	0.2890137600000000	0.2890137600000000	53	0.214433781298139	0.095379776728053
4	0.821939226122650	0.821939226122650	54	0.673807738945284	0.345129899677439
5	0.585420538734197	0.585420538734198	55	0.879163479530912	0.904061008104319
6	0.970813326249438	0.970813326249438	56	0.424940223160047	0.346938806918886
7	0.113339247303761	0.113339247303763	57	0.977464119602946	0.906289084690344
8	0.401973849297512	0.401973849297517	58	0.088112057967135	0.339716718645931
9	0.961563495113813	0.961563495113816	59	0.321393292831724	0.897237078873489
10	0.147836559913285	0.147836559913272	60	0.872398576618023	0.368810812672229
11	0.503923645865164	0.503923645865127	61	0.445277200531482	0.931157588513116
12	0.999938420012499	0.999938420012500	62	0.988021660873313	0.256412535470218
13	0.000246304781624	0.000246304781619	63	0.047339434073811	0.762660588495809
14	0.000984976462315	0.000984976462296	64	0.180393648221529	0.724037661004141
15	0.003936025134734	0.003936025134657	65	0.591407119611426	0.799228505807174
16	0.015682131363489	0.015682131363186	66	0.966578953937370	0.641849205249625
17	0.061744808477550	0.061744808476377	67	0.129216318970838	0.919515211880199
18	0.231729548414484	0.231729548410370	68	0.450077847529859	0.296027948004448
19	0.712123859224412	0.712123859215584	69	0.990031114770992	0.833581608018896
20	0.820013873390967	0.820013873405948	70	0.039478026225196	0.554893243166111
21	0.590364483349242	0.590364483310888	71	0.151678046682236	0.987946927418825
22	0.967337040596098	0.967337040623825	72	0.514687267347589	0.047631184090112
23	0.126384361947522	0.126384361843861	73	0.999137136711442	0.181449817569144
24	0.441645420010560	0.441645419700724	74	0.003448475022014	0.594103125093074
25	0.986378971977024	0.986378971832381	75	0.013746332168146	0.964578407390869
26	0.053741982474292	0.053741983037102	76	0.054229482080276	0.136667613544656
27	0.203415127176100	0.203415129185368	77	0.205154581414323	0.471958307810658
28	0.648149652848124	0.648149657615473	78	0.652264716556147	0.996854653996633
29	0.912206721443921	0.912206715793673	79	0.907261824368305	0.012541811207546
30	0.320342475185814	0.320342493818377	80	0.336551225648800	0.049538056716719
31	0.870892695110561	0.870892721890401	81	0.893137992652362	0.188336150613801
32	0.449754434854499	0.449754355394920	82	0.381770074933085	0.611462579943107
33	0.989901532732837	0.989901500792880	83	0.944086739274687	0.950304373089706
34	0.039985952904069	0.039986078083536	84	0.211147872001506	0.188903886305149
35	0.153548305897691	0.153548766572132	85	0.666257792602967	0.612876832175841
36	0.519884894614559	0.519886171425237	86	0.889433385595155	0.949035283031788
37	0.998418363864672	0.998418160744184	87	0.393366552735581	0.193469258370249

38	0.006316538249856	0.006317348161538	88	0.954517231698025	0.624155617743659
39	0.025106558377575	0.025109757094974	89	0.173656344358254	0.938341530330762
40	0.097904876416033	0.097917028774422	90	0.573999273689525	0.231426811149144
41	0.353278046359976	0.353317137001643	91	0.978096429973691	0.711473768921930
42	0.913890673280218	0.913936550810420	92	0.085695214585646	0.821115380231816
43	0.314778042286590	0.314626127612689	93	0.313406179131065	0.587539650314305
44	0.862771305523247	0.862546109744532	94	0.860730984054127	0.969347238491397
45	0.473587919555836	0.474241273236424	95	0.479492628573366	0.118852678882000
46	0.997209608026444	0.997345951982078	96	0.998317790868680	0.418906878418289
47	0.011130422744760	0.010588016188163	97	0.006717517215034	0.973695622528535
48	0.044026145737131	0.041903640405449	98	0.026689568709997	0.102449828789213
49	0.168351376914654	0.160590901304880	99	0.103908942528286	0.367815445481095
			100	0.372447496763758	0.930108974186555

**Table 2. The first 300 steps (interval 5) for VPLM with  $x_0 = 0.1$ .**

$i$	DP	MP	$i$	DP	MP
0	0.1000000000000000	0.1000000000000000	155	0.857821626017957	0.857821909330965
5	0.832592851312631	0.832592851312630	160	0.535112449500775	0.535110168030664
10	0.543381756879222	0.543381756879222	165	0.871584758242825	0.871581509329935
15	0.889167004162284	0.889167004162284	170	0.411382702016328	0.411414567709174
20	0.371262401351000	0.371262401351000	175	0.891043235648514	0.891101146029621
25	0.808210315973505	0.808210315973505	180	0.307555675733818	0.307706004445068
30	0.493520322668974	0.493520322668974	185	0.907610248538264	0.907516514654172
35	0.880720968984047	0.880720968984047	190	0.505630697151845	0.503674463640026
40	0.344514552359543	0.344514552359542	195	0.825715927618323	0.825110829796234
45	0.837428219346418	0.837428219346419	200	0.639706618737391	0.637623080264878
50	0.560532314789229	0.560532314789228	205	0.763039767716258	0.764730506671172
55	0.893029925860431	0.893029925860432	210	0.313848497119786	0.307251305171718
60	0.376294800158017	0.376294800158021	215	0.895113865546431	0.909230443671585
65	0.803664822317961	0.803664822317964	220	0.309079653805944	0.521664114388859
70	0.476822440123461	0.476822440123481	225	0.906406917714885	0.821930005527828
75	0.881249771116657	0.881249771116646	230	0.455241622719538	0.639690235714764
80	0.335983844868298	0.335983844868324	235	0.863848044506658	0.755689159659303
85	0.849305654962446	0.849305654962366	240	0.531067914806285	0.357202934866837
90	0.545717901170099	0.545717901170505	245	0.826904347375071	0.750558962175503
95	0.893869699914088	0.893869699914330	250	0.671285749390229	0.407925911347316
100	0.360317549873014	0.360317549875023	255	0.818861455246060	0.903010288758529
105	0.791035400810154	0.791035400808953	260	0.636716065663608	0.374800835100522
110	0.398014367631752	0.398014367624153	265	0.754635040717098	0.790407952675023
115	0.847201585829368	0.847201585810587	270	0.364305878836527	0.381871892174048
120	0.575362825035316	0.575362825120107	275	0.755626304670800	0.820284054110586
125	0.897456100113565	0.897456100042480	280	0.354012774381064	0.654803888170862
130	0.378055022881996	0.378055022066093	285	0.737419723296179	0.743968277468713
135	0.799985544913794	0.799985543226208	290	0.588714334137301	0.494287176942652
140	0.461259918019212	0.461259905376383	295	0.915665309466767	0.748056014753772
145	0.881745862476446	0.881745877870685	300	0.632922589329766	0.439826720591001
150	0.327704384756794	0.327704309112235			

**Table 3. The first 300 steps (interval 5) for VPLM with  $x_0 = 0.6$ .**

$i$	DP	MP	$i$	DP	MP
0	0.6000000000000000	0.6000000000000000	155	0.379315744903887	0.379315177127178
5	0.380275886117672	0.380275886117672	160	0.802330634477705	0.802329191782283
10	0.813747928284932	0.813747928284932	165	0.482557000231579	0.482545591306503
15	0.513031780808352	0.513031780808351	170	0.847606678155340	0.847617473433552
20	0.882776067652321	0.882776067652321	175	0.611106990260610	0.611056879154665
25	0.348109006292028	0.348109006292028	180	0.831884841964112	0.832043962837539
30	0.833516133790997	0.833516133790998	185	0.644851604897976	0.645025950622436
35	0.556298328300335	0.556298328300334	190	0.767487963778570	0.767597929156230
40	0.891744714450323	0.891744714450324	195	0.303679969208342	0.303485506961593
45	0.374724087810298	0.374724087810300	200	0.909342022583631	0.909245300737688
50	0.804636682562754	0.804636682562755	205	0.533468011769676	0.531327332478798
55	0.479964749321297	0.479964749321301	210	0.850981111722547	0.846999365380964
60	0.881696083660928	0.881696083660927	215	0.621633988051341	0.641980708338287
65	0.337818000131651	0.337818000131652	220	0.801059396282309	0.757899798173127
70	0.848068286414706	0.848068286414703	225	0.480425307518706	0.341301839310297
75	0.542381878128891	0.542381878128908	230	0.815548182091915	0.777559693054478
80	0.892240765947636	0.892240765947644	235	0.604003887225542	0.302849243722797
85	0.356087782990957	0.356087782991019	240	0.867639715592924	0.913439234124305
90	0.799789651568964	0.799789651568882	245	0.491764355139892	0.605781247588618
95	0.455542260881015	0.455542260880479	250	0.788430125316397	0.863983545725774
100	0.892918171866280	0.892918171866642	255	0.366033267615156	0.539483465449693
105	0.350227999722879	0.350227999725469	260	0.761916085661156	0.838507709569241
110	0.802646029881655	0.802646029876441	265	0.308511986122180	0.697376860807326
115	0.477238556590487	0.477238556554562	270	0.905464647051084	0.915729024268197
120	0.871430513957365	0.871430513986760	275	0.408535223266365	0.646963784101408
125	0.397165700828442	0.397165700580933	280	0.909395308242515	0.738716952924999
130	0.847663050479794	0.847663049834265	285	0.485242724850372	0.568578491212588
135	0.583308290087215	0.583308293106579	290	0.761749450197490	0.903377890996209
140	0.891620997474507	0.891620993130455	295	0.304159596724964	0.360082686274566
145	0.323367391000731	0.323367371492267	300	0.914437554171898	0.741677426184428
150	0.874508295910031	0.874508361230068			

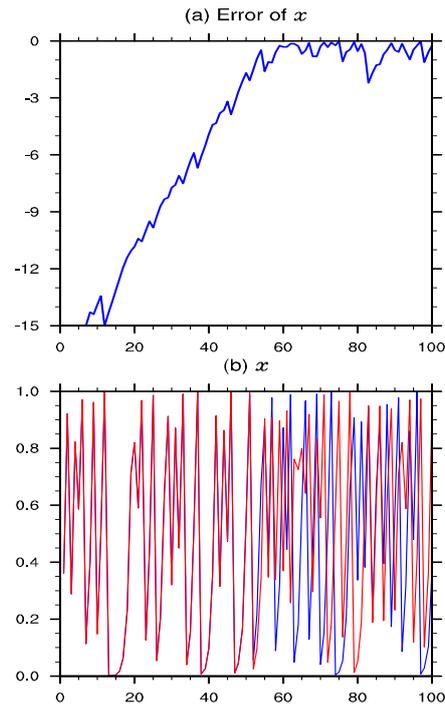


Figure 1. Numerical solution of the fixed parameters logistic map. The initial value is 0.1. (a) The logarithm of the absolute error between DP and MP for the first 100 steps ( $\log_{10}$ ); (b) The solution of DP and MP for the first 100 steps; the blue and red curves represent DP and MP, respectively.

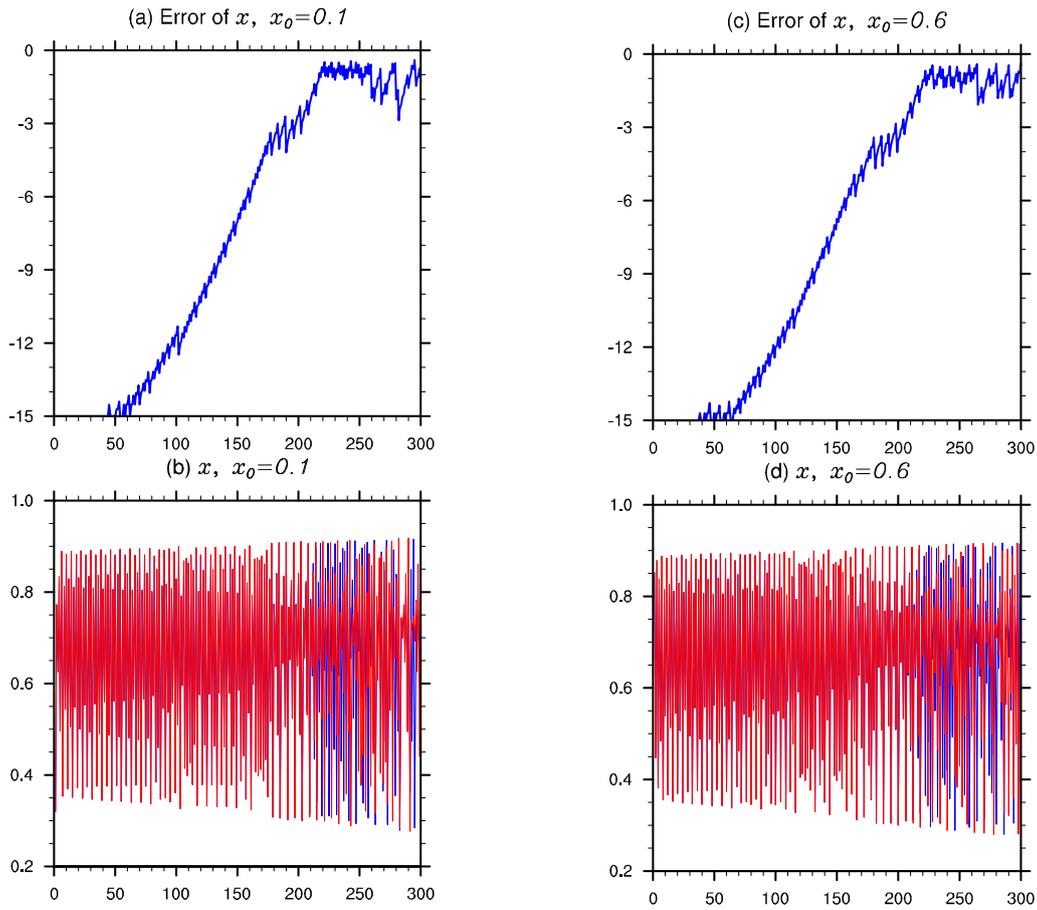


Figure 2. Numerical solution of VPLM; the initial value of (a, b) is 0.1. (a) The logarithm of the absolute error between the DP and MP computations for the first 300 steps ( $\log_{10}$ ), (b) the solution of the DP and MP computations for the first 300 steps; blue and red curves represent the DP and MP computations, respectively; (c, d) is same as (a, b), but for the initial value setting of 0.6.

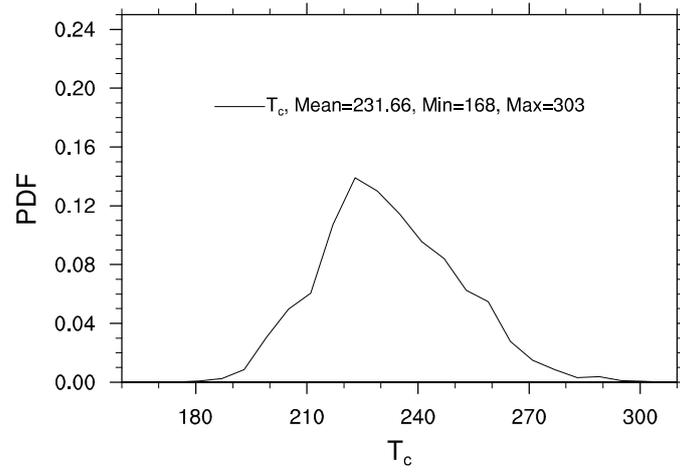


Figure 3. The PDF distribution of the reliable computation time for the VPLM.