
Neural Sequence Model Training via α -divergence Minimization

Sotetsu Koyamada^{1,2,3} Yuta Kikuchi⁴ Atsunori Kanemura² Shin-ichi Maeda⁴ Shin Ishii^{3,5}

Abstract

We propose a new neural sequence model training method in which the objective function is defined by α -divergence. We demonstrate that the objective function generalizes the maximum-likelihood (ML)-based and reinforcement learning (RL)-based objective functions as special cases (i.e., ML corresponds to $\alpha \rightarrow 0$ and RL to $\alpha \rightarrow 1$). We also show that the gradient of the objective function can be considered a mixture of ML- and RL-based objective gradients. The experimental results of a machine translation task show that minimizing the objective function with $\alpha > 0$ outperforms $\alpha \rightarrow 0$, which corresponds to ML-based methods.

1. Introduction

Neural sequence models have been applied successfully to various types of machine learning tasks, such as neural machine translation (Cho et al., 2014; Sutskever et al., 2014; Bahdanau et al., 2015), caption generation (Xu et al., 2015; Chen & Lawrence Zitnick, 2015), conversation task (Vinyals & Le, 2015), and speech recognition (Chorowski et al., 2014; 2015; Bahdanau et al., 2016). As neural sequence models have a wide range of applications, developing more effective and sophisticated learning algorithms can be beneficial.

Popular objective functions for training neural sequence models include the *maximum-likelihood* (ML) and *reinforcement learning* (RL) objective functions. However, both have limitations, i.e., training/testing discrepancy and sample inefficiency, respectively. Bengio et al. (2015) in-

dicated that optimizing the ML objective is not equal to optimizing the evaluation metric (e.g., BLEU (Papineni et al., 2002) score in machine translation). In addition, during training, the ground-truth tokens are used for the prediction of the next token; however, during testing, no ground-truth tokens are available and the tokens that are predicted by the model are used instead. On the other hand, although the RL-based approach does not suffer from the training/testing discrepancy, it does suffer from sample inefficiency. Samples generated by the model do not necessarily yield high evaluation scores (i.e., rewards) especially in the early stage of the training. Consequently, RL-based methods are not self-contained, i.e., they require pre-training via ML-based methods. As discussed in Section 2, since these problems depend on their sampling distributions, it is difficult to resolve these problems simultaneously.

We propose α -divergence minimization training named α -DiMT for a neural sequence model. We demonstrate that an α -DiMT objective function generalizes ML- and RL-based objective functions, i.e., α -DiMT can represent both functions as its special cases ($\alpha \rightarrow 0$ and $\alpha \rightarrow 1$). We also show that, for $\alpha \in (0, 1)$, the gradient of the α -DiMT objective becomes the weighted sum of the gradients of negative log-likelihoods. Here the weights are obtained by the geometric mean of the sampling distributions of the ML- and RL-based objectives. We apply gradient descent methods to optimize the proposed objective function, where the gradient of the objective is estimated by means of importance sampling. Consequently the optimization strategy avoids on-policy RL sampling which suffers from sample inefficiency, and optimizes the objective function closer to the desired RL-based objective.

Experimental results on a machine translation task indicate that the proposed α -DiMT approach outperforms the ML baseline and the reward augmented maximum-likelihood method (RAML; Norouzi et al., 2016), upon which we build the proposed method. We compare our results to those reported by Bahdanau et al. (2017), who proposed an on-policy RL-based method. We also confirm that α -DiMT can provide comparable BLEU score without pre-training.

The contributions of this paper are summarized as follows.

¹Recruit Technologies Co., Ltd., Tokyo, Japan ²National Institute of Advanced Industrial Science and Technology (AIST), Tokyo, Japan ³Graduate School of Informatics, Kyoto University, Kyoto, Japan ⁴Preferred Networks, Inc., Tokyo, Japan ⁵ATR Cognitive Mechanisms Laboratories, Kyoto, Japan. Correspondence to: Sotetsu Koyamada <sotetsu.koyamada@gmail.com>.

- We consider the limitations and advantages of ML, RL, and RAML objective functions with respect to (i) objective score discrepancy, (ii) sampling distribution discrepancy and (iii) sample inefficiency (Section 2).
- We define the α -DiMT objective function using α -divergence and demonstrate that it can be considered a generalization of ML- and RL-based objective functions (Section 4.1).
- We demonstrate that the gradient of the α -DiMT objective can be obtained by the weighted sum of the gradients of negative log likelihoods and that the weights are a mixture of the sampling distributions of ML- and RL-based objective functions (Section 4.2).
- We propose an importance sampling-based optimization method, which is very similar to the RAML optimization, for the proposed α -DiMT objective function (Section 4.3). Thus, there is nearly no implementation cost if RAML has already been implemented.
- The results of machine translation experiments demonstrate that the proposed α -DiMT outperforms the ML-baseline and RAML (Section 6).

2. Comparing objective functions

At least three problems associated with learning neural sequence models exist, and the ML and RL approaches cannot resolve all of these problems simultaneously. In this section, we examine why these problems matter and how they are addressed by current state-of-the-art methods.

Given a context (or input sequence) $x \in \mathcal{X}$ and a target sequence $y = (y_1, \dots, y_T) \in \mathcal{Y}$, an ML approach is typically used to train a neural sequence model. ML minimizes the negative log-likelihood objective function

$$\mathcal{L}(\theta) = - \sum_{x \in \mathcal{X}} \sum_{y \in \mathcal{Y}} q(y|x) \log p_\theta(y|x), \quad (1)$$

where $q(y|x)$ denotes the true sampling distribution. Here, we assume that x is uniformly sampled from \mathcal{X} and omit the distribution of x from Eq. (1) for simplicity. For example, in machine translation, if a corpus contains only a single target sentence y^* for each input sentence x , then $q(y|x) = \delta(y, y^*|x)$ and the objective becomes $\mathcal{L}(\theta) = - \sum_{x \in \mathcal{X}} \log p_\theta(y^*|x)$.

It is known that ML does not optimize the final performance measure. For example, in the case of machine translation, the famous evaluation measures such as BLEU or edit rate (Snoover et al., 2006) differ from the negative likelihood function.

The optimization of the final performance measure can be formulated as the minimization of the negative total expected rewards expressed as follows:

$$\mathcal{L}^*(\theta) = - \sum_{x \in \mathcal{X}} \sum_{y \in \mathcal{Y}} p_\theta(y|x) r(y, y^*|x), \quad (2)$$

where $r(y, y^*|x)$ is a reward function associated with the sequence prediction y , i.e. the BLEU score or the edit rate in machine translation.

The above observations raise the following problems.

- Objective score discrepancy.** The reward function is not used when training the model; however, it is the performance measure in the testing (evaluation) phase.
- Sampling distribution discrepancy.** The model is trained with samples from the true sampling distribution $q(y|x)$; however, it is evaluated using samples generated from the learned distribution $p_\theta(y|x)$.

On-policy RL is an approach to solve the above problems. The objective function of on-policy RL is \mathcal{L}^* in Eq. (2), which is a reward-based objective function; thus, there is no objective score discrepancy, which resolves problem (i). On-policy sampling from $p_\theta(y|x)$ and taking the expectation with $p_\theta(y|x)$ in Eq. (2) also resolves problem (ii). Ranzato et al. (2016) and Bahdanau et al. (2017) directly optimized \mathcal{L}^* using policy gradient methods (Sutton et al., 2000). A sequence prediction task that selects the next token based on an action trajectory (y_1, \dots, y_{t-1}) can be considered an RL problem. Here the next token selection corresponds to the next action selection in RL. In addition, the action trajectory and the context x correspond to the current state in RL. To prevent the policy from becoming overly greedy and deterministic, some studies have used the following entropy-regularized version of the policy gradient objective function (Mnih et al., 2016):

$$\mathcal{L}_{(\tau)}^*(\theta) := \sum_{x \in \mathcal{D}} \left\{ -\tau \mathbb{H}(p_\theta(y|x)) - \sum_{y \in \mathcal{Y}} p_\theta(y|x) r(y, y^*|x) \right\}. \quad (3)$$

Note that $\lim_{\tau \rightarrow 0} \mathcal{L}_{(\tau)}^* = \mathcal{L}^*$ holds. We can obtain the gradient of the objective as $\nabla_\theta \mathcal{L}^*(\theta) = - \sum_{x \in \mathcal{X}} \sum_{y \in \mathcal{Y}} p_\theta(y|x) \nabla_\theta \log p_\theta(y|x) r(y, y^*|x)$ using the policy gradient theorem (Sutton et al., 2000).

On-policy RL can suffer from sample inefficiency; thus, it may not generate samples with high rewards, particularly in the early learning stage. By definition, on-policy RL generates training samples from its model distribution. This means that, if model $p_\theta(y|x)$ has low prediction ability, only a few samples will exist with high rewards.

(iii) **Sample inefficiency.** The RL model can draw samples with low rewards, which results in the failure of estimating the objective function around the peak.

Machine translation suffers from this problem because the action (token) space is vast (typically $>10,000$ dimensions) and rewards are sparse, i.e., positive rewards are observed only at the end of a sequence. Therefore, the RL-based approach usually requires good initialization and thus is *not* self-contained. Previous studies have employed pre-training with ML before performing on-policy RL-based sampling (Ranzato et al., 2016; Bahdanau et al., 2017).

Despite various attempts, a fundamental technical barrier exists. This barrier prevents solving the three problems using a single method. The barrier comes from a trade-off between (ii) sampling distribution discrepancy and (iii) sample inefficiency because these issues are related to the sampling distribution.

Norouzi et al. (2016) proposed RAML, which solves problems (i) and (iii) simultaneously. RAML replaces the sampling distribution of ML, i.e., $q(y|x)$ in Eq. (1), with a reward-based distribution $q_{(\tau)}(y|x) \propto \exp\{r(y, y^*|x)/\tau\}$. In other words, RAML incorporates the reward information into the ML objective function. The RAML objective function is expressed as follows:

$$\mathcal{L}_{(\tau)}(\theta) := - \sum_{x \in \mathcal{X}} \sum_{y \in \mathcal{Y}} q_{(\tau)}(y|x) \log p_{\theta}(y|x). \quad (4)$$

However, problem (ii) remains. As mentioned above, it is difficult to solve problems (ii) and (iii) simultaneously; thus, our approach is to control the trade-off of the sampling distributions by considering their mixture.

3. α -divergence

The proposed method utilizes α -divergence $D_A^{(\alpha)}(p||q)$, which measures the asymmetric distance between two distributions p and q (Amari, 1985). A prominent feature of α -divergence is that it can behave as $D_{\text{KL}}(p||q)$ or $D_{\text{KL}}(q||p)$ depending on the value of α , i.e., $D_A^{(1)}(p||q) := \lim_{\alpha \rightarrow 1} D_A^{(\alpha)}(p||q) = D_{\text{KL}}(p||q)$ and $D_A^{(0)}(p||q) := \lim_{\alpha \rightarrow 0} D_A^{(\alpha)}(p||q) = D_{\text{KL}}(q||p)$. This fact follows from the definition of α -divergence

$$D_A^{(\alpha)}(p||q) := \frac{1}{\alpha(1-\alpha)} \left\{ 1 - \sum_{y \in \mathcal{Y}} p^{\alpha}(y) q^{1-\alpha}(y) \right\} \quad (5)$$

$$= -\frac{1}{\alpha} \sum_{y \in \mathcal{Y}} p(y) \log_{(\alpha)} \left(\frac{q(y)}{p(y)} \right), \quad (6)$$

where $\log_{(\alpha)}(\cdot)$ is the generalized logarithm $\log_{(\alpha)}(x) := (1-\alpha)^{-1}(x^{1-\alpha} - 1)$.

4. α -DiMT

In this section, we describe the objective function of the proposed method, i.e., α -DiMT, and how it is trained.

4.1. Objective function

We define the objective function of α -DiMT as the α -divergence between p_{θ} and $q_{(\tau)}$:

$$\begin{aligned} \mathcal{L}_{(\alpha, \tau)}(\theta) &:= \tau \sum_{x \in \mathcal{X}} D_A^{(\alpha)}(p_{\theta}||q_{(\tau)}) \\ &= -\frac{\tau}{\alpha} \sum_{x \in \mathcal{X}} \sum_{y \in \mathcal{Y}} p_{\theta}(y|x) \log_{(\alpha)} \left(\frac{q_{(\tau)}(y|x)}{p_{\theta}(y|x)} \right). \end{aligned} \quad (7)$$

$$(8)$$

This α -divergence is equal to (up to constant) $\mathcal{L}_{(\tau)}^*$ in Eq. (3) or $\mathcal{L}_{(\tau)}$ in Eq. (4) by employing $\alpha \rightarrow 1$ or $\alpha \rightarrow 0$ limits, respectively. Figure 1 illustrates how the α -DiMT objective bridges the ML- and RL-based objective functions.

$$\lim_{\alpha \rightarrow 1} \mathcal{L}_{(\alpha, \tau)}(\theta) = \tau \sum_{x \in \mathcal{X}} D_{\text{KL}}(p_{\theta}||q_{(\tau)}) \quad (9)$$

$$= \mathcal{L}_{(\tau)}^*(\theta) + \text{constant}, \quad (10)$$

$$\lim_{\alpha \rightarrow 0} \mathcal{L}_{(\alpha, \tau)}(\theta) = \tau \sum_{x \in \mathcal{X}} D_{\text{KL}}(q_{(\tau)}||p_{\theta}) \quad (11)$$

$$= \tau \mathcal{L}_{(\tau)}(\theta) + \text{constant}. \quad (12)$$

Although the objectives $\mathcal{L}_{(\alpha, \tau)}^*(\theta)$, $\mathcal{L}_{(\tau)}^*(\theta)$, and $\mathcal{L}_{(\tau)}(\theta)$ have the same minimizer $p_{\theta}(y|x) = q_{(\tau)}(y|x)$, empirical solutions often differ.

4.2. Objective function gradient

The gradient of (8) used for gradient descent optimization in the proposed α -DiMT can be obtained by a discussion similar to that of the policy gradient theorem (Sutton et al., 2000). The gradient of the α -DiMT objective function is expressed as

$$\nabla_{\theta} \mathcal{L}_{(\alpha, \tau)}(\theta) = - \sum_{x \in \mathcal{X}} \sum_{y \in \mathcal{Y}} p_{\theta}^{(\alpha, \tau)}(y|x) \nabla_{\theta} \log p_{\theta}(y|x), \quad (13)$$

where

$$p_{\theta}^{(\alpha, \tau)}(y|x) = \frac{\tau}{1-\alpha} p_{\theta}^{\alpha}(y|x) q_{(\tau)}^{1-\alpha}(y|x) \quad (14)$$

is a weight that mixes sampling distributions p_{θ} and $q_{(\tau)}$. See Appendix A for the derivation of this gradient. This gradient differs from that of ML or RAML only in the weights. In addition, it converges to the gradient of RL or RAML (up to constant) by taking $\alpha \rightarrow 1$ or $\alpha \rightarrow 0$ limits, respectively; i.e., $\lim_{\alpha \rightarrow 1} \nabla_{\theta} \mathcal{L}_{(\alpha, \tau)} = \nabla_{\theta} \mathcal{L}_{(\tau)}^*$ and $\lim_{\alpha \rightarrow 0} \nabla_{\theta} \mathcal{L}_{(\alpha, \tau)} = \tau \nabla_{\theta} \mathcal{L}_{(\tau)}$.

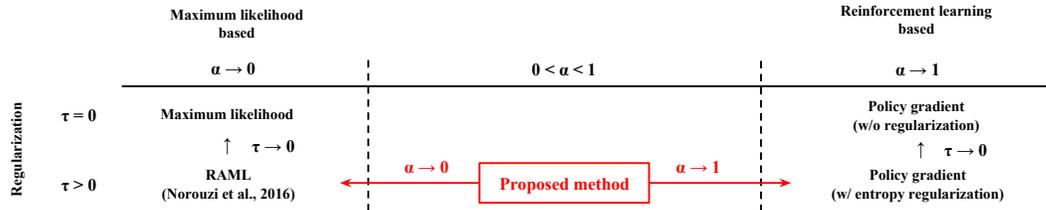


Figure 1. α -DiMT objective bridges ML- and RL-based objectives.

4.3. Optimization of objective function

Our optimization strategy is similar to that of RAML. First, we estimate the gradient of the objective function by importance sampling and then use this estimate with the gradient method. We sample target sentence y for each x from a proposal distribution q_0 and estimate the gradient by importance sampling as follows:

$$\begin{aligned} & \nabla_{\theta} \mathcal{L}_{(\alpha, \tau)}(\theta) \\ &= - \sum_{x \in \mathcal{X}} \sum_{y \in \mathcal{Y}} q_0(y|x) \left(\frac{\tilde{p}_{\theta}^{(\alpha, \tau)}(y|x)}{q_0(y|x)} \right) \nabla \log p_{\theta}(y|x), \end{aligned} \quad (15)$$

where $\tilde{p}_{\theta}^{(\alpha, \tau)}(y|x) = \frac{1}{Z} p_{\theta}^{\alpha}(y|x) q_{(\tau)}^{1-\alpha}(y|x)$ is the normalized distribution of $p_{\theta}^{(\alpha, \tau)}(y|x)$. This normalization changes the magnitude of the gradient but not the direction. Here, q_0 is typically obtained by applying data augmentation to a corpus and calculating rewards for the generated samples.

5. Related works

From the RL literature, reward-based neural sequence model training can be separated into on-policy and off-policy approaches, which differ in the sampling distributions. The proposed α -DiMT approach can be considered an off-policy approach with importance sampling.

Recently, on-policy RL-based approaches for neural sequence predictions have been proposed. Ranzato et al. (2016) proposed a method that uses the REINFORCE algorithm (Williams, 1992). Based on Ranzato et al. (2016), Bahdanau et al. (2017) proposed a method that estimates a critic network and uses it to reduce the variance of the estimated gradient. Bengio et al. (2015) proposed a method that replaces some ground-truth tokens in an output sequence with generated tokens. Yu et al. (2017), Lamb et al. (2016), and Wu et al. (2017) proposed methods based on GAN (generative adversarial net) approaches (Goodfellow et al., 2014). Note that on-policy RL-based approaches

can directly optimize the evaluation metric. Degris et al. (2012) proposed off-policy gradient methods using importance sampling, and the proposed α -DiMT off-policy approach utilizes importance sampling to reduce the difference between the objective function and the evaluation measure when $\alpha > 0$.

As mentioned previously, the proposed α -DiMT can be considered an off-policy RL-based approach in that the sampling distribution differs from the model itself. Thus, the proposed α -DiMT approach has the same advantages as off-policy RL methods compared to on-policy RL methods, i.e., computational efficiency during training and learning stability. On-policy RL approaches must generate samples during training, and immediately utilize these samples. This property leads to high computational costs during training and if the model falls into a poor local minimum, it is difficult to recover from this failure. On the other hand, by exploiting data augmentation, the proposed α -DiMT can collect samples before training. Moreover, because the sampling distribution is a stationary distribution independent of the model, one can expect that the learning process of α -DiMT is more stable than that of on-policy RL approaches. Several other methods that compute rewards before training can be considered off-policy RL-based approaches, e.g., minimum risk training (MRT; Shen et al., 2016, RANDOMER (Guu et al., 2017), and Google neural machine translation (GNMT; Wu et al., 2016).

While the proposed approach is a mixture of ML- and RL-based approaches, this attempt is not unique. The sampling distribution of scheduled sampling (Bengio et al., 2015) is also a mixture of ML- and RL-based sampling distributions. However, the sampling distributions of scheduled sampling can differ even in the same sentence, whereas ours are sampled from a stationary distribution. To bridge the ML- and RL-based approaches, Guu et al. (2017) considered the weights of the gradients of the ML- and RL-based approaches by directly comparing both gradients. In contrast, the weights of the proposed α -DiMT approach are obtained as the results of defining the α -divergence objective function. GNMT (Wu et al., 2016) considered a

Table 1. IWSLT’14 German–English machine translation performance: The best BLEU scores for the development set and corresponding BLEU scores for the test set are shown. Each search algorithm is greedy or beam search (BS) (beam size 10). AC+ML and RF-C+ML denote actor-critic + maximum likelihood and REINFORCE-critic + maximum likelihood, respectively. Both combine on-policy RL- and ML-based objective functions (Bahdanau et al., 2017).

BLEU	Dev (greedy)	Test (greedy)	Test (BS)
Results from Bahdanau et al. (2017)			
ML	n/a	25.82	27.56
AC + LL	n/a	27.49	28.53
RF-C+LL	n/a	27.7	28.3
Our results			
ML	29.83	27.96	28.26
RAML	29.65	27.50	28.35
Ours ($\alpha = 0.3$)	29.90	27.73	28.29
Ours ($\alpha = 0.5$)	29.91	28.02	28.49
Ours ($\alpha = 0.7$)	29.72	27.81	28.25

mixture of ML- and RL-based objective functions by the weighted arithmetic sum of \mathcal{L} and \mathcal{L}^* . Comparing this weighted mean objective function and α -DiMT’s objective function could be an interesting research direction in future.

6. Numerical experiments

We evaluated the effectiveness of α -DiMT experimentally using a neural machine translation task. We compared the BLEU scores of the ML baseline, RAML, and the proposed α -DiMT on the IWSLT’14 German–English corpus (Cettolo et al., 2014). We trained the same attention-based encoder-decoder model (Bahdanau et al., 2015; Luong et al., 2015) for each method. When sampling from $q(\tau)$, we employed a data augmentation procedure similar to that of Norouzi et al. (2016). As a result, we found that α -DiMT with $\alpha > 0$ without pre-training outperformed the ML baseline and RAML.

To compare our experimental results to on-policy RL methods (Ranzato et al., 2016; Bahdanau et al., 2017), we used the IWSLT’14 German–English corpus (Cettolo et al., 2014) and an attention-based encoder-decoder model (Bahdanau et al., 2015; Luong et al., 2015). The training data comprised 150K German–English sentence pairs and approximately 7K development/test sentence pairs. We followed the model parameters used by Bahdanau et al. (2017) and used the same encoder-decoder model architecture for all methods. Details about the models and parameters are discussed at the end of this section.

We obtained augmented data in the same manner as the RAML framework (Norouzi et al., 2016). For each target sentence, some tokens were replaced by other tokens in the

vocabulary and we used the negative Hamming distance as reward. We assumed that Hamming distance e for each sentence is less than $\lceil m \times 0.2 \rceil$, where m is the length of the sentence and $\lceil a \rceil$ denotes the maximum integer which is less than or equal to $a \in \mathbb{R}$. Moreover, the Hamming distance for a sample is uniformly selected from 0 to $\lceil m \times 0.2 \rceil$. One can also use BLEU or another machine translation metric for this reward. However, we assumed the different proposal distribution q_0 from that of RAML. We assumed the simplified proposal distribution q_0 , which is a discrete uniform distribution over $[0, m \times 0.2]$. This results in that hyperparameter τ used in this experiment is larger than that of RAML; thus, τ was set to 3.0 for RAML and the proposed α -DiMT.

The experimental results obtained with the IWSLT’14 corpus are shown in Table 1. We calculated the BLEU scores with *multi-bleu.perl*¹ script for both the development and test sets. As shown in Table 1, the best BLEU score on the development set with greedy search prediction and the corresponding BLEU scores on the test set with greedy and beam search prediction are shown for each method. Here, the beam width was set to 10 (Ranzato et al., 2016; Bahdanau et al., 2017). We found that the proposed α -DiMT with $\alpha = 0.5$ outperformed the ML-baseline and RAML. This implies that an objective function better than RAML for neural sequence model training exists in $\alpha > 0$. Note that the proposed α -DiMT does not utilize pre-training; on the other hand, an on-policy RL approach (Bahdanau et al., 2017) needs good initialization by pre-training using ML. Although the ML baseline performances differ between our results and those of Bahdanau et al. (2017), we emphasize that the proposed α -DiMT performance with $\alpha = 0.5$ without pre-training is comparable with the on-policy RL-based methods.

Model details The model architecture and parameters follow that of Ranzato et al. (2016) and Bahdanau et al. (2017). Here, the encoder was a bidirectional LSTM with 256 units. The decoder was also an LSTM with the same number of units. The vocabulary sizes for the source/target were 32 009 and 22 822, respectively. We utilized stochastic gradient descent with a decaying learning rate. The learning rate decays from 1.0 to 0.05 with dev-decay (Wilson et al., 2017), i.e., after training each epoch, we monitored the greedy BLEU score for the development set and reduced the learning rate by multiplying it with $\delta = 0.5$ only when the greedy BLEU score for the development set did not update the best BLEU score. The minibatch size was 128. In addition, if an unknown token, i.e. a special token representing a word

¹<https://github.com/moses-smt/mosesdecoder/blob/master/scripts/generic/multi-bleu.perl>

not in the vocabulary, was generated in the predicted sentence, it was replaced by the token with the highest attention in the source sentence (Jean et al., 2015). We implemented our models using a fork from the PyTorch² version of the OpenNMT toolkit (Klein et al., 2017). Our reference implementation is available: <https://github.com/sotetsuk/alpha-dimt-icmlws>.

7. Conclusion

In this study, we have proposed a new objective function as α -divergence minimization for neural sequence model training that unifies ML- and RL-based objective functions. In addition, we proved that the gradient of the objective function is the weighted sum of the gradients of negative log-likelihoods, and that the weights are represented as a mixture of the sampling distributions of the ML- and RL-based objective functions. We demonstrated that the proposed approach outperforms the ML baseline and RAML in the IWSLT'14 machine translation task.

By extending the existing objectives via α -divergence, we gained an additional freedom to control the trade-off between the training/testing discrepancy and sample inefficiency. We consider that the sample inefficiency disappears as the learning of the neural sequence model progresses if α is increased as the learning progresses. We will investigate methods to tune the control parameter α in accordance with the learning process in future.

Acknowledgments

AK was supported in part by NEDO, Japan, and JSPS KAKENHI 26730130.

References

- Amari, Shun-ichi. *Differential-Geometrical Methods in Statistics*. Springer, 1985.
- Bahdanau, Dzmitry, Cho, Kyunghyun, and Bengio, Yoshua. Neural machine translation by jointly learning to align and translate. In *Proceedings of International Conference on Learning Representations (ICLR)*, 2015.
- Bahdanau, Dzmitry, Chorowski, Jan, Serdyuk, Dmitriy, Brakel, Philemon, and Bengio, Yoshua. End-to-end attention-based large vocabulary speech recognition. In *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2016.
- Bahdanau, Dzmitry, Brakel, Philemon, Xu, Kelvin, Goyal, Anirudh, Lowe, Ryan, Pineau, Joelle, Courville, Aaron, and Bengio, Yoshua. An actor-critic algorithm for sequence prediction. In *Proceedings of International Conference on Learning Representations (ICLR)*, 2017.
- Bengio, Samy, Vinyals, Oriol, Jaitly, Navdeep, and Shazeer, Noam. Scheduled sampling for sequence prediction with recurrent neural networks. In *Advances in Neural Information Processing Systems (NIPS)*, 2015.
- Cettolo, Mauro, Niehues, Jan, Stüker, Sebastian, Bentivogli, Luisa, and Federico, Marcello. Report on the 11th IWSLT evaluation campaign, IWSLT 2014. In *Proceedings of International Workshop on Spoken Language Translation (IWSLT)*, 2014.
- Chen, Xinlei and Lawrence Zitnick, C. Mind's eye: A recurrent visual representation for image caption generation. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015.
- Cho, Kyunghyun, Van Merriënboer, Bart, Gulcehre, Caglar, Bahdanau, Dzmitry, Bougares, Fethi, Schwenk, Holger, and Bengio, Yoshua. Learning phrase representations using RNN encoder-decoder for statistical machine translation. In *Proceedings of Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2014.
- Chorowski, Jan, Bahdanau, Dzmitry, Cho, Kyunghyun, and Bengio, Yoshua. End-to-end continuous speech recognition using attention-based recurrent NN: First results. *arXiv preprint arXiv:1412.1602*, 2014.
- Chorowski, Jan K, Bahdanau, Dzmitry, Serdyuk, Dmitriy, Cho, Kyunghyun, and Bengio, Yoshua. Attention-based models for speech recognition. In *Advances in Neural Information Processing Systems (NIPS)*, 2015.
- Degrís, Thomas, White, Martha, and Sutton, Richard S. Off-policy actor-critic. In *Proceedings of International Conference on Machine Learning (ICML)*, 2012.
- Goodfellow, Ian, Pouget-Abadie, Jean, Mirza, Mehdi, Xu, Bing, Warde-Farley, David, Ozair, Sherjil, Courville, Aaron, and Bengio, Yoshua. Generative adversarial nets. In *Advances in Neural Information Processing Systems (NIPS)*, 2014.
- Guu, Kelvin, Pasupat, Panupong, Liu, Evan Zheran, and Liang, Percy. From language to programs: Bridging reinforcement learning and maximum marginal likelihood. In *Proceedings of the Annual Meeting of Association for Computational Linguistics (ACL)*, 2017.
- Jean, Sébastien, Cho, Kyunghyun, Memisevic, Roland, and Bengio, Yoshua. On using very large target vocabulary for neural machine translation. In *Proceedings of the Annual Meeting of Association for Computational Linguistics (ACL)*, 2015.
- Klein, Guillaume, Kim, Yoon, Deng, Yuntian, Senellart, Jean, and Rush, Alexander M. OpenNMT: Open-source toolkit for neural machine translation. *arXiv preprint arXiv:1701.02810*, 2017.
- Lamb, Alex, Goyal, Anirudh, Zhang, Ying, Zhang, Saizheng, Courville, Aaron, and Bengio, Yoshua. Professor forcing: A new algorithm for training recurrent networks. In *Advances in Neural Information Processing Systems (NIPS)*, 2016.
- Luong, Minh-Thang, Pham, Hieu, and Manning, Christopher D. Effective approaches to attention-based neural machine translation. In *Proceedings of Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2015.

²<http://pytorch.org>

Mnih, Volodymyr, Badia, Adria Puigdomenech, Mirza, Mehdi, Graves, Alex, Lillicrap, Timothy, Harley, Tim, Silver, David, and Kavukcuoglu, Koray. Asynchronous methods for deep reinforcement learning. In *Proceedings of International Conference on Machine Learning (ICML)*, 2016.

Norouzi, Mohammad, Bengio, Samy, Jaitly, Navdeep, Schuster, Mike, Wu, Yonghui, Schuurmans, Dale, et al. Reward augmented maximum likelihood for neural structured prediction. In *Advances In Neural Information Processing Systems (NIPS)*, 2016.

Papineni, Kishore, Roukos, Salim, Ward, Todd, and Zhu, Wei-Jing. BLEU: a method for automatic evaluation of machine translation. In *Proceedings of the Annual Meeting of Association for Computational Linguistics (ACL)*, 2002.

Ranzato, Marc’Aurelio, Chopra, Sumit, Auli, Michael, and Zaremba, Wojciech. Sequence level training with recurrent neural networks. In *Proceedings of International Conference on Learning Representations (ICLR)*, 2016.

Shen, Shiqi, Cheng, Yong, He, Zhongjun, He, Wei, Wu, Hua, Sun, Maosong, and Liu, Yang. Minimum risk training for neural machine translation. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics (ACL)*, 2016.

Snover, Matthew, Dorr, Bonnie, Schwartz, Richard, Micciulla, Linnea, and Makhoul, John. A study of translation edit rate with targeted human annotation. In *Proceedings of Association for Machine Translation in the Americas (AMTA)*, 2006.

Sutskever, Ilya, Vinyals, Oriol, and Le, Quoc V. Sequence to sequence learning with neural networks. In *Advances in Neural Information Processing Systems (NIPS)*, 2014.

Sutton, Richard S, McAllester, David A, Singh, Satinder P, and Mansour, Yishay. Policy gradient methods for reinforcement learning with function approximation. In *Advances in Neural Information Processing Systems (NIPS)*, 2000.

Vinyals, Oriol and Le, Quoc. A neural conversational model. In *Proceedings of International Conference on Machine Learning (ICML)*, 2015.

Williams, Ronald J. Simple statistical gradient-following algorithms for connectionist reinforcement learning. *Machine Learning*, 8(3-4):229–256, 1992.

Wilson, Ashia C, Roelofs, Rebecca, Stern, Mitchell, Srebro, Nathan, and Recht, Benjamin. The marginal value of adaptive gradient methods in machine learning. *arXiv preprint arXiv:1705.08292*, 2017.

Wu, Lijun, Xia, Yingce, Zhao, Li, Tian, Fei, Qin, Tao, Lai, Jianhuang, and Liu, Tie-Yan. Adversarial neural machine translation. *arXiv preprint arXiv:1704.06933*, 2017.

Wu, Yonghui, Schuster, Mike, Chen, Zhifeng, Le, Quoc V, Norouzi, Mohammad, Macherey, Wolfgang, Krikun, Maxim, Cao, Yuan, Gao, Qin, Macherey, Klaus, et al. Google’s neural machine translation system: Bridging the gap between human and machine translation. *arXiv preprint arXiv:1609.08144*, 2016.

Xu, Kelvin, Ba, Jimmy, Kiros, Ryan, Cho, Kyunghyun, Courville, Aaron, Salakhudinov, Ruslan, Zemel, Rich, and Bengio, Yoshua. Show, attend and tell: Neural image caption generation with visual attention. In *Proceedings of International Conference on Machine Learning (ICML)*, 2015.

Yu, Lantao, Zhang, Weinan, Wang, Jun, and Yu, Yong. SeqGAN: Sequence generative adversarial nets with policy gradient. In *Proceedings of AAAI Conference on Artificial Intelligence (AAAI)*, 2017.

A. Gradient of α -DiMT objective

The gradient of α -DiMT can be obtained as follows:

$$\begin{aligned} & \nabla_{\theta} \mathcal{L}_{(\alpha, \tau)}^*(\theta) \\ &= \nabla_{\theta} \left\{ - \sum_{x \in \mathcal{X}} \frac{\tau}{\alpha(1-\alpha)} \left\{ 1 - \sum_{y \in \mathcal{Y}} p_{\theta}^{\alpha}(y|x) q_{(\tau)}^{1-\alpha}(y|x) \right\} \right\} \end{aligned} \quad (16)$$

$$= - \frac{\tau}{\alpha(1-\alpha)} \sum_{x \in \mathcal{X}} \sum_{y \in \mathcal{Y}} \nabla_{\theta} p_{\theta}^{\alpha}(y|x) q_{(\tau)}^{1-\alpha}(y|x) \quad (17)$$

$$= - \frac{\tau}{1-\alpha} \sum_{x \in \mathcal{X}} \sum_{y \in \mathcal{Y}} p_{\theta}^{\alpha}(y|x) q_{(\tau)}^{1-\alpha}(y|x) \nabla_{\theta} \log p_{\theta}(y|x) \quad (18)$$

$$= - \sum_{x \in \mathcal{X}} \sum_{y \in \mathcal{Y}} p_{\theta}^{(\alpha, \tau)}(y|x) \nabla_{\theta} \log p_{\theta}(y|x), \quad (19)$$

where

$$p_{\theta}^{(\alpha, \tau)}(y|x) = \frac{\tau}{1-\alpha} p_{\theta}^{\alpha}(y|x) q_{(\tau)}^{1-\alpha}(y|x). \quad (20)$$

In Eq. (18), we used the so-called *log-trick*: $\nabla_{\theta} p_{\theta}(y|x) = p_{\theta}(y|x) \nabla_{\theta} \log p_{\theta}(y|x)$.