

Space-Time-Parallel Poroelasticity Simulation

Uwe Köcher · koecher@hsu-hamburg.de

Helmut Schmidt University, University of the Federal Armed Forces Hamburg
 Department of Mechanical Engineering · Numerical Mathematics
 Holstenhofweg 85, 22043 Hamburg, Germany

Keywords: space-time methods, discontinuous-in-time, parallel-in-time, preconditioning, coupled problems.

1 Abstract

The accurate, reliable and efficient numerical approximation of multi-physics processes in heterogeneous porous media with varying media coefficients that include fluid flow and structure interactions is of fundamental importance in energy, environmental, petroleum and biomedical engineering applications fields for instance. Important applications include subsurface compaction drive, carbon sequestration, hydraulic and thermal fracturing and oil recovery. Biomedical applications include the simulation of vibration therapy for osteoporosis processes of trabeculae bones, estimating stress levels induced by tumour growth within the brain or next-generation spinal disc prostheses.

Variational space-time methods offers some appreciable advantages such as the flexibility of the triangulation for complex geometries in space and natural local time stepping, the straightforward construction of higher-order approximations and the application of efficient goal-oriented (duality-based) adaptivity concepts. In addition to that, uniform space-time variational methods appear to be advantageous for stability and a priori error analyses of the discrete schemes. Especially (high-order) discontinuous in time approaches appear to have favourable properties due to the weak application of the initial conditions.

The development of monolithic multi-physics schemes, instead of iterative coupling methods between the physical problems, is a key component of the research to reduce the modeling error. Special emphasis is on the development of efficient multi-physics and multigrid preconditioning technologies and their implementation.

The simulation software DTM++ is a modularised framework written in C++11 and builds on top of deal.II toolchains. The implementation allows parallel simulations from notebooks up to cluster scale, cf. [1, 2, 5].

2 Poroelasticity

The Biot poroelasticity equation system characterise a multi-physics problem of slightly compressible single-phase diffusive porous media flow coupled with quasi-static deformation as structure interaction. The fully-coupled partial differential equations system in strong form for the approximation of displacement \mathbf{u} , fluid flux \mathbf{q} and fluid pressure p is given by

$$\begin{aligned} -\nabla \cdot (\boldsymbol{\sigma}_0 + \mathbf{C} : \boldsymbol{\epsilon}(\mathbf{u} - \mathbf{u}_0) - b(p - p_0)\mathbf{1}) &= \rho_b \mathbf{g}, \\ \eta \mathbf{K}^{-1} \mathbf{q} + \nabla p &= \rho_f \mathbf{g}, \\ \frac{b}{K_{dr}} \partial_t \sigma_v(\mathbf{u}, p) + \left(\frac{1}{M} + \frac{b^2}{K_{dr}}\right) \partial_t p + \operatorname{div} \mathbf{q} &= f, \end{aligned}$$

using the volumetric mean stress

$$\sigma_v(\mathbf{u}, p) = \sigma_{v,0} + K_{dr} \epsilon_v(\mathbf{u} - \mathbf{u}_0) - b(p - p_0),$$

in $\Omega \times I$, $\Omega \subset \mathbb{R}^d$, $I = (0, T)$ and equipped with appropriate initial and boundary conditions. The coupling between the deformation and fluid flow is described by Biot using a coupling coefficient $b = 1 - K_{dr}/K_s$, $0 < b < 1$, and modulus $M > 0$.

3 Discretisation in Time

A variational discontinuous in time discretisation is applied in order to approximate the solution by employing Bochner spaces \mathcal{V} with values in Hilbert spaces \mathcal{H} , e.g.


$$\begin{aligned} \mathcal{V}_\tau^r(I, \mathcal{H}) &= \left\{ v \in L^2(I, \mathcal{H}) \mid v|_{I_n} \in \mathbb{P}_r(I_n, \mathcal{H}) \right\}, \\ \mathbb{P}_r(I_n, \mathcal{H}) &= \left\{ p : I_n \rightarrow \mathcal{H} \mid p = \sum_{j=0}^r p_n^j t^j, p_n^j \in \mathcal{H} \right\}, \end{aligned}$$

with $I_n = (t_{n-1}, t_n)$ of a partition of the time domain. This construction allows to solve the discrete schemes in the sense of time marching schemes, due to the application of discontinuous Bochner spaces as test spaces.

4 Discretisation in Space

The discretisation in space yields a stable, high-order, locally mass conservative and displacement locking-free discrete scheme. Precisely, a mixed finite element $\{\text{Nc}^f(p) - \text{dQ}(p-1)\}$ for the approximation of the flux and pressure and an interior penalty $\text{dG}(p)$ method for the approximation of the displacement \mathbf{u} is applied.

arXiv:1801.04984v1 [math.NA] 20 Dec 2017

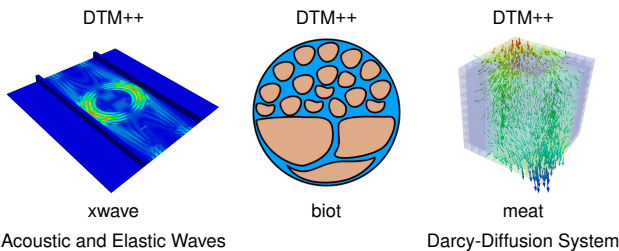

5 Iterative Coupling Approach

The Biot poroelasticity system is commonly solved with iterative coupling approaches by the application of operator splitting methods to decouple the fluid and structure sub-problems. A broadly accepted, unconditionally stable and fast-convergent type of such an operator splitting method is the so called fixed-stress member. Hereby, the flow problem is solved firstly with constrained volumetric mean stress $\sigma_v(\mathbf{u}, p)$ and the deformation problem is solved secondly with constrained pressure in each iteration. In [2, 3] we show that an optimised fixed-stress iterative coupling method is convergent for high-order variational time discretisations.

6 Monolithic Approach

State of the art monolithic schemes commonly deploy (low-order) distributional time integration. Arising block systems are solved with Schur-complement technologies using standard preconditioning strategies.

Monolithic high-order $dG(r)$ variational time discretisations allow and need the development of sophisticated solver and preconditioning technologies. Spectral decomposition and an appropriate ordering of the equations yields sparse block systems as outlined by

$$\begin{bmatrix} \mathbf{L}_0 & \mathbf{C}_1^+ & & & \\ \mathbf{C}_0^- & \mathbf{L}_1 & \mathbf{C}_2^+ & & \\ & \ddots & \ddots & \mathbf{C}_r^+ & \\ & & & \mathbf{C}_{r-1}^- & \mathbf{L}_r \end{bmatrix} \begin{bmatrix} (\mathbf{u}^0, \mathbf{q}^0, p^0)^T \\ (\mathbf{u}^1, \mathbf{q}^1, p^1)^T \\ \vdots \\ (\mathbf{u}^r, \mathbf{q}^r, p^r)^T \end{bmatrix} = \begin{bmatrix} \mathbf{b}^0 \\ \mathbf{b}^1 \\ \vdots \\ \mathbf{b}^r \end{bmatrix}$$

on each I_n in a time marching scheme. The coupling blocks \mathbf{C} only consist of sparse contributions from variables with time derivatives. The diagonal block systems corresponds to lowest-order $dG(0)$ systems of type

$$\mathbf{L}_j = \begin{bmatrix} \tau_n \mathbf{A} & \mathbf{0} & -b \tau_n \mathbf{E} \\ \mathbf{0} & \tau_n \mathbf{M}_q & \tau_n \mathbf{B} \\ -\lambda_{j,j} b \mathbf{E}^T & \tau_n \mathbf{B}^T & \lambda_{j,j} \frac{1}{M} \mathbf{M}_p \end{bmatrix}.$$

Notably, only $dG(0)$ or $dG(1)$ type block systems must be solved, due to the spectral decomposition, cf. [1]. This technology facilitates parallel-in-time discrete algorithms and allows the re-use of optimised solvers.

7 Preconditioning technology

An efficient preconditioning technology of the outer iterative solver GMRES for fully-coupled $dG(0)$, or even $dG(1)$, block systems is based on an optimised truncated fixed-stress solver technology. Within that fixed-stress preconditioning solver, optimised solver and preconditioning for the subproblems is used.

8 Numerical Simulations

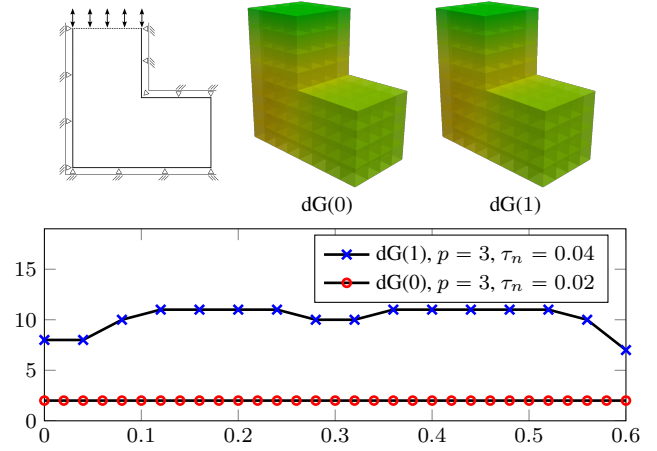


Fig.: Test setting, pressure variable visualisation ($t = 0.09$) and GMRES iterations on $I = (0, T)$ for fully-coupled $dG(0)$ and $dG(1)$ time discretisation solvers with diagonal block-wise (\mathbf{L}_j) truncated fixed-stress iterative preconditioning.

9 Future Prospects

A challenging future development is to study the Biot-Allard model, i.e. an extended model with dynamic structure interactions, that includes elastic wave propagation in the structure as well as additional memory terms. Ongoing work is on the preconditioning technology, that is precisely the application of multigrid techniques and cheaper discretisations, and on their space-time-parallel implementation.

References

- [1] U. Köcher: High-order discontinuous time monolithic solver and preconditioning for the Biot poroelasticity system, in preparation, 2017.
- [2] M. Bause, F. Radu, U. Köcher: Space-time finite element approximation of the Biot poroelasticity system with iterative coupling, *Comput. Meth. Appl. Mech. Engrg.* 320:745-768, doi:10.1016/j.cma.2017.03.017, 2017.
- [3] M. Bause, U. Köcher: Iterative coupling of variational space-time methods for Biot's system of poroelasticity, *Numer. Math. Adv. Appl. ENUMATH 2015*:143-151, doi:10.1007/978-3-319-39929-4_15, 2016.
- [4] M. Bause, U. Köcher: Variational time discretization for mixed finite element approximations of nonstationary diffusion problems. *J. Comput. Appl. Math.* 289:208-224, doi:10.1016/j.cam.2015.02.015, 2015.
- [5] U. Köcher: Variational Space-Time Methods for the Elastic Wave Equation and the Diffusion Equation, Ph.D. thesis, Helmut-Schmidt-University Hamburg, pp. 1-188, urn:nbn:de:gbv:705-opus-31129, 2015.
- [6] U. Köcher, M. Bause: Variational space-time discretisations for the wave equation, *J. Sci. Comput.* 61(2):424-453, 2014.